


FlexNet Operations 2020 R1.1 On Premises

SOAP Web Services Guide

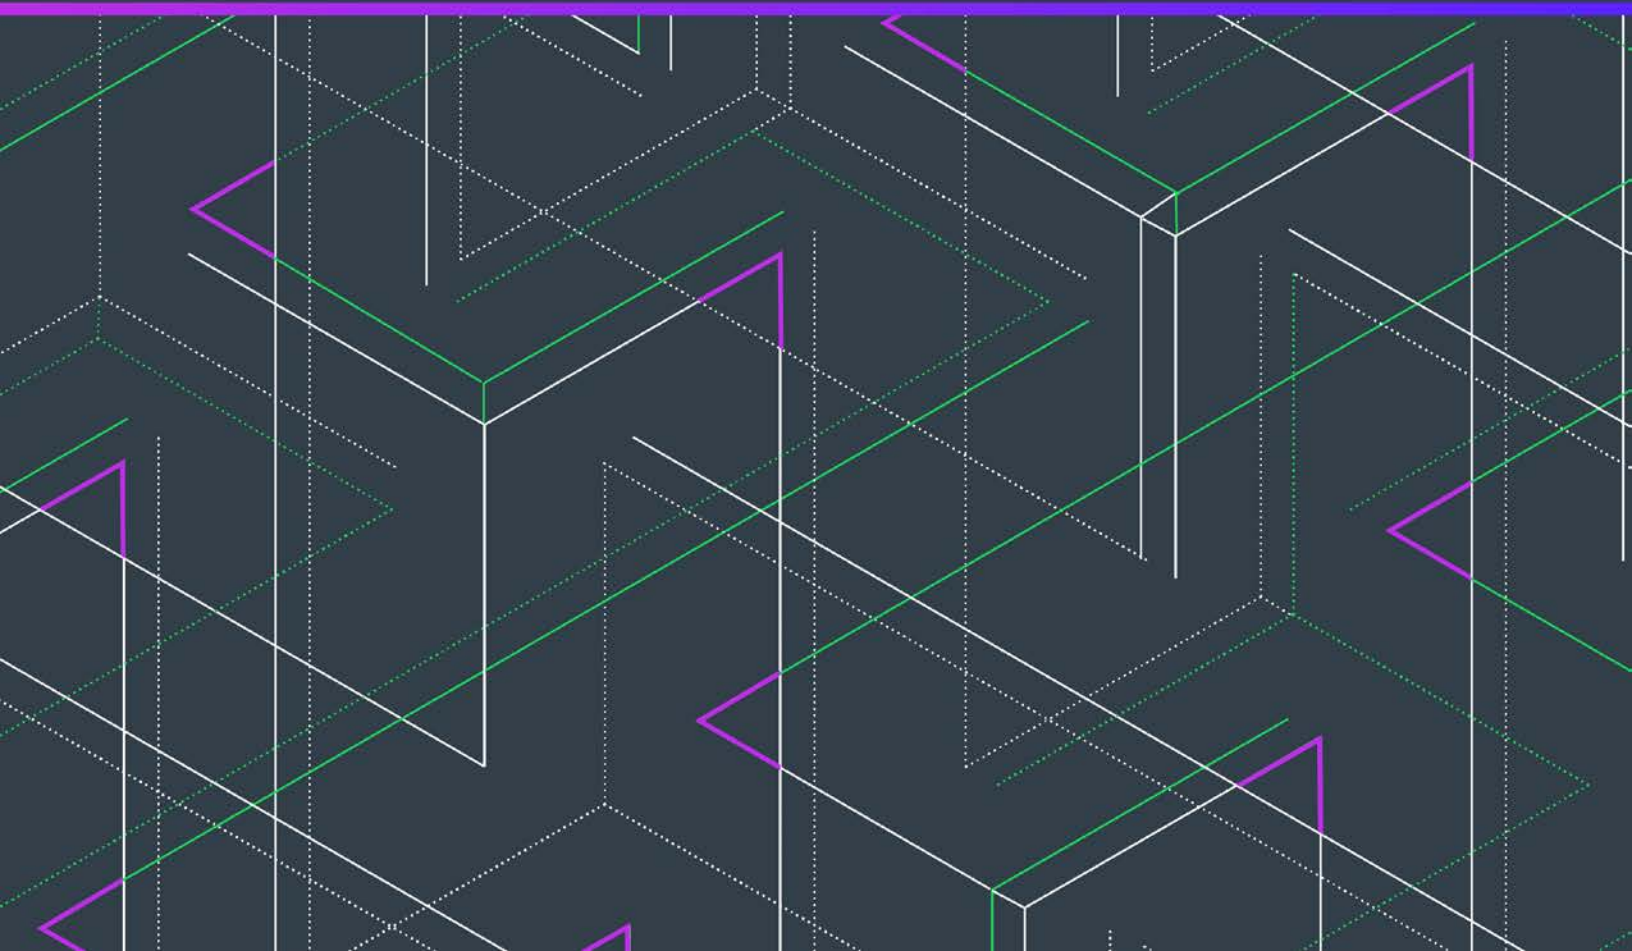

Legal Information

Book Name:	FlexNet Operations 2020 R1.1 On Premises SOAP Web Services Guide
Part Number:	FNO-2020R1.1-SWSG00
Product Release Date:	December 2020
Document Revision Date:	21 November 2020

Copyright Notice

Copyright © 2020 Flexera Software. All Rights Reserved.

This publication contains proprietary and confidential information and creative works owned by Flexera Software and its licensors, if any. Any use, copying, publication, distribution, display, modification, or transmission of such publication in whole or in part in any form or by any means without the prior express written permission of Flexera Software is strictly prohibited. Except where expressly provided by Flexera Software in writing, possession of this publication shall not be construed to confer any license or rights under any Flexera Software intellectual property rights, whether by estoppel, implication, or otherwise.

All copies of the technology and related information, if allowed by Flexera Software, must display this notice of copyright and ownership in full.

Intellectual Property

For a list of trademarks and patents that are owned by Flexera Software, see <https://www.revenera.com/legal/intellectual-property.html>. All other brand and product names mentioned in Flexera Software products, product documentation, and marketing materials are the trademarks and registered trademarks of their respective owners.

Restricted Rights Legend

The Software is commercial computer software. If the user or licensee of the Software is an agency, department, or other entity of the United States Government, the use, duplication, reproduction, release, modification, disclosure, or transfer of the Software, or any related documentation of any kind, including technical data and manuals, is restricted by a license agreement or by the terms of this Agreement in accordance with Federal Acquisition Regulation 12.212 for civilian purposes and Defense Federal Acquisition Regulation Supplement 227.7202 for military purposes. The Software was developed fully at private expense. All other use is prohibited.

Introduction

Table of Contents

FlexNet Operations 2020 R1.1 On Premises SOAP Web Services Guide.....	1
ProductPackagingService.....	2
Methods.....	3
assignProductCategoriesToOrg.....	7
assignProductCategoriesToUser.....	8
createFeature.....	9
createFeatureBundle.....	10
createMaintenance.....	11
createOrganization.....	12
createPartNumber.....	13
createProduct.....	16
createProductCategory.....	17
createProductRelationship.....	18
createUniformSuite.....	19
deleteFeature.....	21
deleteFeatureBundle.....	21
deleteMaintenance.....	22
deletePartNumber.....	23
deleteProduct.....	26
deleteProductRelationship.....	27
deleteUniformSuite.....	28
getFeatureBundleCount.....	29
getFeatureBundlesQuery.....	30
getFeatureCount.....	31
getFeaturesQuery.....	32
getLicenseModelIdentifiers.....	33
getLicenseTechnologiesQuery.....	34
getMaintenanceCount.....	35
getMaintenanceQuery.....	36
getPartNumberCount.....	37
getPartNumbersQuery.....	39
getProductCategories.....	41
getProductCount.....	41
getProductRelationships.....	42

getProductsQuery.....	43
getTransactionKeyIdentifiers.....	44
getUniformSuiteCount.....	45
getUniformSuiteQuery.....	46
getUsersForProductCategory.....	47
removeProductCategoriesFromOrg.....	48
removeProductCategoriesFromUser.....	49
setFeatureBundleState.....	50
setFeatureState.....	51
setMaintenanceState.....	52
setProductState.....	53
setUniformSuiteState.....	54
updateFeature.....	55
updateFeatureBundle.....	56
updateMaintenance.....	57
updateProduct.....	58
updateProductRelationship.....	59
updateUniformSuite.....	60
Complex Types.....	62
accountIdentifierType.....	70
accountPKType.....	70
addressDataType.....	71
attributeDescriptorDataType.....	71
attributeDescriptorType.....	72
attributeMetaDescriptorDataType.....	72
attributeMetaDescriptorType.....	72
categoryAttributeDataType.....	73
categoryAttributesDataType.....	74
correlationDataType.....	74
createdFeatureBundleDataListType.....	75
createdFeatureDataListType.....	75
createdFeatureDataType.....	75
createdMaintenanceDataType.....	76
createdMaintenanceDataListType.....	76
createdOrgDataListType.....	77
createdOrgDataType.....	77
createdPartNumberDataListType.....	77
createdPartNumberDataType.....	78
createdProductCategoryDataListType.....	78
createdProductCategoryDataType.....	78

createdProductDataListType.....	79
createdProductDataType.....	79
createdUniformSuiteDataListType.....	80
createdUniformSuiteDataType.....	80
createFeatureBundleDataType.....	80
createFeatureBundleRequestType.....	81
createFeatureBundleResponseType.....	81
createFeatureRequestType.....	82
createFeatureResponseType.....	83
createMaintenanceDataType.....	84
createMaintenanceRequestType.....	85
createMaintenanceResponseType.....	86
createOrganizationRequestType.....	87
createOrganizationResponseType.....	87
createPartNumberDataType.....	88
createPartNumberRequestType.....	89
createPartNumberResponseType.....	89
createProductCategoryDataType.....	92
createProductCategoryRequestType.....	92
createProductCategoryResponseType.....	93
createProductDataType.....	94
createProductRelationshipRequestType.....	97
createProductRelationshipResponseType.....	98
createProductRequestType.....	99
createProductResponseType.....	100
createUniformSuiteDataType.....	101
createUniformSuiteRequestType.....	103
createUniformSuiteResponseType.....	103
customAttributeDescriptorDataType.....	105
customAttributeDescriptorType.....	105
customAttributeQueryType.....	105
customAttributesQueryListType.....	107
DateTimeQueryType.....	107
deleteFeatureBundleDataType.....	108
deleteFeatureBundleRequestType.....	108
deleteFeatureBundleResponseType.....	109
deleteFeatureDataType.....	110
deleteFeatureRequestType.....	111
deleteFeatureResponseType.....	111
deleteMaintenanceDataType.....	112

deleteMaintenanceRequestType.....	113
deleteMaintenanceResponseType.....	113
deletePartNumberDataType.....	114
deletePartNumberRequestType.....	115
deletePartNumberResponseType.....	115
deleteProductDataType.....	118
deleteProductRelationshipRequestType.....	118
deleteProductRelationshipResponseType.....	119
deleteProductRequestType.....	120
deleteProductResponseType.....	121
deleteUniformSuiteDataType.....	122
deleteUniformSuiteRequestType.....	123
deleteUniformSuiteResponseType.....	123
dupGroupDataType.....	124
DurationType.....	125
emailContactListType.....	126
entitledProductDataListType.....	126
entitledProductDataType.....	126
entitlementIdentifierType.....	127
entitlementLineItemIdentifierType.....	127
failedDeleteFeatureBundleDataListType.....	128
failedDeleteFeatureBundleDataType.....	128
failedDeleteFeatureDataListType.....	128
failedDeleteFeatureDataType.....	129
failedDeleteMaintenanceDataListType.....	129
failedDeleteMaintenanceDataType.....	130
failedDeletePartNumberDataListType.....	130
failedDeletePartNumberDataType.....	130
failedDeleteProductDataListType.....	131
failedDeleteProductDataType.....	131
failedDeleteUniformSuiteDataListType.....	131
failedDeleteUniformSuiteDataType.....	132
failedFeatureBundleDataListType.....	132
failedFeatureBundleDataType.....	132
failedFeatureBundleStateDataListType.....	133
failedFeatureBundleStateDataType.....	133
failedFeatureDataListType.....	134
failedFeatureDataType.....	134
failedFeatureStateDataListType.....	134
failedFeatureStateDataType.....	135

failedMaintenanceDataListType.....	135
failedMaintenanceDataType.....	135
failedMaintenanceStateDataListType.....	136
failedMaintenanceStateDataType.....	136
failedOrgDataListType.....	137
failedOrgDataType.....	137
failedPartNumberDataListType.....	137
failedPartNumberDataType.....	138
failedProductCategoryDataListType.....	138
failedProductCategoryDataType.....	139
failedProductDataListType.....	139
failedProductDataType.....	139
failedProductRelationshipDataListType.....	140
failedProductRelationshipDataType.....	140
failedProductStateDataListType.....	140
failedProductStateDataType.....	141
failedUniformSuiteDataListType.....	141
failedUniformSuiteDataType.....	142
failedUniformSuiteStateDataListType.....	142
failedUniformSuiteStateDataType.....	142
failedUpdateFeatureBundleDataListType.....	143
failedUpdateFeatureBundleDataType.....	143
failedUpdateFeatureDataListType.....	143
failedUpdateFeatureDataType.....	144
failedUpdateMaintenanceDataListType.....	144
failedUpdateMaintenanceDataType.....	145
failedUpdateProductDataListType.....	145
failedUpdateProductDataType.....	145
failedUpdateProductRelationshipDataListType.....	146
failedUpdateProductRelationshipDataType.....	146
failedUpdateUniformSuiteDataListType.....	147
failedUpdateUniformSuiteDataType.....	147
featureBundleIdentifierType.....	147
featureBundleIdentifierWithCountDataType.....	148
featureBundleQueryDataType.....	148
featureBundleQueryParametersType.....	149
featureBundlesListType.....	151
featureBundleStateDataType.....	151
featureDataType.....	152
featureIdentifierType.....	152

featureIdentifierWithCountDataType.....	153
featureOverrideParamsType.....	153
featureQueryDataType.....	154
featureQueryParametersType.....	155
featuresListType.....	157
featureStateDataType.....	157
getFeatureBundleCountRequestType.....	158
getFeatureBundleCountResponseType.....	158
getFeatureBundlesQueryRequestType.....	159
getFeatureBundlesQueryResponseDataType.....	160
getFeatureBundlesQueryResponseType.....	161
getFeatureCountRequestType.....	162
getFeatureCountResponseType.....	162
getFeaturesQueryRequestType.....	163
getFeaturesQueryResponseDataType.....	164
getFeaturesQueryResponseType.....	164
getLicenseTechnologyQueryRequestType.....	165
getLicenseTechnologyQueryResponseType.....	166
getMaintenanceCountRequestType.....	167
getMaintenanceCountResponseType.....	168
getMaintenanceQueryRequestType.....	169
getMaintenanceQueryResponseDataType.....	170
getMaintenanceQueryResponseType.....	170
getModelIdentifiersRequestType.....	171
getModelIdentifiersResponseType.....	172
getPartNumberCountRequestType.....	173
getPartNumberCountResponseType.....	174
getPartNumbersQueryRequestType.....	176
getPartNumbersQueryResponseType.....	177
getProductCategoriesRequestType.....	179
getProductCategoriesResponseDataType.....	180
getProductCategoriesResponseType.....	180
getProductCountRequestType.....	181
getProductCountResponseType.....	182
getProductRelationshipsRequestType.....	183
getProductRelationshipsResponseType.....	184
getProductsQueryRequestType.....	185
getProductsQueryResponseDataType.....	185
getProductsQueryResponseType.....	186
getTransactionKeyIdentifiersRequestType.....	187

getTransactionKeyIdentifiersResponseType.....	188
getUniformSuiteCountRequestType.....	189
getUniformSuiteCountResponseType.....	189
getUniformSuitesQueryRequestType.....	190
getUniformSuitesQueryResponseDataType.....	191
getUniformSuitesQueryResponseType.....	191
getUsersForProductCategoryRequestType.....	192
getUsersForProductCategoryResponseDataType.....	193
getUsersForProductCategoryResponseType.....	193
handleProductCategoriesToUserRequestType.....	194
handleProductCategoriesToUserResponseType.....	195
handleProductCategoryToOrgRequestType.....	196
handleProductCategoryToOrgResponseType.....	197
hostTypePKType.....	198
identifierQueryParametersType.....	199
licenseGeneratorIdentifierType.....	199
licenseGeneratorsDetailsType.....	200
licenseModelDetailsType.....	200
licenseModelIdentifierType.....	201
licenseModelPKType.....	201
licenseModelsListType.....	201
licenseTechnologyDataListType.....	202
licenseTechnologyDetailsType.....	202
licenseTechnologyIdentifierType.....	203
licenseTechnologyPKType.....	203
licenseTechnologyQueryParametersType.....	203
maintenanceIdentifierType.....	204
maintenancePKType.....	204
maintenanceQueryDataType.....	205
maintenanceQueryParametersType.....	205
maintenanceStateDataType.....	208
modelAttributesType.....	209
modelIdentifiersDataListType.....	209
organizationBasicDataType.....	209
organizationIdentifierType.....	210
organizationPKType.....	210
OrgTypeList.....	210
packagePropertiesDataType.....	211
partNumberDataListType.....	212
partNumberDataType.....	212

partNumberIdentifierType.....	212
partNumberIdentifierWithModelType.....	213
partNumberPKType.....	213
partNumberQueryParametersType.....	214
partNumbersListType.....	216
partNumbersSimpleListType.....	217
prodCustomAttributeQueryType.....	217
prodCustomAttributesQueryListType.....	217
productCategoryDataType.....	218
productCategoryParametersType.....	218
productIdentifierType.....	219
productIdentifierWithCountDataType.....	219
productPKType.....	220
productQueryDataType.....	220
productQueryParametersType.....	223
productRelationshipDataType.....	226
productsListType.....	227
productStateDataType.....	228
roleIdentifierType.....	228
setFeatureBundleStateRequestType.....	228
setFeatureBundleStateResponseType.....	229
setFeatureStateRequestType.....	230
setFeatureStateResponseType.....	231
setMaintenanceStateRequestType.....	232
setMaintenanceStateResponseType.....	233
setProductStateRequestType.....	234
setProductStateResponseType.....	235
setUniformSuiteStateRequestType.....	236
setUniformSuiteStateResponseType.....	237
suiteCustomAttributeQueryType.....	238
suiteCustomAttributesQueryListType.....	239
suiteIdentifierType.....	239
suitePKType.....	240
suiteQueryParametersType.....	240
transactionKeyIdentifiersDataListType.....	243
trustedKeyIdentifierType.....	244
trustedKeyPKType.....	244
uniformSuiteQueryDataType.....	244
uniformSuiteStateDataType.....	246
updateEntitledProductDataListType.....	246

updateFeatureBundleDataType.....	247
updateFeatureBundleRequestType.....	247
updateFeatureBundleResponseType.....	248
updateFeatureBundlesListType.....	249
updateFeatureDataType.....	250
updateFeatureRequestType.....	251
updateFeatureResponseType.....	251
updateFeaturesListType.....	252
updateHostTypeListType.....	253
updateLicenseModelsListType.....	253
updateMaintenanceDataType.....	254
updateMaintenanceRequestType.....	255
updateMaintenanceResponseType.....	255
updatePartNumbersListType.....	256
updatePartNumbersSimpleListType.....	257
updateProductDataType.....	257
updateProductRelationshipDataType.....	260
updateProductRelationshipRequestType.....	261
updateProductRelationshipResponseType.....	262
updateProductRequestType.....	263
updateProductResponseType.....	264
updateProductsListType.....	265
updateUniformSuiteDataType.....	266
updateUniformSuiteRequestType.....	267
updateUniformSuiteResponseType.....	268
userIdentifierType.....	269
userPKType.....	270
versionDateAttributesType.....	270
Simple Types.....	271
CollectionOperationType.....	271
VersionDateOptionType.....	271
Elements.....	272
assignProductCategoriesToOrgRequest.....	277
assignProductCategoriesToOrgResponse.....	278
assignProductCategoriesToUserRequest.....	279
assignProductCategoriesToUserResponse.....	280
createFeatureBundleRequest.....	282
createFeatureBundleResponse.....	283
createFeatureRequest.....	285
createFeatureResponse.....	286

createMaintenanceRequest.....	288
createMaintenanceResponse.....	289
createOrganizationRequest.....	291
createOrganizationResponse.....	292
createPartNumberRequest.....	293
createPartNumberResponse.....	294
createProductCategoryRequest.....	296
createProductCategoryResponse.....	297
createProductRelationshipRequest.....	299
createProductRelationshipResponse.....	300
createProductRequest.....	302
createProductResponse.....	303
createUniformSuiteRequest.....	305
createUniformSuiteResponse.....	306
deleteFeatureBundleRequest.....	308
deleteFeatureBundleResponse.....	309
deleteFeatureRequest.....	310
deleteFeatureResponse.....	311
deleteMaintenanceRequest.....	313
deleteMaintenanceResponse.....	314
deletePartNumberRequest.....	316
deletePartNumberResponse.....	316
deleteProductRelationshipRequest.....	319
deleteProductRelationshipResponse.....	320
deleteProductRequest.....	322
deleteProductResponse.....	322
deleteUniformSuiteRequest.....	324
deleteUniformSuiteResponse.....	325
getFeatureBundleCountRequest.....	327
getFeatureBundleCountResponse.....	327
getFeatureBundlesQueryRequest.....	329
getFeatureBundlesQueryResponse.....	330
getFeatureCountRequest.....	332
getFeatureCountResponse.....	333
getFeaturesQueryRequest.....	335
getFeaturesQueryResponse.....	336
getLicenseTechnologyQueryRequest.....	337
getLicenseTechnologyQueryResponse.....	338
getMaintenanceCountRequest.....	340
getMaintenanceCountResponse.....	341

getMaintenanceQueryRequest.....	343
getMaintenanceQueryResponse.....	344
getModelIdentifiersRequest.....	346
getModelIdentifiersResponse.....	347
getPartNumberCountRequest.....	348
getPartNumberCountResponse.....	349
getPartNumbersQueryRequest.....	351
getPartNumbersQueryResponse.....	352
getProductCategoriesRequest.....	356
getProductCategoriesResponse.....	356
getProductCountRequest.....	358
getProductCountResponse.....	359
getProductRelationshipsRequest.....	361
getProductRelationshipsResponse.....	361
getProductsQueryRequest.....	363
getProductsQueryResponse.....	364
getTransactionKeyIdentifiersRequest.....	366
getTransactionKeyIdentifiersResponse.....	367
getUniformSuiteCountRequest.....	368
getUniformSuiteCountResponse.....	369
getUniformSuitesQueryRequest.....	371
getUniformSuitesQueryResponse.....	372
getUsersForProductCategoryRequest.....	374
getUsersForProductCategoryResponse.....	375
removeProductCategoriesFromOrgRequest.....	377
removeProductCategoriesFromOrgResponse.....	378
removeProductCategoriesFromUserRequest.....	379
removeProductCategoriesFromUserResponse.....	380
setFeatureBundleStateRequest.....	382
setFeatureBundleStateResponse.....	382
setFeatureStateRequest.....	384
setFeatureStateResponse.....	385
setMaintenanceStateRequest.....	387
setMaintenanceStateResponse.....	387
setProductStateRequest.....	389
setProductStateResponse.....	389
setUniformSuiteStateRequest.....	391
setUniformSuiteStateResponse.....	392
updateFeatureBundleRequest.....	394
updateFeatureBundleResponse.....	394

updateFeatureRequest.....	396
updateFeatureResponse.....	397
updateMaintenanceRequest.....	399
updateMaintenanceResponse.....	399
updateProductRelationshipRequest.....	401
updateProductRelationshipResponse.....	402
updateProductRequest.....	404
updateProductResponse.....	404
updateUniformSuiteRequest.....	406
updateUniformSuiteResponse.....	407
EntitlementOrderService.....	409
Methods.....	410
createBulkEntitlement.....	415
createEntitlementLineItem.....	416
createSimpleEntitlement.....	418
createWebRegKey.....	421
deleteEntitlement.....	423
deleteEntitlementLineItem.....	424
deleteMaintenanceLineItem.....	425
deleteWebRegKey.....	426
emailActivatableItem.....	428
emailEntitlement.....	429
getActivatableItemCount.....	430
getActivatableItemsQuery.....	431
getBulkEntitlementCount.....	432
getBulkEntitlementPropertiesQuery.....	433
getEntitlementAttributesFromModel.....	434
getEntitlementCount.....	435
getEntitlementLineItemPropertiesQuery.....	436
getEntitlementsQuery.....	438
getExactAvailableCount.....	439
getMatchingBulkEnts.....	440
getMatchingLineItems.....	442
getStateChangeHistory.....	444
getWebRegKeyCount.....	445
getWebRegKeysQuery.....	447
linkMaintenanceLineItem.....	449
mapEntitlementsToUser.....	450
mergeEntitlements.....	451
renewLicense.....	452

replaceEntitlementLineItem.....	453
setEntitlementState.....	454
setLineItemState.....	455
setMaintenanceLineItemState.....	456
splitBulkEntitlement.....	457
splitLineItem.....	458
transferEntitlement.....	459
transferLineItem.....	460
unlinkMaintenanceLineItem.....	461
updateBulkEntitlement.....	462
updateEntitlementLineItem.....	463
updateSimpleEntitlement.....	464
upgradeLicense.....	465
upsellLicense.....	466
Complex Types.....	468
accountIdentifierType.....	476
accountPKType.....	476
acpiGenerationIdLicensePolicyDataType.....	477
activatableItemDetailType.....	477
addedEntitlementLineItemDataListType.....	478
addedEntitlementLineItemDataType.....	479
addEntitlementLineItemDataType.....	479
addOnlyEntitlementLineItemRequestType.....	480
addOnlyEntitlementLineItemResponseType.....	481
addressDataType.....	483
addWebRegKeyDataType.....	483
addWebRegKeyRequestType.....	484
addWebRegKeyResponseType.....	484
advancedReinstallPolicyType.....	487
attributeDescriptorDataType.....	488
attributeDescriptorType.....	488
attributeMetaDescriptorDataType.....	489
attributeMetaDescriptorType.....	489
bulkEntitlementDataType.....	490
bulkEntitlementPropertiesType.....	493
bulkEntitlementResponseConfigRequestType.....	495
cancelLicensePolicyDataType.....	497
channelPartnerDataListType.....	497
channelPartnerDataType.....	498
correlationDataType.....	498

createBulkEntitlementDataType.....	498
createBulkEntitlementRequestType.....	502
createBulkEntitlementResponseType.....	502
createdBulkEntitlementDataListType.....	503
createdBulkEntitlementDataType.....	504
createdEntitlementLifeCycleDataListType.....	504
createdEntitlementLifeCycleDataType.....	505
createdRenewEntitlementDataListType.....	505
createdRenewEntitlementDataType.....	505
createdSimpleEntitlementDataListType.....	506
createdSimpleEntitlementDataType.....	506
createEntitlementLineItemDataType.....	507
createMaintenanceLineItemDataType.....	510
createSimpleEntitlementDataType.....	511
createSimpleEntitlementRequestType.....	512
createSimpleEntitlementResponseType.....	513
customAttributeDescriptorType.....	515
customAttributeQueryType.....	516
customAttributesQueryListType.....	517
deleteEntitlementDataType.....	518
deleteEntitlementRequestType.....	518
deleteEntitlementResponseType.....	519
deleteMaintenanceLineItemDataType.....	520
deleteMaintenanceLineItemRequestType.....	520
deleteMaintenanceLineItemResponseType.....	521
deleteWebRegKeyRequestType.....	522
deleteWebRegKeyResponseType.....	522
DurationType.....	525
emailActivatableItemRequestType.....	526
emailActivatableItemResponseType.....	527
emailContactListType.....	528
emailEntitlementRequestType.....	528
emailEntitlementResponseType.....	529
entCustomAttributeQueryType.....	530
entCustomAttributesQueryListType.....	531
entitledProductDataListType.....	531
entitledProductDataType.....	531
entitlementDataType.....	532
entitlementIdentifierType.....	532
entitlementLifeCycleDataType.....	533

EntitlementLifeCycleRequestType.....	533
EntitlementLifeCycleResponseType.....	534
entitlementLineItemDataType.....	535
entitlementLineItemIdentifierType.....	539
entitlementLineItemPropertiesType.....	539
entitlementLineItemResponseConfigRequestType.....	543
entitlementListType.....	544
entitlementStateChangeDataType.....	545
entitlementStateChangeListType.....	545
entitlementStateDataType.....	545
expirationTermsDataType.....	546
extraActivationDataType.....	546
failedAddEntitlementLineItemDataListType.....	547
failedAddEntitlementLineItemDataType.....	547
failedAddWebRegKeyDataListType.....	547
failedAddWebRegKeyDataType.....	548
failedBulkEntitlementDataListType.....	548
failedBulkEntitlementDataType.....	549
failedDeleteEntitlementDataListType.....	549
failedDeleteEntitlementDataType.....	549
failedDeleteMaintenanceLineItemDataListType.....	550
failedDeleteMaintenanceLineItemDataType.....	550
failedDeleteWebRegKeyDataType.....	551
failedDeleteWebRegKeyListType.....	551
failedEntitlementLifeCycleDataListType.....	551
failedEntitlementLifeCycleDataType.....	552
failedEntitlementStateDataListType.....	552
failedEntitlementStateDataType.....	552
failedIdDataType.....	553
failedLineItemStateDataListType.....	553
failedLineItemStateDataType.....	554
failedLinkMaintenanceLineItemDataType.....	554
failedLinkMaintenanceLineItemListType.....	554
failedMaintenanceLineItemStateDataListType.....	555
failedMaintenanceLineItemStateDataType.....	555
failedMapEntitlementsToUserDataListType.....	555
failedMatchingBulkEntDataType.....	556
failedMatchingBulkEntsListType.....	556
failedMatchingLineItemDataType.....	557
failedMatchingLineItemsListType.....	557

failedRemoveEntitlementLineItemDataListType.....	557
failedRemoveEntitlementLineItemDataType.....	558
failedRenewEntitlementDataListType.....	558
failedRenewEntitlementDataType.....	558
failedSimpleEntitlementDataListType.....	559
failedSimpleEntitlementDataType.....	559
failedSplitBulkEntitlementDataType.....	560
failedSplitBulkEntitlementListType.....	560
failedSplitLineItemDataType.....	560
failedSplitLineItemListType.....	561
failedTransferEntitlementDataType.....	561
failedTransferEntitlementListType.....	562
failedTransferLineItemDataType.....	562
failedTransferLineItemListType.....	562
failedUnlinkMaintenanceLineItemDataType.....	563
failedUnlinkMaintenanceLineItemListType.....	563
failedUpdateBulkEntitlementDataListType.....	563
failedUpdateBulkEntitlementDataType.....	564
failedUpdateEntitlementLineItemDataListType.....	564
failedUpdateEntitlementLineItemDataType.....	565
failedUpdateSimpleEntitlementDataListType.....	565
failedUpdateSimpleEntitlementDataType.....	565
featureBundleIdentifierType.....	566
featureBundleListType.....	566
featureBundleStateChangeDataType.....	567
featureBundleStateChangeListType.....	567
featureIdentifierType.....	567
featureListType.....	568
featureStateChangeDataType.....	568
featureStateChangeListType.....	569
fulfillmentIdentifierType.....	569
getActivatableItemCountRequestType.....	569
getActivatableItemCountResponseType.....	570
getBulkEntitlementCountRequestType.....	571
getBulkEntitlementCountResponseType.....	572
getBulkEntitlementPropertiesRequestType.....	573
getBulkEntitlementPropertiesResponseType.....	574
getEntitlementAttributesRequestType.....	575
getEntitlementAttributesResponseType.....	576
getEntitlementCountRequestType.....	578

getEntitlementCountResponseType.....	578
getExactAvailableCountRequestType.....	579
getExactAvailableCountResponseType.....	580
getMatchingBulkEntInfoType.....	581
getMatchingBulkEntsListType.....	582
getMatchingBulkEntsRequestType.....	582
getMatchingBulkEntsResponseListType.....	583
getMatchingBulkEntsResponseType.....	583
getMatchingLinItemInfoType.....	584
getMatchingLinItemsListType.....	585
getMatchingLinItemsRequestType.....	585
getMatchingLinItemsResponseListType.....	586
getMatchingLinItemsResponseType.....	586
getStateChangeHistoryRequestType.....	587
getStateChangeHistoryResponseType.....	588
getWebRegKeyCountRequestType.....	589
getWebRegKeyCountResponseType.....	590
getWebRegKeysQueryRequestType.....	592
getWebRegKeysQueryResponseType.....	593
hostTypePKType.....	595
idListType.....	595
idType.....	596
licenseGeneratorIdentifierType.....	596
licenseModelIdentifierType.....	596
licenseModelListType.....	597
licenseModelStateChangeDataType.....	597
licenseModelStateChangeListType.....	598
licenseTechnologyIdentifierType.....	598
licenseTechnologyPKType.....	598
lifeCycleLinItemDataType.....	599
linItemCustomAttributeQueryType.....	599
linItemCustomAttributesQueryListType.....	600
linItemLifeCycleDataType.....	600
linItemStateDataType.....	601
linkMaintenanceLinItemDataType.....	601
linkMaintenanceLinItemListType.....	602
linkMaintenanceLinItemRequestType.....	602
linkMaintenanceLinItemResponseType.....	603
maintenanceIdentifierType.....	604
maintenanceLinItemDataType.....	604

maintenanceLineItemPropertiesType.....	605
maintenanceLineItemStateDataType.....	606
mapEntitlementsToUserRequestType.....	607
mapEntitlementsToUserResponseType.....	607
matchingBulkEntDataType.....	609
matchingLineItemDataType.....	609
mergeEntitlementsRequestType.....	609
mergeEntitlementsResponseType.....	610
newEntitlementLineItemDataType.....	611
organizationIdentifierType.....	612
organizationPKType.....	612
OrgTypeList.....	612
PartnerTierQueryType.....	613
partNumberIdentifierType.....	614
partNumberIdentifierWithModelType.....	614
partNumberPKType.....	615
policyAttributesDataType.....	615
policyAttributesListType.....	616
policyTermType.....	617
productIdentifierType.....	618
productIdentifierWithCountDataType.....	618
productListType.....	619
productPKType.....	619
productStateChangeDataType.....	619
productStateChangeListType.....	620
reinstallPolicyDataType.....	620
removeEntitlementLineItemDataType.....	621
removeEntitlementLineItemRequestType.....	621
removeEntitlementLineItemResponseType.....	622
renewedEntitlementLineItemDataType.....	623
renewEntitlementDataType.....	623
renewEntitlementRequestType.....	624
renewEntitlementResponseType.....	624
renewLineItemDataType.....	625
renewParametersDataType.....	626
replaceOnlyEntitlementLineItemRequestType.....	628
replaceOnlyEntitlementLineItemResponseType.....	629
roleIdentifierType.....	630
rolePKType.....	630
searchActivatableItemDataType.....	630

searchActivatableItemRequestType.....	637
searchActivatableItemResponseType.....	638
searchBulkEntitlementDataType.....	639
searchEntitlementDataType.....	644
searchEntitlementLineItemPropertiesRequestType.....	652
searchEntitlementLineItemPropertiesResponseType.....	653
searchEntitlementRequestType.....	654
searchEntitlementResponseType.....	655
setEntitlementStateRequestType.....	656
setEntitlementStateResponseType.....	657
setLineItemStateRequestType.....	658
setLineItemStateResponseType.....	659
setMaintenanceLineItemStateRequestType.....	660
setMaintenanceLineItemStateResponseType.....	661
simpleEntitlementDataType.....	661
splitBulkEntitlementDataType.....	662
splitBulkEntitlementInfoType.....	663
splitBulkEntitlementListType.....	664
splitBulkEntitlementRequestType.....	664
splitBulkEntitlementResponseListType.....	665
splitBulkEntitlementResponseType.....	665
splitLineItemDataType.....	666
splitLineItemInfoType.....	667
splitLineItemListType.....	668
splitLineItemRequestType.....	668
splitLineItemResponseListType.....	669
splitLineItemResponseType.....	669
stateChangeDataType.....	670
stateChangeResponseType.....	671
suiteIdentifierType.....	671
transferEntitlementInfoType.....	672
transferEntitlementsListType.....	673
transferEntitlementsRequestType.....	673
transferEntitlementsResponseType.....	674
transferLineItemInfoType.....	675
transferLineItemsListType.....	676
transferLineItemsRequestType.....	676
transferLineItemsResponseType.....	677
transferredEntitlementDataType.....	678
transferredEntitlementsListType.....	679

transferredLineItemDataType.....	679
transferredLineItemMapType.....	680
transferredLineItemsListType.....	680
trustedKeyIdentifierType.....	680
unlinkMaintenanceLineItemDataType.....	681
unlinkMaintenanceLineItemListType.....	681
unlinkMaintenanceLineItemRequestType.....	682
unlinkMaintenanceLineItemResponseType.....	682
updateBulkEntitlementDataType.....	683
updateBulkEntitlementRequestType.....	686
updateBulkEntitlementResponseType.....	687
updateEntitledProductDataListType.....	688
updateEntitlementLineItemDataType.....	688
updateEntitlementLineItemRequestType.....	689
updateEntitlementLineItemResponseType.....	689
updateLineItemDataType.....	690
updateMaintenanceLineItemDataType.....	693
updateSimpleEntitlementDataType.....	694
updateSimpleEntitlementRequestType.....	695
updateSimpleEntitlementResponseType.....	695
userIdentifierType.....	696
userPKType.....	697
versionDateAttributesType.....	697
VersionFormatQueryType.....	698
virtualLicensePolicyDataType.....	698
webRegKeyCountDataType.....	698
webRegKeyDataListType.....	699
webRegKeyDataType.....	699
webRegKeysDataListType.....	700
webRegKeysListType.....	700
Simple Types.....	701
CreateOrUpdateOperationType.....	701
VersionDateOptionType.....	701
Elements.....	702
addWebRegKeyRequest.....	707
addWebRegKeyResponse.....	708
createBulkEntitlementRequest.....	710
createBulkEntitlementResponse.....	712
createEntitlementLineItemRequest.....	714
createEntitlementLineItemResponse.....	716

createSimpleEntitlementRequest.....	718
createSimpleEntitlementResponse.....	720
deleteEntitlementRequest.....	724
deleteEntitlementResponse.....	724
deleteMaintenanceLineItemRequest.....	726
deleteMaintenanceLineItemResponse.....	726
deleteWebRegKeyRequest.....	728
deleteWebRegKeyResponse.....	729
emailActivatableItemRequest.....	731
emailActivatableItemResponse.....	732
emailEntitlementRequest.....	734
emailEntitlementResponse.....	735
getActivatableItemCountRequest.....	736
getActivatableItemCountResponse.....	737
getBulkEntitlementCountRequest.....	739
getBulkEntitlementCountResponse.....	739
getBulkEntitlementPropertiesRequest.....	741
getBulkEntitlementPropertiesResponse.....	742
getEntitlementAttributesRequest.....	745
getEntitlementAttributesResponse.....	746
getEntitlementCountRequest.....	748
getEntitlementCountResponse.....	749
getExactAvailableCountRequest.....	751
getExactAvailableCountResponse.....	751
getMatchingBulkEntsRequest.....	753
getMatchingBulkEntsResponse.....	754
getMatchingLineItemsRequest.....	755
getMatchingLineItemsResponse.....	756
getStateChangeHistoryRequest.....	758
getStateChangeHistoryResponse.....	759
getWebRegKeyCountRequest.....	761
getWebRegKeyCountResponse.....	762
getWebRegKeysQueryRequest.....	764
getWebRegKeysQueryResponse.....	765
linkMaintenanceLineItemRequest.....	768
linkMaintenanceLineItemResponse.....	769
mapEntitlementsToUserRequest.....	771
mapEntitlementsToUserResponse.....	772
mergeEntitlementsRequest.....	774
mergeEntitlementsResponse.....	774

removeEntitlementLineItemRequest.....	776
removeEntitlementLineItemResponse.....	777
renewLicenseRequest.....	778
renewLicenseResponse.....	779
replaceEntitlementLineItemRequest.....	781
replaceEntitlementLineItemResponse.....	782
searchActivatableItemRequest.....	784
searchActivatableItemResponse.....	785
searchEntitlementLineItemPropertiesRequest.....	787
searchEntitlementLineItemPropertiesResponse.....	789
searchEntitlementRequest.....	792
searchEntitlementResponse.....	792
setEntitlementStateRequest.....	795
setEntitlementStateResponse.....	795
setLineItemStateRequest.....	797
setLineItemStateResponse.....	798
setMaintenanceLineItemStateRequest.....	800
setMaintenanceLineItemStateResponse.....	800
splitBulkEntitlementRequest.....	802
splitBulkEntitlementResponse.....	803
splitLineItemRequest.....	804
splitLineItemResponse.....	805
transferEntitlementsRequest.....	807
transferEntitlementsResponse.....	808
transferLineItemsRequest.....	810
transferLineItemsResponse.....	811
unlinkMaintenanceLineItemRequest.....	813
unlinkMaintenanceLineItemResponse.....	814
updateBulkEntitlementRequest.....	816
updateBulkEntitlementResponse.....	817
updateEntitlementLineItemRequest.....	819
updateEntitlementLineItemResponse.....	819
updateSimpleEntitlementRequest.....	821
updateSimpleEntitlementResponse.....	822
upgradeLicenseRequest.....	824
upgradeLicenseResponse.....	825
upsellLicenseRequest.....	827
upsellLicenseResponse.....	828
LicenseService.....	831
Methods.....	832

activateShortCode.....	835
consolidateFulfillments.....	836
createChildLineItemFulfillment.....	837
createLicense.....	838
createLicensesAsBatch.....	839
createLicensesAsBatchAndConsolidate.....	841
deleteOnholdFulfillments.....	842
emailConsolidatedLicenses.....	843
emailLicense.....	844
emergencyLicense.....	845
getConsolidatedFulfillmentCount.....	846
getConsolidatedFulfillmentsQuery.....	847
getFulfillmentAttributesForBatchActivation.....	848
getFulfillmentAttributesFromModel.....	849
getFulfillmentCount.....	850
getFulfillmentHistory.....	851
getFulfillmentPropertiesQuery.....	852
getFulfillmentsQuery.....	853
getHostAttributesFromLicenseTechnology.....	854
manualActivation.....	855
manualRepair.....	856
manualReturn.....	857
offlineFNPTtrustedStorageActivation.....	858
publisherErrorLicense.....	859
rehostLicense.....	860
renewFulfillment.....	861
repairLicense.....	862
repairShortCode.....	863
returnLicense.....	864
returnShortCode.....	865
setLicense.....	866
stopGapLicense.....	867
transferHost.....	868
upgradeFulfillment.....	869
upsellFulfillment.....	870
verifyCreateLicense.....	871
Complex Types.....	873
accountIdentifierType.....	879
accountPKType.....	879
accountTypeList.....	879

activateLicensesRequestType.....	880
activateLicensesResponseType.....	880
activateShortCodeRequestType.....	881
activateShortCodeResponseType.....	882
activationDataType.....	883
activationIdOverDraftMapType.....	883
activationIdsListType.....	883
addressDataType.....	884
advancedFmtLCResponseDataListType.....	884
advancedFmtLCResponseDataType.....	885
advancedFulfillmentLCDataType.....	885
advancedFulfillmentLCInfoType.....	886
advancedFulfillmentLCListType.....	887
advancedFulfillmentLCRequestType.....	887
advancedFulfillmentLCResponseType.....	888
attributeDescriptorDataType.....	889
attributeDescriptorType.....	890
attributeMetaDescriptorDataType.....	890
attributeMetaDescriptorType.....	891
commonBatchDataSetType.....	891
consolidatedFulfillmentsQPTType.....	892
consolidatedLicenseDataType.....	895
consolidatedLicenseIdListType.....	896
consolidatedResponseDataType.....	896
consolidateFulfillmentsRequestType.....	897
consolidateFulfillmentsResponseType.....	897
correlationDataType.....	898
countDataSetType.....	899
countDataType.....	899
countForHostsType.....	899
createChildLineItemFulfillmentDataType.....	900
createChildLineItemFulfillmentRequestType.....	901
createChildLineItemFulfillmentResponseType.....	902
createdChildLIFmtResponseDataType.....	903
createdChildLIFulfillmentDataType.....	903
createdChildLIFulfillmentInfoType.....	904
createdFulfillmentDataListType.....	904
createdFulfillmentDataType.....	905
createFulfillmentDataType.....	905
createFulfillmentRequestType.....	907

createFulfillmentResponseType.....	907
createLicensesAsBatchRequestType.....	909
createLicensesAsBatchResponseDataType.....	909
createLicensesAsBatchResponseType.....	909
createShortCodeDataType.....	911
customAttributeQueryType.....	911
customAttributesQueryListType.....	913
CustomHostIDType.....	913
deleteOnholdFulfillmentsRequestType.....	914
deleteOnholdFulfillmentsResponseType.....	914
Dictionary.....	915
DictionaryEntriesCollection.....	916
DictionaryEntry.....	916
duplicateFulfillmentRecordListDataType.....	917
DurationType.....	917
emailConsolidatedLicensesRequestType.....	918
emailConsolidatedLicensesResponseType.....	919
emailContactListType.....	919
emailLicenseRequestType.....	920
emailLicenseResponseType.....	921
emergencyFulfillmentDataType.....	922
emergencyFulfillmentRequestType.....	922
emergencyFulfillmentResponseDataType.....	923
emergencyFulfillmentResponseType.....	923
emergencyResponseDataType.....	924
entitledProductDataListType.....	924
entitledProductDataType.....	925
entitlementIdentifierType.....	925
entitlementLineItemIdentifierType.....	925
failedAdvancedFmtLCDDataType.....	926
failedAdvancedFmtLCResponseDataType.....	926
failedChildLIFmtResponseDataType.....	927
failedChildLIFulfillmentDataType.....	927
failedEmergencyResponseDataType.....	927
failedEmergencyResponseListDataType.....	928
failedFulfillmentDataListType.....	928
failedFulfillmentDataType.....	928
failedOnholdFulfillmentDataType.....	929
failedOnholdFulfillmentListType.....	929
failedPublisherErrorResponseDataType.....	930

failedPublisherErrorResponseListDataType.....	930
failedRehostResponseDataType.....	930
failedRehostResponseListDataType.....	931
failedRepairResponseDataType.....	931
failedRepairResponseListDataType.....	931
failedRepairShortCodeDataType.....	932
failedReturnResponseDataType.....	932
failedReturnResponseListDataType.....	933
failedReturnShortCodeDataType.....	933
failedSetLicenseOnholdFulfillmentDataType.....	933
failedSetLicenseOnholdFulfillmentListType.....	934
failedShortCodeDataType.....	934
failedStopGapResponseDataType.....	935
failedStopGapResponseListDataType.....	935
failedTransferHostDataType.....	935
failedTransferHostListDataType.....	936
featureBundleIdentifierType.....	936
featureBundlePKType.....	936
featureIdentifierType.....	937
featurePKType.....	937
fulfillmentDataType.....	937
fulfillmentHistoryDataType.....	939
fulfillmentHistoryDetailsType.....	940
fulfillmentHistoryRecordType.....	940
fulfillmentIdentifierListType.....	941
fulfillmentIdentifierType.....	941
fulfillmentIdListType.....	942
fulfillmentPropertiesType.....	942
fulfillmentResponseConfigRequestType.....	944
fulfillmentsQueryParametersType.....	946
getConsolidatedFulfillmentCountRequestType.....	951
getConsolidatedFulfillmentCountResponseType.....	952
getConsolidatedFulfillmentsQueryRequestType.....	953
getConsolidatedFulfillmentsQueryResponseDataType.....	954
getConsolidatedFulfillmentsQueryResponseType.....	954
getFmtAttributesForBatchActivationRequestType.....	955
getFmtAttributesForBatchActivationResponseType.....	956
getFmtAttributesForBatchDataType.....	957
getFulfillmentAttributesDataType.....	958
getFulfillmentAttributesRequestType.....	959

getFulfillmentAttributesResponseType.....	959
getFulfillmentCountRequestType.....	960
getFulfillmentCountResponseDataType.....	961
getFulfillmentCountResponseType.....	961
getFulfillmentHistoryRequestType.....	962
getFulfillmentHistoryResponseType.....	964
getFulfillmentPropertiesRequestType.....	965
getFulfillmentPropertiesResponseType.....	966
getFulfillmentsQueryRequestType.....	967
getFulfillmentsQueryResponseDataType.....	968
getFulfillmentsQueryResponseType.....	969
getHostAttributesDataType.....	970
getHostAttributesRequestType.....	970
getHostAttributesResponseType.....	970
hostIdDataDetailsType.....	971
hostIdDataSetType.....	972
hostIdDataType.....	972
hostIdDetailsType.....	973
hostTypePKType.....	973
licenseFileDataListType.....	974
licenseFileDataType.....	974
licenseGeneratorIdentifierType.....	974
licenseModelIdentifierType.....	975
licenseTechnologyIdentifierType.....	975
licenseTechnologyPKType.....	976
maintenanceIdentifierType.....	976
maintenancePKType.....	976
ModelDsType.....	977
onHoldFmtLicenseDataType.....	977
onholdFulfillmentListType.....	978
organizationIdentifierType.....	978
organizationPKType.....	978
OrgTypeList.....	979
overDraftDataListType.....	979
partNumberIdentifierWithModelType.....	980
partNumberPKType.....	980
productIdentifierType.....	981
productIdentifierWithCountDataType.....	981
publisherAttributesListDataType.....	982
publisherErrorFulfillmentDataType.....	982

publisherErrorFulfillmentRequestType.....	983
publisherErrorFulfillmentResponseDataType.....	983
publisherErrorFulfillmentResponseType.....	984
publisherErrorResponseDataType.....	984
rehostFulfillmentDataType.....	985
rehostFulfillmentRequestType.....	985
rehostFulfillmentResponseDataType.....	986
rehostFulfillmentResponseType.....	986
rehostResponseDataType.....	987
repairFulfillmentDataType.....	988
repairFulfillmentRequestType.....	988
repairFulfillmentResponseDataType.....	989
repairFulfillmentResponseType.....	989
repairResponseDataType.....	990
repairShortCodeDataType.....	991
repairShortCodeRequestType.....	991
repairShortCodeResponseType.....	992
returnFulfillmentDataType.....	993
returnFulfillmentRequestType.....	993
returnFulfillmentResponseDataType.....	994
returnFulfillmentResponseType.....	994
returnResponseDataType.....	995
returnShortCodeDataType.....	996
returnShortCodeRequestType.....	996
returnShortCodeResponseType.....	997
ServerIDsType.....	998
setLicenseRequestType.....	999
setLicenseResponseType.....	999
stopGapFulfillmentDataType.....	1000
stopGapFulfillmentRequestType.....	1001
stopGapFulfillmentResponseDataType.....	1001
stopGapFulfillmentResponseType.....	1002
stopGapResponseDataType.....	1002
suiteIdentifierType.....	1003
suitePKType.....	1003
transferHostIdDataType.....	1004
transferHostList.....	1004
transferHostRequestType.....	1004
transferHostResponseType.....	1005
trustedRequestType.....	1006

trustedResponseType.....	1007
typeLineItem.....	1008
verifiedFulfillmentDataType.....	1009
versionDateAttributesType.....	1009
VersionFormatQueryType.....	1010
Simple Types.....	1011
accountType.....	1011
ActivationType.....	1011
CollectionOperationAccountType.....	1012
CreateOrUpdateOperationAccountType.....	1012
CreateOrUpdateOperationType.....	1012
FulfillmentSourceType.....	1012
VersionDateOptionType.....	1013
Elements.....	1014
activateLicensesRequest.....	1017
activateLicensesResponse.....	1019
activateShortCodeRequest.....	1020
activateShortCodeResponse.....	1021
consolidateFulfillmentsRequest.....	1022
consolidateFulfillmentsResponse.....	1023
createChildLineItemFulfillmentRequest.....	1025
createChildLineItemFulfillmentResponse.....	1026
createLicenseRequest.....	1028
createLicenseResponse.....	1029
createLicensesAsBatchAndConsolidateRequest.....	1031
createLicensesAsBatchAndConsolidateResponse.....	1032
createLicensesAsBatchRequest.....	1034
createLicensesAsBatchResponse.....	1035
deleteOnholdFulfillmentsRequest.....	1038
deleteOnholdFulfillmentsResponse.....	1039
emailConsolidatedLicensesRequest.....	1041
emailConsolidatedLicensesResponse.....	1041
emailLicenseRequest.....	1043
emailLicenseResponse.....	1044
emergencyLicenseRequest.....	1045
emergencyLicenseResponse.....	1046
getConsolidatedFulfillmentCountRequest.....	1049
getConsolidatedFulfillmentCountResponse.....	1050
getConsolidatedFulfillmentsQueryRequest.....	1052
getConsolidatedFulfillmentsQueryResponse.....	1053

getFmtAttributesForBatchActivationRequest.....	1055
getFmtAttributesForBatchActivationResponse.....	1056
getFulfillmentAttributesRequest.....	1058
getFulfillmentAttributesResponse.....	1059
getFulfillmentCountRequest.....	1061
getFulfillmentCountResponse.....	1061
getFulfillmentHistoryRequest.....	1063
getFulfillmentHistoryResponse.....	1065
getFulfillmentPropertiesRequest.....	1066
getFulfillmentPropertiesResponse.....	1068
getFulfillmentsQueryRequest.....	1071
getFulfillmentsQueryResponse.....	1072
getHostAttributesRequest.....	1074
getHostAttributesResponse.....	1075
manualActivationRequest.....	1077
manualActivationResponse.....	1077
manualRepairRequest.....	1079
manualRepairResponse.....	1079
manualReturnRequest.....	1080
manualReturnResponse.....	1081
publisherErrorLicenseRequest.....	1082
publisherErrorLicenseResponse.....	1083
rehostLicenseRequest.....	1086
rehostLicenseResponse.....	1087
renewFulfillmentRequest.....	1090
renewFulfillmentResponse.....	1091
repairLicenseRequest.....	1093
repairLicenseResponse.....	1094
repairShortCodeRequest.....	1097
repairShortCodeResponse.....	1098
returnLicenseRequest.....	1099
returnLicenseResponse.....	1100
returnShortCodeRequest.....	1104
returnShortCodeResponse.....	1105
setLicenseRequest.....	1106
setLicenseResponse.....	1106
stopGapLicenseRequest.....	1108
stopGapLicenseResponse.....	1109
transferHostRequest.....	1112
transferHostResponse.....	1113

upgradeFulfillmentRequest.....	1114
upgradeFulfillmentResponse.....	1115
upsellFulfillmentRequest.....	1117
upsellFulfillmentResponse.....	1118
verifyCreateLicenseRequest.....	1120
verifyCreateLicenseResponse.....	1121
UserOrgHierarchyService.....	1124
Methods.....	1125
createOrganization.....	1126
createUser.....	1126
deleteOrganization.....	1127
deleteUser.....	1128
getOrganizationCount.....	1129
getOrganizationsQuery.....	1130
getParentOrganizations.....	1131
getRelatedOrganizations.....	1132
getSubOrganizations.....	1133
getUserCount.....	1134
getUserPermissions.....	1135
getUsersQuery.....	1136
linkOrganizations.....	1137
relateOrganizations.....	1138
updateOrganization.....	1139
updateUser.....	1140
updateUserRoles.....	1141
Complex Types.....	1143
accountIdentifierType.....	1145
accountPKType.....	1146
addressDataType.....	1146
attributeDescriptorDataType.....	1147
attributeDescriptorType.....	1147
createdOrganizationDataListType.....	1148
createdUserDataListType.....	1148
createOrgRequestType.....	1148
createOrgResponseType.....	1149
createUserData Type.....	1150
createUserOrganizationRolesListType.....	1152
createUserOrganizationsListType.....	1152
createUserOrganizationType.....	1152
createUserRequestType.....	1153

createUserResponseType.....	1154
DateTimeQueryType.....	1155
deleteOrganizationRequestType.....	1156
deleteOrganizationResponseType.....	1156
deleteOrgDataType.....	1157
deleteUserRequestType.....	1158
deleteUserResponseType.....	1158
failedCreateOrgDataListType.....	1159
failedCreateOrgDataType.....	1160
failedCreateUserDataListType.....	1160
failedCreateUserDataType.....	1160
failedDeleteOrgDataListType.....	1161
failedDeleteOrgDataType.....	1161
failedDeleteUserDataListType.....	1162
failedDeleteUserDataType.....	1162
failedLinkOrgDataListType.....	1162
failedLinkOrgDataType.....	1163
failedRelateOrganizationsDataListType.....	1163
failedRelateOrganizationsDataType.....	1163
failedUpdateOrgDataListType.....	1164
failedUpdateOrgDataType.....	1164
failedUpdateUserDataListType.....	1164
failedUpdateUserDataType.....	1165
failedUpdateUserRolesDataListType.....	1165
failedUpdateUserRolesDataType.....	1165
featureIdentifierType.....	1166
getOrganizationCountRequestType.....	1166
getOrganizationCountResponseDataType.....	1167
getOrganizationCountResponseType.....	1167
getOrganizationsQueryRequestType.....	1168
getOrganizationsQueryResponseDataType.....	1169
getOrganizationsQueryResponseType.....	1169
getParentOrganizationsRequestType.....	1170
getParentOrganizationsResponseType.....	1171
getRelatedOrganizationsRequestType.....	1172
getRelatedOrganizationsResponseType.....	1173
getSubOrganizationsRequestType.....	1174
getSubOrganizationsResponseType.....	1175
getUserCountRequestType.....	1176
getUserCountResponseDataType.....	1177

getUserCountResponseType.....	1177
getUserPermissionsRequestType.....	1178
getUserPermissionsResponseDataType.....	1179
getUserPermissionsResponseType.....	1179
getUsersQueryRequestType.....	1180
getUsersQueryResponseDataType.....	1181
getUsersQueryResponseType.....	1181
linkOrganizationsDataType.....	1182
linkOrganizationsRequestType.....	1183
linkOrganizationsResponseType.....	1183
organizationDataType.....	1184
organizationDetailDataType.....	1185
organizationIdentifierType.....	1186
organizationPKType.....	1186
organizationQueryParametersType.....	1187
OrgTypeList.....	1188
relateOrganizationsDataType.....	1189
relateOrganizationsRequestType.....	1189
relateOrganizationsResponseType.....	1190
roleIdentifierType.....	1191
rolePKType.....	1191
updateOrganizationRequestType.....	1191
updateOrganizationResponseType.....	1192
updateOrgDataType.....	1193
updateRelatedOrganizationsListType.....	1194
updateSubOrganizationsListType.....	1194
updateUserDataType.....	1195
updateUserOrganizationRolesListType.....	1196
updateUserOrganizationsListType.....	1196
updateUserOrganizationType.....	1197
updateUserRequestType.....	1197
updateUserResponseType.....	1198
updateUserRolesDataType.....	1199
updateUserRolesListType.....	1200
updateUserRolesOrganizationDataType.....	1200
updateUserRolesRequestType.....	1201
updateUserRolesResponseType.....	1201
userCustomAttributeQueryType.....	1202
userCustomAttributesQueryListType.....	1203
userDetailDataType.....	1203

userIdentifierType.....	1204
userPKType.....	1205
userQueryParametersType.....	1205
versionDateAttributesType.....	1207
Elements.....	1208
createOrgRequest.....	1209
createOrgResponse.....	1210
createUserRequest.....	1212
createUserResponse.....	1214
deleteOrganizationRequest.....	1216
deleteOrganizationResponse.....	1217
deleteUserRequest.....	1218
deleteUserResponse.....	1219
getOrganizationCountRequest.....	1220
getOrganizationCountResponse.....	1221
getOrganizationsQueryRequest.....	1223
getOrganizationsQueryResponse.....	1224
getParentOrganizationsRequest.....	1225
getParentOrganizationsResponse.....	1226
getRelatedOrganizationsRequest.....	1228
getRelatedOrganizationsResponse.....	1228
getSubOrganizationsRequest.....	1230
getSubOrganizationsResponse.....	1231
getUserCountRequest.....	1233
getUserCountResponse.....	1234
getUserPermissionsRequest.....	1235
getUserPermissionsResponse.....	1236
getUsersQueryRequest.....	1238
getUsersQueryResponse.....	1239
linkOrganizationsRequest.....	1241
linkOrganizationsResponse.....	1242
relateOrganizationsRequest.....	1244
relateOrganizationsResponse.....	1245
updateOrganizationRequest.....	1247
updateOrganizationResponse.....	1248
updateUserRequest.....	1250
updateUserResponse.....	1251
updateUserRolesRequest.....	1253
updateUserRolesResponse.....	1253
UserAdministration.....	1256

Methods	1257
addGroups	1257
addUsers	1258
changeGroupStatus	1258
changeUserStatus	1259
countUsers	1259
deleteUsers	1260
findUsers	1261
resetPassword	1261
retrieveAllGroups	1262
retrieveAllUsers	1262
retrieveCustomAttrMetaData	1263
retrieveGroup	1263
retrieveUser	1264
updateGroups	1265
updateUsers	1265
Complex Types	1267
AllGroupsResponse	1267
AllUsersResponse	1268
CountUsersQuery	1269
CountUsersResponse	1269
CustomAttribute	1270
CustomAttributeMetaData	1271
CustomAttrMetaDataResponse	1271
DeleteUserList	1272
DisplayGroup	1273
DisplayUser	1273
DomainGroup	1274
DomainUser	1275
EmptyRequest	1276
FindUsersQuery	1277
FindUsersResponse	1278
GroupList	1278
GroupQuery	1279
GroupResponse	1279
GroupStatus	1280
Role	1281
StatusResponseList	1281
User	1282
UserList	1284

UserQuery.....	1285
UserReset.....	1285
UserResponse.....	1286
UserStatus.....	1286
Elements.....	1288
addGroupsRequest.....	1289
addGroupsResponse.....	1290
addUsersRequest.....	1291
addUsersResponse.....	1292
changeGroupStatusRequest.....	1293
changeGroupStatusResponse.....	1293
changeUserStatusRequest.....	1294
changeUserStatusResponse.....	1295
countUsersRequest.....	1296
countUsersResponse.....	1297
customAttrMetaDataRequest.....	1298
customAttrMetaDataResponse.....	1298
deleteUsersRequest.....	1300
deleteUsersResponse.....	1301
findUsersRequest.....	1302
findUsersResponse.....	1303
resetPasswordRequest.....	1304
resetPasswordResponse.....	1305
retrieveAllGroupsRequest.....	1305
retrieveAllGroupsResponse.....	1306
retrieveAllUsersRequest.....	1307
retrieveAllUsersResponse.....	1308
retrieveGroupRequest.....	1309
retrieveGroupResponse.....	1310
retrieveUserRequest.....	1311
retrieveUserResponse.....	1312
updateGroupsRequest.....	1313
updateGroupsResponse.....	1314
updateUsersRequest.....	1315
updateUsersResponse.....	1315
OrganizationAdministration.....	1317
Methods.....	1318
addOrganizations.....	1318
countOrganizations.....	1319
deleteOrganizations.....	1319

findOrganizations.....	1320
retrieveAllOrganizations.....	1321
retrieveOrganization.....	1321
updateOrganizations.....	1322
Complex Types.....	1323
AllOrganizationResponse.....	1323
Contact.....	1324
CountOrganizationsQuery.....	1324
CountOrganizationsResponse.....	1325
DeleteOrganizationList.....	1326
DisplayOrganization.....	1326
EmptyRequest.....	1327
FindOrganizationsQuery.....	1327
FindOrganizationsResponse.....	1328
Organization.....	1329
OrganizationList.....	1329
OrganizationQuery.....	1330
OrganizationResponse.....	1330
StatusResponseList.....	1331
UpdateOrganization.....	1332
UpdateOrganizationList.....	1332
Elements.....	1334
addOrganizationsRequest.....	1334
addOrganizationsResponse.....	1335
countOrganizationsRequest.....	1336
countOrganizationsResponse.....	1337
deleteOrganizationsRequest.....	1338
deleteOrganizationsResponse.....	1339
findOrganizationsRequest.....	1339
findOrganizationsResponse.....	1340
retrieveAllOrganizationsRequest.....	1342
retrieveAllOrganizationsResponse.....	1342
retrieveOrganizationRequest.....	1343
retrieveOrganizationResponse.....	1344
updateOrganizationsRequest.....	1345
updateOrganizationsResponse.....	1346
FlexnetAuthentication.....	1348
Methods.....	1349
getSecureToken.....	1349
getUserToken.....	1349

Complex Types.....	1351
IdentityType.....	1351
TokenResponseType.....	1351
UserTokenReturn.....	1352
Elements.....	1353
secureTokenRequest.....	1353
secureTokenResponse.....	1353
UserTokenInput.....	1354
UserTokenReturn.....	1355
ManageDeviceService.....	1356
Methods.....	1357
createDevice.....	1359
decrementAddonLineItems.....	1360
deleteAddonLineItems.....	1360
deleteDevice.....	1361
generateCapabilityResponse.....	1361
generateCloneDetectionReport.....	1363
generatePrebuiltLicense.....	1363
getAutoProvisionedServer.....	1364
getDeviceCount.....	1364
getDevicesQuery.....	1365
incrementAddonLineItems.....	1366
linkAddonLineItems.....	1366
moveDevice.....	1367
obsoleteHost.....	1367
returnHost.....	1368
updateDevice.....	1368
Complex Types.....	1370
addonLineItemDataDataType.....	1373
attributeDescriptorDataType.....	1374
attributeDescriptorType.....	1375
capabilityRequestType.....	1375
capabilityResponseDataType.....	1376
channelPartnerDataListType.....	1376
channelPartnerDataType.....	1376
cloneSuspect.....	1377
createdDeviceDataListType.....	1378
createDeviceIdentifier.....	1378
createDevRequestType.....	1379
createDevResponseType.....	1380

customAttributeDescriptorDataType.....	1380
customAttributeDescriptorType.....	1381
customAttributeQueryType.....	1381
customAttributesQueryListType.....	1383
DateQueryType.....	1383
DateTimeQueryType.....	1384
deleteAddonLineItemDataType.....	1384
deleteAddonLineItemsRequestType.....	1385
deleteAddonLineItemsResponseType.....	1385
deleteDeviceRequestType.....	1386
deleteDeviceResponseType.....	1386
deleteFailAddonDataListType.....	1387
deleteFailAddonDataType.....	1387
deleteLineItemDataType.....	1388
deleteLineItemIdentifier.....	1388
deviceDataType.....	1388
deviceIdIdentifier.....	1389
DeviceMachineTypeQueryType.....	1390
deviceQueryDataType.....	1391
DeviceServedStateQueryType.....	1393
DeviceStateQueryType.....	1394
deviceTypeList.....	1395
dictionaryEntry.....	1395
dictionaryType.....	1396
DurationType.....	1396
entitledProductDataListType.....	1397
entitledProductDataType.....	1397
failedCapabilityResponseDataType.....	1398
failedCreateDevDataListType.....	1398
failedCreateDeviceDataType.....	1398
failedDeleteDevDataListType.....	1399
failedDeleteDevDataType.....	1399
failedGenerateCapabilityResponseDataType.....	1399
failedGeneratePrebuiltLicenseDataListType.....	1400
failedGeneratePrebuiltLicenseDataType.....	1400
failedGetDevicesDataType.....	1400
failedMoveDeviceDataType.....	1401
failedMoveDeviceListDataType.....	1401
failedObsoleteHostDataType.....	1401
failedObsoleteHostListDataType.....	1402

failedReturnHostDataType.....	1402
failedReturnHostListDataType.....	1402
failedUpdateDevDataListType.....	1403
failedUpdateDeviceDataType.....	1403
featureDataDataType.....	1404
featureIds.....	1404
generateCapabilityResponseDataType.....	1405
generateCapabilityResponseDictionary.....	1405
generateCapabilityResponseDictionaryEntry.....	1405
generateCapabilityResponseRequestType.....	1406
generateCapabilityResponseResponseType.....	1406
generateCloneDetectionReportRequest.....	1407
generateCloneDetectionReportResponse.....	1408
generatePrebuiltLicenseDataListType.....	1408
generatePrebuiltLicenseDataType.....	1408
generatePrebuiltLicenseRequestType.....	1409
generatePrebuiltLicenseResponseType.....	1409
getAutoProvisionedServerRequest.....	1410
getAutoProvisionedServerResponse.....	1411
getDeviceCountResponseDataType.....	1411
getDeviceCountResponseType.....	1411
getDevicesCountRequestType.....	1412
getDevicesParametersType.....	1412
getDevicesRequestType.....	1419
getDevicesResponseDataType.....	1421
getDevicesResponseType.....	1421
hostTypeIdIdentifier.....	1422
licenseModelIdentifierType.....	1422
linkAddonLineItemDataType.....	1423
linkAddonLineItemsRequestType.....	1423
linkAddonLineItemsResponseType.....	1424
linkFailAddonDataListType.....	1424
linkFailAddonDataType.....	1425
linkLineItemDataType.....	1425
linkLineItemIdentifier.....	1425
moveDeviceList.....	1426
moveDeviceRequestType.....	1426
moveDeviceResponseType.....	1427
NumberQueryType.....	1428
obsoleteHostRequestListType.....	1428

obsoleteHostResponseType.....	1429
obsoleteHostType.....	1429
OpsEmbeddedStatusInfoType.....	1430
organizationIdentifierType.....	1430
organizationPKType.....	1431
PartnerTierQueryType.....	1431
productIdentifierType.....	1431
productPKType.....	1432
publisherIdentifier.....	1432
returnHostRequestListType.....	1433
returnHostResponseType.....	1433
returnHostType.....	1434
ServerIdsType.....	1434
soldToType.....	1434
successAddonDataListType.....	1435
updateChannelPartnerDataListType.....	1435
updatedDeviceDataListType.....	1436
updateDevDataType.....	1436
updateDevRequestType.....	1438
updateDevResponseType.....	1438
userIdentifierType.....	1439
userPKType.....	1439
Simple Types.....	1441
deviceServedStatusType.....	1441
Elements.....	1442
createDeviceRequest.....	1443
createDeviceResponse.....	1445
decrementAddonLineItemsRequest.....	1446
decrementAddonLineItemsResponse.....	1447
deleteAddonLineItemsRequest.....	1448
deleteAddonLineItemsResponse.....	1449
deleteDeviceRequest.....	1451
deleteDeviceResponse.....	1451
generateCapabilityResponseRequest.....	1452
generateCapabilityResponseResponse.....	1454
generateCloneDetectionReportRequest.....	1455
generateCloneDetectionReportResponse.....	1456
generatePrebuiltLicenseRequest.....	1458
generatePrebuiltLicenseResponse.....	1459
getAutoProvisionedServerRequest.....	1460

getAutoProvisionedServerResponse.....	1461
getDeviceCountRequest.....	1462
getDeviceCountResponse.....	1463
getDevicesRequest.....	1464
getDevicesResponse.....	1468
incrementAddonLineItemsRequest.....	1470
incrementAddonLineItemsResponse.....	1471
linkAddonLineItemsRequest.....	1472
linkAddonLineItemsResponse.....	1473
moveDeviceRequest.....	1474
moveDeviceResponse.....	1475
obsoleteHostRequest.....	1477
obsoleteHostResponse.....	1477
returnHostRequest.....	1478
returnHostResponse.....	1479
updateDeviceRequest.....	1480
updateDeviceResponse.....	1482
DownloadPackagingService.....	1484
Methods.....	1485
assignDownloadPackageToProduct.....	1486
assignFileToDownloadPackage.....	1486
createAgreement.....	1487
createDownloadPackage.....	1488
createFile.....	1488
createManufacturer.....	1489
deleteFile.....	1490
getAgreementCount.....	1490
getAgreementQuery.....	1491
getDownloadPackageCount.....	1492
getDownloadPackageInProductCount.....	1492
getDownloadPackageInProductQuery.....	1493
getDownloadPackageQuery.....	1494
getFileCount.....	1495
getFileQuery.....	1495
getManufacturerCount.....	1496
getManufacturerQuery.....	1497
getMultipleDownloadPackagesCount.....	1498
getMultipleDownloadPackagesQuery.....	1498
removeDownloadPackageFromProduct.....	1499
removeFileFromDownloadPackage.....	1500

updateAgreement.....	1500
updateDownloadPackage.....	1501
updateFile.....	1501
updateManufacturer.....	1502
uploadFile.....	1503
Complex Types.....	1504
Agreement.....	1505
AgreementCountResult.....	1506
AgreementQueryParameters.....	1506
AgreementQueryResponseDataType.....	1507
AgreementQueryResults.....	1507
AgreementTransactionResult.....	1508
AttributeDescriptor.....	1508
CountResponseDataType.....	1508
DownloadPackage.....	1509
DownloadPackageAlternateLanguage.....	1511
DownloadPackageAssociationResult.....	1512
DownloadPackageCountResult.....	1512
DownloadPackageDisassociationResult.....	1512
DownloadPackageIDType.....	1513
DownloadPackageInProductCountResult.....	1513
DownloadPackageInProductQueryParameters.....	1514
DownloadPackageInProductQueryResponseDataType.....	1514
DownloadPackageInProductQueryResults.....	1515
DownloadPackageQueryParameters.....	1515
DownloadPackageQueryResponseDataType.....	1516
DownloadPackageQueryResults.....	1517
DownloadPackageResult.....	1517
DownloadPackageSortBy.....	1518
DownloadPackageSortBys.....	1518
DownloadPackageSortOrderType.....	1519
DownloadPackageTransactionResult.....	1519
ExportComplianceClassification.....	1520
File.....	1520
FileAlternateLanguage.....	1522
FileCountResult.....	1522
FileDeleteResult.....	1523
FileIDType.....	1523
FileInDownloadPackageType.....	1524
FileQueryParameters.....	1524

FileQueryResponseDataType.....	1525
FileQueryResults.....	1526
FileResult.....	1526
FileTransactionResult.....	1527
FileUploadResult.....	1527
Manufacturer.....	1527
ManufacturerCountResult.....	1528
ManufacturerQueryParameters.....	1528
ManufacturerQueryResponseDataType.....	1529
ManufacturerQueryResults.....	1530
ManufacturerTransactionResult.....	1530
MultipleDownloadPackagesQueryParameters.....	1531
MultipleDownloadPackagesQueryResponseDataType.....	1531
MultipleDownloadPackagesQueryResults.....	1532
ProductAssociationResult.....	1532
ProductDisassociationResult.....	1533
ProductIDType.....	1533
ProductLine.....	1534
ProductLineAlternateLanguage.....	1534
QueryError.....	1535
QueryResult.....	1535
TransactionError.....	1536
TransactionResult.....	1536
UnexpectedError.....	1537
Simple Types.....	1538
DownloadPackageSortKey.....	1538
FileStatusType.....	1538
OpTypeType.....	1539
Elements.....	1540
ActualSHA256 [type File].....	1543
Ascending [type DownloadPackageSortBy].....	1544
assignDownloadPackageToProduct.....	1544
assignDownloadPackageToProductResponse.....	1545
Availability [type MultipleDownloadPackagesQueryParameters].....	1545
BatchSize [element getDownloadPackageInProductQuery].....	1546
BatchSize [element getMultipleDownloadPackagesQuery].....	1546
createAgreement.....	1547
createAgreementResponse.....	1547
createDownloadPackage.....	1548
createDownloadPackageResponse.....	1550

createManufacturer.....	1552
createManufacturerResponse.....	1552
CreationDateEnd [type MultipleDownloadPackagesQueryParameters].....	1553
CreationDateStart [type MultipleDownloadPackagesQueryParameters].....	1553
DownloadPackage [type DownloadPackageResult].....	1554
DownloadPackageCountResult [element getMultipleDownloadPackagesCountResponse].....	1556
DownloadPackageDescription [type DownloadPackageQueryParameters].....	1557
DownloadPackageDescription [type MultipleDownloadPackagesQueryParameters].....	1558
DownloadPackageID [type DownloadPackageSortOrderType].....	1558
DownloadPackageID [type MultipleDownloadPackagesQueryParameters].....	1559
DownloadPackageInProductCountResult [element getDownloadPackageInProductCountResponse].....	1559
DownloadPackageInProductQueryParameters [element getDownloadPackageInProductCount].....	1560
DownloadPackageInProductQueryParameters [element getDownloadPackageInProductQuery].....	1561
DownloadPackageInProductQueryResults [element getDownloadPackageInProductQueryResponse].....	1561
DownloadPackageResult [type DownloadPackageInProductQueryResponseDataType].....	1562
DownloadPackageResult [type DownloadPackageQueryResponseDataType].....	1563
DownloadPackageResult [type MultipleDownloadPackagesQueryResponseDataType].....	1563
DownloadPackageSortOrder [type FileResult].....	1564
DownloadPackageSystemID [type DownloadPackageResult].....	1565
DownloadPackageVersion [type DownloadPackageQueryParameters].....	1565
DownloadPackageVersion [type MultipleDownloadPackagesQueryParameters].....	1566
ExpectedChecksum [type File].....	1566
File [type FileResult].....	1567
FileResult [type FileQueryResponseDataType].....	1568
getAgreementCount.....	1569
getAgreementCountResponse.....	1569
getAgreementQuery.....	1570
getAgreementQueryResponse.....	1571
getDownloadPackageCount.....	1572
getDownloadPackageCountResponse.....	1573
getDownloadPackageInProductCount.....	1573
getDownloadPackageInProductCountResponse.....	1574
getDownloadPackageInProductQuery.....	1574
getDownloadPackageInProductQueryResponse.....	1574
getDownloadPackageQuery.....	1575
getDownloadPackageQueryResponse.....	1576
getManufacturerCount.....	1576
getManufacturerCountResponse.....	1577
getManufacturerQuery.....	1578
getManufacturerQueryResponse.....	1579

getMultipleDownloadPackagesCount.....	1580
getMultipleDownloadPackagesCountResponse.....	1581
getMultipleDownloadPackagesQuery.....	1581
getMultipleDownloadPackagesQueryResponse.....	1582
MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesCount].....	1582
MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesQuery].....	1583
MultipleDownloadPackagesQueryResults [element getMultipleDownloadPackagesQueryResponse].....	1583
PageNumber [element getDownloadPackageInProductQuery].....	1584
PageNumber [element getMultipleDownloadPackagesQuery].....	1584
Product [type DownloadPackageResult].....	1585
ProductName [type DownloadPackageInProductQueryParameters].....	1585
ProductVersion [type DownloadPackageInProductQueryParameters].....	1586
QueryResult [type DownloadPackageInProductCountResult].....	1586
QueryResult [type DownloadPackageInProductQueryResults].....	1587
QueryResult [type MultipleDownloadPackagesQueryResults].....	1588
removeDownloadPackageFromProduct.....	1588
removeDownloadPackageFromProductResponse.....	1589
ResponseData [type DownloadPackageInProductCountResult].....	1590
ResponseData [type DownloadPackageInProductQueryResults].....	1590
ResponseData [type MultipleDownloadPackagesQueryResults].....	1591
RestrictCode [type DownloadPackage].....	1592
ReturnContainedObjects [element getDownloadPackageInProductQuery].....	1592
ReturnContainedObjects [element getMultipleDownloadPackagesQuery].....	1593
SortBy [type DownloadPackageSortBys].....	1593
SortBys [element getMultipleDownloadPackagesQuery].....	1594
SortKey [type DownloadPackageSortBy].....	1594
SortOrder [type DownloadPackageSortOrderType].....	1595
updateAgreement.....	1595
updateAgreementResponse.....	1596
updateDownloadPackage.....	1597
updateDownloadPackageResponse.....	1598
updateManufacturer.....	1599
updateManufacturerResponse.....	1600
UsageService.....	1601
Methods.....	1602
getUsage.....	1602
Complex Types.....	1603
Period.....	1603
StatusInfo.....	1603
Usage.....	1604

Elements..... 1606

 GetUsageRequest.....1606

 GetUsageResponse..... 1606

EsdWebService..... 1609

Appendix A..... 1610

Appednix B..... 1612

Appendix C..... 1616

Appendix D..... 1618

Appendix E.....1662

FlexNet Operations 2020 R1.1 On Premises SOAP Web Services Guide

FlexNet Operations supports the integration of software license delivery into the business operations of software producers. Much of its functionality is exposed as Web services to facilitate its integration with software producer back office systems.

FlexNet Operations Web services are accessed using a document-style SOAP mechanism from client applications that you write. SOAP is an XML-based protocol that supports information exchange using HTTP and has implementations in many programming languages. Because each Web service is a document-style SOAP service, its parameters are sent in a specific XML format. This format is defined in a service-specific XML Schema document and a WSDL file. A language-specific client implementation (for example, C, C++, Java, Visual Studio .NET, Perl) of each interface can be generated from its WSDL file.

A WSDL file defines the interface to each web service. The custom data types and XML Schema elements specific to each interface are defined in one or more companion XML Schema documents. The files containing these interface definitions are located in the FlexNet Operations installation.

Sources

Name	Description
ProductPackagingService	Web service to create, update, delete, count and query various product packaging definitions.
EntitlementOrderService	Web service to create, update, delete, count and query entitlements.
LicenseService	Web service to create, rehost, repair, return, query of license activations.
UserOrgHierarchyService	Web service to create, update and query organizational hierarchies as well as to create, update or delete users and user roles in an organization.
UserAdministration	Web service to manage users.
OrganizationAdministration	Web service to manage organizations.
FlexnetAuthentication	Web service to manage Flexnet authentication.
ManageDeviceService	Web service to manage devices.
DownloadPackagingService	The Download Packaging Web Service is an add-on to the FlexNet Operations entitlement management system.
UsageService	Web service to retrieve real-time, reconciled usage data for an organization.
EsdWebService	The Electronic Software Delivery Web Service has been replaced with the Download Packaging Service, and Flexera Software suggests that existing implementations be migrated to the newer service. Please contact Support if you have an Electronic Software Delivery implementation and you require documentation.
Appendix-A	Web Service Data Types with Choices
Appendix-B	License Model Attributes
Appendix-C	ClientSecurityCredentials Class Source
Appendix-D	Error Codes
Appendix-E	Supported Hostid Types

ProductPackagingService Web Service

Description

Web service to create, update, delete, count and query various product packaging definitions.

Introduction

Information about the products you develop and sell may be stored in an Enterprise Resource Planning (ERP) or Customer Relationship Management (CRM) system. The Product Web service facilitates the integration of your ERP or CRM system with FlexNet Operations. It can be used to import product definitions and to import part numbers that can be associated with products you create through the FlexNet Operations user interface or Product Packaging Service.

Methods: ProductPackagingService

Methods

Name	Description
assignProductCategoriesToOrg	The assignProductCategoriesToOrg operation assigns a product category to a publisher organization.
assignProductCategoriesToUser	The assignProductCategoriesToUser operation assigns a product category to a user.
createFeature	The createFeature operation adds one or more features.
createFeatureBundle	The createFeatureBundle operation adds one or more feature bundles. To use the createFeatureBundle operation to create a feature bundle, there must be existing draft or deployed features in the FlexNet Operations database.
createMaintenance	The createMaintenance operation adds one or more maintenance products. To use the createMaintenance operation to create a maintenance product: If part numbers are to be mapped to maintenance products, unassigned part numbers must already exist in the FlexNet Operations database. Part numbers can be imported through the Product Packaging Service or from an XML file through the FlexNet Operations UI.
createOrganization	The createOrganization operation adds one or more organizations. Note: The createOrganization operation in <i>ProductPackagingService</i> is deprecated. Use the createOrganization operation in <i>UserOrgHierarchyService</i> instead.
createPartNumber	The createPartNumber operation adds one or more part numbers, either asynchronously or synchronously. By default, part number creation is asynchronous. To use the Product Packaging Service to load unassigned part numbers asynchronously, the Importing Part Numbers alert must be configured. See the <i>FlexNet Operations Online Help</i> for instructions. Before checking whether the part numbers were really added, wait until after the import has triggered. With synchronous processing, the Web services client will be blocked until the request is completely processed. Therefore, use synchronous processing to load only for small numbers of part numbers at a time. The Importing Part Numbers alert does not have to be configured to load unassigned part numbers synchronously.

Methods

Name	Description
createProduct	The createProduct operation adds one or more products. To use the createProduct operation to create a product: • There must be existing draft or deployed features and/or feature bundles in the FlexNet Operations database. • There must be at least one existing draft or deployed license technology in the FlexNet Operations database. • If specifying the FlexNet Licensing technology, there must be one or more existing license generator configurations in the FlexNet Operations database. • There must be existing license models in the FlexNet Operations database. • If a product is to be licensed with a trusted license model, there must be existing transaction keys in the FlexNet Operations database. • If part numbers are to be mapped to products, unassigned part numbers must already exist in the FlexNet Operations database. Part numbers can be imported through the Product Packaging Service or from an XML file through the FlexNet Operations user interface.
createProductCategory	The createProductCategory operation creates one or more product categories. To create a product category, provide a category name and, optionally, a description.
createProductRelationship	The createProductRelationship operation adds one or more relationships. To use the createProductRelationship operation to create a product relationship, there must be existing draft or deployed products that can be related to one another in the FlexNet Operations database.

Methods

Name	Description
createUniformSuite	The createUniformSuite operation adds one or more suites. To use the createUniformSuite operation to create a suite: • There must be existing draft or deployed products in the FlexNet Operations database. • There must be at least one existing draft or deployed license technology in the FlexNet Operations database. • If specifying the FlexNet Licensing technology, there must be one or more existing license generator configurations in the FlexNet Operations database. • There must be existing license models in the FlexNet Operations database. • If a suite is to be licensed with a trusted license model, there must be existing transaction keys in the FlexNet Operations database. • If part numbers are to be mapped to suites, unassigned part numbers must already exist in the FlexNet Operations database. Part numbers can be imported through the Product Packaging Service or from an XML file through the FlexNet Operations UI.
deleteFeature	The deleteFeature operation deletes one or more features.
deleteFeatureBundle	The deleteFeatureBundle operation deletes one or more feature bundles.
deleteMaintenance	The deleteMaintenance operation deletes one or more maintenance products.
deletePartNumber	The deletePartNumber operation deletes one or more part numbers.
deleteProduct	The deleteProduct operation deletes one or more products.
deleteProductRelationship	The deleteProductRelationship operation deletes one or more relationships.
deleteUniformSuite	The deleteUniformSuite operation deletes one or more suites.
getFeatureBundleCount	The getFeatureBundleCount operation returns the number of feature bundles that match specified criteria.
getFeatureBundlesQuery	The getFeatureBundlesQuery operation returns the feature bundles that match specified criteria.
getFeatureCount	The getFeatureCount operation returns the number of features that match specified criteria.
getFeaturesQuery	The getFeaturesQuery operation returns the features that match specified criteria.
getLicenseModelIdentifiers	The getLicenseModelIdentifiers operation returns the license models that match specified criteria. Attributes of the license models that need to be set (for example, type of hostids, counts) are returned; any attributes that are not needed are ignored if set. To use it, there should be existing license models in the FlexNet Operations database.
getLicenseTechnologiesQuery	The getLicenseTechnologiesQuery operation returns the license technologies that match specified criteria.

Methods

Name	Description
getMaintenanceCount	The getMaintenanceCount operation returns the number of maintenance products that match specified criteria.
getMaintenanceQuery	The getMaintenanceQuery operation returns the maintenance products that match specified criteria.
getPartNumberCount	The getPartNumberCount operation returns the number of part numbers that match specified criteria.
getPartNumbersQuery	The getPartNumbersQuery operation returns the part numbers that match specified criteria.
getProductCategories	The getProductCategories operation returns all product categories.
getProductCount	The getProductCount operation returns the number of products that match specified criteria.
getProductRelationships	The getProductRelationships operation returns the relationships between a specified product and other products.
getProductsQuery	The getProductsQuery operation returns the products that match specified criteria.
getTransactionKeyIdentifiers	The getTransactionKeyIdentifiers operation returns the transaction keys that match specified criteria. To use it, there should be existing transaction keys in the FlexNet Operations database.
getUniformSuiteCount	The getUniformSuiteCount operation returns the number of suites that match specified criteria.
getUniformSuiteQuery	The getUniformSuitesQuery operation returns the suites that match specified criteria.
getUsersForProductCategory	The getUsersForProductCategory operation returns all users with the specified product category assigned.
removeProductCategoriesFromOrg	The removeProductCategoriesFromOrg operation deletes one or more product categories from a publisher organization.
removeProductCategoriesFromUser	The removeProductCategoriesFromUser operation deletes one or more product categories from a user.
setFeatureBundleState	The setFeatureBundleState operation sets the state of one or more feature bundles.
setFeatureState	The setFeatureState operation sets the state of one or more features.
setMaintenanceState	The setMaintenanceState operation sets the state of one or more maintenance products.
setProductState	The setProductState operation sets the state of one or more products.
setUniformSuiteState	The setUniformSuiteState operation sets the state of one or more suites.
updateFeature	The updateFeature operation modifies one or more elements of one or more features.
updateFeatureBundle	The updateFeatureBundle operation modifies one or more elements of one or more features bundles.
updateMaintenance	The updateMaintenance operation modifies one or more elements of one or more maintenance products.
updateProduct	The updateProduct operation modifies one or more elements of one or more products.

Methods

Name	Description
updateProductRelationship	The updateProductRelationship operation modifies one or more elements of one or more relationships.
updateUniformSuite	The updateUniformSuite operation modifies one or more elements of one or more suites.

Method: assignProductCategoriesToOrg

Description

The **assignProductCategoriesToOrg** operation assigns a product category to a publisher organization.

Parameters

Name	Type	Direction	Description
msgparameters	handleProductCategoryToOrgRequestType	Input	See handleProductCategoryToOrgRequestType .

Returns

A [assignProductCategoriesToOrgResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType										
		<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td rowspan="2">status</td><td rowspan="2">StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
		Element	Data Type	Description							
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.									
		reason	string	Gives a reason for partial failure or failure.							

Method: assignProductCategoriesToUser

Description

The **assignProductCategoriesToUser** operation assigns a product category to a user.

Parameters

Name	Type	Direction	Description
msgparameters	handleProductCategoriesToUserRequestType	Input	See handleProductCategoriesToUserRequestType .

Returns

A [assignProductCategoriesToUserResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType										
		<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td rowspan="2">status</td><td rowspan="2">StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
		Element	Data Type	Description							
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.									
		reason	string	Gives a reason for partial failure or failure.							

Method: createFeature

Description

The **createFeature** operation adds one or more features.

Parameters

Name	Type	Direction	Description
msgparameters	createFeatureRequestType	Input	See createFeatureRequestType .

Returns

A [createFeatureResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedFeatureDataListType	Information about the features that were not added is listed in the failedData element. See failedFeatureDataListType .									
responseData	createdFeatureDataListType	Information about the features that were added is listed in the responseData element. See createdFeatureDataListType .									

Method: createFeatureBundle

Description

The **createFeatureBundle** operation adds one or more feature bundles. To use the **createFeatureBundle** operation to create a feature bundle, there must be existing draft or deployed features in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	createFeatureBundleRequestType	Input	See createFeatureBundleRequestType .

Returns

A [createFeatureBundleResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedFeatureBundleDataListType	Information about the feature bundles that were not added is listed in the failedData element. See failedFeatureBundleDataListType .									
responseData	createdFeatureBundleDataListType	Information about the feature bundles that were added is listed in the responseData element. See createdFeatureBundleDataListType .									

Method: createMaintenance

Description

The **createMaintenance** operation adds one or more maintenance products. To use the **createMaintenance** operation to create a maintenance product:

- If part numbers are to be mapped to maintenance products, unassigned part numbers must already exist in the FlexNet Operations database. Part numbers can be imported through the Product Packaging Service or from an XML file through the FlexNet Operations UI.

Parameters

Name	Type	Direction	Description
msgparameters	createMaintenanceRequestType	Input	See createMaintenanceRequestType .

Returns

A [createMaintenanceResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Status Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Status Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Status Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedMaintenanceDataListType	Information about the maintenance products that were not added is listed in the failedData element. See failedMaintenanceDataListType .									
responseData	createdMaintenanceDataListType	Information about the maintenance products that were added is listed in the responseData element. See createdMaintenanceDataListType .									

Method: createOrganization

Description

The **createOrganization** operation adds one or more organizations.

Note: The **createOrganization** operation in *ProductPackagingService* is deprecated. Use the **createOrganization** operation in *UserOrgHierarchyService* instead.

Parameters

Name	Type	Direction	Description
msgparameters	createOrganizationRequestType	Input	See createOrganizationRequestType .

Returns

A [createOrganizationResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	createdOrgDataListType	Information about the organizations that were added is listed in the responseData element. See createdOrgDataListType .									
failedData	failedOrgDataListType	Information about the organizations that were not added is listed in the failedData element. See failedOrgDataListType .									

Method: createPartNumber

Description

The **createPartNumber** operation adds one or more part numbers, either asynchronously or synchronously. By default, part number creation is asynchronous.

To use the Product Packaging Service to load unassigned part numbers asynchronously, the **Importing Part Numbers** alert must be configured. See the *FlexNet Operations Online Help* for instructions. Before checking whether the part numbers were really added, wait until after the import has triggered.

With synchronous processing, the Web services client will be blocked until the request is completely processed. Therefore, use synchronous processing to load only for small numbers of part numbers at a time. The **Importing Part Numbers** alert does not have to be configured to load unassigned part numbers synchronously.

Parameters

Name	Type	Direction	Description
msgparameters	createPartNumberRequestType	Input	See createPartNumberRequestType .

Returns

A [createPartNumberResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of part numbers was not scheduled.
		reason	string	Gives reason for partial failure or failure.

Returns

Name	Type	Description
failedData	failedPartNumberDataListType	Information about the part numbers that were not added is listed in the failedData element. See failedPartNumberDataListType . Not populated for asynchronous requests.
responseData	createdPartNumberDataListType	Information about the part numbers that were added is listed in the responseData element. See createdPartNumberDataListType . Not populated for asynchronous requests.

Method: createProduct

Description

The **createProduct** operation adds one or more products. To use the createProduct operation to create a product:

- There must be existing draft or deployed features and/or feature bundles in the FlexNet Operations database.
- There must be at least one existing draft or deployed license technology in the FlexNet Operations database.
- If specifying the FlexNet Licensing technology, there must be one or more existing license generator configurations in the FlexNet Operations database.
- There must be existing license models in the FlexNet Operations database.
- If a product is to be licensed with a trusted license model, there must be existing transaction keys in the FlexNet Operations database.
- If part numbers are to be mapped to products, unassigned part numbers must already exist in the FlexNet Operations database. Part numbers can be imported through the Product Packaging Service or from an XML file through the FlexNet Operations user interface.

Parameters

Name	Type	Direction	Description
msgparameters	createProductRequestType	Input	See createProductRequestType .

Returns

A [createProductResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedProductDataListType	Information about the products that were not added is listed in the failedData element. See failedProductDataListType .									
responseData	createdProductDataListType	Information about the products that were added is listed in the responseData element. See createdProductDataListType .									

Method: createProductCategory

Description

The **createProductCategory** operation creates one or more product categories. To create a product category, provide a category name and, optionally, a description.

Parameters

Name	Type	Direction	Description
msgparameters	createProductCategoryRequestType	Input	See createProductCategoryRequestType .

Returns

A [createProductCategoryResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedProductCategoryDataListType	Information about the categories that were not added is listed in the failedData element. See failedProductCategoryDataListType									
responseData	createdProductCategoryDataListType	Information about the categories that were added is listed in the responseData element. See createdProductCategoryDataListType .									

Method: createProductRelationship

Description

The **createProductRelationship** operation adds one or more relationships. To use the **createProductRelationship** operation to create a product relationship, there must be existing draft or deployed products that can be related to one another in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	createProductRelationshipRequestType	Input	See createProductRelationshipRequestType .

Returns

A [createProductRelationshipResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusInfo</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusInfo	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusInfo	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedProductRelationshipDataListType	Information about the relationships that were not added is listed in the failedData element. See failedProductRelationshipDataListType .									

Method: createUniformSuite

Description

The **createUniformSuite** operation adds one or more suites. To use the createUniformSuite operation to create a suite:

- There must be existing draft or deployed products in the FlexNet Operations database.
- There must be at least one existing draft or deployed license technology in the FlexNet Operations database.
- If specifying the FlexNet Licensing technology, there must be one or more existing license generator configurations in the FlexNet Operations database.
- There must be existing license models in the FlexNet Operations database.
- If a suite is to be licensed with a trusted license model, there must be existing transaction keys in the FlexNet Operations database.

Description

- If part numbers are to be mapped to suites, unassigned part numbers must already exist in the FlexNet Operations database. Part numbers can be imported through the Product Packaging Service or from an XML file through the FlexNet Operations UI.

Parameters

Name	Type	Direction	Description
msgparameters	createUniformSuiteRequestType	Input	See createUniformSuiteRequestType .

Returns

A [createUniformSuiteResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUniformSuiteDataListType	Information about the suites that were not added is listed in the failedData element. See failedUniformSuiteDataListType .									
responseData	createdUniformSuiteDataListType	Information about the suites that were added is listed in the responseData element. See createdUniformSuiteDataListType .									

Method: deleteFeature

Description

The **deleteFeature** operation deletes one or more features.

Parameters

Name	Type	Direction	Description
msgparameters	deleteFeatureRequestType	Input	See deleteFeatureRequestType .

Returns

A [deleteFeatureResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteFeatureDataListType	Information about the features that were not deleted is listed in the failedData element. See failedDeleteFeatureDataListType .									

Method: deleteFeatureBundle

Description

The **deleteFeatureBundle** operation deletes one or more feature bundles.

Parameters

Name	Type	Direction	Description
msgparameters	deleteFeatureBundleRequestType	Input	See deleteFeatureBundleRequestType .

Returns

A [deleteFeatureBundleResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>response</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	response	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.									
response	string	Gives reason for partial failure or failure.									
failedData	failedDeleteFeatureBundleDataListType	Information about the feature bundles that were not deleted is listed in the failedData element. See failedDeleteFeatureBundleDataListType .									

Method: deleteMaintenance

Description

The **deleteMaintenance** operation deletes one or more maintenance products.

Parameters

Name	Type	Direction	Description
msgparameters	deleteMaintenanceRequestType	Input	See deleteMaintenanceRequestType .

Returns

A [deleteMaintenanceResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteMaintenanceDataListType	Information about the maintenance products that were not deleted is listed in the failedData element. See failedDeleteMaintenanceDataListType .									

Method: deletePartNumber

Description

The **deletePartNumber** operation deletes one or more part numbers.

Parameters

Name	Type	Direction	Description
msgparameters	deletePartNumberRequestType	Input	See deletePartNumberRequestType .

Returns

A [deletePartNumberResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType			
		Element	Data Type	Description
		status	StatusType	Returns one of the following: - SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. - PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of part numbers was not scheduled.
reason	string	Gives reason for partial failure or failure.		

Returns

Name	Type	Description
failedData	failedDeletePartNumberDataListType	Information about the part numbers that were not deleted is listed in the failedData element. See failedDeletePartNumberDataListType .

Method: deleteProduct

Description

The **deleteProduct** operation deletes one or more products.

Parameters

Name	Type	Direction	Description
msgparameters	deleteProductRequestType	Input	See deleteProductRequestType .

Returns

A [deleteProductResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request ere processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request ere processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request ere processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteProductDataListType	Information about the products that were not deleted is listed in the failedData element. See failedDeleteProductDataListType .									

Method: deleteProductRelationship

Description

The **deleteProductRelationship** operation deletes one or more relationships.

Parameters

Name	Type	Direction	Description
msgparameters	deleteProductRelationshipRequestType	Input	See deleteProductRelationshipRequestType .

Returns

A [deleteProductRelationshipResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedProductRelationshipDataListType	Information about the relationships that were not deleted is listed in the failedData element. See failedProductRelationshipDataListType									

Method: deleteUniformSuite

Description

The **deleteUniformSuite** operation deletes one or more suites.

Parameters

Name	Type	Direction	Description
msgparameters	deleteUniformSuiteRequestType	Input	See deleteUniformSuiteRequestType .

Returns

A [deleteUniformSuiteResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteUniformSuiteDataListType	Information about the suites that were not deleted is listed in the failedData element. See failedDeleteUniformSuiteDataListType .									

Method: getFeatureBundleCount

Description

The **getFeatureBundleCount** operation returns the number of feature bundles that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getFeatureBundleCountRequestType	Input	See getFeatureBundleCountRequestType .

Returns

A [getFeatureBundleCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getCountResponseType	Contains an integer count element.									

Method: getFeatureBundlesQuery

Description

The **getFeatureBundlesQuery** operation returns the feature bundles that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getFeatureBundlesQueryRequestType	Input	See getFeatureBundlesQueryRequestType .

Returns

A [getFeatureBundlesQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getFeatureBundlesQueryResponseDataType	See getFeatureBundlesQueryResponseDataType .									

Method: getFeatureCount

Description

The **getFeatureCount** operation returns the number of features that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getFeatureCountRequestType	Input	See getFeatureCountRequestType .

Returns

A [getFeatureCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getCountResponseType	Contains an integer count element.									

Method: getFeaturesQuery

Description

The **getFeaturesQuery** operation returns the features that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getFeaturesQueryRequestType	Input	See getFeaturesQueryRequestType .

Returns

A [getFeaturesQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getFeaturesQueryResponseDataType	See getFeaturesQueryResponseDataType .									

Method: getLicenseModelIdentifiers

Description

The **getLicenseModelIdentifiers** operation returns the license models that match specified criteria. Attributes of the license models that need to be set (for example, type of hostids, counts) are returned; any attributes that are not needed are ignored if set. To use it, there should be existing license models in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	getModelIdentifiersRequestType	Input	See getModelIdentifiersRequestType .

Returns

A [getModelIdentifiersResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	modelIdentifiersDataListType	See modelIdentifiersDataListType .									

Method: getLicenseTechnologiesQuery

Description

The **getLicenseTechnologiesQuery** operation returns the license technologies that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getLicenseTechnologyQueryRequestType	Input	See getLicenseTechnologyQueryRequestType .

Returns

A [getLicenseTechnologyQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	licenseTechnologyDataListType	Information about the license technologies that matched the query is listed in the responseData element. See licenseTechnologyDataListType .									

Method: getMaintenanceCount

Description

The **getMaintenanceCount** operation returns the number of maintenance products that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getMaintenanceCountRequestType	Input	See getMaintenanceCountRequestType .

Returns

A [getMaintenanceCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getCountResponseType	Contains an integer count element.									

Method: getMaintenanceQuery

Description

The **getMaintenanceQuery** operation returns the maintenance products that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getMaintenanceQueryRequestType	Input	See getMaintenanceQueryRequestType .

Returns

A [getMaintenanceQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getMaintenanceQueryResponseDataType	See getMaintenanceQueryResponseDataType .									

Method: getPartNumberCount

Description

The **getPartNumberCount** operation returns the number of part numbers that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getPartNumberCountRequestType	Input	See getPartNumberCountRequestType .

Returns

A [getPartNumberCountResponse](#) element having the structure defined by the following table.

Name	Type	Description		
statusInfo	StatusInfoType			
		Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of part numbers was not scheduled.
		reason	string	Gives reason for partial failure or failure.

Returns

Name	Type	Description
responseData	partNumberCountDataType	Contains an integer count element. See partNumberCountDataType .

Method: getPartNumbersQuery

Description

The **getPartNumbersQuery** operation returns the part numbers that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getPartNumbersQueryRequestType	Input	See getPartNumbersQueryRequestType .

Returns

A [getPartNumbersQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. - PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of part numbers was not scheduled. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. - PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of part numbers was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. - PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of part numbers was not scheduled.									
reason	string	Gives reason for partial failure or failure.									
responseData	partNumberDataListType	See partNumberDataListType .									

Method: getProductCategories

Description

The **getProductCategories** operation returns all product categories.

Parameters

Name	Type	Direction	Description
msgparameters	getProductCategoriesRequestType	Input	See getProductCategoriesRequestType .

Returns

A [getProductCategoriesResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.									
reason	string	Gives a reason for partial failure or failure.									
responseData	getProductCategoriesResponseDataType	A getProductCategoriesResponse contains an array of responseData elements. See getProductCategoriesResponseDataType .									

Method: getProductCount

Description

The **getProductCount** operation returns the number of products that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getProductCountRequestType	Input	See getProductCountRequestType .

Returns

A [getProductCountResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getCountResponseDataType	Contains an integer count element. See getCountResponseDataType .									

Method: getProductRelationships

Description

The **getProductRelationships** operation returns the relationships between a specified product and other products.

Parameters

Name	Type	Direction	Description
msgparameters	getProductRelationshipsRequestType	Input	See getProductRelationshipsRequestType .

Returns

A [getProductRelationshipsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
relationship	productRelationshipDataType	A getProductRelationshipsResponse contains an array of relationship elements. See productRelationshipDataType .									

Method: getProductsQuery

Description

The **getProductsQuery** operation returns the products that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getProductsQueryRequestType	Input	See getProductsQueryRequestType .

Returns

A [getProductsQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getProductsQueryResponseDataType	See getProductsQueryResponseDataType .									

Method: getTransactionKeyIdentifiers

Description

The **getTransactionKeyIdentifiers** operation returns the transaction keys that match specified criteria. To use it, there should be existing transaction keys in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	getTransactionKeyIdentifiersRequestType	Input	See getTransactionKeyIdentifiersRequestType .

Returns

A [getTransactionKeyIdentifiersResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	transactionKeyIdentifiersDataListType	See transactionKeysIdentifiersDataListType .									

Method: getUniformSuiteCount

Description

The **getUniformSuiteCount** operation returns the number of suites that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getUniformSuiteCountRequestType	Input	See getUniformSuiteCountRequestType .

Returns

A [getUniformSuiteCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getCountResponseDataType	Contains an integer count element.									

Method: getUniformSuiteQuery

Description

The **getUniformSuitesQuery** operation returns the suites that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getUniformSuitesQueryRequestType	Input	See getUniformSuitesQueryRequestType .

Returns

A [getUniformSuitesQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getUniformSuitesQueryResponseDataType	See getUniformSuitesQueryResponseDataType .									

Method: getUsersForProductCategory

Description

The **getUsersForProductCategory** operation returns all users with the specified product category assigned.

Parameters

Name	Type	Direction	Description
msgparameters	getUsersForProductCategoryRequestType	Input	See getUsersForProductCategoryRequestType .

Returns

A [getUsersForProductCategoryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.									
reason	string	Gives a reason for partial failure or failure.									
userData	getUsersForProductCategoryResponseDataType	A getUsersForProductCategoryResponseDataType contains an array of userData elements. See getUsersForProductCategoryResponseDataType .									

Method: removeProductCategoriesFromOrg

Description

The **removeProductCategoriesFromOrg** operation deletes one or more product categories from a publisher organization.

Parameters

Name	Type	Direction	Description
msgparameters	handleProductCategoryToOrgRequestType	Input	See handleProductCategoryToOrgRequestType .

Returns

A [removeProductCategoriesFromOrgResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—All categories in the request were processed. • PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. • FAILURE—None of the categories in the request were processed.
		reason	string	Gives a reason for partial failure or failure.

Method: removeProductCategoriesFromUser

Description

The **removeProductCategoriesFromUser** operation deletes one or more product categories from a user.

Parameters

Name	Type	Direction	Description
msgparameters	handleProductCategoriesToUserRequestType	Input	See handleProductCategoriesToUserRequestType .

Returns

A [removeProductCategoriesFromUserResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.									
reason	string	Gives a reason for partial failure or failure.									

Method: setFeatureBundleState

Description

The **setFeatureBundleState** operation sets the state of one or more feature bundles.

Parameters

Name	Type	Direction	Description
msgparameters	setFeatureBundleStateRequestType	Input	See setFeatureBundleStateRequestType .

Returns

A [setFeatureBundleStateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedFeatureBundleStateDataListType	Information about the feature bundles whose state was not set is listed in the failedData element. See failedFeatureBundleStateDataListType .									

Method: setFeatureState

Description

The **setFeatureState** operation sets the state of one or more features.

Parameters

Name	Type	Direction	Description
msgparameters	setFeatureStateRequestType	Input	See setFeatureStateRequestType .

Returns

A [setFeatureStateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedFeatureStateDataListType	Information about the features whose state was not set is listed in the failedData element. See failedFeatureStateDataListType .									

Method: setMaintenanceState

Description

The **setMaintenanceState** operation sets the state of one or more maintenance products.

Parameters

Name	Type	Direction	Description
msgparameters	setMaintenanceStateRequestType	Input	See setMaintenanceStateRequestType .

Returns

A [setMaintenanceStateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedMaintenanceStateDataListType	Information about the maintenance products whose state was not set is listed in the failedData element. See failedMaintenanceStateDataListType .									

Method: setProductState

Description

The **setProductState** operation sets the state of one or more products.

Parameters

Name	Type	Direction	Description
msgparameters	setProductStateRequestType	Input	See setProductStateRequestType .

Returns

A [setProductStateResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedProductStateDataListType	Information about the products whose state was not set is listed in the failedData element. See failedProductStateDataListType .									

Method: setUniformSuiteState

Description

The **setUniformSuiteState** operation sets the state of one or more suites.

Parameters

Name	Type	Direction	Description
msgparameters	setUniformSuiteStateRequestType	Input	See setUniformSuiteStateRequestType .

Returns

A [setUniformSuiteStateResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUniformSuiteStateDataListType	Information about the suites whose state was not set is listed in the failedData element. See failedUniformSuiteStateDataListType .									

Method: updateFeature

Description

The **updateFeature** operation modifies one or more elements of one or more features.

Parameters

Name	Type	Direction	Description
msgparameters	updateFeatureRequestType	Input	See updateFeatureRequestType .

Returns

A [updateFeatureResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateFeatureDataListType	Contains one or more failedFeature elements. See failedUpdateFeatureDataListType .									

Method: updateFeatureBundle

Description

The **updateFeatureBundle** operation modifies one or more elements of one or more features bundles.

Parameters

Name	Type	Direction	Description
msgparameters	updateFeatureBundleRequestType	Input	See updateFeatureBundleRequestType .

Returns

A [updateFeatureBundleResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateFeatureBundleDataListType	Information about the feature bundles that were not modified is listed in the failedData element. See failedUpdateFeatureBundleDataListType .									

Method: updateMaintenance

Description

The **updateMaintenance** operation modifies one or more elements of one or more maintenance products.

Parameters

Name	Type	Direction	Description
msgparameters	updateMaintenanceRequestType	Input	See updateMaintenanceRequestType .

Returns

A [updateMaintenanceResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateMaintenanceDataListType	Information about the maintenance products that were not modified is listed in the failedData element. See failedUpdateMaintenanceDataListType .									

Method: updateProduct

Description

The **updateProduct** operation modifies one or more elements of one or more products.

Parameters

Name	Type	Direction	Description
msgparameters	updateProductRequestType	Input	See updateProductRequestType .

Returns

A [updateProductResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateProductDataListType	Information about the products that were not modified is listed in the failedData element. See failedUpdateProductDataListType .									

Method: updateProductRelationship

Description

The **updateProductRelationship** operation modifies one or more elements of one or more relationships.

Parameters

Name	Type	Direction	Description
msgparameters	updateProductRelationshipRequestType	Input	See updateProductRelationshipRequestType .

Returns

A [updateProductRelationshipResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateProductRelationshipDataListType	Information about the relationships that were not modified is listed in the failedData element. See failedUpdateProductRelationshipDataListType .									

Method: updateUniformSuite

Description

The **updateUniformSuite** operation modifies one or more elements of one or more suites.

Parameters

Name	Type	Direction	Description
msgparameters	updateUniformSuiteRequestType	Input	See updateUniformSuiteRequestType .

Returns

A [updateUniformSuiteResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateUniformSuiteDataListType	Information about the suites that were not modified is listed in the failedData element. See failedUpdateUniformSuiteDataListType .									

Complex Types: ProductPackagingService

Complex Types

Name
accountIdentifierType
accountPKType
addressDataType
attributeDescriptorDataType
attributeDescriptorType
attributeMetaDescriptorDataType
attributeMetaDescriptorType
categoryAttributeDataType
categoryAttributesDataType
correlationDataType
createdFeatureBundleDataListType
createdFeatureDataListType
createdFeatureDataType
createdMaintenanceDataType
createdMaintenanceDataListType
createdOrgDataListType
createdOrgDataType
createdPartNumberDataListType
createdPartNumberDataType
createdProductCategoryDataListType
createdProductCategoryDataType
createdProductDataListType
createdProductDataType
createdUniformSuiteDataListType
createdUniformSuiteDataType
createFeatureBundleDataType
createFeatureBundleRequestType
createFeatureBundleResponseType
createFeatureRequestType
createFeatureResponseType
createMaintenanceDataType
createMaintenanceRequestType
createMaintenanceResponseType
createOrganizationRequestType

Complex Types

Name
<u>createOrganizationResponseType</u>
<u>createPartNumberDataType</u>
<u>createPartNumberRequestType</u>
<u>createPartNumberResponseType</u>
<u>createProductCategoryDataType</u>
<u>createProductCategoryRequestType</u>
<u>createProductCategoryResponseType</u>
<u>createProductDataType</u>
<u>createProductRelationshipRequestType</u>
<u>createProductRelationshipResponseType</u>
<u>createProductRequestType</u>
<u>createProductResponseType</u>
<u>createUniformSuiteDataType</u>
<u>createUniformSuiteRequestType</u>
<u>createUniformSuiteResponseType</u>
<u>customAttributeDescriptorDataType</u>
<u>customAttributeDescriptorType</u>
<u>customAttributeQueryType</u>
<u>customAttributesQueryListType</u>
<u>DateTimeQueryType</u>
<u>deleteFeatureBundleDataType</u>
<u>deleteFeatureBundleRequestType</u>
<u>deleteFeatureBundleResponseType</u>
<u>deleteFeatureDataType</u>
<u>deleteFeatureRequestType</u>
<u>deleteFeatureResponseType</u>
<u>deleteMaintenanceDataType</u>
<u>deleteMaintenanceRequestType</u>
<u>deleteMaintenanceResponseType</u>
<u>deletePartNumberDataType</u>
<u>deletePartNumberRequestType</u>
<u>deletePartNumberResponseType</u>
<u>deleteProductDataType</u>
<u>deleteProductRelationshipRequestType</u>
<u>deleteProductRelationshipResponseType</u>

Complex Types

Name
deleteProductRequestType
deleteProductResponseType
deleteUniformSuiteDataType
deleteUniformSuiteRequestType
deleteUniformSuiteResponseType
dupGroupDataType
DurationType
emailContactListType
entitledProductDataListType
entitledProductDataType
entitlementIdentifierType
entitlementLineItemIdentifierType
failedDeleteFeatureBundleDataListType
failedDeleteFeatureBundleDataType
failedDeleteFeatureDataListType
failedDeleteFeatureDataType
failedDeleteMaintenanceDataListType
failedDeleteMaintenanceDataType
failedDeletePartNumberDataListType
failedDeletePartNumberDataType
failedDeleteProductDataListType
failedDeleteProductDataType
failedDeleteUniformSuiteDataListType
failedDeleteUniformSuiteDataType
failedFeatureBundleDataListType
failedFeatureBundleDataType
failedFeatureBundleStateDataListType
failedFeatureBundleStateDataType
failedFeatureDataListType
failedFeatureDataType
failedFeatureStateDataListType
failedFeatureStateDataType
failedMaintenanceDataListType
failedMaintenanceDataType
failedMaintenanceStateDataListType

Complex Types

Name
failedMaintenanceStateDataType
failedOrgDataListType
failedOrgDataType
failedPartNumberDataListType
failedPartNumberDataType
failedProductCategoryDataListType
failedProductCategoryDataType
failedProductDataListType
failedProductDataType
failedProductRelationshipDataListType
failedProductRelationshipDataType
failedProductStateDataListType
failedProductStateDataType
failedUniformSuiteDataListType
failedUniformSuiteDataType
failedUniformSuiteStateDataListType
failedUniformSuiteStateDataType
failedUpdateFeatureBundleDataListType
failedUpdateFeatureBundleDataType
failedUpdateFeatureDataListType
failedUpdateFeatureDataType
failedUpdateMaintenanceDataListType
failedUpdateMaintenanceDataType
failedUpdateProductDataListType
failedUpdateProductDataType
failedUpdateProductRelationshipDataListType
failedUpdateProductRelationshipDataType
failedUpdateUniformSuiteDataListType
failedUpdateUniformSuiteDataType
featureBundleIdentifierType
featureBundleIdentifierWithCountDataType
featureBundleQueryDataType
featureBundleQueryParametersType
featureBundlesListType
featureBundleStateDataType

Complex Types

Name
featureDataType
featureIdentifierType
featureIdentifierWithCountDataType
featureOverrideParamsType
featureQueryDataType
featureQueryParametersType
featuresListType
featureStateDataType
getFeatureBundleCountRequestType
getFeatureBundleCountResponseType
getFeatureBundlesQueryRequestType
getFeatureBundlesQueryResponseDataType
getFeatureBundlesQueryResponseType
getFeatureCountRequestType
getFeatureCountResponseType
getFeaturesQueryRequestType
getFeaturesQueryResponseDataType
getFeaturesQueryResponseType
getLicenseTechnologyQueryRequestType
getLicenseTechnologyQueryResponseType
getMaintenanceCountRequestType
getMaintenanceCountResponseType
getMaintenanceQueryRequestType
getMaintenanceQueryResponseDataType
getMaintenanceQueryResponseType
getModelIdentifiersRequestType
getModelIdentifiersResponseType
getPartNumberCountRequestType
getPartNumberCountResponseType
getPartNumbersQueryRequestType
getPartNumbersQueryResponseType
getProductCategoriesRequestType
getProductCategoriesResponseDataType
getProductCategoriesResponseType
getProductCountRequestType

Complex Types

Name
getProductCountResponseType
getProductRelationshipsRequestType
getProductRelationshipsResponseType
getProductsQueryRequestType
getProductsQueryResponseDataType
getProductsQueryResponseType
getTransactionKeyIdentifiersRequestType
getTransactionKeyIdentifiersResponseType
getUniformSuiteCountRequestType
getUniformSuiteCountResponseType
getUniformSuitesQueryRequestType
getUniformSuitesQueryResponseDataType
getUniformSuitesQueryResponseType
getUsersForProductCategoryRequestType
getUsersForProductCategoryResponseDataType
getUsersForProductCategoryResponseType
handleProductCategoriesToUserRequestType
handleProductCategoriesToUserResponseType
handleProductCategoryToOrgRequestType
handleProductCategoryToOrgResponseType
hostTypePKType
identifierQueryParametersType
licenseGeneratorIdentifierType
licenseGeneratorsDetailsType
licenseModelDetailsType
licenseModelIdentifierType
licenseModelPKType
licenseModelsListType
licenseTechnologyDataListType
licenseTechnologyDetailsType
licenseTechnologyIdentifierType
licenseTechnologyPKType
licenseTechnologyQueryParametersType
maintenancIdentifierType
maintenancePKType

Complex Types

Name
maintenanceQueryDataType
maintenanceQueryParametersType
maintenanceStateDataType
modelAttributesType
modelIdentifiersDataListType
organizationBasicDataType
organizationIdentifierType
organizationPKType
OrgTypeList
packagePropertiesDataType
partNumberDataListType
partNumberDataType
partNumberIdentifierType
partNumberIdentifierWithModelType
partNumberPKType
partNumberQueryParametersType
partNumbersListType
partNumbersSimpleListType
prodCustomAttributeQueryType
prodCustomAttributesQueryListType
productCategoryDataType
productCategoryParametersType
productIdentifierType
productIdentifierWithCountDataType
productPKType
productQueryDataType
productQueryParametersType
productRelationshipDataType
productsListType
productStateDataType
roleIdentifierType
setFeatureBundleStateRequestType
setFeatureBundleStateResponseType
setFeatureStateRequestType
setFeatureStateResponseType

Complex Types

Name
setMaintenanceStateRequestType
setMaintenanceStateResponseType
setProductStateRequestType
setProductStateResponseType
setUniformSuiteStateRequestType
setUniformSuiteStateResponseType
suiteCustomAttributeQueryType
suiteCustomAttributesQueryListType
suiteIdentifierType
suitePKType
suiteQueryParametersType
transactionKeyIdentifiersDataListType
trustedKeyIdentifierType
trustedKeyPKType
uniformSuiteQueryDataType
uniformSuiteStateDataType
updateEntitledProductDataListType
updateFeatureBundleDataType
updateFeatureBundleRequestType
updateFeatureBundleResponseType
updateFeatureBundlesListType
updateFeatureDataType
updateFeatureRequestType
updateFeatureResponseType
updateFeaturesListType
updateHostTypeListType
updateLicenseModelsListType
updateMaintenanceDataType
updateMaintenanceRequestType
updateMaintenanceResponseType
updatePartNumbersListType
updatePartNumbersSimpleListType
updateProductDataType
updateProductRelationshipDataType
updateProductRelationshipRequestType

Complex Types

Name
updateProductRelationshipResponseType
updateProductRequestType
updateProductResponseType
updateProductsListType
updateUniformSuiteDataType
updateUniformSuiteRequestType
updateUniformSuiteResponseType
userIdentifierType
userPKType
versionDateAttributesType

Complex Type: accountIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	
primaryKeys	accountPKType	0..1	

Complex Type: accountPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
name	string	1..1	

Complex Type: addressDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
address1	string	0..1	First line of address.
address2	string	0..1	Second line of address.
city	string	0..1	City portion of address.
state	string	0..1	State portion of address.
zipcode	string	0..1	Postal code.
country	string	0..1	Country, in two-letter ISO-3166 code. If not provided, defaults to US.
region	string	0..1	Address region.

Complex Type: attributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	attributeDescriptorType	0..*	Contains a required string attributeName and one of the attributeDescriptorType values.

Complex Type: attributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attributeName	string	1..1	Name of the attribute.
 CHOICE		1..1	
arrayValue	string	0..*	Array of string values of the attribute.
booleanValue	boolean	0..1	Boolean value of the attribute.
dateValue	date	0..1	Date value of the attribute.
integerValue	integer	0..1	Integer value of the attribute.
stringValue	string	0..1	String value of the attribute.

Complex Type: attributeMetaDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	attributeMetaDescriptorType	0..*	Contains one or more attribute elements.

Complex Type: attributeMetaDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of the license model attribute.
attributeDataType	AttributeDataType	1..1	Returns one of the following: - TEXT - BOOLEAN - NUMBER - DATE - MULTI_VALUED_TEXT - LONGTEXT
namespace	string	1..1	Refers to the license technology on which the attribute is created.
validValues	valueType	0..1	validValues contains an array of value strings that represent valid values for a MULTI_VALUED_TEXT license model attribute.

Complex Type: categoryAttributeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of the license model attribute.
isRequired	boolean	1..1	TRUE or FALSE

Content Model

Component	Type	Occurs	Description
dataType	AttributeDataType	1..1	Returns one of the following: • TEXT • BOOLEAN • NUMBER • DATE • MULTI_VALUED_TEXT • LONGTEXT
maxLength	string	0..1	Maximum length of the data type.
validValues	valueType	0..1	validValues contains an array of value strings that represent valid values for a MULTI_VALUED_TEXT license model attribute.

Complex Type: categoryAttributesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
categoryAttribute	categoryAttributeDataType	1..*	See categoryAttributeDataType .

Complex Type: correlationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the feature bundle in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the feature bundle.

Complex Type: createdFeatureBundleDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdFeatureBundle	correlationDataType	0..*	responseData (see createFeatureBundleResponseType) contains one or more createdFeatureBundle elements. See correlationDataType .

Complex Type: createdFeatureDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdFeature	createdFeatureDataType	0..*	responseData (see createFeatureResponseType) contains one or more createdFeature elements. See createdFeatureDataType .

Complex Type: createdFeatureDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the feature in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the feature.

Complex Type: createdMaintenanceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the maintenance product in the request, starting at 1 (string).
uniqueId	string	1..1	Unique database identifier of the maintenance product (string).

Complex Type: createdMaintenanceDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
createdMaintenance	createdMaintenaceDataT ype	0..*	responseData contains one or more createdMaintenance elements. See createdMaintenanceDataType .

Complex Type: createdOrgDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdOrganization	createdOrgDataType	0..*	responseData contains one or more createdOrganization elements. See createdOrgDataType .

Complex Type: createdOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the organization in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the organization.

Complex Type: createdPartNumberDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdPartNumber	createdPartNumberDataType	0..*	responseData contains one or more createdPartNumber elements. See createdPartNumberDataType .

Complex Type: createdPartNumberDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the part number in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the part number.

Complex Type: createdProductCategoryDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdProductCategory	createdProductCategoryDataType	0..*	responseData contains one or more createdProductCategory elements. See createdProductCategoryDataType .

Complex Type: createdProductCategoryDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the product category in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier for the product category.

Complex Type: createdProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdProduct	createdProductDataType	0..*	responseData contains one or more createdProduct elements. See createdProductDataType .

Complex Type: createdProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the product in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the product.

Complex Type: createdUniformSuiteDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdUniformSuite	createdUniformSuiteDataType	0..*	responseData contains one or more createdUniformSuite elements. See createdUniformSuiteDataType .

Complex Type: createdUniformSuiteDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the suite in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the suite.

Complex Type: createFeatureBundleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
name	string	1..1	Required. Name of a feature bundle.
description	string	0..1	Optional. Describe what makes this feature bundle unique.
features	featuresListType	1..1	Required. See featuresListType .

Complex Type: createFeatureBundleRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureBundle	createFeatureBundleDataTypes	1..*	Required. A createFeatureBundleRequest contains an array of featureBundle elements to be added. See createFeatureBundleDataTypes .

Referenced By

Name	Type
createFeatureBundleRequest	Element
createFeatureBundle	Method

Complex Type: createFeatureBundleResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureBundleDataListType	0..1	Information about the feature bundles that were not added is listed in the failedData element. See failedFeatureBundleDataListType .									
responseData	createdFeatureBundleDataListType	0..1	Information about the feature bundles that were added is listed in the responseData element. See createdFeatureBundleDataListType .									

Referenced By

Name	Type
createFeatureBundleResponse	Element

Complex Type: createFeatureRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureDataType	1..*	Required. A createFeatureRequest contains an array of feature elements to be added. See featureDataType .

Referenced By

Name	Type
createFeatureRequest	Element
createFeature	Method

Complex Type: createFeatureResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureDataListType	0..1	Information about the features that were not added is listed in the failedData element. See failedFeatureDataListType .									
responseData	createdFeatureDataListType	0..1	Information about the features that were added is listed in the responseData element. See createdFeatureDataListType .									

Referenced By

Name	Type
createFeatureResponse	Element

Complex Type: createMaintenanceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceName	string	1..1	Required. Name of maintenance product.
version	string	0..1	Required at deployment. Version of maintenance product.
description	string	0..1	Optional. Describe what makes this maintenance product unique.
allowUpgrades	boolean	0..1	Are upgrades allowed for this maintenance?
allowUpsells	boolean	0..1	Are upsells allowed for this maintenance?
allowRenewals	boolean	0..1	Are renewals allowed for this maintenance?
partNumbers	partNumbersSimpleListType	0..1	Optional. Specify if one or more part numbers are mapped to the product. See partNumbersSimpleListType .

Complex Type: createMaintenanceRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	createMaintenanceDataType	1..*	Required. A createMaintenanceRequest contains an array of maintenance elements to be added. See createMaintenanceDataType .

Referenced By

Name	Type
createMaintenanceRequest	Element
createMaintenance	Method

Complex Type: createMaintenanceResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Status Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Status Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Status Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedMaintenanceDataListType	0..1	Information about the maintenance products that were not added is listed in the failedData element. See failedMaintenanceDataListType .									
responseData	createdMaintenanceDataListType	0..1	Information about the maintenance products that were added is listed in the responseData element. See createdMaintenanceDataListType .									

Referenced By

Name	Type
createMaintenanceResponse	Element

Complex Type: createOrganizationRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationBasicDataType	1..*	Required. A createOrganizationRequest contains an array of organization elements to be added. See organizationBasicDataType .

Referenced By

Name	Type
createOrganizationRequest	Element
createOrganization	Method

Complex Type: createOrganizationResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	createdOrgDataListType	0..1	Information about the organizations that were added is listed in the responseData element. See createdOrgDataListType .									
failedData	failedOrgDataListType	0..1	Information about the organizations that were not added is listed in the failedData element. See failedOrgDataListType .									

Referenced By

Name	Type
createOrganizationResponse	Element

Complex Type: createPartNumberDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partId	string	1..1	Required. Value of a part number.
description	string	0..1	Optional. Describe what makes this part number unique.

Complex Type: createPartNumberRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	createPartNumberDataType	1..*	Required. A createPartNumberRequest contains an array of partNumber elements to be added. See createPartNumberDataType .
processSync	boolean	0..1	Optional. Set to true to create part numbers synchronously, that is, the Web services client will be blocked until the request is completely processed. Use synchronous processing only for creating small numbers of part numbers at a time. By default, part number creation is asynchronous.

Referenced By

Name	Type
createPartNumberRequest	Element
createPartNumber	Method

Complex Type: createPartNumberResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>import request of part numbers was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			import request of part numbers was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		import request of part numbers was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedPartNumberDataListType	0..1	Information about the part numbers that were not added is listed in the failedData element. See failedPartNumberDataListType . Not populated for asynchronous requests.									
responseData	createdPartNumberDataListType	0..1	Information about the part numbers that were added is listed in the responseData element. See createdPartNumberDataListType . Not populated for asynchronous requests.									

Referenced By

Name	Type
createPartNumberResponse	Element

Complex Type: createProductCategoryDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Required. A name for the product category.
description	string	0..1	Optional. A description for the product category.

Complex Type: createProductCategoryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productCategory	createProductCategoryDataType	1..*	Required. A createProductCategoryRequest contains an array of productCategory elements to be added. See createProductCategoryDataType .

Referenced By

Name	Type
createProductCategoryRequest	Element
createProductCategory	Method

Complex Type: createProductCategoryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductCategoryDataListType	0..1	Information about the categories that were not added is listed in the failedData element. See failedProductCategoryDataListType									
responseData	createdProductCategoryDataListType	0..1	Information about the categories that were added is listed in the responseData element. See createdProductCategoryDataListType .									

Referenced By

Name	Type
createProductCategoryResponse	Element

Complex Type: createProductDataTypes

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productName	string	1..1	Required. Name of product.
version	string	0..1	Required at deployment. Version of product.
description	string	0..1	Optional. Describe what makes this product unique.
licenseTechnology	licenseTechnologyIdentifierType	0..1	Optional. If not specified, set to FlexNet Licensing. See licenseTechnologyIdentifierType .
licenseGenerator	licenseGeneratorIdentifierType	0..1	Optional. If only one license generator configuration exists for the specified license technology, that license generator configuration is set automatically. If multiple license generator configurations exist for the specified license technology, the license generator configuration must be set. See licenseGeneratorIdentifierType .
packageProperties	packagePropertiesDataType	0..1	Optional, to be used if licenses are to be delivered using a PACKAGE line. See packagePropertiesDataType .
features	featuresListType	0..1	Required for deployment. Draft or deployed features or feature bundles must be added before deploying the product. See featuresListType .
featureBundles	featureBundlesListType	0..1	Required for deployment. Draft or deployed features or feature bundles must be added before deploying the product. See featureBundlesListType .
licenseModels	licenseModelsListType	0..1	Required for deployment. Deployed license models must be linked before deploying the product. See licenseModelsListType .
trustedKey	trustedKeyIdentifierType	0..1	Optional. If one or more of the license models are trusted, the use of either trustedKey or virtualTrustedKey (or both) is required. Use trustedKey for default binding. Use virtualTrustedKey for virtualization-aware binding. See trustedKeyIdentifierType .
virtualTrustedKey	trustedKeyIdentifierType	0..1	Optional. If one or more of the license models are trusted, the use of either trustedKey or virtualTrustedKey (or both) is required. Use trustedKey for default binding. Use virtualTrustedKey for virtualization-aware binding. See trustedKeyIdentifierType .
partNumbers	partNumbersListType	0..1	Optional. Specify if one or more part numbers are mapped to the product. See partNumbersListType .

Content Model

Component	Type	Occurs	Description
hostType	hostTypePKType	0..1	If no hostType is set for a FlexNet product, the default certificate or trusted host host type is used. Required if a host type is defined on a custom license technology. See hostTypePKType .
hostTypes	hostTypeListType	0..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts.
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology product that can be used on a device licensed using FNE. If set to true, a hostType appropriate to a device must be explicitly set. usedOnDevice can be changed after a product is deployed. If it is changed from false to true, a hostType must be set
productCategory	string	0..1	Optional. Sets the product category for this product. If you do not set a category or if you set an empty or nonexistent category, FlexNet Operations automatically assigns the product to the default Uncategorized Products category without an error.
customAttributes	attributeDescriptorDataType	0..1	A collection of license model or custom attributes. See attributeDescriptorDataType .
allowDownloadObsoleteFrInAdmin	boolean	0..1	If true, allows administrative console users to download obsolete fulfillment records.
allowDownloadObsoleteFrInPortal	boolean	0..1	If true, allows self-service portal users to download obsolete fulfillment records.
productAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
startDate	date	0..1	Only used for automatic upgrade jobs, the startDate value defines the beginning of a date range for which this product qualifies as an upgrade-to product, based on the upgrade relationships as defined when the upgrade job runs. The date range defined by startDate and endDate has no impact on manually generated upgrades nor on bulk operations. startDate is only available for products; it is not available for maintenance products nor for product suites. Note: This attribute is available in ProductPackagingService v1 and later.

Content Model

Component	Type	Occurs	Description
endDate	date	0..1	Only used for automatic upgrade jobs, the endDate value defines the ending of a date range for which this product qualifies as an upgrade-to product, based on the upgrade relationships as defined when the upgrade job runs. The date range defined by startDate and endDate has no impact on manually generated upgrades nor on bulk operations. endDate is only available for products; it is not available for maintenance products nor for product suites. Note: This attribute is available in ProductPackagingService v1 and later.
upgradeEmailTemplateVarName	string	0..1	Only used for automatic upgrade jobs, the upgradeEmailTemplateVarName specifies the variation of the Product Upgrade Job Email template to use when FlexNet Operations automatically creates upgrade lines as a result of running the Product Version Upgrade job. (This value sets the template variation used for email messages sent to end users as a result of the Product Version Upgrade job.) - The upgradeEmailTemplateVarName value can be empty, DEFAULT, None, or the name of an active variation of the Product Upgrade Job Email template. - Empty (no value specified) and DEFAULT cause FlexNet Operations to use the default variation of the Product Upgrade Job Email template for automatic upgrades to this product. None prevents FlexNet Operations from sending email messages for automatic upgrades to this product. - A specified variation name uses the named variation of the Product Upgrade Job Email template for automatic upgrades to this product. (Only active variations of the Product Upgrade Job Email template are available for use. Draft variations are not used.) Note: This attribute is available in ProductPackagingService v1 and later.

Complex Type: createProductRelationshipRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
relationship	productRelationshipDataType	1..*	Required. A createProductRelationshipRequest contains an array of relationship elements to be added. See productRelationshipDataType .

Referenced By

Name	Type
createProductRelationshipRequest	Element
createProductRelationship	Method

Complex Type: createProductRelationshipResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusInfo</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusInfo	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusInfo	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductRelationshipDataListType	0..1	Information about the relationships that were not added is listed in the failedData element. See failedProductRelationshipDataListType .									

Referenced By

Name	Type
createProductRelationshipResponse	Element

Complex Type: createProductRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	createProductDataType	1..*	Required. A createProductRequest contains an array of product elements to be added. See createProductDataType .

Referenced By

Name	Type
createProductRequest	Element
createProduct	Method

Complex Type: createProductResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductDataListType	0..1	Information about the products that were not added is listed in the failedData element. See failedProductDataListType .									
responseData	createdProductDataListType	0..1	Information about the products that were added is listed in the responseData element. See createdProductDataListType .									

Referenced By

Name	Type
createProductResponse	Element

Complex Type: createUniformSuiteDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suiteName	string	1..1	Required. Name of suite.
version	string	0..1	Required at deployment. Version of suite.
description	string	0..1	Optional. Describe what makes this suite unique.
licenseTechnology	licenseTechnologyIdentifierType	0..1	Optional. If not specified, set to FlexNet Licensing. See licenseTechnologyIdentifierType .
licenseGenerator	licenseGeneratorIdentifierType	0..1	Optional. If only one license generator configuration exists for the specified license technology, that license generator configuration is set automatically. If multiple license generator configurations exist for the specified license technology, the license generator configuration must be set. See licenseGeneratorIdentifierType .
packageProperties	packagePropertiesDataType	0..1	Optional, if licenses are to be delivered using a PACKAGE line. See packagePropertiesDataType .
products	productsListType	0..1	Required for deployment. Draft or deployed products must be added before deploying the suite. See productsListType .
licenseModels	licenseModelsListType	0..1	Required for deployment. Deployed license models must be linked before deploying the suite. See licenseModelsListType .
trustedKey	trustedKeyIdentifierType	0..1	Optional. If one or more of the license models are trusted, the use of either trustedKey or virtualTrustedKey (or both) is required. Use trustedKey for default binding. Use virtualTrustedKey for virtualization-aware binding. See trustedKeyIdentifierType .
virtualTrustedKey	trustedKeyIdentifierType	0..1	Optional. If one or more of the license models are trusted, the use of either trustedKey or virtualTrustedKey (or both) is required. Use trustedKey for default binding. Use virtualTrustedKey for virtualization-aware binding. See trustedKeyIdentifierType .
partNumbers	partNumbersListType	0..1	Optional. Specify if one or more part numbers are mapped to the suite. See partNumbersListType .
hostType	hostTypePKType	0..1	If no hostType is set for a FlexNet suite, the default certificate or trusted host host type is used. Required if a host type is defined on a custom license technology. See hostTypePKType .
hostTypes	hostTypeListType	0..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts.

Content Model

Component	Type	Occurs	Description
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology suite that can be used on a device licensed using FNE. If set to true, a hostType appropriate to a device must be explicitly set. usedOnDevice can be changed after a suite is deployed. If it is changed from false to true, a hostType must be set.
customAttributes	attributeDescriptorDataType	0..1	A collection of license model or custom attributes. See attributeDescriptorDataType .
allowDownloadObsoleteFrInAdmin	boolean	0..1	If true, allows administrative console users to download obsolete fulfillment records.
allowDownloadObsoleteFrInPortal	boolean	0..1	If true, allows self-service portal users to download obsolete fulfillment records.
productAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: createUniformSuiteRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniformSuite	createUniformSuiteDataType	1..*	Required. A createUniformSuiteRequest contains an array of uniformSuite elements to be added. See createUniformSuiteDataType .

Referenced By

Name	Type
createUniformSuiteRequest	Element
createUniformSuite	Method

Complex Type: createUniformSuiteResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUniformSuiteDataListType	0..1	Information about the suites that were not added is listed in the failedData element. See failedUniformSuiteDataListType .									
responseData	createdUniformSuiteDataListType	0..1	Information about the suites that were added is listed in the responseData element. See createdUniformSuiteDataListType .									

Referenced By

Name	Type
createUniformSuiteResponse	Element

Complex Type: customAttributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	customAttributeDescriptorType	0..*	See customAttributeDescriptorType .

Complex Type: customAttributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of the custom attribute.

Complex Type: customAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attributeName	string	1..1	The name of the custom attribute.
 CHOICE		1..1	
booleanValue	boolean	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. Set to true or false if the custom attribute is of type boolean.
dateValue	DateQueryType	0..1	Optional. A dateValue element contains: - value—a date value to compare to the version date value. - searchType—which is one of the following datedSearchType values: - BEFORE - AFTER - ON.
numberValue	NumberQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. A numberValue element contains: - value—an integer number to match part or all of the custom attribute value. - searchType—which is one of the following simpleSearchType values: - GREATER_THAN - GREATER_THAN_EQUALS - LESS_THAN - LESS_THAN_EQUALS - EQUALS - NOT_EQUALS

Content Model

Component	Type	Occurs	Description
stringValue	SimpleQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. A stringValue element contains: • value—a string to match part or all of the custom attribute value. • searchType—which is one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: customAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	customAttributeQueryType	0..*	See customAttributeQueryType .

Complex Type: DateTimeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	dateTime	1..1	A date and time value to compare to another date and time value.
searchType	datedSearchType	1..1	One of the following datedSearchType values: - BEFORE - AFTER - ON

Complex Type: deleteFeatureBundleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundleIdentifier	featureBundleIdentifierType	1..1	Required. See featureBundleIdentifierType .

Complex Type: deleteFeatureBundleRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	deleteFeatureBundleDataType	1..*	Required. A deleteFeatureBundleRequest contains an array of featureBundle elements to be deleted. See deleteFeatureBundleDataType .

Referenced By

Name	Type
deleteFeatureBundleRequest	Element
deleteFeatureBundle	Method

Complex Type: deleteFeatureBundleResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>response</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	response	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.							
response	string	Gives reason for partial failure or failure.										
failedData	failedDeleteFeatureBundleDataListType	0..1	Information about the feature bundles that were not deleted is listed in the failedData element. See failedDeleteFeatureBundleDataListType .									

Referenced By

Name	Type
deleteFeatureBundleResponse	Element

Complex Type: deleteFeatureDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	Required. See featureIdentifierType .

Complex Type: deleteFeatureRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	deleteFeatureDataType	1..*	Required. A deleteFeatureRequest contains an array of feature elements to be deleted. See deleteFeatureDataType .

Referenced By

Name	Type
deleteFeatureRequest	Element
deleteFeature	Method

Complex Type: deleteFeatureResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteFeatureDataListType	0..1	Information about the features that were not deleted is listed in the failedData element. See failedDeleteFeatureDataListType .									

Referenced By

Name	Type
deleteFeatureResponse	Element

Complex Type: deleteMaintenanceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceIdentifier	maintenanceIdentifierType	1..1	Required. See maintenanceIdentifierType .

Complex Type: deleteMaintenanceRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	deleteMaintenanceDataType	1..*	Required. A deleteMaintenanceRequest contains an array of maintenance elements to be deleted. See deleteMaintenanceDataType .

Referenced By

Name	Type
deleteMaintenanceRequest	Element
deleteMaintenance	Method

Complex Type: deleteMaintenanceResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteMaintenanceDataListType	0..1	Information about the maintenance products that were not deleted is listed in the failedData element. See failedDeleteMaintenanceDataListType .									

Referenced By

Name	Type
deleteMaintenanceResponse	Element

Complex Type: deletePartNumberDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumberIdentifier	partNumberIdentifierType	1..1	Required. See partNumberIdentifierType .

Complex Type: deletePartNumberRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	deletePartNumberDataType	1..*	Required. A deletePartNumberRequest contains an array of partNumber elements to be deleted. See deletePartNumberDataType .

Referenced By

Name	Type
deletePartNumberRequest	Element
deletePartNumber	Method

Complex Type: deletePartNumberResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>import request of part numbers was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			import request of part numbers was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		import request of part numbers was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeletePartNumberDataListType	0..1	Information about the part numbers that were not deleted is listed in the failedData element. See failedDeletePartNumberDataListType .									

Referenced By

Name	Type
deletePartNumberResponse	Element

Complex Type: deleteProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .

Complex Type: deleteProductRelationshipRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
relationship	productRelationshipDataType	1..*	Required. A deleteProductRelationshipRequest contains an array of relationship elements to be deleted. See productRelationshipDataType .

Referenced By

Name	Type
deleteProductRelationshipRequest	Element
deleteProductRelationship	Method

Complex Type: deleteProductRelationshipResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductRelationshipDataListType	0..1	Information about the relationships that were not deleted is listed in the failedData element. See failedProductRelationshipDataListType									

Referenced By

Name	Type
deleteProductRelationshipResponse	Element

Complex Type: deleteProductRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	deleteProductDataType	1..*	Required. A deleteProductRequest contains an array of product elements to be deleted. See deleteProductDataType .

Referenced By

Name	Type
deleteProductRequest	Element
deleteProduct	Method

Complex Type: deleteProductResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request ere processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request ere processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request ere processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteProductDataListType	0..1	Information about the products that were not deleted is listed in the failedData element. See failedDeleteProductDataListType .									

Referenced By

Name	Type
deleteProductResponse	Element

Complex Type: deleteUniformSuiteDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suiteIdentifier	suiteIdentifierType	1..1	Required. See suiteIdentifierType .

Complex Type: deleteUniformSuiteRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniformSuite	deleteUniformSuiteDataType	1..*	Required. A deleteUniformSuiteRequest contains an array of uniformSuite elements to be deleted. See deleteUniformSuiteDataType .

Referenced By

Name	Type
deleteUniformSuiteRequest	Element
deleteUniformSuite	Method

Complex Type: deleteUniformSuiteResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteUniformSuiteDataListType	0..1	Information about the suites that were not deleted is listed in the failedData element. See failedDeleteUniformSuiteDataListType .									

Referenced By

Name	Type
deleteUniformSuiteResponse	Element

Complex Type: dupGroupDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
dupGroupOption	DupGroupType	1..1	Specify if dupGroup element is specified. Specify one of the following: • NO_OVERRIDE • GROUPMASK • NONE
groupMask	groupMaskDataType	0..1	Specify if dupGroupOption is set to GROUPMASK. A groupMask element contains an array of option elements that each contains one of the following values: • USER • HOST • DISPLAY • VENDOR

Complex Type: DurationType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
numDuration	integer	1..1	Required. Specify the number of units of time, for example, 10, for a duration of 10 durationUnit.

Content Model

Component	Type	Occurs	Description
durationUnit	DurationUnit	1..1	Required. Specify one of the following units of time: • DAYS • WEEKS • MONTHS • YEARS

Complex Type: emailContactListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
emailId	string	0..*	List of email addresses to which to send license certificate.

Complex Type: entitledProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitledProduct	entitledProductDataType	0..*	See entitledProductDataType .

Complex Type: entitledProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productIdentifierType	0..1	See productIdentifierType .
quantity	integer	1..1	Quantity per copy of the line item. This is a multiplier to the number of copies. If one copy of the line item is fulfilled, this many copies of the entitled product will be fulfilled.

Complex Type: entitlementIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the entitlement.
primaryKeys	entitlementPKType	0..1	Database primary key of the entitlement—string containing the entitlementId of the entitlement.

Complex Type: entitlementLineItemIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
uniqueId	string	0..1	Unique database identifier of the entitlement line item.
primaryKeys	entitlementLineItemPKType	0..1	Database primary key of the entitlement line item—string containing the activationId of the entitlement line item.

Complex Type: failedDeleteFeatureBundleDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFeatureBundle	failedDeleteFeatureBundleDataType	0..*	failedData (see deleteFeatureBundleResponseType) contains one or more failedFeatureBundle elements. See failedDeleteFeatureBundleDataType .

Complex Type: failedDeleteFeatureBundleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundleIdentifier	featureBundleIdentifierType	1..1	See featureBundleIdentifierType .
reason	string	0..1	The reason the feature bundle was not deleted.

Complex Type: failedDeleteFeatureDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFeature	failedDeleteFeatureDataType	0..*	failedData contains one or more failedFeature elements. See failedDeleteFeatureDataType .

Complex Type: failedDeleteFeatureDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	See featureIdentifierType .
reason	string	0..1	The reason the feature was not deleted.

Complex Type: failedDeleteMaintenanceDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedMaintenance	failedDeleteMaintenanceDataType	0..*	failedData contains one or more failedMaintenance elements. See failedDeleteMaintenanceDataType .

Complex Type: failedDeleteMaintenanceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceIdentifier	maintenanceIdentifierType	1..1	See maintenanceIdentifierType .
reason	string	0..1	The reason the maintenance product was not deleted.

Complex Type: failedDeletePartNumberDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedPartNumber	failedDeletePartNumberDataType	0..*	failedData contains one or more failedPartNumber elements. See failedDeletePartNumberDataType .

Complex Type: failedDeletePartNumberDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	partNumberIdentifierType	1..1	See partNumberIdentifierType .

Content Model

Component	Type	Occurs	Description
reason	string	1..1	The reason the part number was not deleted.

Complex Type: failedDeleteProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedProduct	failedDeleteProductData Type	0..*	failedData contains one or more failedProduct elements. See failedDeleteProductData Type .

Complex Type: failedDeleteProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	See productIdentifierType .
reason	string	0..1	The reason the product was not deleted.

Complex Type: failedDeleteUniformSuiteDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUniformSuite	failedDeleteUniformSuite DataType	0..*	failedData contains one or more failedUniformSuite elements. See failedDeleteUniformSuiteDataType .

Complex Type: failedDeleteUniformSuiteDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suiteIdentifier	suiteIdentifierType	1..1	See suiteIdentifierType .
reason	string	0..1	The reason the suite was not deleted.

Complex Type: failedFeatureBundleDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFeatureBundle	failedFeatureBundleData Type	0..*	failedData contains one or more failedFeatureBundle elements. See failedFeatureBundleDataType .

Complex Type: failedFeatureBundleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	createFeatureBundleData Type	1..1	See createFeatureBundleData Type .
reason	string	1..1	String containing the reason the feature bundle was not added.

Complex Type: failedFeatureBundleStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFeatureBundle	failedFeatureBundleState Data Type	0..*	A failedData element contains an array of failedFeatureBundle elements whose state was not set. See failedFeatureBundleState Data Type .

Complex Type: failedFeatureBundleStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	featureBundleStateData Type	1..1	See featureBundleStateData Type .

Content Model

Component	Type	Occurs	Description
reason	string	1..1	Reason the state of the feature bundle was not set.

Complex Type: failedFeatureDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFeature	failedFeatureDataType	0..*	failedData contains one or more failedFeature elements. See failedFeatureDataType .

Complex Type: failedFeatureDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureDataType	0..1	See featureDataType .
reason	string	0..1	String containing the reason the feature was not added.

Complex Type: failedFeatureStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFeature	failedFeatureStateDataType	0..*	A failedData element contains an array of failedFeature elements whose state was not set. See failedFeatureStateDataType .

Complex Type: failedFeatureStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureStateDataType	1..1	See featureStateDataType .
reason	string	1..1	Reason the state was not set.

Complex Type: failedMaintenanceDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedMaintenance	failedMaintenanceDataType	0..*	failedData contains one or more failedMaintenance elements. See failedMaintenanceDataType .

Complex Type: failedMaintenanceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	createMaintenanceDataType	0..1	See createMaintenanceDataType .
reason	string	0..1	String containing the reason the maintenance product was not added.

Complex Type: failedMaintenanceStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedMaintenance	failedMaintenanceStateDataType	0..*	A failedData element contains an array of failedMaintenance elements whose state was not set. See failedMaintenanceStateDataType .

Complex Type: failedMaintenanceStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	maintenanceStateDataType	1..1	See maintenanceStateDataType .

Content Model

Component	Type	Occurs	Description
reason	string	1..1	Reason the state of the maintenance product was not set.

Complex Type: failedOrgDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedOrganization	failedOrgDataType	0..*	failedData contains one or more failedOrganization elements. See failedOrgDataType .

Complex Type: failedOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationBasicDataType	0..1	See organizationBasicDataType .
reason	string	0..1	String containing the reason the organization was not added.

Complex Type: failedPartNumberDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedPartNumber	failedPartNumberDataType	0..*	failedData contains one or more failedPartNumber elements. See failedPartNumberDataType .

Complex Type: failedPartNumberDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	createPartNumberDataType	0..1	See createPartNumberDataType .
reason	string	0..1	String containing the reason the part number was not added.

Complex Type: failedProductCategoryDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedProductCategory	failedProductCategoryDataType	0..*	failedData contains one or more failedProductCategory elements. See failedProductCategoryDataType .

Complex Type: failedProductCategoryDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productCategory	createProductCategoryDataType	0..1	See createProductCategoryDataType .
reason	string	0..1	String containing the reason the category was not added.

Complex Type: failedProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedProduct	failedProductDataType	0..*	failedData contains one or more failedProduct elements. See failedProductDataType .

Complex Type: failedProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	createProductDataType	0..1	See createProductDataType .
reason	string	0..1	String containing the reason the product was not added.

Complex Type: failedProductRelationshipDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedRelationship	failedProductRelationshipDataType	0..*	failedData contains one or more failedRelationship elements. See failedProductRelationshipDataType .

Complex Type: failedProductRelationshipDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
relationship	productRelationshipDataType	0..1	See productRelationshipDataType .
reason	string	0..1	The reason the relationship was not added.

Complex Type: failedProductStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedProduct	failedProductStateDataType	0..*	A failedData element contains an array of failedProduct elements whose state was not set. See failedProductStateDataType .

Complex Type: failedProductStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productStateDataType	1..1	See productStateDataType .
reason	string	1..1	Reason the state of the product was not set.

Complex Type: failedUniformSuiteDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUniformSuite	failedUniformSuiteDataType	0..*	failedData contains one or more failedUniformSuite elements. See failedUniformSuiteDataType .

Complex Type: failedUniformSuiteDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniformSuite	createUniformSuiteDataType	0..1	See createUniformSuiteDataType .
reason	string	0..1	String containing the reason the suite was not added.

Complex Type: failedUniformSuiteStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUniformSuite	failedUniformSuiteStateDataType	0..*	failedData contains an array of failedUniformSuite elements whose state was not set. See failedUniformSuiteStateDataType .

Complex Type: failedUniformSuiteStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
suite	uniformSuiteStateDataType	1..1	See uniformSuiteStateDataType .
reason	string	1..1	String containing the reason the suite was not added.

Complex Type: failedUpdateFeatureBundleDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedFeatureBundle	failedUpdateFeatureBundleDataType	0..*	failedData contains one or more failedFeatureBundle elements. See failedUpdateFeatureBundleDataType .

Complex Type: failedUpdateFeatureBundleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureBundle	updateFeatureBundleDataType	1..1	See updateFeatureBundleDataType .
reason	string	0..1	The reason the feature bundle was not modified.

Complex Type: failedUpdateFeatureDataListType

Description

Contains one or more **failedFeature** elements.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedFeature	failedUpdateFeatureDataType	0..*	failedData contains one or more failedFeature elements. See failedUpdateFeatureDataType .

Complex Type: failedUpdateFeatureDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	See featureIdentifierType .
reason	string	0..1	String containing the reason the feature was not added.

Complex Type: failedUpdateMaintenanceDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedMaintenance	failedUpdateMaintenanceData Type	0..*	failedData contains one or more failedMaintenance elements. See failedUpdateMaintenanceData Type .

Complex Type: failedUpdateMaintenanceData Type

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	updateMaintenanceData Type	1..1	See updateMaintenanceData Type .
reason	string	0..1	The reason the maintenance product was not modified.

Complex Type: failedUpdateProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedProduct	failedUpdateProductData Type	0..*	failedData contains one or more failedProduct elements. See failedUpdateProductData Type .

Complex Type: failedUpdateProductData Type

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	updateProductDataType	1..1	See updateProductDataType .
reason	string	0..1	The reason the product was not modified.

Complex Type: failedUpdateProductRelationshipDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedRelationship	failedUpdateProductRelationshipDataType	0..*	failedData contains one or more failedRelationship elements. See failedUpdateProductRelationshipDataType .

Complex Type: failedUpdateProductRelationshipDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
relationship	updateProductRelationshipDataType	1..1	See updateProductRelationshipDataType .
reason	string	1..1	The reason the relationship was not modified.

Complex Type: failedUpdateUniformSuiteDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUniformSuite	failedUpdateUniformSuiteDataType	0..*	failedData contains one or more failedUniformSuite elements. See failedUpdateUniformSuiteDataType .

Complex Type: failedUpdateUniformSuiteDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniformSuite	updateUniformSuiteDataType	1..1	See updateUniformSuiteDataType .
reason	string	0..1	The reason the suite was not modified.

Complex Type: featureBundleIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the feature bundle, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature bundle.
primaryKeys	featureBundlePKType	0..1	Database primary key of the feature bundle—a string containing the name of the feature bundle.

Complex Type: featureBundleIdentifierWithCountDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundleIdentifier	featureBundleIdentifierType	1..1	Required. See featureBundleIdentifierType .
count	positiveInteger	1..1	Required. Positive integer that indicates the cardinality of the feature bundle in the product.

Complex Type: featureBundleQueryDataType

Description

All elements in the feature bundles are returned, unless otherwise noted.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the feature.

Content Model

Component	Type	Occurs	Description
name	string	1..1	Name of the feature.
description	string	0..1	Description of the feature.
state	StateType	1..1	DRAFT or DEPLOYED.
features	featuresListType	0..1	The features in the feature bundle are returned if returnContainedObjects in the request is set to true. See featuresListType .

Complex Type: featureBundleQueryParametersType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	SimpleQueryType	0..1	Optional. A name element contains: • value—a string to match part or all of the feature bundle name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
description	SimpleQueryType	0..1	Optional. A description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of DRAFT or DEPLOYED to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
creationDate	DateQueryType	0..1	Optional. A creationDate element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Complex Type: featureBundlesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	featureBundleIdentifierWithCountDataType	1..*	featureBundles contains an array of one or more featureBundle elements. See featureBundleIdentifierWithCountDataType .

Complex Type: featureBundleStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
featureBundleIdentifier	featureBundleIdentifierType	1..1	Required. See featureBundleIdentifierType .
stateToSet	StateType	1..1	Required. DRAFT or DEPLOYED.

Complex Type: featureDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureName	string	1..1	Required. Name of a feature that can contain up to 30 ASCII characters, numbers, underscores, and hyphens.
versionFormat	VersionFormatType	1..1	Required. Specify FIXED or DATE_BASED.
version	string	0..1	The version contains numbers and up to one decimal point. A feature with a FIXED version format needs a version to save and deploy the feature. For a DATE_BASED version format, this value is ignored.
description	string	0..1	Optional. Describe what makes this feature unique.
featureOverrideParams	featureOverrideParamsType	0..1	Optional. If you have a FLEXnet_Ops.FeatureOverride license and the Web service user is assigned the Set Feature Override permission, one or more of these parameters can be set on an individual feature to override settings on a license model. See featureOverrideParamsType. Even if no feature overrides are explicitly set, the dupGroupOption, NO_OVERRIDE, is set automatically.

Complex Type: featureIdentifierType

Description

In the request, specify either **uniqueId** or **primaryKeys** to uniquely specify the feature, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature.
primaryKeys	featurePKType	0..1	Database primary keys of the feature—strings containing name and, if the feature version format is FIXED, the version of the feature. If the feature version format is DATE_BASED, specify only name.

Complex Type: featureIdentifierWithCountDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	Required. See featureIdentifierType .
count	positiveInteger	1..1	Required. Positive integer that indicates the cardinality of the feature in the feature bundle or product.

Complex Type: featureOverrideParamsType

Description

Describes the elements in featureOverrideParamsType. Your FlexNet Operations license must contain a FLEXnet_Ops.FeatureOverride feature and the Web service user must have the **Set Feature Override** permission to use these settings. They are recommended only for backwards compatibility with GT/licensing.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
vendorString	string	0..1	Optional. Override a VENDOR_STRING setting in a license model with this value.
notice	string	0..1	Optional. Override a NOTICE setting in a license model with this value.
serialNumber	string	0..1	Optional. Override a SERIAL_NUMBER setting in a license model with this value.
dupGroup	dupGroupDataType	0..1	Optional. Override a DUP_GROUP setting in a license model with this value. See dupGroupDataType . Even if no feature overrides are explicitly set, the dupGroupOption , NO_OVERRIDE, is set automatically.

Complex Type: featureQueryDataType

Description

All elements in the features are returned.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the feature.
featureName	string	1..1	Name of the feature.
versionFormat	VersionFormatType	1..1	FIXED or DATE_BASED.
version	string	0..1	Version of the feature, if FIXED format.
description	string	0..1	Description of the feature.
state	StateType	1..1	DRAFT or DEPLOYED.
featureOverrideParams	featureOverrideParamsType	0..1	This element is returned only if your FlexNet Operations license contains a FLEXnet_Ops.FeatureOverride feature. See featureOverrideParamsType .

Complex Type: featureQueryParametersType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureName	SimpleQueryType	0..1	Optional. A featureName element contains: • value—a string to match part or all of the featureName element. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
version	SimpleQueryType	0..1	Optional. A version element contains: • value—a string to match part or all of the version value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
versionFormat	VersionFormatQueryType	0..1	Optional. A versionFormat element contains: • value—VersionFormatType of FIXED or DATE_BASED. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
description	SimpleQueryType	0..1	Optional. A description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of DRAFT or DEPLOYED to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
creationDate	DateQueryType	0..1	Optional. A creationDate element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Complex Type: featuresListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureIdentifierWithCountDataType	1..*	Required. features contains an array of one or more feature elements. See featureIdentifierWithCountDataType .

Complex Type: featureStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	Required. See featureIdentifierType .
stateToSet	StateType	1..1	Required. DRAFT or DEPLOYED.

Complex Type: getFeatureBundleCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureBundleQueryParametersType	0..1	Required. See featureBundleQueryParametersType . Leave this element blank to return all feature bundles.

Referenced By

Name	Type
getFeatureBundleCountRequest	Element
getFeatureBundleCount	Method

Complex Type: getFeatureBundleCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getFeatureBundleCountResponse	Element

Complex Type: getFeatureBundlesQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureBundleQueryParametersType	0..1	Required. See featureBundleQueryParametersType . Leave this element blank to return all feature bundles.
pageNumber	integer	1..1	Required. Starts at 1. Say the getFeatureBundleCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return an array of featuresListType of features that are contained in the feature bundle. See featuresListType .

Referenced By

Name	Type
getFeatureBundlesQueryRequest	Element
getFeatureBundlesQuery	Method

Complex Type: getFeatureBundlesQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	featureBundleQueryDataType	0..*	A responseData element contains an array of featureBundle elements. See featureBundleQueryDataType .

Complex Type: getFeatureBundlesQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFeatureBundlesQueryResponseDataType	0..1	See getFeatureBundlesQueryResponseDataType .									

Referenced By

Name	Type
getFeatureBundlesQueryResponse	Element

Complex Type: getFeatureCountRequestType

Description

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureQueryParametersType	0..1	Required. See featureQueryParametersType . Leave this element blank to return all features.

Referenced By

Name	Type
getFeatureCountRequest	Element
getFeatureCount	Method

Complex Type: getFeatureCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getFeatureCountResponse	Element

Complex Type: getFeaturesQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureQueryParametersType	0..1	Required. See featureQueryParametersType . Leave this element blank to return all features.
pageNumber	integer	1..1	Required. Starts at 1. Say the getFeatureCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getFeaturesQueryRequest	Element
getFeaturesQuery	Method

Complex Type: getFeaturesQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureQueryDataType	0..*	A responseData element contains an array of feature elements to be added. See featureQueryDataType .

Complex Type: getFeaturesQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFeaturesQueryResponseDataType	0..1	See getFeaturesQueryResponseDataType .									

Referenced By

Name	Type
getFeaturesQueryResponse	Element

Complex Type: getLicenseTechnologyQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	licenseTechnologyQueryParametersType	0..1	Required. See licenseTechnologyQueryParametersType . Leave this element blank to return all license technologies.

Referenced By

Name	Type
getLicenseTechnologyQueryRequest	Element
getLicenseTechnologiesQuery	Method

Complex Type: getLicenseTechnologyQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	licenseTechnologyDataListType	0..1	Information about the license technologies that matched the query is listed in the responseData element. See licenseTechnologyDataListType .									

Referenced By

Name	Type
getLicenseTechnologyQueryResponse	Element

Complex Type: getMaintenanceCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	maintenanceQueryParametersType	0..1	Required. See maintenanceQueryParametersType . Leave this element blank to return all maintenance products.

Referenced By

Name	Type
getMaintenanceCountRequest	Element
getMaintenanceCount	Method

Complex Type: getMaintenanceCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getMaintenanceCountResponse	Element

Complex Type: getMaintenanceQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	maintenanceQueryParametersType	0..1	Required. See maintenanceQueryParametersType . Leave this element blank to return all maintenance products.
pageNumber	integer	1..1	Required. Starts at 1. Say the getMaintenanceCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return arrays of elements that are contained in the maintenance product.

Referenced By

Name	Type
getMaintenanceQueryRequest	Element
getMaintenanceQuery	Method

Complex Type: getMaintenanceQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	maintenanceQueryDataType	0..*	A responseData element contains an array of maintenance elements. See maintenanceQueryDataType .

Complex Type: getMaintenanceQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getMaintenanceQueryResponseDataType	0..1	See getMaintenanceQueryResponseDataType .									

Referenced By

Name	Type
getMaintenanceQueryResponse	Element

Complex Type: getModelIdentifiersRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	identifierQueryParametersType	0..1	Required. See identifierQueryParametersType .

Referenced By

Name	Type
getModelIdentifiersRequest	Element
getLicenseModelIdentifiers	Method

Complex Type: getModelIdentifiersResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	modelIdentifiersDataListType	0..1	See modelIdentifiersDataListType .									

Referenced By

Name	Type
getModelIdentifiersResponse	Element

Complex Type: getPartNumberCountRequestType

Description

A **getPartNumberCountRequest** message contains an element of getPartNumberCountRequestType.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
queryParams	partNumberQueryParametersType	0..1	Required. See partNumberQueryParametersType .

Referenced By

Name	Type
getPartNumberCountRequest	Element
getPartNumberCount	Method

Complex Type: getPartNumberCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description											
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>import request of part numbers was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>			Element	Data Type	Description			import request of part numbers was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description												
		import request of part numbers was not scheduled.												
reason	string	Gives reason for partial failure or failure.												
responseData	partNumberCountDataType	0..1	Contains an integer count element. See partNumberCountDataType.											

Referenced By

Name	Type
getPartNumberCountResponse	Element

Complex Type: getPartNumbersQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	partNumberQueryParametersType	0..1	Required. See partNumberQueryParametersType .
pageNumber	integer	1..1	Required. Starts at 1. Say the getPartNumberCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getPartNumbersQueryRequest	Element
getPartNumbersQuery	Method

Complex Type: getPartNumbersQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description		
			Element	Data Type	Description
					import request of part numbers was not scheduled.
			reason	string	Gives reason for partial failure or failure.
responseData	partNumberDataListType	0..1	See partNumberDataListType .		

Referenced By

Name	Type
getPartNumbersQueryResponse	Element

Complex Type: getProductCategoriesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
pageNumber	integer	0..1	The page number of the query results. The page number depends on the batch size and the number of records returned. Say the getProductCategories query returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	True or False.

Referenced By

Name	Type
getProductCategoriesRequest	Element
getProductCategories	Method

Complex Type: getProductCategoriesResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productCategory	productCategoryDataType	0..*	A responseData element contains an array of productCategory elements. See productCategoryDataType .

Complex Type: getProductCategoriesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives a reason for partial failure or failure.										
responseData	getProductCategoriesResponseDataType	0..1	A getProductCategoriesResponse contains an array of responseData elements. See getProductCategoriesResponseDataType .									

Referenced By

Name	Type
getProductCategoriesResponse	Element

Complex Type: getProductCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	productQueryParametersType	0..1	Required. See productQueryParametersType . Leave this element blank to return all products.

Referenced By

Name	Type
getProductCountRequest	Element
getProductCount	Method

Complex Type: getProductCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element. See <code>getCountResponseDataType</code> .									

Referenced By

Name	Type
getProductCountResponse	Element

Complex Type: getProductRelationshipsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .

Referenced By

Name	Type
getProductRelationshipsRequest	Element
getProductRelationships	Method

Complex Type: getProductRelationshipsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
relationship	productRelationshipDataType	1..*	A getProductRelationshipsResponse contains an array of relationship elements. See productRelationshipDataType .

Referenced By

Name	Type
getProductRelationshipsResponse	Element

Complex Type: getProductQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	productQueryParametersType	0..1	Required. See productQueryParametersType . Leave this element blank to return all products.
pageNumber	integer	1..1	Required. Starts at 1. Say the getProductCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return arrays of elements that are contained in the product.

Referenced By

Name	Type
getProductsQueryRequest	Element
getProductsQuery	Method

Complex Type: getProductQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productQueryDataType	0..*	A responseData element contains an array of product elements. See productQueryDataType .

Complex Type: getProductsQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getProductsQueryResponseDataType	0..1	See getProductsQueryResponseDataType .									

Referenced By

Name	Type
getProductsQueryResponse	Element

Complex Type: getTransactionKeyIdentifiersRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	identifierQueryParametersType	0..1	Required. See identifierQueryParametersType .

Referenced By

Name	Type
getTransactionKeyIdentifiersRequest	Element
getTransactionKeyIdentifiers	Method

Complex Type: getTransactionKeyIdentifiersResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
responseData	transactionKeyIdentifiersDataListType	0..1	See transactionKeysIdentifiersDataListType .

Referenced By

Name	Type
getTransactionKeyIdentifiersResponse	Element

Complex Type: getUniformSuiteCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	suiteQueryParametersType	0..1	Required. See suiteQueryParametersType . Leave this element blank to return all suites.

Referenced By

Name	Type
getUniformSuiteCountRequest	Element
getUniformSuiteCount	Method

Complex Type: getUniformSuiteCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getUniformSuiteCountResponse	Element

Complex Type: getUniformSuitesQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	suiteQueryParametersType	0..1	Required. See suiteQueryParametersType . Leave this element blank to return all suites.
pageNumber	integer	1..1	Required. Starts at 1. Say the getUniformSuiteCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return arrays of elements that are contained in the suite.

Referenced By

Name	Type
getUniformSuitesQueryRequest	Element
getUniformSuiteQuery	Method

Complex Type: getUniformSuitesQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniformSuite	uniformSuiteQueryDataType	0..*	A responseData element contains an array of uniformSuite elements. See uniformSuiteQueryDataType .

Complex Type: getUniformSuitesQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUniformSuitesQueryResponseDataType	0..1	See getUniformSuitesQueryResponseDataType .									

Referenced By

Name	Type
getUniformSuitesQueryResponse	Element

Complex Type: getUsersForProductCategoryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productCategory	productCategoryDataType	1..1	Required. See productCategoryDataType .

Referenced By

Name	Type
getUsersForProductCategoryRequest	Element
getUsersForProductCategory	Method

Complex Type: getUsersForProductCategoryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	0..*	See userIdentifierType .

Complex Type: getUsersForProductCategoryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives a reason for partial failure or failure.										
userData	getUsersForProductCategoryResponseDataType	0..1	A getUsersForProductCategoryResponseDataType contains an array of userData elements. See getUsersForProductCategoryResponseDataType .									

Referenced By

Name	Type
getUsersForProductCategoryResponse	Element

Complex Type: handleProductCategoriesToUserRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	1..1	See userIdentifierType .
productCategory	productCategoryDataTy e	1..*	An array of productCategory elements. See productCategoryDataTy e .

Referenced By

Name	Type
assignProductCategoriesToUserRequest	Element
removeProductCategoriesFromUserRequest	Element
assignProductCategoriesToUser	Method
removeProductCategoriesFromUser	Method

Complex Type: handleProductCategoriesToUserResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.
			reason	string	Gives a reason for partial failure or failure.

Referenced By

Name	Type
assignProductCategoriesToUserResponse	Element
removeProductCategoriesFromUserResponse	Element

Complex Type: handleProductCategoryToOrgRequestType

Description

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
org	organizationIdentifierType	1..1	See organizationIdentifierType .
productCategory	productCategoryDataType	1..*	An array of productCategory elements. See productCategoryDataType .

Referenced By

Name	Type
assignProductCategoriesToOrgRequest	Element
removeProductCategoriesFromOrgRequest	Element
assignProductCategoriesToOrg	Method
removeProductCategoriesFromOrg	Method

Complex Type: handleProductCategoryToOrgResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All categories in the request were processed. • PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. • FAILURE—None of the categories in the request were processed.
			reason	string	Gives a reason for partial failure or failure.

Referenced By

Name	Type
assignProductCategoriesToOrgResponse	Element
removeProductCategoriesFromOrgResponse	Element

Complex Type: hostTypePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the host type.

Complex Type: identifierQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	SimpleQueryType	0..1	Required. A name element contains: - value—a string to match part or all of the name. - searchType—one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Complex Type: licenseGeneratorIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license generator configuration.
primaryKeys	licenseGeneratorPKType	0..1	Database primary key of the license generator configuration—string containing the name of the license generator configuration.

Complex Type: licenseGeneratorsDetailsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseGeneratorIdentifier	licenseGeneratorIdentifierType	0..*	licenseGenerators contains one or more licenseGeneratorIdentifier elements. See licenseGeneratorIdentifierType .

Complex Type: licenseModelDetailsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..1	See licenseModelIdentifierType .
licenseTechnology	licenseTechnologyIdentifierType	1..1	See licenseTechnologyIdentifierType .
attributeDetails	modelAttributesType	1..1	See modelAttributesType .

Complex Type: licenseModelIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the license model, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license model.
primaryKeys	licenseModelPKType	0..1	Database primary key of the license model. See licenseModelPKType .

Complex Type: licenseModelPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the license model.

Complex Type: licenseModelsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModel	licenseModelIdentifierType	1..*	Required. See licenseModelIdentifierType .

Complex Type: licenseTechnologyDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseTechnology	licenseTechnologyDetailsType	0..*	responseData contains one or more licenseTechnology elements. See TlicenseTechnologyDetailsType .

Complex Type: licenseTechnologyDetailsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseTechnologyIdentifier	licenseTechnologyIdentifierType	1..1	See licenseTechnologyIdentifierType .
licenseGenerators	licenseGeneratorsDetailsType	1..1	See licenseGeneratorsDetailsType .
hostTypes	hostTypeListType	1..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts.
state	StateType	1..1	DRAFT or DEPLOYED.

Complex Type: licenseTechnologyIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license technology.
primaryKeys	licenseTechnologyPKType	0..1	Database primary key of the license technology. See licenseTechnologyPKType .

Complex Type: licenseTechnologyPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	The name of the license technology.

Complex Type: licenseTechnologyQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
name	SimpleQueryType	0..1	Optional. A name element contains: • value—a string to match part or all of the license technology name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: maintenancIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the maintenance product, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the maintenance product.
primaryKeys	maintenancePKType	0..1	Database primary key of the maintenance product. See maintenancePKType .

Complex Type: maintenancePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the maintenance product.
version	string	1..1	The version of the maintenance product.

Complex Type: maintenanceQueryDataType

Description

All elements in the maintenance products are returned, unless otherwise noted.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the maintenance product.
maintenanceName	string	1..1	Name of the maintenance product.
version	string	0..1	Version of the maintenance product.
description	string	0..1	Description of the maintenance product.
state	StateType	1..1	DRAFT, DEPLOYED, INACTIVE, ON_HOLD, or OBSOLETE.
allowUpgrades	boolean	0..1	Are upgrades allowed for this maintenance?
allowUpsells	boolean	0..1	Are upsells allowed for this maintenance?
allowRenewals	boolean	0..1	Are renewals allowed for this maintenance?
partNumbers	partNumbersSimpleListType	0..1	The part numbers in the maintenance product are returned if returnContainedObjects in the request is set to true. See partNumbersSimpleListType .

Complex Type: maintenanceQueryParametersType

Description

Specify the elements needed to construct your query

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
maintenanceName	SimpleQueryType	0..1	Optional. A maintenanceName element contains: • value—a string to match part or all of the maintenance product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS.
version	SimpleQueryType	0..1	Optional. A version element contains: • value—a string to match part or all of the maintenance product version. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS.

Content Model

Component	Type	Occurs	Description
description	SimpleQueryType	0..1	Optional. A description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS.
partNumber	SimpleQueryType	0..1	Optional. A partNumber element contains: • value—a string to match part or all of the part number. • searchType—one of the following simpleSearchType values • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS.
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of DRAFT, DEPLOYED, INACTIVE, or OBSOLETE to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
creationDate	DateQueryType	0..1	Optional. A creationDate element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Complex Type: maintenanceStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
maintenanceIdentifier	maintenanceIdentifierType	1..1	Required. See maintenanceIdentifierType .
stateToSet	StateType	1..1	Required. DRAFT, DEPLOYED, INACTIVE, or OBSOLETE.

Complex Type: modelAttributesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
needServerId	boolean	1..1	Returns true if the license model requires that a license server hostid is provided at fulfillment time.
needNodeLockId	boolean	1..1	Returns true if the license model requires that a node-locked hostid is provided at fulfillment time.
needCount	boolean	1..1	Returns true if the license model requires that a fulfill count is provided at fulfillment time.
needOverdraftCount	boolean	1..1	Returns true if the license model requires that an overdraft count is provided at fulfillment time.

Complex Type: modelIdentifiersDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
licenseModel	licenseModelDetailsType	0..*	See licenseModelDetailsType .

Complex Type: organizationBasicDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgUnitId	string	1..1	Required. Identifier of the organization.
displayName	string	1..1	Required. Display name of the organization.

Complex Type: organizationIdentifierType

Description

The organization can be specified using one of these elements.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database ID of the organization.
primaryKeys	organizationPKType	0..1	Name. See organizationPKType .

Complex Type: organizationPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the organization.

Complex Type: OrgTypeList

Description

A list of multiple **orgType** elements. Use **orgTypeList** when you want to query organizations of multiple types. Add an **orgType** element to the **orgTypeList** for each organization type you want to include in the query. If no **orgType** or **orgTypeList** is specified, the query searches only CUSTOMER organizations (the default).

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgType	OrgType	1..*	Optional. Defines the organization type. orgType can be: • CUSTOMER • PUBLISHER • CHANNEL_PARTNER • SELF_REGISTERED Default: CUSTOMER.

Complex Type: packagePropertiesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Required. Name of a package that can contain up to 30 ASCII characters, numbers, underscores, and hyphens.
version	string	0..1	The version contains numbers and up to one decimal point. A value is required at deployment for a FIXED version format; any specified value is ignored for a DATE_BASED version format.
versionFormat	VersionFormatType	1..1	Required. Specify FIXED or DATE_BASED.

Complex Type: partNumberDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	partNumberDataType	0..*	A responseData element contains an array of partNumber elements to be added. See partNumberDataType .

Complex Type: partNumberDataType

Description

All elements in the part numbers are returned, unless otherwise noted.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumberIdentifier	partNumberIdentifierType	1..1	See partNumberIdentifierType .
description	string	1..1	Description of the part number.
creationDate	date	1..1	Date the part number was created.
lastModifiedDate	date	1..1	Date the part number was last modified.
mappedProduct	productIdentifierType	0..1	Product to which the part number is mapped, if applicable.
mappedLicenseModel	licenseModelIdentifierType	0..1	License model to which the part number is mapped, if applicable.

Complex Type: partNumberIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the part number, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the part number.
primaryKeys	partNumberPKType	0..1	Database primary key of the part number. See partNumberPKType .

Complex Type: partNumberIdentifierWithModelType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the part number, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the part number.
primaryKeys	partNumberPKType	0..1	Database primary key of the part number. See partNumberPKType .
licenseModel	licenseModelIdentifierType	0..1	Optional, if you want to map a part number for a product to one specific license model linked to the product. See licenseModelIdentifierType .

Complex Type: partNumberPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partId	string	1..1	The partId of the part number.

Complex Type: partNumberQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partId	SimpleQueryType	0..1	Required. Value of a part number. A partId element contains: • value—a string to match part or all of the part number. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
description	SimpleQueryType	0..1	Optional. Describe what makes this part number unique. A description element contains: • value—a string to match part or all of the description. searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
productName	SimpleQueryType	0..1	Optional. A productName element contains: • value—a string to match part or all of the product name to which the part number is mapped. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS.
licenseModel	SimpleQueryType	0..1	Optional. A licenseModel element contains: • value—a string to match part or all of the license model name to which the part number is mapped. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
creationDate	DateQueryType	0..1	Optional. Date the part number was created. A creationDate element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDate	DateQueryType	0..1	Date the part number was last modified. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
unmappedWithProduct	boolean	0..1	Optional. Set to true to return part numbers that are not mapped to any product. Set to false to return part numbers that are mapped to a product. Do not use this parameter at all to return part numbers whether or not they are mapped to a specific product.
unmappedWithLicense Model	boolean	0..1	Optional. Set to true to return part numbers that are not mapped to any license model. Set to false to return part numbers that are mapped to a license model. Do not use this parameter at all to return part numbers whether or not they are mapped to a specific license model.

Complex Type: partNumbersListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	partNumberIdentifierWithModelType	1..*	Required. See partNumberIdentifierWithModelType .

Complex Type: partNumbersSimpleListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	partNumberIdentifierType	1..*	Required. See partNumberIdentifierType .

Complex Type: prodCustomAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of a text-type product custom attribute by which to search for a product.
stringValue	SimpleQueryType	0..1	Value of the text-type product custom attribute.

Complex Type: prodCustomAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	prodCustomAttributeQueryType	0..*	See prodCustomAttributeQueryType .

Complex Type: productCategoryDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier for the product category.
name	string	0..1	The name of the product category.
description	string	0..1	The product category description. Populated only in response messages.
categoryAttributes	categoryAttributesDataType	0..1	See categoryAttributesDataType .

Complex Type: productCategoryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
productCategoryName	SimpleQueryType	0..1	A productCategoryName element contains: • value—a string to match part or all of the productCategoryName value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: productIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the product, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the product.
primaryKeys	productPKType	0..1	Database primary key of the product. See productPKType .

Complex Type: productIdentifierWithCountDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .
count	positiveInteger	1..1	Required. Positive integer that indicates the cardinality of the product in the suite.

Complex Type: productPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the product.
version	string	1..1	The version of the product.

Complex Type: productQueryDataType

Description

All elements in the products are returned, unless otherwise noted.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the product.
productName	string	1..1	Name of the product.

Content Model

Component	Type	Occurs	Description
version	string	0..1	Version of the product.
description	string	0..1	Description of the product.
state	StateType	1..1	DRAFT, DEPLOYED, INACTIVE, or OBSOLETE.
licenseTechnology	licenseTechnologyIdentifierType	0..1	Optional. See licenseTechnologyIdentifierType .
licenseGenerator	licenseGeneratorIdentifierType	0..1	Optional. See licenseGeneratorIdentifierType .
packageProperties	packagePropertiesDataType	0..1	See packagePropertiesDataType .
features	featuresListType	0..1	The features in the product are returned if returnContainedObjects in the request is set to true. See featuresListType .
featureBundles	featureBundlesListType	0..1	The feature bundles in the product are returned if returnContainedObjects in the request is set to true. See featureBundlesListType .
licenseModels	licenseModelsListType	0..1	The licenseModels in the product are returned if returnContainedObjects in the request is set to true. See licenseModelsListType .
trustedKey	trustedKeyIdentifierType	0..1	The transaction keys in the product are returned if returnContainedObjects in the request is set to true. See trustedKeyIdentifierType .
virtualTrustedKey	trustedKeyIdentifierType	0..1	The transaction keys in the product are returned if returnContainedObjects in the request is set to true. See trustedKeyIdentifierType .
partNumbers	partNumbersListType	0..1	The part numbers in the product are returned if returnContainedObjects in the request is set to true. See partNumbersListType .
hostType	hostTypePKType	0..1	See hostTypePKType .
hostTypes	hostTypeListType	0..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts.
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology product that can be used on a device licensed using FNE.
productCategory	string	0..1	Optional. The product category for this product.
customAttributes	attributeDescriptorDataType	0..1	A collection of license model or custom attributes. See attributeDescriptorDataType .
allowDownloadObsoleteFrInAdmin	boolean	0..1	If true, allows administrative console users to download obsolete fulfillment records.
allowDownloadObsoleteFrInPortal	boolean	0..1	If true, allows self-service portal users to download obsolete fulfillment records.
creationDate	dateTime	0..1	The date and time (timestamp) the product was created.
lastModifiedDate	dateTime	0..1	The date and time (timestamp) the product was last modified.

Content Model

Component	Type	Occurs	Description
productAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
startDate	date	0..1	Only used for automatic upgrade jobs, the startDate value defines the beginning of a date range for which this product qualifies as an upgrade-to product, based on the upgrade relationships as defined when the upgrade job runs. The date range defined by startDate and endDate has no impact on manually generated upgrades nor on bulk operations. startDate is only available for products; it is not available for maintenance products nor for product suites. Note: This attribute is available in ProductPackagingService v1 and later.
endDate	date	0..1	Only used for automatic upgrade jobs, the endDate value defines the ending of a date range for which this product qualifies as an upgrade-to product, based on the upgrade relationships as defined when the upgrade job runs. The date range defined by startDate and endDate has no impact on manually generated upgrades nor on bulk operations. endDate is only available for products; it is not available for maintenance products nor for product suites. Note: This attribute is available in ProductPackagingService v1 and later.
upgradeEmailTemplateVarName	string	0..1	The variation of the Product Upgrade Job Email template FlexNet Operations uses to send an email when, as a result of running the Product Version Upgrade job, it automatically creates upgrade lines for the current product. (This value is the template variation used for email messages sent to end users as a result of the Product Version Upgrade job.) • If upgradeEmailTemplateVarName is empty (no value) or DEFAULT, the default variation of the Product Upgrade Job Email template is used. • If upgradeEmailTemplateVarName is None, FlexNet Operations does not send email messages when it creates upgrade lines as a result of the Product Version Upgrade job. • If upgradeEmailTemplateVarName specifies an active variation of the Product Upgrade Job email template, FlexNet Operations uses the variation specified. Note: This attribute is available in ProductPackagingService v1 and later.

Complex Type: productQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
productName	SimpleQueryType	0..1	Optional. A productName element contains: • value—a string to match part or all of the product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
version	SimpleQueryType	0..1	Optional. A version element contains: • value—a string to match part or all of the product version. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
description	SimpleQueryType	0..1	Optional. A description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
partNumber	SimpleQueryType	0..1	Optional. A partNumber element contains: • value—a string to match part or all of the part number. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of: DRAFT, DEPLOYED, INACTIVE, or OBSOLETE to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
creationDate	DateQueryType	0..1	Optional. A creationDate element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
licenseTechnology	SimpleQueryType	0..1	Optional. A licenseTechnology element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
hostType	SimpleQueryType	0..1	Optional. A hostType element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology product that can be used on a device licensed using FNE. If set to true, a hostType appropriate to a device must be explicitly set. usedOnDevice can be changed after a product is deployed. If it is changed from false to true, a hostType must be set
productAttributes	prodCustomAttributesQueryListType	0..1	See prodCustomAttributesQueryListType .

Complex Type: productRelationshipDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productToRelate	productIdentifierType	1..1	Required. See productIdentifierType .
relatedProduct	productIdentifierType	1..1	Required. See productIdentifierType .

Content Model

Component	Type	Occurs	Description
relation	relationshipType	1..1	Required. Select one of the following that describes how the productToRelate is related to the relatedProduct. For example, the product to relate is a demo of the related product. - RELATION_UNDEFINED - PRODUCTION_VERSION_OF - DEMO_OF - UPGRADE_FROM - UPGRADE_TO - UPSELL_FROM - UPSELL_TO - IS_MAINTENANCE - HAS_MAINTENANCE

Referenced By

Name	Type
updateProductRelationshipDataType	Complex Type

Complex Type: productsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
product	productIdentifierWithCountDataType	1..*	products contains an array of one or more product elements. See productIdentifierWithCountDataType .

Complex Type: productStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .
stateToSet	StateType	1..1	Required. DRAFT, DEPLOYED, INACTIVE, or OBSOLETE.

Complex Type: roleIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Role ID.
primaryKeys	rolePKType	0..1	Name of the role.

Complex Type: setFeatureBundleStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
featureBundle	featureBundleStateDataType	1..*	Required. A setFeatureBundleState request contains an array of featureBundle elements for which to change the state. See featureBundleStateDataType .

Referenced By

Name	Type
setFeatureBundleStateRequest	Element
setFeatureBundleState	Method

Complex Type: setFeatureBundleStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureBundleStateDataListType	0..1	Information about the feature bundles whose state was not set is listed in the failedData element. See failedFeatureBundleStateDataListType .									

Referenced By

Name	Type
setFeatureBundleStateResponse	Element

Complex Type: setFeatureStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureStateDataType	1..*	Required. A setFeatureStateRequest contains an array of feature elements for which to change the state. See featureStateDataType .

Referenced By

Name	Type
setFeatureStateRequest	Element
setFeatureState	Method

Complex Type: setFeatureStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureStateDataListType	0..1	Information about the features whose state was not set is listed in the failedData element. See failedFeatureStateDataListType .									

Referenced By

Name	Type
setFeatureStateResponse	Element

Complex Type: setMaintenanceStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	maintenanceStateDataType	1..*	Required. A setMaintenanceState request contains an array of maintenance elements for which to change the state. See maintenanceStateDataType .

Referenced By

Name	Type
setMaintenanceStateRequest	Element
setMaintenanceState	Method

Complex Type: setMaintenanceStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedMaintenanceStateDataListType	0..1	Information about the maintenance products whose state was not set is listed in the failedData element. See failedMaintenanceStateDataListType .									

Referenced By

Name	Type
setMaintenanceStateResponse	Element

Complex Type: setProductStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productStateDataType	1..*	Required. A setProductState request contains an array of product elements for which to change the state. See productStateDataType .

Referenced By

Name	Type
setProductStateRequest	Element
setProductState	Method

Complex Type: setProductStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductStateDataListType	0..1	Information about the products whose state was not set is listed in the failedData element. See failedProductStateDataListType .									

Referenced By

Name	Type
setProductStateResponse	Element

Complex Type: setUniformSuiteStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suite	uniformSuiteStateDataType	1..*	Required. A setUniformSuiteState request contains an array of suite elements for which to change the state. See uniformSuiteStateDataType .

Referenced By

Name	Type
setUniformSuiteStateRequest	Element
setUniformSuiteState	Method

Complex Type: setUniformSuiteStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUniformSuiteStateDataListType	0..1	Information about the suites whose state was not set is listed in the failedData element. See failedUniformSuiteStateDataListType .									

Referenced By

Name	Type
setUniformSuiteStateResponse	Element

Complex Type: suiteCustomAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of a text-type product custom attribute by which to search for a uniform suite.
stringValue	SimpleQueryType	0..1	Value of the text-type product custom attribute.

Complex Type: suiteCustomAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	suiteCustomAttributeQueryType	0..*	See suiteCustomAttributeQueryType .

Complex Type: suiteIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the suite, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the suite.
primaryKeys	suitePKType	0..1	Database primary key of the suite. See suitePKType .

Complex Type: suitePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	The name of the suite.
version	string	1..1	The version of the suite.

Complex Type: suiteQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
suiteName	SimpleQueryType	0..1	Optional. A suiteName element contains: • value—a string to match part or all of the suite name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
version	SimpleQueryType	0..1	Optional. A version element contains: • value—a string to match part or all of the suite version. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
description	SimpleQueryType	0..1	Optional. A description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
partNumber	SimpleQueryType	0..1	Optional. A partNumber element contains: • value—a string to match part or all of the part number. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of DRAFT, DEPLOYED, INACTIVE, or OBSOLETE to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
creationDate	DateQueryType	0..1	Optional. A creationDate element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
licenseTechnology	SimpleQueryType	0..1	Optional. A licenseTechnology element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
hostType	SimpleQueryType	0..1	Optional. A hostType element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology suite that can be used on a device licensed using FNE. If set to true, a hostType appropriate to a device must be explicitly set. usedOnDevice can be changed after a suite is deployed. If it is changed from false to true, a hostType must be set.
productAttributes	suiteCustomAttributesQueryListType	0..1	See suiteCustomAttributesQueryListType .

Complex Type: transactionKeyIdentifiersDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
transactionKeyIdentifier	trustedKeyIdentifierType	0..*	See trustedKeyIdentifierType .

Complex Type: trustedKeyIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the transaction key, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the transaction key.
primaryKeys	trustedKeyPKType	0..1	Database primary key of the transaction key. See trustedKeyPKType .

Complex Type: trustedKeyPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
keyName	string	1..1	The keyName of the transaction key.

Complex Type: uniformSuiteQueryDataType

Description

All elements in the suites are returned, unless otherwise noted.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the suite.
suiteName	string	1..1	Name of the suite.
version	string	0..1	Version of the suite.
description	string	0..1	Description of the suite.
state	StateType	1..1	DRAFT, DEPLOYED, INACTIVE, ON_HOLD, or OBSOLETE.
licenseTechnology	licenseTechnologyIdentifierType	0..1	See licenseTechnologyIdentifierType .
licenseGenerator	licenseGeneratorIdentifierType	0..1	See licenseGeneratorIdentifierType .
packageProperties	packagePropertiesDataType	0..1	See packagePropertiesDataType .
products	productsListType	0..1	The products in the suite are returned if returnContainedObjects in the request is set to true. See productsListType .
licenseModels	licenseModelsListType	0..1	The licenseModels in the suite are returned if returnContainedObjects in the request is set to true. See licenseModelsListType .
trustedKey	trustedKeyIdentifierType	0..1	The default transaction keys in the suite are returned if returnContainedObjects in the request is set to true. See trustedKeyIdentifierType .
virtualTrustedKey	trustedKeyIdentifierType	0..1	The virtualization-aware transaction keys in the suite are returned if returnContainedObjects in the request is set to true. See trustedKeyIdentifierType .
partNumbers	partNumbersListType	0..1	The part numbers in the suite are returned if returnContainedObjects in the request is set to true. See partNumbersListType .
hostType	hostTypePKType	0..1	See hostTypePKType .
hostTypes	hostTypeListType	0..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts.
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology suite that can be used on a device licensed using FNE.
productCategory	string	0..1	Optional. The product category for this suite.

Content Model

Component	Type	Occurs	Description
customAttributes	attributeDescriptorDataType	0..1	A collection of license model or custom attributes. See attributeDescriptorDataType .
allowDownloadObsoleteFrInAdmin	boolean	0..1	If true, allows administrative console users to download obsolete fulfillment records.
allowDownloadObsoleteFrInPortal	boolean	0..1	If true, allows self-service portal users to download obsolete fulfillment records.
creationDate	dateTime	0..1	The date and time (timestamp) the suite was created.
lastModifiedDate	dateTime	0..1	The date and time (timestamp) the suite was last modified.
productAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: uniformSuiteStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suiteIdentifier	suiteIdentifierType	1..1	Required. See suiteIdentifierType .
stateToSet	StateType	1..1	Required. DRAFT, DEPLOYED, INACTIVE, or OBSOLETE.

Complex Type: updateEntitledProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
entitledProducts	entitledProductDataType	0..*	See entitledProductDataType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each entitlement to be modified: • REPLACE • ADD • DELETE

Complex Type: updateFeatureBundleDataType

Description

The **featureBundleIdentifier** always needs to be specified, along with the new values of the elements to be updated.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureBundleIdentifier	featureBundleIdentifierType	1..1	Required. See featureBundleIdentifierType .
name	string	0..1	Only need to specify if modifying value. The name of the feature bundle.
description	string	0..1	Only need to specify if modifying value. Describe what makes this feature bundle unique.
features	updateFeaturesListType	0..1	Only need to specify if modifying value. See updateFeaturesListType .

Complex Type: updateFeatureBundleRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	updateFeatureBundleData Type	1..*	Required. An updateFeatureBundleRequest contains an array of featureBundle elements to be modified. See updateFeatureBundleDataType .

Referenced By

Name	Type
updateFeatureBundleRequest	Element
updateFeatureBundle	Method

Complex Type: updateFeatureBundleResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateFeatureBundleDataListType	0..1	Information about the feature bundles that were not modified is listed in the failedData element. See failedUpdateFeatureBundleDataListType .									

Referenced By

Name	Type
updateFeatureBundleResponse	Element

Complex Type: updateFeatureBundlesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	featureBundleIdentifierWithCountDataType	1..*	Required. See featureBundleIdentifierWithCountDataType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each feature bundle to be modified in the product: - REPLACE - ADD - DELETE

Complex Type: updateFeatureDataType

Description

The **featureIdentifier** always needs to be specified, along with the new values of the elements to be updated.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	Required. See featureIdentifierType .
featureName	string	0..1	Only need to specify if modifying value. Name of a feature that can contain up to 30 ASCII characters, numbers, underscores, and hyphens.
versionFormat	VersionFormatType	0..1	Only need to specify if modifying value. FIXED or DATE_BASED.
version	string	0..1	Only need to specify if modifying value. The version contains numbers and up to one decimal point. Ignored for a DATE_BASED version format.
description	string	0..1	Only need to specify if modifying value. Describe what makes this feature unique.

Content Model

Component	Type	Occurs	Description
featureOverrideParams	featureOverrideParamsType	0..1	Only need to specify if modifying value. If you have a FLEXnet_Ops.FeatureOverride license and the Web service user is assigned the Set Feature Override permission, one or more of these parameters can be set on an individual feature and override settings on a license model. See featureOverrideParamsType .

Complex Type: updateFeatureRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
feature	updateFeatureDataType	1..*	Required. An updateFeatureRequest contains an array of feature elements to be modified. See updateFeatureDataType .

Referenced By

Name	Type
updateFeatureRequest	Element
updateFeature	Method

Complex Type: updateFeatureResponseType

Description

Elements used in an updateFeatureResponse message. Each feature in the updateFeatureRequest is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about features that were modified successfully.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateFeatureDataListType	0..1	Contains one or more failedFeature elements. See failedUpdateFeatureDataListType .									

Referenced By

Name	Type
updateFeatureResponse	Element

Complex Type: updateFeaturesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureIdentifierWithCountDataType	0..*	Required. See featuresListType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each feature to be modified in the feature bundle or product: - REPLACE - ADD - DELETE

Complex Type: updateHostTypeListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostType	hostTypePKType	0..*	See hostTypePKType .
opType	CollectionOperationType	1..1	See CollectionOperationType .

Complex Type: updateLicenseModelsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
licenseModelIdentifiers	licenseModelIdentifierType	1..*	Required. See licenseModelIdentifierType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each part number to be modified in the product: • REPLACE • ADD • DELETE

Complex Type: updateMaintenanceDataType

Description

The **maintenanceIdentifier** always needs to be specified, along with the new values of the elements to be updated.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceIdentifier	maintenanceIdentifierType	1..1	Required. See maintenanceIdentifierType .
name	string	0..1	Only need to specify if modifying value. The name of the maintenance product.
version	string	0..1	Only need to specify if modifying value. Version of maintenance product.
description	string	0..1	Only need to specify if modifying value. Describe what makes this maintenance product unique.
allowUpgrades	boolean	0..1	Are upgrades allowed for this maintenance?
allowUpsells	boolean	0..1	Are upsells allowed for this maintenance?
allowRenewals	boolean	0..1	Are renewals allowed for this maintenance?
partNumbers	updatePartNumbersSimpleListType	0..1	Only need to specify if modifying value. See updatePartNumbersSimpleListType .

Complex Type: updateMaintenanceRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	updateMaintenanceData Type	1..*	Required. An updateMaintenanceRequest contains an array of maintenance elements to be modified. See updateMaintenanceDataType .

Referenced By

Name	Type
updateMaintenanceRequest	Element
updateMaintenance	Method

Complex Type: updateMaintenanceResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateMaintenanceDataListType	0..1	Information about the maintenance products that were not modified is listed in the failedData element. See failedUpdateMaintenanceDataListType .									

Referenced By

Name	Type
updateMaintenanceResponse	Element

Complex Type: updatePartNumbersListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	partNumberIdentifierWithModelType	0..*	Required. See partNumberIdentifierWithModelType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each part number to be modified in the product: - REPLACE - ADD - DELETE

Complex Type: updatePartNumbersSimpleListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	partNumberIdentifierType	0..*	Required. See partNumberIdentifierType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each part number mapping to be modified in the product: - REPLACE - ADD - DELETE

Complex Type: updateProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .
name	string	0..1	Only need to specify if modifying value. The name of the product.
version	string	0..1	Only need to specify if modifying value. Version of product.
description	string	0..1	Only need to specify if modifying value. Describe what makes this product unique.
licenseGenerator	licenseGeneratorIdentifierType	0..1	Only need to specify if modifying value. See licenseGeneratorIdentifierType .
packageProperties	packagePropertiesDataType	0..1	Only need to specify if modifying value. See packagePropertiesDataType .
features	updateFeaturesListType	0..1	Only need to specify if modifying value. See updateFeaturesListType .
featureBundles	updateFeatureBundlesListType	0..1	Only need to specify if modifying value. See updateFeatureBundlesListType .
partNumbers	updatePartNumbersListType	0..1	Only need to specify if modifying value. See updatePartNumbersListType .
licenseModels	updateLicenseModelsListType	0..1	Only need to specify if modifying value. See updateLicenseModelsListType .
trustedKey	trustedKeyIdentifierType	0..1	Only need to specify if modifying value. See trustedKeyIdentifierType .
virtualTrustedKey	trustedKeyIdentifierType	0..1	Only need to specify if modifying value. See trustedKeyIdentifierType .
hostType	hostTypePKType	0..1	If no hostType is set for a FlexNet product, the default certificate or trusted host host type is used. Required if a host type is defined on a custom license technology. See hostTypePKType .
hostTypes	updateHostTypeListType	0..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts. See updateHostTypeListType .
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology product that can be used on a device licensed using FNE. If set to true, a hostType appropriate to a device must be explicitly set. usedOnDevice can be changed after a product is deployed. If it is changed from false to true, a hostType must be set

Content Model

Component	Type	Occurs	Description
productCategory	string	0..1	Optional. Sets the product category for this product. If you do not set a category or if you set an empty or nonexistent category, FlexNet Operations automatically assigns the product to the default Uncategorized Products category without an error.
customAttributes	attributeDescriptorDataType	0..1	A collection of license model or custom attributes. See attributeDescriptorDataType .
allowDownloadObsoleteFrInAdmin	boolean	0..1	If true, allows administrative console users to download obsolete fulfillment records.
allowDownloadObsoleteFrInPortal	boolean	0..1	If true, allows self-service portal users to download obsolete fulfillment records.
productAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
startDate	date	0..1	Only used for automatic upgrade jobs, the startDate value defines the beginning of a date range for which this product qualifies as an upgrade-to product, based on the upgrade relationships as defined when the upgrade job runs. The date range defined by startDate and endDate has no impact on manually generated upgrades nor bulk operations. startDate is only available for products; it is not available for maintenance products nor for product suites. Note: This attribute is available in ProductPackagingService v1 and later.
endDate	date	0..1	Only used for automatic upgrade jobs, the endDate value defines the ending of a date range for which this product qualifies as an upgrade-to product, based on the upgrade relationships as defined when the upgrade job runs. The date range defined by startDate and endDate has no impact on manually generated upgrades nor bulk operations. endDate is only available for products; it is not available for maintenance products nor for product suites. Note: This attribute is available in ProductPackagingService v1 and later.

Content Model

Component	Type	Occurs	Description
upgradeEmailTemplateVarName	string	0..1	Only used for automatic upgrade jobs, the upgradeEmailTemplateVarName specifies the variation of the Product Upgrade Job Email template to use when FlexNet Operations automatically creates upgrade lines as a result of running the Product Version Upgrade job. (This value sets the template variation used for email messages sent to end users as a result of the Product Version Upgrade job.) • The upgradeEmailTemplateVarName value can be empty, DEFAULT, None, or the name of an active variation of the Product Upgrade Job Email template. • Empty (no value specified) and DEFAULT cause FlexNet Operations to use the default variation of the Product Upgrade Job Email template for automatic upgrades to this product. • None prevents FlexNet Operations from sending email messages for automatic upgrades to this product. • A specified variation name uses the named variation of the Product Upgrade Job Email template for automatic upgrades to this product. (Only active variations of the Product Upgrade Job Email template are available for use. Draft variations are not used.) Note: This attribute is available in ProductPackagingService v1 and later.

Complex Type: updateProductRelationshipDataType

Derived By

Extending [productRelationshipDataType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productToRelate	productIdentifierType	1..1	Required. See productIdentifierType .

Content Model

Component	Type	Occurs	Description
relatedProduct	productIdentifierType	1..1	Required. See productIdentifierType .
relation	relationshipType	1..1	Required. Select one of the following that describes how the productToRelate is related to the relatedProduct. For example, the product to relate is a demo of the related product. • RELATION_UNDEFINED • PRODUCTION_VERSION_OF • DEMO_OF • UPGRADE_FROM • UPGRADE_TO • UPSELL_FROM • UPSELL_TO • IS_MAINTENANCE • HAS_MAINTENANCE
newRelation	relationshipType	1..1	Required. Select one of the following that describes how the productToRelate is related to the relatedProduct. For example, the product to relate is a demo of the related product. • RELATION_UNDEFINED • PRODUCTION_VERSION_OF • DEMO_OF • UPGRADE_FROM • UPGRADE_TO • UPSELL_FROM • UPSELL_TO • IS_MAINTENANCE • HAS_MAINTENANCE

Complex Type: updateProductRelationshipRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
relationship	updateProductRelationshipDataTypes	1..*	Required. An updateProductRelationshipRequest contains an array of relationship elements to be modified. See updateProductRelationshipDataTypes .

Referenced By

Name	Type
updateProductRelationshipRequest	Element
updateProductRelationship	Method

Complex Type: updateProductRelationshipResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateProductRelationshipDataListType	0..1	Information about the relationships that were not modified is listed in the failedData element. See failedUpdateProductRelationshipDataListType .									

Referenced By

Name	Type
updateProductRelationshipResponse	Element

Complex Type: updateProductRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	updateProductDataType	1..*	Required. An updateProductRequest contains an array of product elements to be modified. See updateProductDataType .

Referenced By

Name	Type
updateProductRequest	Element
updateProduct	Method

Complex Type: updateProductResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateProductDataListType	0..1	Information about the products that were not modified is listed in the failedData element. See failedUpdateProductDataListType .									

Referenced By

Name	Type
updateProductResponse	Element

Complex Type: updateProductsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierWithCountDataType	1..*	Required. See productIdentifierWithCountDataType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each feature bundle to be modified in the product: - REPLACE - ADD - DELETE

Complex Type: updateUniformSuiteDataType

Description

The **suiteIdentifier** always needs to be specified, along with the new values of the elements to be updated.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suiteIdentifier	suiteIdentifierType	1..1	Required. See suiteIdentifierType .
name	string	0..1	Only need to specify if modifying value. The name of the suite.
version	string	0..1	Only need to specify if modifying value. Version of suite.
description	string	0..1	Only need to specify if modifying value. Describe what makes this suite unique.
licenseGenerator	licenseGeneratorIdentifierType	0..1	Only need to specify if modifying value. See licenseGeneratorIdentifierType .
packageProperties	packagePropertiesDataType	0..1	Only need to specify if modifying value. See packagePropertiesDataType .
products	updateProductsListType	0..1	Only need to specify if modifying value. See updateProductsListType .

Content Model

Component	Type	Occurs	Description
licenseModels	updateLicenseModelsListType	0..1	Only need to specify if modifying value. See updateLicenseModelsListType .
trustedKey	trustedKeyIdentifierType	0..1	Only need to specify if modifying value. See trustedKeyIdentifierType .
virtualTrustedKey	trustedKeyIdentifierType	0..1	Only need to specify if modifying value. See trustedKeyIdentifierType .
partNumbers	updatePartNumbersListType	0..1	Only need to specify if modifying value. See updatePartNumbersListType .
hostType	hostTypePKType	0..1	If no hostType is set for a FlexNet suite, the default certificate or trusted host host type is used. Required if a host type is defined on a custom license technology. See hostTypePKType .
hostTypes	updateHostTypeListType	0..1	A collection of one or more hostTypePKType elements. Use hostTypes to assign multiple hosts. See updateHostTypeListType .
usedOnDevice	boolean	0..1	Used to signify a FlexNet license technology suite that can be used on a device licensed using FNE. If set to true, a hostType appropriate to a device must be explicitly set. usedOnDevice can be changed after a suite is deployed. If it is changed from false to true, a hostType must be set.
customAttributes	attributeDescriptorDataType	0..1	A collection of license model or custom attributes. See attributeDescriptorDataType .
allowDownloadObsoleteFrInAdmin	boolean	0..1	If true, allows administrative console users to download obsolete fulfillment records.
allowDownloadObsoleteFrInPortal	boolean	0..1	If true, allows self-service portal users to download obsolete fulfillment records.
productAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: updateUniformSuiteRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
uniformSuite	updateUniformSuiteDataType	1..*	Required. An updateUniformSuiteRequest contains an array of uniformSuite elements to be modified. See updateUniformSuiteDataType .

Referenced By

Name	Type
updateUniformSuiteRequest	Element
updateUniformSuite	Method

Complex Type: updateUniformSuiteResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateUniformSuiteDataListType	0..1	Information about the suites that were not modified is listed in the failedData element. See failedUpdateUniformSuiteDataListType .									

Referenced By

Name	Type
updateUniformSuiteResponse	Element

Complex Type: userIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database ID of the user.
userName	string	0..1	User's FlexNet Operations login name.
primaryKeys	userPKType	0..1	See userPKType .

Complex Type: userPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
firstName	string	1..1	User's first name.
lastName	string	1..1	User's last name.
emailAddress	string	1..1	User's email address.
phoneNumber	string	0..1	Optional. User's phone number.

Complex Type: versionDateAttributesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
versionOption	VersionDateOptionType	1..1	See VersionDateOptionType .
duration	DurationType	0..1	See DurationType .

Simple Types: ProductPackagingService

Simple Types

Name
CollectionOperationType
VersionDateOptionType

Simple Type: CollectionOperationType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
REPLACE	
ADD	
DELETE	

Simple Type: VersionDateOptionType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
DEFINE_NOW	
USE_START_DATE	
USE_ACTIVATION_DATE	
DEFINE_VERSION_STARTDATE_LATE R	
DEFINE_VERSION_DATE_LATER	

Elements: ProductPackagingService

Elements

Name	Description
assignProductCategoriesToOrgRequest	An assignProductCategoriesToOrgRequest message contains an element of <code>handleProductCategoryToOrgRequestType</code> .
assignProductCategoriesToOrgResponse	An assignProductCategoriesToOrgResponse message contains an element of <code>handleProductCategoryToOrgResponseType</code> . Assigning each product category either succeeds or fails. No specific information is returned about categories.
assignProductCategoriesToUserRequest	An assignProductCategoriesToUserRequest message contains an element of <code>handleProductCategoriesToUserRequestType</code> .
assignProductCategoriesToUserResponse	An assignProductCategoriesToUserResponse message contains an element of <code>handleProductCategoriesToUserResponseType</code> . Assigning each product category either succeeds or fails. No specific information is returned about categories.
createFeatureBundleRequest	A createFeatureBundleRequest message contains an element of <code>createFeatureBundleRequestType</code> .
createFeatureBundleResponse	A createFeatureBundleResponse message contains an element of <code>createFeatureBundleResponseType</code> . Each feature bundle in the createFeatureBundleRequest is added as an atomic unit; adding each either succeeds or fails.
createFeatureRequest	A createFeatureRequest message contains an element of <code>createFeatureRequestType</code> .
createFeatureResponse	A createFeatureResponse message contains an element of <code>createFeatureResponseType</code> .
createMaintenanceRequest	A createMaintenanceRequest message contains an element of <code>createMaintenanceRequestType</code> .
createMaintenanceResponse	A createMaintenanceResponse message contains an element of <code>createMaintenanceResponseType</code> .
createOrganizationRequest	A createOrganizationRequest message contains an element of <code>createOrganizationRequestType</code> .
createOrganizationResponse	A createOrganizationResponse message contains an element of <code>createOrganizationResponseType</code> . Each organization in the createOrganizationRequest is added as an atomic unit; adding each either succeeds or fails.
createPartNumberRequest	A createPartNumberRequest message contains an element of <code>createPartNumberRequestType</code> .
createPartNumberResponse	A createPartNumberResponse message contains an element of <code>createPartNumberResponseType</code> . Each part number in the createPartNumberRequest is added as an atomic unit; adding each either succeeds or fails.
createProductCategoryRequest	A createProductCategoryRequest message contains an element of <code>createProductCategoryRequestType</code> .
createProductCategoryResponse	A createProductCategoryResponse message contains an element of <code>createProductCategoryResponseType</code> .
createProductRelationshipRequest	A createProductRelationshipRequest message contains an element of <code>createProductRelationshipRequestType</code> .

Elements

Name	Description
createProductRelationshipResponse	A createProductRelationshipResponse message contains an element of <code>createProductRelationshipResponseType</code> . Each relationship in the createProductRelationshipRequest is added as an atomic unit; adding each either succeeds or fails.
createProductRequest	A createProductRequest message contains an element of <code>createProductRequestType</code> .
createProductResponse	A createProductResponse message contains an element of <code>createProductResponseType</code> . Each product in the createProductRequest is added as an atomic unit; adding each either succeeds or fails.
createUniformSuiteRequest	A createUniformSuiteRequest message contains an element of <code>createUniformSuiteRequestType</code> .
createUniformSuiteResponse	A createUniformSuiteResponse message contains an element of <code>createUniformSuiteResponseType</code> . Each suite in the createUniformSuiteRequest is added as an atomic unit; adding each either succeeds or fails.
deleteFeatureBundleRequest	A deleteFeatureBundleRequest message contains an element of <code>deleteFeatureBundleRequestType</code> .
deleteFeatureBundleResponse	A deleteFeatureBundleResponse message contains an element of <code>deleteFeatureBundleResponseType</code> . Each feature bundle in the deleteFeatureBundleRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about feature bundles that were deleted successfully.
deleteFeatureRequest	A deleteFeatureRequest message contains an element of <code>deleteFeatureRequestType</code> .
deleteFeatureResponse	A deleteFeatureResponse message contains an element of <code>deleteFeatureResponseType</code> . Each feature in the deleteFeatureRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about features that were deleted successfully.
deleteMaintenanceRequest	A deleteMaintenanceRequest message contains an element of <code>deleteMaintenanceRequestType</code> .
deleteMaintenanceResponse	A deleteMaintenanceResponse message contains an element of <code>deleteMaintenanceResponseType</code> . Each maintenance product in the deleteMaintenanceRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about maintenance products that were deleted successfully.
deletePartNumberRequest	A deletePartNumberRequest message contains an element of <code>deletePartNumberRequestType</code> .
deletePartNumberResponse	A deletePartNumberResponse message contains an element of <code>deletePartNumberResponseType</code> . Each part number in the deletePartNumberRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about part numbers that were deleted successfully.
deleteProductRelationshipRequest	A deleteProductRelationshipRequest message contains an element of <code>deleteProductRelationshipRequestType</code> .

Elements

Name	Description
deleteProductRelationshipResponse	A deleteProductRelationshipResponse message contains an element of deleteProductRelationshipResponseType. Each relationship in the deleteProductRelationshipRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about relationships that were deleted successfully
deleteProductRequest	A deleteProductRequest message contains an element of deleteProductRequestType.
deleteProductResponse	A deleteProductResponse message contains an element of deleteProductResponseType. Each product in the deleteProductRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about products that were deleted successfully.
deleteUniformSuiteRequest	A deleteUniformSuiteRequest message contains an element of deleteUniformSuiteRequestType.
deleteUniformSuiteResponse	A deleteUniformSuiteResponse message contains an element of deleteUniformSuiteResponseType. Each suite in the deleteUniformSuiteRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about suites that were deleted successfully.
getFeatureBundleCountRequest	A getFeatureBundleCountRequest message contains an element of getFeatureBundleCountRequestType.
getFeatureBundleCountResponse	A getFeatureBundleCountResponse message contains an element of getFeatureBundleCountResponseType.
getFeatureBundlesQueryRequest	A getFeatureBundlesQueryRequest message contains an element of getFeatureBundlesQueryRequestType.
getFeatureBundlesQueryResponse	A getFeatureBundlesQueryResponse message contains an element of getFeatureBundlesQueryResponseType.
getFeatureCountRequest	A getFeatureCountRequest message contains an element of getFeatureCountRequestType.
getFeatureCountResponse	A getFeatureCountResponse message contains an element of getFeatureCountResponseType.
getFeaturesQueryRequest	A getFeaturesQueryRequest message contains an element of getFeaturesQueryRequestType.
getFeaturesQueryResponse	A getFeaturesQueryResponse message contains an element of getFeaturesQueryResponseType.
getLicenseTechnologyQueryRequest	A getLicenseTechnologyQueryRequest message contains an element of getLicenseTechnologyQueryRequestType.
getLicenseTechnologyQueryResponse	A getLicenseTechnologyQueryResponse message contains an element of getLicenseTechnologyQueryResponseType.
getMaintenanceCountRequest	A getMaintenanceCountRequest message contains an element of getMaintenanceCountRequestType.
getMaintenanceCountResponse	A getMaintenanceCountResponse message contains an element of getMaintenanceCountResponseType.
getMaintenanceQueryRequest	A getMaintenanceQueryRequest message contains an element of getMaintenanceQueryRequestType.

Elements

Name	Description
getMaintenanceQueryResponse	A getMaintenanceQueryResponse message contains an element of getMaintenanceQueryResponseType.
getModelIdentifiersRequest	A getModelIdentifiersRequest message contains an element of getModelIdentifiersRequestType.
getModelIdentifiersResponse	A getModelIdentifiersResponse message contains an element of getModelIdentifiersResponseType.
getPartNumberCountRequest	A getPartNumberCountRequest message contains an element of getPartNumberCountRequestType.
getPartNumberCountResponse	A getPartNumberCountResponse message contains an element of getPartNumberCountResponseType.
getPartNumbersQueryRequest	A getPartNumbersQueryRequest message contains an element of getPartNumbersQueryRequestType.
getPartNumbersQueryResponse	A getPartNumbersQueryResponse message contains an element of getPartNumbersQueryResponseType.
getProductCategoriesRequest	A getProductCategoriesRequest message contains an element of getProductCategoriesRequestType.
getProductCategoriesResponse	A getProductCategoriesResponse message contains an element of getProductCategoriesResponseType.
getProductCountRequest	A getProductCountRequest message contains an element of getProductCountRequestType.
getProductCountResponse	A getProductCountResponse message contains an element of getProductCountResponseType.
getProductRelationshipsRequest	A getProductRelationshipsRequest message contains an element of getProductRelationshipsRequestType.
getProductRelationshipsResponse	A getProductRelationshipsResponse message contains an element of getProductRelationshipsResponseType.
getProductsQueryRequest	A getProductsQueryRequest message contains an element of getProductsQueryRequestType.
getProductsQueryResponse	A getProductsQueryResponse message contains an element of getProductsQueryResponseType.
getTransactionKeyIdentifiersRequest	A getTransactionKeyIdentifiersRequest message contains an element of getTransactionKeyIdentifiersRequestType.
getTransactionKeyIdentifiersResponse	A getTransactionKeyIdentifiersResponse message contains an element of getTransactionKeyIdentifiersResponseType.
getUniformSuiteCountRequest	A getUniformSuiteCountRequest message contains an element of getUniformSuiteCountRequestType.
getUniformSuiteCountResponse	A getUniformSuiteCountResponse message contains an element of getUniformSuiteCountResponseType.
getUniformSuitesQueryRequest	A getUniformSuitesQueryRequest message contains an element of getUniformSuitesQueryRequestType.
getUniformSuitesQueryResponse	A getUniformSuitesQueryResponse message contains an element of getUniformSuitesQueryResponseType.
getUsersForProductCategoryRequest	A getUsersForProductCategoryRequest message contains an element of getUsersForProductCategoryRequestType.

Elements

Name	Description
getUsersForProductCategoryResponse	A getUsersForProductCategoryResponse message contains an element of <code>getUsersForProductCategoryResponseType</code> .
removeProductCategoriesFromOrgRequest	A removeProductCategoriesFromOrgRequest message contains an element of <code>handleProductCategoryToOrgRequestType</code> .
removeProductCategoriesFromOrgResponse	A removeProductCategoriesFromOrgResponse message contains an element of <code>handleProductCategoryToOrgResponseType</code> . Removing each product category either succeeds or fails. No specific information is returned about categories.
removeProductCategoriesFromUserRequest	A removeProductCategoriesFromUserRequest message contains an element of <code>handleProductCategoriesToUserRequestType</code> .
removeProductCategoriesFromUserResponse	A removeProductCategoriesFromUserResponse message contains an element of <code>handleProductCategoriesToUserResponseType</code> .
setFeatureBundleStateRequest	A setFeatureBundleStateRequest message contains an element of <code>setFeatureBundleStateRequestType</code> .
setFeatureBundleStateResponse	A setFeatureBundleStateResponse message contains an element of <code>setFeatureBundleStateResponseType</code> .
setFeatureStateRequest	A setFeatureStateRequest message contains an element of <code>setFeatureStateRequestType</code> .
setFeatureStateResponse	A setFeatureStateResponse message contains an element of <code>setFeatureStateResponseType</code> .
setMaintenanceStateRequest	A setMaintenanceStateRequest message contains an element of <code>setMaintenanceStateRequestType</code> .
setMaintenanceStateResponse	A setMaintenanceStateResponse message contains an element of <code>setMaintenanceStateResponseType</code> .
setProductStateRequest	A setProductStateRequest message contains an element of <code>setProductStateRequestType</code> .
setProductStateResponse	A setProductStateResponse message contains an element of <code>setProductStateResponseType</code> .
setUniformSuiteStateRequest	A setUniformSuiteStateRequest message contains an element of <code>setUniformSuiteStateRequestType</code> .
setUniformSuiteStateResponse	A setUniformSuiteStateResponse message contains an element of <code>setUniformSuiteStateResponseType</code> .
updateFeatureBundleRequest	An updateFeatureBundleRequest message contains an element of <code>updateFeatureBundleRequestType</code> .
updateFeatureBundleResponse	An updateFeatureBundleResponse message contains an element of <code>updateFeatureBundleResponseType</code> . Each feature bundle in the updateFeatureBundleRequest is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about feature bundles that were modified successfully.
updateFeatureRequest	An updateFeatureRequest message contains an element of <code>updateFeatureRequestType</code> .
updateFeatureResponse	An updateFeatureRequest message contains an element of <code>updateFeatureRequestType</code> .
updateMaintenanceRequest	An updateMaintenanceRequest message contains an element of <code>updateMaintenanceRequestType</code> .

Elements

Name	Description
updateMaintenanceResponse	An updateMaintenanceResponse message contains an element of <code>updateMaintenanceResponseType</code> . Each maintenance product in the updateMaintenanceRequest is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about maintenance products that were modified successfully.
updateProductRelationshipRequest	An updateProductRelationshipRequest message contains an element of <code>updateProductRelationshipRequestType</code> .
updateProductRelationshipResponse	An updateProductRelationshipResponse message contains an element of <code>updateProductRelationshipResponseType</code> . Each relationship in the updateProductRelationshipRequest is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about relationships that were modified successfully.
updateProductRequest	An updateProductRequest message contains an element of <code>updateProductRequestType</code> .
updateProductResponse	An updateProductResponse message contains an element of <code>updateProductResponseType</code> . Each product in the updateProductRequest is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about products that were modified successfully.
updateUniformSuiteRequest	An updateUniformSuiteRequest message contains an element of <code>updateUniformSuiteRequestType</code> .
updateUniformSuiteResponse	An updateUniformSuiteResponse message contains an element of <code>updateUniformSuiteResponseType</code> . Each suite in the updateUniformSuiteRequest is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about suites that were modified successfully.

Element: assignProductCategoriesToOrgRequest

Description

An **assignProductCategoriesToOrgRequest** message contains an element of `handleProductCategoryToOrgRequestType`.

Derived By

Type [handleProductCategoryToOrgRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
org	organizationIdentifierType	1..1	See organizationIdentifierType .

Content Model

Component	Type	Occurs	Description
productCategory	productCategoryDataType	1..*	An array of productCategory elements. See productCategoryDataType .

Referenced By

Name	Type
assignProductCategoriesToOrg	Method

XML Example

The following XML fragment illustrates an **assignProductCategoriesToOrgRequest** message:

```
<assignProductCategoriesToOrgRequest>
  <org>
    <primaryKeys>
      <name>PCPORG</name>
    </primaryKeys>
  </org>
  <productCategory>
    <name>CRM</name>
  </productCategory>
</assignProductCategoriesToOrgRequest>
```

Element: assignProductCategoriesToOrgResponse

Description

An **assignProductCategoriesToOrgResponse** message contains an element of **handleProductCategoryToOrgResponseType**.

Assigning each product category either succeeds or fails. No specific information is returned about categories.

Derived By

Type [handleProductCategoryToOrgResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All categories in the request were processed. • PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. • FAILURE—None of the categories in the request were processed.
			reason	string	Gives a reason for partial failure or failure.

Referenced By

Name	Type
assignProductCategoriesToOrg	Method

XML Example

The following XML fragment illustrates a successful **assignProductCategoriesToOrgResponse** message:

```
<assignProductCategoriesToOrgResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</assignProductCategoriesToOrgResponse>
```

Element: assignProductCategoriesToUserRequest

Description

An **assignProductCategoriesToUserRequest** message contains an element of `handleProductCategoriesToUserRequestType`.

Derived By

Type [handleProductCategoriesToUserRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	1..1	See userIdentifierType .
productCategory	productCategoryDataType	1..*	An array of productCategory elements. See productCategoryDataType .

Referenced By

Name	Type
assignProductCategoriesToUser	Method

XML Example

The following XML fragment illustrates an **assignProductCategoriesToUserRequest** message:

```
<assignProductCategoriesToUserRequest>
  <user>
    <primaryKeys>
      <firstName>John</firstName>
      <lastName>Smith</lastName>
      <emailAddress>jsmith@example.com</emailAddress>
      <phoneNumber>408-123-4567</phoneNumber>
    </primaryKeys>
  </user>
  <!--one or more product categories-->
  <productCategory>
    <name>CRM</name>
  </productCategory>
</assignProductCategoriesToUserRequest>
```

Element: assignProductCategoriesToUserResponse

Description

An **assignProductCategoriesToUserResponse** message contains an element of `handleProductCategoriesToUserResponseType`.

Assigning each product category either succeeds or fails. No specific information is returned about categories.

Derived By

Type [handleProductCategoriesToUserResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives a reason for partial failure or failure.										

Referenced By

Name	Type
assignProductCategoriesToUser	Method

XML Example

The following XML fragment illustrates a successful **assignProductCategoriesToUserResponse** message:

XML Example

```
<assignProductCategoriesToUserResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</assignProductCategoriesToUserResponse>
```

Element: createFeatureBundleRequest

Description

A **createFeatureBundleRequest** message contains an element of createFeatureBundleRequestType.

Derived By

Type [createFeatureBundleRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureBundle	createFeatureBundleData Type	1..*	Required. A createFeatureBundleRequest contains an array of featureBundle elements to be added. See createFeatureBundleDataType .

Referenced By

Name	Type
createFeatureBundle	Method

XML Example

The following XML fragment illustrates a **createFeatureBundleRequest** message:

```
<createFeatureBundleRequest>
  <featureBundle>
    <name>FB_basic_count10</name>
    <description>Basic with count of 10</description>
    <features>
      <feature>
        <featureIdentifier>
          <primaryKeys>
            <name>Feature_add1</name>
            <version>1.0</version>
          </primaryKeys>
        </featureIdentifier>
        <count>10</count>
      </feature>
      <feature>
        <featureIdentifier>
```

XML Example

```
<primaryKeys>
  <name>Feature_add2</name>
  <version>1.0</version>
</primaryKeys>
</featureIdentifier>
<count>10</count>
</feature>
</features>
</featureBundle>
</createFeatureBundleRequest>
```

Element: createFeatureBundleResponse

Description

A **createFeatureBundleResponse** message contains an element of createFeatureBundleResponseType.

Each feature bundle in the **createFeatureBundleRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createFeatureBundleResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureBundleDataListType	0..1	Information about the feature bundles that were not added is listed in the failedData element. See failedFeatureBundleDataListType .									
responseData	createdFeatureBundleDataListType	0..1	Information about the feature bundles that were added is listed in the responseData element. See createdFeatureBundleDataListType .									

Referenced By

Name	Type
createFeatureBundle	Method

XML Example

The following XML fragment illustrates a successful **createFeatureBundleResponse** message:

XML Example

```
<createFeatureBundleResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <createdFeatureBundle>
      <recordRefNo>1</recordRefNo>
      <uniqueId>HID-100236</uniqueId>
    </createdFeatureBundle>
  </responseData>
</createFeatureBundleResponse>
```

Element: createFeatureRequest

Description

A **createFeatureRequest** message contains an element of createFeatureRequestType.

Derived By

Type [createFeatureRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
feature	featureDataType	1..*	Required. A createFeatureRequest contains an array of feature elements to be added. See featureDataType .

Referenced By

Name	Type
createFeature	Method

XML Example

The following XML fragment illustrates a **createFeatureRequest** message:

```
<createFeatureRequest>
  <feature>
    <featureName>Feature_add1</featureName>
    <versionFormat>FIXED</versionFormat>
    <version>1.0</version>
    <description>Feature_add1 desc</description>
  </feature>
  <feature>
    <featureName>Feature_add2</featureName>
    <versionFormat>FIXED</versionFormat>
```

XML Example

```
<version>1.0</version>
<description>Feature_add2 desc</description>
</feature>
<feature>
  <featureName>Feature_toUpdate</featureName>
  <versionFormat>DATE_BASED</versionFormat>
  <version></version>
  <description>Feature_toUpdate desc</description>
</feature>
<feature>
  <featureName>Feature_withOverrides</featureName>
  <versionFormat>FIXED</versionFormat>
  <version>1.0</version>
  <description>Feature_withOverrides desc</description>
  <featureOverrideParams>
    <vendorString>New vendor string</vendorString>
    <dupGroup>
      <dupGroupOption>GROUPMASK</dupGroupOption>
      <groupMask>
        <option>HOST</option>
        <option>DISPLAY</option>
      </groupMask>
    </dupGroup>
  </featureOverrideParams>
</feature>
</createFeatureRequest>
```

Element: createFeatureResponse

Description

A **createFeatureResponse** message contains an element of createFeatureResponseType.

Derived By

Type [createFeatureResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureDataListType	0..1	Information about the features that were not added is listed in the failedData element. See failedFeatureDataListType .									
responseData	createdFeatureDataListType	0..1	Information about the features that were added is listed in the responseData element. See createdFeatureDataListType .									

Referenced By

Name	Type
createFeature	Method

XML Example

The following XML fragment illustrates a partial-failure **createFeatureResponse** message:

```
<createFeatureResponse>  
  <statusInfo>
```

XML Example

```
<status>PARTIAL_FAILURE</status>
<reason>Partial failure of input data. 1 records failed.
Please check the specific reasons in returned data.</reason>
</statusInfo>
<failedData>
  <failedFeature>
    <feature>
      <featureName>Feature 3</featureName>
      <versionFormat>FIXED</versionFormat>
      <version>1.0</version>
      <description>Feature 3 desc</description>
    </feature>
    <reason>The feature name is invalid; it must contain only ASCII
letters, numbers, or _ (underscore) with no whitespace
# 0539-341R</reason>
  </failedFeature>
</failedData>
<responseData>
  <createdFeature>
    <recordRefNo>1</recordRefNo>
    <uniqueId>HID-100000</uniqueId>
  </createdFeature>
  <createdFeature>
    <recordRefNo>2</recordRefNo>
    <uniqueId>HID-100001</uniqueId>
  </createdFeature>
</responseData>
</createFeatureResponse>
```

Element: createMaintenanceRequest

Description

A **createMaintenanceRequest** message contains an element of createMaintenanceRequestType.

Derived By

Type [createMaintenanceRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
maintenance	createMaintenanceDataT ype	1..*	Required. A createMaintenanceRequest contains an array of maintenance elements to be added. See createMaintenanceDataType .

Referenced By

Name	Type
createMaintenance	Method

XML Example

The following XML fragment illustrates a **createMaintenanceRequest** message:

```
<createMaintenanceRequest>
  <maintenance>
    <maintenanceName>Maint_basic</maintenanceName>
    <version>1.0</version>
    <description>Maint_basic desc</description>
  </maintenance>
</createMaintenanceRequest>
```

Element: createMaintenanceResponse

Description

A **createMaintenanceResponse** message contains an element of createMaintenanceResponseType.

Derived By

Type [createMaintenanceResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Status Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Status Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Status Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedMaintenanceDataListType	0..1	Information about the maintenance products that were not added is listed in the failedData element. See failedMaintenanceDataListType .									
responseData	createdMaintenanceDataListType	0..1	Information about the maintenance products that were added is listed in the responseData element. See createdMaintenanceDataListType .									

Referenced By

Name	Type
createMaintenance	Method

XML Example

The following XML fragment illustrates a successful **createMaintenanceResponse** message:

XML Example

```
<createMaintenanceResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <createdMaintenance>
      <recordRefNo>1</recordRefNo>
      <uniqueId>HID-20102</uniqueId>
    </createdMaintenance>
  </responseData>
</createMaintenanceResponse>
```

Element: createOrganizationRequest

Description

A **createOrganizationRequest** message contains an element of createOrganizationRequestType.

Derived By

Type [createOrganizationRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
organization	organizationBasicDataType	1..*	Required. A createOrganizationRequest contains an array of organization elements to be added. See organizationBasicDataType .

Referenced By

Name	Type
createOrganization	Method

XML Example

The following XML fragment illustrates a **createOrganizationRequest** message:

```
<createOrganizationRequest>
  <organization>
    <orgUnitId>SENTRY</orgUnitId>
    <displayName>Sentry Software Company</displayName>
  </organization>
</createOrganizationRequest>
```

Element: createOrganizationResponse

Description

A **createOrganizationResponse** message contains an element of createOrganizationResponseType.

Each organization in the **createOrganizationRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createOrganizationResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	createdOrgDataListType	0..1	Information about the organizations that were added is listed in the responseData element. See createdOrgDataListType .									
failedData	failedOrgDataListType	0..1	Information about the organizations that were not added is listed in the failedData element. See failedOrgDataListType .									

Referenced By

Name	Type
createOrganization	Method

XML Example

The following XML fragment illustrates a successful **createOrganizationResponse** message:

```
<createOrganizationResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <createdOrganization>
      <recordRefNo>1</recordRefNo>
      <uniqueId>HID-100263</uniqueId>
    </createdOrganization>
  </responseData>
</createOrganizationResponse>
```

Element: createPartNumberRequest

Description

A **createPartNumberRequest** message contains an element of createPartNumberRequestType.

Derived By

Type [createPartNumberRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
partNumber	createPartNumberDataType	1..*	Required. A createPartNumberRequest contains an array of partNumber elements to be added. See createPartNumberDataType .
processSync	boolean	0..1	Optional. Set to true to create part numbers synchronously, that is, the Web services client will be blocked until the request is completely processed. Use synchronous processing only for creating small numbers of part numbers at a time. By default, part number creation is asynchronous.

Referenced By

Name	Type
createPartNumber	Method

XML Example

The following XML fragment illustrates a **createPartNumberRequest** message:

```
<createPartNumberRequest>
  <partNumber>
    <partId>Part-1</partId>
    <description>part description 1</description>
  </partNumber>
  <partNumber>
    <partId>Part-2</partId>
    <description>part description 2</description>
  </partNumber>
  <processSync>true</processSync>
</createPartNumberRequest>
```

Element: createPartNumberResponse

Description

A **createPartNumberResponse** message contains an element of createPartNumberResponseType.

Each part number in the **createPartNumberRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createPartNumberResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>import request of part numbers was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			import request of part numbers was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		import request of part numbers was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedPartNumberDataListType	0..1	Information about the part numbers that were not added is listed in the failedData element. See failedPartNumberDataListType . Not populated for asynchronous requests.									
responseData	createdPartNumberDataListType	0..1	Information about the part numbers that were added is listed in the responseData element. See createdPartNumberDataListType . Not populated for asynchronous requests.									

Referenced By

Name	Type
createPartNumber	Method

XML Example

The following XML fragment illustrates a successful synchronous **createPartNumberResponse** message:

```
<createPartNumberResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <createdPartNumber>
      <recordRefNo>0</recordRefNo>
      <uniqueId>HID-20252</uniqueId>
    </createdPartNumber>
    <createdPartNumber>
      <recordRefNo>1</recordRefNo>
      <uniqueId>HID-20253</uniqueId>
    </createdPartNumber>
  </responseData>
</createPartNumberResponse>
```

Element: createProductCategoryRequest

Description

A **createProductCategoryRequest** message contains an element of createProductCategoryRequestType.

Derived By

Type [createProductCategoryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
productCategory	createProductCategoryData Type	1..*	Required. A createProductCategoryRequest contains an array of productCategory elements to be added. See createProductCategoryData Type .

Referenced By

Name	Type
createProductCategory	Method

XML Example

The following XML fragment illustrates a **createProductCategoryRequest** message:

```
<createProductCategoryRequest>
  <!--one or more repetitions-->
  <productCategory>
    <name>CRM</name>
    <!--optional-->
    <description>Customer Relationship Management Products</description>
  </productCategory>
</createProductCategoryRequest>
```

Element: createProductCategoryResponse

Description

A **createProductCategoryResponse** message contains an element of createProductCategoryResponseType.

Derived By

Type [createProductCategoryResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductCategoryDataListType	0..1	Information about the categories that were not added is listed in the failedData element. See failedProductCategoryDataListType									
responseData	createdProductCategoryDataListType	0..1	Information about the categories that were added is listed in the responseData element. See createdProductCategoryDataListType .									

Referenced By

Name	Type
createProductCategory	Method

XML Example

The following XML fragment illustrates a successful **createProductCategoryResponse** message:

XML Example

```
<createProductCategoryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <createdProductCategory>
      <recordRefNo>1</recordRefNo>
      <uniqueId>149420</uniqueId>
    </createdProductCategory>
  </responseData>
</createProductCategoryResponse>
```

The following XML fragment illustrates a failed **createProductCategoryResponse** message:

```
<createProductCategoryResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed. Please check the specific reasons in the returned data</reason>
  </statusInfo>
  <failedData>
    <failedProductCategory>
      <productCategory>
        <name>CRM</name>
        <description>Customer Relationship Management Products</description>
      </productCategory>
      <reason>8251:Cannot create Product Category CRM because there already exists another category with this name. [Incident#
7785-511]</reason>
    </failedProductCategory>
  </failedData>
</createProductCategoryResponse>
```

Element: createProductRelationshipRequest

Description

A **createProductRelationshipRequest** message contains an element of createProductRelationshipRequestType.

Derived By

Type [createProductRelationshipRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
relationship	productRelationshipData Type	1..*	Required. A createProductRelationshipRequest contains an array of relationship elements to be added. See productRelationshipData Type .

Referenced By

Name	Type
createProductRelationship	Method

XML Example

The following XML fragment illustrates a **createProductRelationshipRequest** message:

```
<createProductRelationshipRequest>
  <relationship>
    <productToRelate>
      <primaryKeys>
        <name>Product_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </productToRelate>
    <relatedProduct>
      <primaryKeys>
        <name>Product_basic</name>
        <version>2.0</version>
      </primaryKeys>
    </relatedProduct>
    <relation>UPGRADE_TO</relation>
  </relationship>
</createProductRelationshipRequest>
```

Element: createProductRelationshipResponse

Description

A **createProductRelationshipResponse** message contains an element of createProductRelationshipResponseType.

Each relationship in the **createProductRelationshipRequest** is added as an atomic unit; adding each either succeeds or fails

Derived By

Type [createProductRelationshipResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusInfo</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusInfo	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusInfo	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductRelationshipDataListType	0..1	Information about the relationships that were not added is listed in the failedData element. See failedProductRelationshipDataListType .									

Referenced By

Name	Type
createProductRelationship	Method

XML Example

The following XML fragment illustrates a successful **createProductRelationshipResponse** message:

```
<createProductRelationshipResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</createProductRelationshipResponse>
```

Element: createProductRequest

Description

A **createProductRequest** message contains an element of createProductRequestType.

Derived By

Type [createProductRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	createProductDataType	1..*	Required. A createProductRequest contains an array of product elements to be added. See createProductDataType .

Referenced By

Name	Type
createProduct	Method

XML Example

The following XML fragment illustrates a **createProductRequest** message:

```
<createProductRequest>
  <product>
    <productName>Product_basic</productName>
    <version>1.0</version>
    <description>Product_basic description</description>
    <licenseTechnology>
      <primaryKeys>
        <name>FLEXnet Licensing</name>
      </primaryKeys>
    </licenseTechnology>
    <licenseGenerator>
      <primaryKeys>
        <name>demo</name>
      </primaryKeys>
    </licenseGenerator>
    <featureBundles>
      <featureBundle>
        <featureBundleIdentifier>
          <primaryKeys>
            <name>FB_basic_count10</name>
          </primaryKeys>
        </featureBundleIdentifier>
        <count>10</count>
      </featureBundle>
    </featureBundles>
  </product>
</createProductRequest>
```


XML Example

```
<licenseModels>
  <licenseModel>
    <primaryKeys>
      <name>Floating Counted</name>
    </primaryKeys>
  </licenseModel>
  <licenseModel>
    <primaryKeys>
      <name>Nodelocked Uncounted</name>
    </primaryKeys>
  </licenseModel>
  <licenseModel>
    <primaryKeys>
      <name>Retail Activation</name>
    </primaryKeys>
  </licenseModel>
</licenseModels>
<trustedKey>
  <primaryKeys>
    <keyName>opsmTK1</keyName>
  </primaryKeys>
</trustedKey>
<virtualTrustedKey>
  <primaryKeys>
    <keyName>opsmTK2</keyName>
  </primaryKeys>
</virtualTrustedKey>
</product>
</createProductRequest>
```

Element: createProductResponse

Description

A **createProductResponse** message contains an element of createProductResponseType.

Each product in the **createProductRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createProductResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductDataListType	0..1	Information about the products that were not added is listed in the failedData element. See failedProductDataListType .									
responseData	createdProductDataListType	0..1	Information about the products that were added is listed in the responseData element. See createdProductDataListType .									

Referenced By

Name	Type
createProduct	Method

XML Example

The following XML fragment illustrates a successful **createProductResponse** message:

```
<createProductResponse>  
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <createdProduct>
    <recordRefNo>1</recordRefNo>
    <uniqueId>HID-100245</uniqueId>
  </createdProduct>
</responseData>
</createProductResponse>
```

Element: createUniformSuiteRequest

Description

A **createUniformSuiteRequest** message contains an element of createUniformSuiteRequestType.

Derived By

Type [createUniformSuiteRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniformSuite	createUniformSuiteDataType	1..*	Required. A createUniformSuiteRequest contains an array of uniformSuite elements to be added. See createUniformSuiteDataType .

Referenced By

Name	Type
createUniformSuite	Method

XML Example

The following XML fragment illustrates a **createUniformSuiteRequest** message:

```
<createUniformSuiteRequest>
  <uniformSuite>
    <suiteName>S1</suiteName>
    <version>1.0</version>
    <licenseTechnology>
      <primaryKeys>
        <name>FlexNet Licensing</name>
      </primaryKeys>
    </licenseTechnology>
    <licenseGenerator>
      <primaryKeys>
        <name>demo</name>
      </primaryKeys>
    </licenseGenerator>
  </uniformSuite>
</createUniformSuiteRequest>
```

XML Example

```
</primaryKeys>
</licenseGenerator>
<products>
  <product>
    <productIdentifier>
      <primaryKeys>
        <name>P1</name>
        <version>1.0</version>
      </primaryKeys>
    </productIdentifier>
    <count>3</count>
  </product>
</products>
<licenseModels>
  <licenseModel>
    <primaryKeys>
      <name>Floating Counted</name>
    </primaryKeys>
  </licenseModel>
</licenseModels>
<productAttributes>
  <attribute>
    <attributeName>PROD_NUM</attributeName>
    <integerValue>3</integerValue>
  </attribute>
</productAttributes>
</uniformSuite>
</createUniformSuiteRequest>
```

Element: createUniformSuiteResponse

Description

A **createUniformSuiteResponse** message contains an element of createUniformSuiteResponseType.

Each suite in the **createUniformSuiteRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createUniformSuiteResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUniformSuiteDataListType	0..1	Information about the suites that were not added is listed in the failedData element. See failedUniformSuiteDataListType .									
responseData	createdUniformSuiteDataListType	0..1	Information about the suites that were added is listed in the responseData element. See createdUniformSuiteDataListType .									

Referenced By

Name	Type
createUniformSuite	Method

XML Example

The following XML fragment illustrates a successful **createUniformSuiteResponse** message:

```
<createUniformSuiteResponse>
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <createdUniformSuite>
    <recordRefNo>1</recordRefNo>
    <uniqueId>HID-12</uniqueId>
  </createdUniformSuite>
</responseData>
</createUniformSuiteResponse>
```

Element: deleteFeatureBundleRequest

Description

A **deleteFeatureBundleRequest** message contains an element of deleteFeatureBundleRequestType.

Derived By

Type [deleteFeatureBundleRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureBundle	deleteFeatureBundleData Type	1..*	Required. A deleteFeatureBundleRequest contains an array of featureBundle elements to be deleted. See deleteFeatureBundleData Type .

Referenced By

Name	Type
deleteFeatureBundle	Method

XML Example

The following XML fragment illustrates a **deleteFeatureBundleRequest** message:

```
<deleteFeatureBundleRequest>
  <featureBundle>
    <featureBundleIdentifier>
      <primaryKeys>
        <name>FB_toDelete</name>
      </primaryKeys>
    </featureBundleIdentifier>
  </featureBundle>
</deleteFeatureBundleRequest>
```

Element: deleteFeatureBundleResponse

Description

A **deleteFeatureBundleResponse** message contains an element of deleteFeatureBundleResponseType.

Each feature bundle in the **deleteFeatureBundleRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about feature bundles that were deleted successfully.

Derived By

Type [deleteFeatureBundleResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>response</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	response	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
response	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedDeleteFeatureBundleDataListType	0..1	Information about the feature bundles that were not deleted is listed in the failedData element. See failedDeleteFeatureBundleDataListType .

Referenced By

Name	Type
deleteFeatureBundle	Method

XML Example

The following XML fragment illustrates a successful **deleteFeatureBundleResponse** message:

```
<deleteFeatureBundleResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</deleteFeatureBundleResponse>
```

Element: deleteFeatureRequest

Description

A **deleteFeatureRequest** message contains an element of deleteFeatureRequestType.

Derived By

Type [deleteFeatureRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	deleteFeatureDataType	1..*	Required. A deleteFeatureRequest contains an array of feature elements to be deleted. See deleteFeatureDataType .

Referenced By

Name	Type
deleteFeature	Method

XML Example

The following XML fragment illustrates a **deleteFeatureRequest** message (Feature_toDelete has a fixed version, so version needs to be specified):

```
<deleteFeatureRequest>
  <feature>
    <featureIdentifier>
      <primaryKeys>
        <name>Feature_toDelete</name>
        <version></version>
      </primaryKeys>
    </featureIdentifier>
  </feature>
</deleteFeatureRequest>
```

Element: deleteFeatureResponse

Description

A **deleteFeatureResponse** message contains an element of deleteFeatureResponseType.

Each feature in the **deleteFeatureRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about features that were deleted successfully.

Derived By

Type [deleteFeatureResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteFeatureDataListType	0..1	Information about the features that were not deleted is listed in the failedData element. See failedDeleteFeatureDataListType .									

Referenced By

Name	Type
deleteFeature	Method

XML Example

The following XML fragment illustrates an unsuccessful **deleteFeatureResponse** message (Feature_toDelete has a fixed version, so version needs to be specified):

```
<deleteFeatureResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed. Please check the
      specific reasons in returned data.</reason>
  </statusInfo>
</deleteFeatureResponse>
```

XML Example

```
</statusInfo>
<failedData>
  <failedFeature>
    <featureIdentifier>
      <primaryKeys>
        <name>Feature_toDelete</name>
        <version/>
      </primaryKeys>
    </featureIdentifier>
    <reason>Identifier Feature_toDelete is invalid.
      # 4359-767</reason>
  </failedFeature>
</failedData>
</deleteFeatureResponse>
```

Element: deleteMaintenanceRequest

Description

A **deleteMaintenanceRequest** message contains an element of deleteMaintenanceRequestType.

Derived By

Type [deleteMaintenanceRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	deleteMaintenanceDataType	1..*	Required. A deleteMaintenanceRequest contains an array of maintenance elements to be deleted. See deleteMaintenanceDataType .

Referenced By

Name	Type
deleteMaintenance	Method

XML Example

The following XML fragment illustrates a **deleteMaintenanceRequest** message:

```
<deleteMaintenanceRequest>
  <maintenance>
    <maintenanceIdentifier>
      <primaryKeys>
        <name>Maintenance1</name>
        <version>1.0</version>
      </primaryKeys>
```

XML Example

```
</maintenanceIdentifier>
</maintenance>
</deleteMaintenanceRequest>
```

Element: deleteMaintenanceResponse

Description

A **deleteMaintenanceResponse** message contains an element of deleteMaintenanceResponseType.

Each maintenance product in the **deleteMaintenanceRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about maintenance products that were deleted successfully.

Derived By

Type [deleteMaintenanceResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteMaintenanceDataListType	0..1	Information about the maintenance products that were not deleted is listed in the failedData element. See failedDeleteMaintenanceDataListType .									

Referenced By

Name	Type
deleteMaintenance	Method

XML Example

The following XML fragment illustrates a successful **deleteMaintenanceResponse** message:

```
<deleteMaintenanceResponse>
  <statusInfo>
    <status>SUCCESS</status>
```

XML Example

```
</statusInfo>  
</deleteMaintenanceResponse>
```

Element: deletePartNumberRequest

Description

A **deletePartNumberRequest** message contains an element of deletePartNumberRequestType.

Derived By

Type [deletePartNumberRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partNumber	deletePartNumberDataType	1..*	Required. A deletePartNumberRequest contains an array of partNumber elements to be deleted. See deletePartNumberDataType .

Referenced By

Name	Type
deletePartNumber	Method

XML Example

The following XML fragment illustrates a **deletePartNumberRequest** message:

```
<deletePartNumberRequest>  
  <partNumber>  
    <partNumberIdentifier>  
      <primaryKeys>  
        <partId>part-11</partId>  
      </primaryKeys>  
    </partNumberIdentifier>  
  </partNumber>  
</deletePartNumberRequest>
```

Element: deletePartNumberResponse

Description

A **deletePartNumberResponse** message contains an element of deletePartNumberResponseType.

Each part number in the **deletePartNumberRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about part numbers that were deleted successfully.

Derived By

Type [deletePartNumberResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>import request of part numbers was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			import request of part numbers was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		import request of part numbers was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeletePartNumberDataListType	0..1	Information about the part numbers that were not deleted is listed in the failedData element. See failedDeletePartNumberDataListType .									

Referenced By

Name	Type
deletePartNumber	Method

XML Example

The following XML fragment illustrates a successful **deletePartNumberResponse** message:

```
<deletePartNumberResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deletePartNumberResponse>
```

Element: deleteProductRelationshipRequest

Description

A **deleteProductRelationshipRequest** message contains an element of deleteProductRelationshipRequestType.

Derived By

Type [deleteProductRelationshipRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
relationship	productRelationshipDataType	1..*	Required. A deleteProductRelationshipRequest contains an array of relationship elements to be deleted. See productRelationshipDataType .

Referenced By

Name	Type
deleteProductRelationship	Method

XML Example

The following XML fragment illustrates a **deleteProductRelationshipRequest** message:

```
<deleteProductRelationshipRequest>
  <relationship>
    <productToRelate>
      <primaryKeys>
        <name>P11</name>
        <version>1.0</version>
      </primaryKeys>
    </productToRelate>
    <relatedProduct>
      <primaryKeys>
        <name>P10</name>
        <version>1.0</version>
      </primaryKeys>
    </relatedProduct>
    <relation>UPSELL_FROM</relation>
  </relationship>
</deleteProductRelationshipRequest>
```

Element: deleteProductRelationshipResponse

Description

A **deleteProductRelationshipResponse** message contains an element of deleteProductRelationshipResponseType.

Each relationship in the **deleteProductRelationshipRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about relationships that were deleted successfully

Derived By

Type [deleteProductRelationshipResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductRelationshipDataListType	0..1	Information about the relationships that were not deleted is listed in the failedData element. See failedProductRelationshipDataListType									

Referenced By

Name	Type
deleteProductRelationship	Method

XML Example

The following XML fragment illustrates a successful **deleteProductRelationshipResponse** message:

```
<deleteProductRelationshipResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</deleteProductRelationshipResponse>
```

XML Example

```
</statusInfo>  
</deleteProductRelationshipResponse>
```

Element: deleteProductRequest

Description

A **deleteProductRequest** message contains an element of deleteProductRequestType.

Derived By

Type [deleteProductRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	deleteProductDataType	1..*	Required. A deleteProductRequest contains an array of product elements to be deleted. See deleteProductDataType .

Referenced By

Name	Type
deleteProduct	Method

XML Example

The following XML fragment illustrates a **deleteProductRequest** message:

```
<deleteProductRequest>  
  <product>  
    <productIdentifier>  
      <primaryKeys>  
        <name>Product A</name>  
        <version>1.0</version>  
      </primaryKeys>  
    </productIdentifier>  
  </product>  
</deleteProductRequest>
```

Element: deleteProductResponse

Description

A **deleteProductResponse** message contains an element of deleteProductResponseType.

Each product in the **deleteProductRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about products that were deleted successfully.

Derived By

Type [deleteProductResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return AR TIAL_FAILURE - FAILURE—Non e of the products in the request ere processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return AR TIAL_FAILURE - FAILURE—Non e of the products in the request ere processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were rocessed. - PARTIAL_FAILURE—Some, but not all products n the request were processed. The getCount and getQuery operations never return AR TIAL_FAILURE - FAILURE—Non e of the products in the request ere processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteProductDataListType	0..1	Information about the products that were not deleted is listed in the failedData element. See failedDeleteProductDataListType .									

Referenced By

Name	Type
deleteProduct	Method

XML Example

The following XML fragment illustrates a successful **deleteProductResponse** message:

```
<deleteProductResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteProductResponse>
```

Element: deleteUniformSuiteRequest

Description

A **deleteUniformSuiteRequest** message contains an element of deleteUniformSuiteRequestType.

Derived By

Type [deleteUniformSuiteRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniformSuite	deleteUniformSuiteDataType	1..*	Required. A deleteUniformSuiteRequest contains an array of uniformSuite elements to be deleted. See deleteUniformSuiteDataType .

Referenced By

Name	Type
deleteUniformSuite	Method

XML Example

The following XML fragment illustrates a **deleteUniformSuiteRequest** message:

```
<deleteUniformSuiteRequest>
  <uniformSuite>
    <suiteIdentifier>
      <primaryKeys>
        <name>S1</name>
      </primaryKeys>
    </suiteIdentifier>
  </uniformSuite>
</deleteUniformSuiteRequest>
```

XML Example

```
<version>1.0</version>
</primaryKeys>
</suiteIdentifier>
</uniformSuite>
</deleteUniformSuiteRequest>
```

Element: deleteUniformSuiteResponse

Description

A **deleteUniformSuiteResponse** message contains an element of deleteUniformSuiteResponseType.

Each suite in the **deleteUniformSuiteRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about suites that were deleted successfully.

Derived By

Type [deleteUniformSuiteResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteUniformSuiteDataListType	0..1	Information about the suites that were not deleted is listed in the failedData element. See failedDeleteUniformSuiteDataListType .									

Referenced By

Name	Type
deleteUniformSuite	Method

XML Example

The following XML fragment illustrates a successful **deleteUniformSuiteResponse** message:

```
<deleteUniformSuiteResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteUniformSuiteResponse>
```


Element: getFeatureBundleCountRequest

Description

A **getFeatureBundleCountRequest** message contains an element of `getFeatureBundleCountRequestType`.

Derived By

Type [getFeatureBundleCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureBundleQueryParametersType	0..1	Required. See featureBundleQueryParametersType . Leave this element blank to return all feature bundles.

Referenced By

Name	Type
getFeatureBundleCount	Method

XML Example

The following XML fragment illustrates a **getFeatureBundleCountRequest** message:

```
<getFeatureBundleCountRequest>  
  <queryParams>  
  </queryParams>  
</getFeatureBundleCountRequest>
```

Element: getFeatureBundleCountResponse

Description

A **getFeatureBundleCountResponse** message contains an element of `getFeatureBundleCountResponseType`.

Derived By

Type [getFeatureBundleCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getFeatureBundleCount	Method

XML Example

The following XML fragment illustrates a successful **getFeatureBundleCountResponse** message:

```
<getFeatureBundleCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</getFeatureBundleCountResponse>
```

XML Example

```
</statusInfo>
<responseData>
  <count>17</count>
</responseData>
</getFeatureBundleCountResponse>
```

Element: getFeatureBundlesQueryRequest

Description

A **getFeatureBundlesQueryRequest** message contains an element of `getFeatureBundlesQueryRequestType`.

Derived By

Type [getFeatureBundlesQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureBundleQueryParametersType	0..1	Required. See featureBundleQueryParametersType . Leave this element blank to return all feature bundles.
pageNumber	integer	1..1	Required. Starts at 1. Say the <code>getFeatureBundleCount</code> operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return an array of featuresListType of features that are contained in the feature bundle. See featuresListType .

Referenced By

Name	Type
getFeatureBundlesQuery	Method

XML Example

The following XML fragment illustrates a **getFeatureBundlesQueryRequest** message:

```
<getFeatureBundlesQueryRequest>
  <queryParams>
```

XML Example

```
<name>
  <value>FB_basic</value>
  <searchType>STARTS_WITH</searchType>
</name>
</queryParams>
<pageNumber>1</pageNumber>
<batchSize>50</batchSize>
<returnContainedObjects>true</returnContainedObjects>
</getFeatureBundlesQueryRequest>
```

Element: getFeatureBundlesQueryResponse

Description

A **getFeatureBundlesQueryResponse** message contains an element of **getFeatureBundlesQueryResponseType**.

Derived By

Type [getFeatureBundlesQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getFeatureBundlesQueryResponseDataType	0..1	See getFeatureBundlesQueryResponseDataType .									

Referenced By

Name	Type
getFeatureBundlesQuery	Method

XML Example

The following XML fragment illustrates a successful **getFeatureBundlesQueryResponse** message that returns the contained features:

```
<getFeatureBundlesQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
```

XML Example

```
<responseData>
  <featureBundle>
    <uniqueId>HID-100236</uniqueId>
    <name>FB_basic_count10</name>
    <description>Basic now contains Feature_add3</description>
    <state>DRAFT</state>
    <features>
      <feature>
        <featureIdentifier>
          <uniqueId>HID-100230</uniqueId>
          <primaryKeys>
            <name>Feature_add1</name>
            <version>1.0</version>
          </primaryKeys>
        </featureIdentifier>
        <count>10</count>
      </feature>
      <feature>
        <featureIdentifier>
          <uniqueId>HID-100231</uniqueId>
          <primaryKeys>
            <name>Feature_add2</name>
            <version>1.0</version>
          </primaryKeys>
        </featureIdentifier>
        <count>10</count>
      </feature>
      <feature>
        <featureIdentifier>
          <uniqueId>HID-100237</uniqueId>
          <primaryKeys>
            <name>Feature_add3</name>
            <version>1.0</version>
          </primaryKeys>
        </featureIdentifier>
        <count>10</count>
      </feature>
    </features>
  </featureBundle>
</responseData>
</getFeatureBundlesQueryResponse>
```

Element: getFeatureCountRequest

Description

A **getFeatureCountRequest** message contains an element of `getFeatureCountRequestType`.

Derived By

Type [getFeatureCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	featureQueryParametersType	0..1	Required. See featureQueryParametersType . Leave this element blank to return all features.

Referenced By

Name	Type
getFeatureCount	Method

XML Example

The following XML fragment illustrates a **getFeatureCountRequest** message:

```
<getFeatureCountRequest>
  <queryParams>
    <featureName>
      <value>Feature_add</value>
      <searchType>STARTS_WITH</searchType>
    </featureName>
    <versionFormat>
      <value>FIXED</value>
      <searchType>EQUALS</searchType>
    </versionFormat>
  </queryParams>
</getFeatureCountRequest>
```

Element: getFeatureCountResponse

Description

A **getFeatureCountResponse** message contains an element of `getFeatureCountResponseType`.

Derived By

Type [getFeatureCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getFeatureCount	Method

XML Example

The following XML fragment illustrates a successful **getFeatureCountResponse** message:

```
<getFeatureCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>2</count>
  </responseData>
</getFeatureCountResponse>
```


XML Example

```
</getFeatureCountResponse>
```

Element: getFeaturesQueryRequest

Description

A **getFeaturesQueryRequest** message contains an element of **getFeaturesQueryRequestType**.

Derived By

Type [getFeaturesQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	featureQueryParametersType	0..1	Required. See featureQueryParametersType . Leave this element blank to return all features.
pageNumber	integer	1..1	Required. Starts at 1. Say the getFeatureCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getFeaturesQuery	Method

XML Example

The following XML fragment illustrates a **getFeaturesQueryRequest** message:

```
<getFeaturesQueryRequest>
  <queryParams>
    <featureName>
      <value>Feature_add</value>
      <searchType>STARTS_WITH</searchType>
    </featureName>
    <versionFormat>
      <value>FIXED</value>
      <searchType>EQUALS</searchType>
    </versionFormat>
  </queryParams>
  <pageNumber>1</pageNumber>
  <batchSize>50</batchSize>
```

XML Example

```
</getFeaturesQueryRequest>
```

Element: getFeaturesQueryResponse

Description

A **getFeaturesQueryResponse** message contains an element of `getFeaturesQueryResponseType`.

Derived By

Type [getFeaturesQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description											
 SEQUENCE		1..1												
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>			Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description												
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.												
reason	string	Gives reason for partial failure or failure.												

Content Model

Component	Type	Occurs	Description
responseData	getFeaturesQueryResponseDataType	0..1	See getFeaturesQueryResponseDataType .

Referenced By

Name	Type
getFeaturesQuery	Method

XML Example

The following XML fragment illustrates a successful **getFeaturesQueryResponse** message:

```
<getFeaturesQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <feature>
      <uniqueId>HID-100231</uniqueId>
      <featureName>Feature_add2</featureName>
      <versionFormat>FIXED</versionFormat>
      <version>1.0</version>
      <description>Feature_add2 desc</description>
      <state>DRAFT</state>
      <featureOverrideParams>
        <dupGroup>
          <dupGroupOption>NO_OVERRIDE</dupGroupOption>
        </dupGroup>
      </featureOverrideParams>
    </feature>
    <feature>
      <uniqueId>HID-100230</uniqueId>
      <featureName>Feature_add1</featureName>
      <versionFormat>FIXED</versionFormat>
      <version>1.0</version>
      <description>Feature_add1 desc</description>
      <state>DRAFT</state>
      <featureOverrideParams>
        <dupGroup>
          <dupGroupOption>NO_OVERRIDE</dupGroupOption>
        </dupGroup>
      </featureOverrideParams>
    </feature>
  </responseData>
</getFeaturesQueryResponse>
```

Element: getLicenseTechnologyQueryRequest

Description

A **getLicenseTechnologyQueryRequest** message contains an element of **getLicenseTechnologyQueryRequestType**.

Derived By

Type [getLicenseTechnologyQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	licenseTechnologyQueryParametersType	0..1	Required. See licenseTechnologyQueryParametersType . Leave this element blank to return all license technologies.

Referenced By

Name	Type
getLicenseTechnologiesQuery	Method

XML Example

The following XML fragment illustrates a **getLicenseTechnologyQueryRequest** message:

```
<getLicenseTechnologyQueryRequest>
  <queryParams>
    <name>
      <value>FLEX</value>
      <searchType>STARTS_WITH</searchType>
    </name>
  </queryParams>
</getLicenseTechnologyQueryRequest>
```

Element: getLicenseTechnologyQueryResponse

Description

A **getLicenseTechnologyQueryResponse** message contains an element of [getLicenseTechnologyQueryResponseType](#).

Derived By

Type [getLicenseTechnologyQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All organizations in the request were processed. - PARTIAL_FAILURE—Some, but not all organizations in the request were processed. - FAILURE—None of the organizations in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	licenseTechnologyDataListType	0..1	Information about the license technologies that matched the query is listed in the responseData element. See licenseTechnologyDataListType .									

Referenced By

Name	Type
getLicenseTechnologiesQuery	Method

XML Example

The following XML fragment illustrates a successful **getLicenseTechnologyQueryResponse** message:

```
<getLicenseTechnologyQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <licenseTechnology>
      <licenseTechnologyIdentifier>
        <uniqueId>HID-100</uniqueId>
        <primaryKeys>
          <name>FLEXnet Licensing</name>
        </primaryKeys>
      </licenseTechnologyIdentifier>
    </licenseTechnology>
  </responseData>
</getLicenseTechnologyQueryResponse>
```

XML Example

```
</primaryKeys>
</licenseTechnologyIdentifier>
<licenseGenerators>
  <licenseGeneratorIdentifier>
    <uniqueId>HID-100</uniqueId>
    <primaryKeys>
      <name>demo</name>
    </primaryKeys>
  </licenseGeneratorIdentifier>
</licenseGenerators>
<state>DRAFT</state>
</licenseTechnology>
</responseData>
</getLicenseTechnologyQueryResponse>
```

Element: getMaintenanceCountRequest

Description

A **getMaintenanceCountRequest** message contains an element of **getMaintenanceCountRequestType**.

Derived By

Type [getMaintenanceCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	maintenanceQueryParametersType	0..1	Required. See maintenanceQueryParametersType . Leave this element blank to return all maintenance products.

Referenced By

Name	Type
getMaintenanceCount	Method

XML Example

The following XML fragment illustrates a **getMaintenanceCountRequest** message:

```
<getMaintenanceCountRequest>
  <queryParams>
    <maintenanceName>
      <value>M</value>
      <searchType>STARTS_WITH</searchType>
    </maintenanceName>
    <version>
```

XML Example

```
<value>1</value>
<searchType>STARTS_WITH</searchType>
</version>
</queryParams>
</getMaintenanceCountRequest>
```

Element: getMaintenanceCountResponse

Description

A **getMaintenanceCountResponse** message contains an element of **getMaintenanceCountResponseType**.

Derived By

Type [getMaintenanceCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getMaintenanceCount	Method

XML Example

The following XML fragment illustrates a successful **getMaintenanceCountResponse** message:

```
<getMaintenanceCountResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>
```


XML Example

```
<responseData>
  <count>1</count>
</responseData>
</getMaintenanceCountResponse>
```

Element: getMaintenanceQueryRequest

Description

A **getMaintenanceQueryRequest** message contains an element of `getMaintenanceQueryRequestType`.

Derived By

Type [getMaintenanceQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	maintenanceQueryParametersType	0..1	Required. See maintenanceQueryParametersType . Leave this element blank to return all maintenance products.
pageNumber	integer	1..1	Required. Starts at 1. Say the <code>getMaintenanceCount</code> operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return arrays of elements that are contained in the maintenance product.

Referenced By

Name	Type
getMaintenanceQuery	Method

XML Example

The following XML fragment illustrates a **getMaintenanceQueryRequest** message:

```
<getMaintenanceQueryRequest>
  <queryParams>
    <maintenanceName>
      <value>M</value>
    <searchType>STARTS_WITH</searchType>
  </queryParams>
</getMaintenanceQueryRequest>
```

XML Example

```
</maintenanceName>
<version>
  <value>1</value>
  <searchType>STARTS_WITH</searchType>
</version>
</queryParams>
<pageNumber>1</pageNumber>
<batchSize>30</batchSize>
<returnContainedObjects>>false</returnContainedObjects>
</getMaintenanceQueryRequest>
```

Element: getMaintenanceQueryResponse

Description

A **getMaintenanceQueryResponse** message contains an element of **getMaintenanceQueryResponseType**.

Derived By

Type [getMaintenanceQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getMaintenanceQueryResponseDataType	0..1	See getMaintenanceQueryResponseDataType .									

Referenced By

Name	Type
getMaintenanceQuery	Method

XML Example

The following XML fragment illustrates a successful **getMaintenanceQueryResponse** message:

```
<getMaintenanceQueryResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>
```

XML Example

```
<responseData>
  <maintenance>
    <uniqueId>HID-20102</uniqueId>
    <maintenanceName>Maint_basic_updated</maintenanceName>
    <description>Maint_basic_updated desc</description>
    <state>DRAFT</state>
  </maintenance>
</responseData>
</getMaintenanceQueryResponse>
```

Element: getModelIdentifiersRequest

Description

A **getModelIdentifiersRequest** message contains an element of `getModelIdentifiersRequestType`.

Derived By

Type [getModelIdentifiersRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	identifierQueryParametersType	0..1	Required. See identifierQueryParametersType .

Referenced By

Name	Type
getLicenseModelIdentifiers	Method

XML Example

The following XML fragment illustrates a **getModelIdentifiersRequest** message that returns the IDs, names, and fulfillment parameters (that are set as name-value pairs) of all license models:

```
<getModelIdentifiersRequest>
  <queryParams>
  </queryParams>
</getModelIdentifiersRequest>
```

The following XML fragment illustrates a **getModelIdentifiersRequest** message that returns the fulfillment-time parameters (that are set as name-value pairs) for the license model whose name is **Floating Counted**:

```
<getModelIdentifiersRequest>
  <queryParams>
    <name>
      <value>Floating Counted</value>
    </name>
  </queryParams>
</getModelIdentifiersRequest>
```

XML Example

```
<searchType>EQUALS</searchType>
</name>
</queryParams>
</getModelIdentifiersRequest>
```

Element: getModelIdentifiersResponse

Description

A **getModelIdentifiersResponse** message contains an element of **getModelIdentifiersResponseType**.

Derived By

Type [getModelIdentifiersResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	modelIdentifiersDataListType	0..1	See modelIdentifiersDataListType .									

Referenced By

Name	Type
getLicenseModelIdentifiers	Method

XML Example

The following XML fragment illustrates a successful **getModelIdentifiersResponse** message:

```
<getModelIdentifiersResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <licenseModel>
      <licenseModelIdentifier>
        <uniqueId>HID-501</uniqueId>
        <primaryKeys>
          <name>Floating Counted</name>
        </primaryKeys>
      </licenseModelIdentifier>
      <licenseTechnology>
        <uniqueId>HID-100</uniqueId>
        <primaryKeys>
          <name>FLEXnet Licensing</name>
        </primaryKeys>
      </licenseTechnology>
      <attributeDetails>
        <needServerId>true</needServerId>
        <needNodeLockId>false</needNodeLockId>
        <needCount>true</needCount>
        <needOverdraftCount>true</needOverdraftCount>
      </attributeDetails>
    </licenseModel>
  </responseData>
</getModelIdentifiersResponse>
```

Element: getPartNumberCountRequest

Description

Derived By

Type [getPartNumberCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	partNumberQueryParametersType	0..1	Required. See partNumberQueryParametersType .

Referenced By

Name	Type
getPartNumberCount	Method

XML Example

The following XML fragment illustrates a **getPartNumberCountRequest** message:

```
<getPartNumberCountRequest>
  <queryParams>
    <unmappedWithProduct>true</unmappedWithProduct>
  </queryParams>
</getPartNumberCountRequest>
```

Element: getPartNumberCountResponse

Description

A **getPartNumberCountResponse** message contains an element of `getPartNumberCountResponseType`.

Derived By

Type [getPartNumberCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: - SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. - PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description		
			Elemen t	Data Type	Description
					import request of part numbers was not scheduled.
			reason	string	Gives reason for partial failure or failure.
responseData	partNumberCountDataTy pe	0..1	Contains an integer count element. See partNumberCountDataType.		

Referenced By

Name	Type
getPartNumberCount	Method

XML Example

The following XML fragment illustrates a successful **getPartNumberCountResponse** message:

```
<getPartNumberCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>17</count>
  </responseData>
</getPartNumberCountResponse>
```

Element: getPartNumbersQueryRequest

Description

A **getPartNumbersQueryRequest** message contains an element of getPartNumbersQueryRequestType.

Derived By

Type [getPartNumbersQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	partNumberQueryParametersType	0..1	Required. See partNumberQueryParametersType .
pageNumber	integer	1..1	Required. Starts at 1. Say the getPartNumberCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getPartNumbersQuery	Method

XML Example

The following XML fragment illustrates a **getPartNumbersQueryRequest** message:

```
<getPartNumbersQueryRequest>
  <queryParams>
    <productName>
      <value>Product A</value>
      <searchType>EQUALS</searchType>
    </productName>
    <licenseModel>
      <value>Floating Counted</value>
      <searchType>EQUALS</searchType>
    </licenseModel>
  </queryParams>
  <pageNumber>1</pageNumber>
  <batchSize>100</batchSize>
</getPartNumbersQueryRequest>
```

Element: getPartNumbersQueryResponse

Description

A **getPartNumbersQueryResponse** message contains an element of [getPartNumbersQueryResponseType](#).

Derived By

Type [getPartNumbersQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the part numbers in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of part numbers was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all part numbers in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the part numbers in the request were processed successfully. If the request was asynchronous, FAILURE means that the

Content Model

Component	Type	Occurs	Description		
			Element	Data Type	Description
					import request of part numbers was not scheduled.
			reason	string	Gives reason for partial failure or failure.
responseData	partNumberDataListType	0..1	See partNumberDataListType .		

Referenced By

Name	Type
getPartNumbersQuery	Method

XML Example

The following XML fragment illustrates a successful **getPartNumbersQueryResponse** message:

```
<getPartNumbersQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <partNumber>
      <partNumberIdentifier>
        <uniqueId>HID-20130</uniqueId>
        <primaryKeys>
          <partId>Part-22</partId>
        </primaryKeys>
      </partNumberIdentifier>
      <description xsi:nil="true"/>
      <creationDate>2008-01-04</creationDate>
      <lastModifiedDate>2008-01-04</lastModifiedDate>
      <mappedProduct>
        <uniqueId>HID-20093</uniqueId>
        <primaryKeys>
          <name>Product A</name>
          <version>1.0</version>
        </primaryKeys>
      </mappedProduct>
      <mappedLicenseModel>
        <uniqueId>HID-501</uniqueId>
        <primaryKeys>
          <name>Floating Counted</name>
        </primaryKeys>
      </mappedLicenseModel>
    </partNumber>
  </responseData>
</getPartNumbersQueryResponse>
```

Element: getProductCategoriesRequest

Description

A **getProductCategoriesRequest** message contains an element of getProductCategoriesRequestType.

Derived By

Type [getProductCategoriesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
pageNumber	integer	0..1	The page number of the query results. The page number depends on the batch size and the number of records returned. Say the getProductCategories query returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	True or False.

Referenced By

Name	Type
getProductCategories	Method

XML Example

The following XML fragment illustrates a **getProductCategoriesRequest** message:

```
<getProductCategoriesRequest>  
  <pageNumber>1</pageNumber>  
  <batchSize>30</batchSize>  
  <returnContainedObjects>>false</returnContainedObjects>  
</getProductCategoriesRequest>
```

Element: getProductCategoriesResponse

Description

A **getProductCategoriesResponse** message contains an element of getProductCategoriesResponseType.

Derived By

Type [getProductCategoriesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives a reason for partial failure or failure.										
responseData	getProductCategoriesResponseDataType	0..1	A getProductCategoriesResponse contains an array of responseData elements. See getProductCategoriesResponseDataType .									

Referenced By

Name	Type
getProductCategories	Method

XML Example

The following XML fragment illustrates a successful **getProductCategoriesResponse** message:

```
<getProductCategoriesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <productCategory>
      <name>ALL</name>
      <description>ALL.</description>
    </productCategory>
    <productCategory>
      <name>Uncategorized Products</name>
      <description>Uncategorized Products.</description>
    </productCategory>
    <productCategory>
      <name>CRM</name>
      <description>Customer Relationship Management Products</description>
    </productCategory>
  </responseData>
</getProductCategoriesResponse>
```

Element: getProductCountRequest

Description

A **getProductCountRequest** message contains an element of `getProductCountRequestType`.

Derived By

Type [getProductCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	productQueryParametersType	0..1	Required. See productQueryParametersType . Leave this element blank to return all products.

Referenced By

Name	Type
getProductCount	Method

XML Example

The following XML fragment illustrates a **getProductCountRequest** message:

```
<getProductCountRequest>
```


XML Example

```
<queryParams>
  <productName>
    <value>Product</value>
    <searchType>STARTS_WITH</searchType>
  </productName>
  <version>
    <value>1</value>
    <searchType>STARTS_WITH</searchType>
  </version>
</queryParams>
</getProductCountRequest>
```

Element: getProductCountResponse

Description

A **getProductCountResponse** message contains an element of getProductCountResponseType.

Derived By

Type [getProductCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element. See <code>getCountResponseDataType</code> .									

Referenced By

Name	Type
getProductCount	Method

XML Example

The following XML fragment illustrates a successful **getProductCountResponse** message:

```
<getProductCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>1</count>
  </responseData>
</getProductCountResponse>
```

XML Example

```
</getProductCountResponse>
```

Element: getProductRelationshipsRequest

Description

A **getProductRelationshipsRequest** message contains an element of `getProductRelationshipsRequestType`.

Derived By

Type [getProductRelationshipsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .

Referenced By

Name	Type
getProductRelationships	Method

XML Example

The following XML fragment illustrates a **getProductRelationshipsRequest** message:

```
<getProductRelationshipsRequest>
  <productIdentifier>
    <primaryKeys>
      <name>Product_basic</name>
      <version>1.0</version>
    </primaryKeys>
  </productIdentifier>
</getProductRelationshipsRequest>
```

Element: getProductRelationshipsResponse

Description

A **getProductRelationshipsResponse** message contains an element of `getProductRelationshipsResponseType`.

Derived By

Type [getProductRelationshipsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: SUCCESS—All relationships in the request were processed. PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. FAILURE—None of the relationships in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
relationship	productRelationshipDataType	1..*	A getProductRelationshipsResponse contains an array of relationship elements. See productRelationshipDataType .									

Referenced By

Name	Type
getProductRelationships	Method

XML Example

The following XML fragment illustrates a successful **getProductRelationshipsResponse** message:

```
<getProductRelationshipsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <relationship>
    <productToRelate>
      <primaryKeys>
        <name>Product_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </productToRelate>
  </relationship>
</getProductRelationshipsResponse>
```

XML Example

```
</productToRelate>
<relatedProduct>
  <uniqueId>HID-100251</uniqueId>
  <primaryKeys>
    <name>Product_basic</name>
    <version>2.0</version>
  </primaryKeys>
</relatedProduct>
<relation>UPGRADE_TO</relation>
</relationship>
</getProductRelationshipsResponse>
```

Element: getProductsQueryRequest

Description

A **getProductsQueryRequest** message contains an element of `getProductsQueryRequestType`.

Derived By

Type [getProductsQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	productQueryParametersType	0..1	Required. See productQueryParametersType . Leave this element blank to return all products.
pageNumber	integer	1..1	Required. Starts at 1. Say the getProductCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return arrays of elements that are contained in the product.

Referenced By

Name	Type
getProductsQuery	Method

XML Example

The following XML fragment illustrates a **getProductsQueryRequest** message:

XML Example

```
<getProductsQueryRequest>
  <queryParams>
    <productName>
      <value>Product</value>
      <searchType>STARTS_WITH</searchType>
    </productName>
    <version>
      <value>1</value>
      <searchType>STARTS_WITH</searchType>
    </version>
  </queryParams>
  <pageNumber>1</pageNumber>
  <batchSize>50</batchSize>
  <returnContainedObjects>false</returnContainedObjects>
</getProductsQueryRequest>
```

Element: getProductsQueryResponse

Description

A **getProductsQueryResponse** message contains an element of `getProductsQueryResponseType`.

Derived By

Type [getProductsQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.
			reason	string	Gives reason for partial failure or failure.
responseData	getProductsQueryResponseDataType	0..1	See getProductsQueryResponseDataType .		

Referenced By

Name	Type
getProductsQuery	Method

XML Example

The following XML fragment illustrates a successful **getProductsQueryResponse** message:

```
<getProductsQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <product>
      <uniqueId>HID-100245</uniqueId>
    </product>
  </responseData>
</getProductsQueryResponse>
```

XML Example

```
<productName>Product_basic</productName>
<version>1.0</version>
<description>Product_basic description</description>
<state>DRAFT</state>
<licenseTechnology>
  <uniqueId>HID-100</uniqueId>
  <primaryKeys>
    <name>FLEXnet Licensing</name>
  </primaryKeys>
</licenseTechnology>
<licenseGenerator>
  <uniqueId>HID-101</uniqueId>
  <primaryKeys>
    <name>demo</name>
  </primaryKeys>
</licenseGenerator>
<hostType>
  <name>Certificate or Trusted Host</name>
</hostType>
<usedOnDevice>false</usedOnDevice>
<productCategory>Uncategorized Products</productCategory>
<allowDownloadObsoleteFrInAdmin>false</allowDownloadObsoleteFrInAdmin>
<allowDownloadObsoleteFrInPortal>false</allowDownloadObsoleteFrInPortal>
<creationDate>2011-10-22T20:38:15.660Z</creationDate>
<lastModifiedDate>2012-03-28T20:39:35.162Z</lastModifiedDate>
</product>
</responseData>
</getProductsQueryResponse>
```

Element: getTransactionKeyIdentifiersRequest

Description

A **getTransactionKeyIdentifiersRequest** message contains an element of **getTransactionKeyIdentifiersRequestType**.

Derived By

Type [getTransactionKeyIdentifiersRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	identifierQueryParametersType	0..1	Required. See identifierQueryParametersType .

Referenced By

Name	Type
getTransactionKeyIdentifiers	Method

XML Example

The following XML fragment illustrates a **getTransactionKeyIdentifiersRequest** message that returns the IDs and names of all transaction keys:

```
<getTransactionKeyIdentifiersRequest>  
</getTransactionKeyIdentifiersRequest>
```

The following XML fragment illustrates a **getTransactionKeyIdentifiersRequest** message that returns the names of all transaction keys whose names contain the string TK:

```
<getTransactionKeyIdentifiersRequest>  
  <queryParams>  
    <name>  
      <value>TK</value>  
      <searchType>CONTAINS</searchType>  
    </name>  
  </queryParams>  
</getTransactionKeyIdentifiersRequest>
```

Element: getTransactionKeyIdentifiersResponse

Description

A **getTransactionKeyIdentifiersResponse** message contains an element of `getTransactionKeyIdentifiersResponseType`.

Derived By

Type [getTransactionKeyIdentifiersResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entities in the request were processed. - FAILURE—None of the entities in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	transactionKeyIdentifiersDataListType	0..1	See transactionKeysIdentifiersDataListType .									

Referenced By

Name	Type
getTransactionKeyIdentifiers	Method

XML Example

The following XML fragment illustrates a successful **getTransactionKeyIdentifiersResponse** message:

```
<getTransactionKeyIdentifiersResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <transactionKeyIdentifier>
      <uniqueId>HID-100047</uniqueId>
      <primaryKeys>
        <keyName>TK1</keyName>
      </primaryKeys>
    </transactionKeyIdentifier>
  </responseData>
</getTransactionKeyIdentifiersResponse>
```

Element: getUniformSuiteCountRequest

Description

A **getUniformSuiteCountRequest** message contains an element of `getUniformSuiteCountRequestType`.

Derived By

Type [getUniformSuiteCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	suiteQueryParametersType	0..1	Required. See suiteQueryParametersType . Leave this element blank to return all suites.

Referenced By

Name	Type
getUniformSuiteCount	Method

XML Example

The following XML fragment illustrates a **getUniformSuiteCountRequest** message:

```
<getUniformSuiteCountRequest>
  <queryParams>
    <suiteName>
      <value>S1</value>
      <searchType>EQUALS</searchType>
    </suiteName>
  </queryParams>
</getUniformSuiteCountRequest>
```

Element: getUniformSuiteCountResponse

Description

A **getUniformSuiteCountResponse** message contains an element of `getUniformSuiteCountResponseType`.

Derived By

Type [getUniformSuiteCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getUniformSuiteCount	Method

XML Example

The following XML fragment illustrates a successful **getUniformSuiteCountResponse** message:

```
<getUniformSuiteCountResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
  <responseData>
```

XML Example

```
<count>1</count>
</responseData>
</getUniformSuiteCountResponse>
```

Element: getUniformSuitesQueryRequest

Description

A **getUniformSuitesQueryRequest** message contains an element of **getUniformSuitesQueryRequestType**.

Derived By

Type [getUniformSuitesQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	suiteQueryParametersType	0..1	Required. See suiteQueryParametersType . Leave this element blank to return all suites.
pageNumber	integer	1..1	Required. Starts at 1. Say the getUniformSuiteCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
returnContainedObjects	boolean	1..1	Required. If true, return arrays of elements that are contained in the suite.

Referenced By

Name	Type
getUniformSuiteQuery	Method

XML Example

The following XML fragment illustrates a **getUniformSuitesQueryRequest** message:

```
<getUniformSuitesQueryRequest>
  <queryParams>
    <suiteName>
      <value>S10</value>
      <searchType>EQUALS</searchType>
    </suiteName>
    <version>
      <value>1.0</value>
    </version>
  </queryParams>
</getUniformSuitesQueryRequest>
```

XML Example

```
<searchType>EQUALS</searchType>
</version>
</queryParams>
<pageNumber>1</pageNumber>
<batchSize>10</batchSize>
<returnContainedObjects>false</returnContainedObjects>
</getUniformSuitesQueryRequest>
```

Element: getUniformSuitesQueryResponse

Description

A **getUniformSuitesQueryResponse** message contains an element of `getUniformSuitesQueryResponseType`.

Derived By

Type [getUniformSuitesQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUniformSuitesQueryResponseDataType	0..1	See getUniformSuitesQueryResponseDataType .									

Referenced By

Name	Type
getUniformSuiteQuery	Method

XML Example

The following XML fragment illustrates a successful **getUniformSuitesQueryResponse** message:

```
<getUniformSuitesQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <uniformSuite>
      <uniqueId>HID-6</uniqueId>
    </uniformSuite>
  </responseData>
</getUniformSuitesQueryResponse>
```

XML Example

```
<suiteName>S10</suiteName>
<version>1.0</version>
<description>Suite_basic description</description>
<state>DEPLOYED</state>
<licenseTechnology>
  <uniqueId>HID-100</uniqueId>
  <primaryKeys>
    <name>FLEXnet Licensing</name>
  </primaryKeys>
</licenseTechnology>
<licenseGenerator>
  <uniqueId>HID-101</uniqueId>
  <primaryKeys>
    <name>demo</name>
  </primaryKeys>
</licenseGenerator>
<hostType>
  <name>Certificate or Trusted Host</name>
</hostType>
<usedOnDevice>false</usedOnDevice>
<productCategory>Uncategorized Products</productCategory>
<allowDownloadObsoleteFrInAdmin>false</allowDownloadObsoleteFrInAdmin>
<allowDownloadObsoleteFrInPortal>false</allowDownloadObsoleteFrInPortal>
<creationDate>2011-10-22T20:38:15.660Z</creationDate>
<lastModifiedDate>2012-03-28T20:39:35.162Z</lastModifiedDate>
</uniformSuite>
</responseData>
</getUniformSuitesQueryResponse>
```

Element: getUsersForProductCategoryRequest

Description

A **getUsersForProductCategoryRequest** message contains an element of **getUsersForProductCategoryRequestType**.

Derived By

Type [getUsersForProductCategoryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productCategory	productCategoryDataType	1..1	Required. See productCategoryDataType .

Referenced By

Name	Type
getUsersForProductCategory	Method

XML Example

The following XML fragment illustrates a **getUsersForProductCategoryRequest** message:

```
<getUsersForProductCategoryRequest>
  <productCategory>
    <name>Product_basic</name>
  </productCategory>
</getUsersForProductCategoryRequest>
```

Element: getUsersForProductCategoryResponse

Description

A **getUsersForProductCategoryResponse** message contains an element of `getUsersForProductCategoryResponseType`.

Derived By

Type [getUsersForProductCategoryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives a reason for partial failure or failure.										
userData	getUsersForProductCategoryResponseDataType	0..1	A getUsersForProductCategoryResponseDataType contains an array of userData elements. See getUsersForProductCategoryResponseDataType .									

Referenced By

Name	Type
getUsersForProductCategory	Method

XML Example

The following XML fragment illustrates a successful **getUsersForProductCategoryResponse** message:

```
<getUsersForProductCategoryResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>
```

XML Example

```
<userData>
  <user>
    <userName>admin</userName>
  </user>
  <user>
    <userName>p1admin</userName>
  </user>
  <user>
    <userName>pcuser</userName>
  </user>
</userData>
</getUsersForProductCategoryResponse>
```

The following XML fragment illustrates a failed **getUsersForProductCategoryResponse** message:

```
<getUsersForProductCategoryResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>There is no such Product Category with provided ID/Name!</reason>
  </statusInfo>
</getUsersForProductCategoryResponse>
```

Element: removeProductCategoriesFromOrgRequest

Description

A **removeProductCategoriesFromOrgRequest** message contains an element of **handleProductCategoryToOrgRequestType**.

Derived By

Type [handleProductCategoryToOrgRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
org	organizationIdentifierType	1..1	See organizationIdentifierType .
productCategory	productCategoryDataType	1..*	An array of productCategory elements. See productCategoryDataType .

Referenced By

Name	Type
removeProductCategoriesFromOrg	Method

XML Example

The following XML fragment illustrates a **removeProductCategoriesFromOrgRequest** message:

```
<removeProductCategoriesFromOrgRequest>
  <org>
    <primaryKeys>
      <name>PCPORG</name>
    </primaryKeys>
  </org>
  <productCategory>
    <name>CRM</name>
  </productCategory>
</removeProductCategoriesFromOrgRequest>
```

Element: removeProductCategoriesFromOrgResponse

Description

A **removeProductCategoriesFromOrgResponse** message contains an element of **handleProductCategoryToOrgResponseType**.

Removing each product category either succeeds or fails. No specific information is returned about categories.

Derived By

Type [handleProductCategoryToOrgResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All categories in the request were processed. • PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. • FAILURE—None of the categories in the request were processed.
			reason	string	Gives a reason for partial failure or failure.

Referenced By

Name	Type
removeProductCategoriesFromOrg	Method

XML Example

The following XML fragment illustrates a successful **removeProductCategoriesFromOrgResponse** message:

```
<removeProductCategoriesFromOrgResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</removeProductCategoriesFromOrgResponse>
```

Element: removeProductCategoriesFromUserRequest

Description

A **removeProductCategoriesFromUserRequest** message contains an element of `handleProductCategoriesToUserRequestType`.

Derived By

Type [handleProductCategoriesToUserRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	1..1	See userIdentifierType .
productCategory	productCategoryDataType	1..*	An array of productCategory elements. See productCategoryDataType .

Referenced By

Name	Type
removeProductCategoriesFromUser	Method

XML Example

The following XML fragment illustrates a **removeProductCategoriesFromUserRequest** message:

```
<removeProductCategoriesFromUserRequest>
  <user>
    <primaryKeys>
      <firstName>John</firstName>
      <lastName>Smith</lastName>
      <emailAddress>jsmith@example.com</emailAddress>
    </primaryKeys>
  </user>
  <productCategory>
    <name>CRM</name>
  </productCategory>
</removeProductCategoriesFromUserRequest>
```

Element: removeProductCategoriesFromUserResponse

Description

A **removeProductCategoriesFromUserResponse** message contains an element of `handleProductCategoriesToUserResponseType`.

Derived By

Type [handleProductCategoriesToUserResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives a reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.	reason	string	Gives a reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All categories in the request were processed. - PARTIAL_FAILURE—Some, but not all categories in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the categories in the request were processed.										
reason	string	Gives a reason for partial failure or failure.										

Referenced By

Name	Type
removeProductCategoriesFromUser	Method

XML Example

The following XML fragment illustrates a successful **removeProductCategoriesFromUserResponse** message:

XML Example

```
<removeProductCategoriesFromUserResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</removeProductCategoriesFromUserResponse>
```

Element: setFeatureBundleStateRequest

Description

A **setFeatureBundleStateRequest** message contains an element of setFeatureBundleStateRequestType.

Derived By

Type [setFeatureBundleStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureBundle	featureBundleStateDataType	1..*	Required. A setFeatureBundleState request contains an array of featureBundle elements for which to change the state. See featureBundleStateDataType .

Referenced By

Name	Type
setFeatureBundleState	Method

XML Example

The following XML fragment illustrates a **setFeatureBundleStateRequest** message:

```
<setFeatureBundleStateRequest>
  <featureBundle>
    <featureBundleIdentifier>
      <primaryKeys>
        <name>FB_basic_count10</name>
      </primaryKeys>
    </featureBundleIdentifier>
    <stateToSet>INACTIVE</stateToSet>
  </featureBundle>
</setFeatureBundleStateRequest>
```

Element: setFeatureBundleStateResponse

Description

A **setFeatureBundleStateResponse** message contains an element of **setFeatureBundleStateResponseType**.

Derived By

Type [setFeatureBundleStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureBundleStateDataListType	0..1	Information about the feature bundles whose state was not set is listed in the failedData element. See failedFeatureBundleStateDataListType .									

Referenced By

Name	Type
setFeatureBundleState	Method

XML Example

The following XML fragment illustrates an unsuccessful **setFeatureBundleStateResponse** message:

```
<setFeatureBundleStateResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed. Please check the
      specific reasons in returned data.</reason>
  </statusInfo>
  <failedData>
    <failedFeatureBundle>
      <featureBundle>
        <featureBundleIdentifier>
          <primaryKeys>
            <name>FB_basic_count10</name>
          </primaryKeys>
        </featureBundleIdentifier>
        <stateToSet>INACTIVE</stateToSet>
      </featureBundle>
      <reason>Inactive state is invalid for feature bundle.
        # 5170-9511</reason>
    </failedFeatureBundle>
  </failedData>
</setFeatureBundleStateResponse>
```

Element: setFeatureStateRequest

Description

A **setFeatureStateRequest** message contains an element of setFeatureStateRequestType.

Derived By

Type [setFeatureStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureStateDataType	1..*	Required. A setFeatureStateRequest contains an array of feature elements for which to change the state. See featureStateDataType .

Referenced By

Name	Type
setFeatureState	Method

XML Example

The following XML fragment illustrates a **setFeatureStateRequest** message:

```
<setFeatureStateRequest>
  <feature>
    <featureIdentifier>
      <primaryKeys>
        <name>Feature_add1</name>
        <version></version>
      </primaryKeys>
    </featureIdentifier>
    <stateToSet>DEPLOYED</stateToSet>
  </feature>
</setFeatureStateRequest>
```

Element: setFeatureStateResponse

Description

A **setFeatureStateResponse** message contains an element of setFeatureStateResponseType.

Derived By

Type [setFeatureStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedFeatureStateDataListType	0..1	Information about the features whose state was not set is listed in the failedData element. See failedFeatureStateDataListType .									

Referenced By

Name	Type
setFeatureState	Method

XML Example

The following XML fragment illustrates a successful **setFeatureStateResponse** message:

```
<setFeatureStateResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</setFeatureStateResponse>
```

Element: setMaintenanceStateRequest

Description

A **setMaintenanceStateRequest** message contains an element of setMaintenanceStateRequestType.

Derived By

Type [setMaintenanceStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	maintenanceStateDataType	1..*	Required. A setMaintenanceState request contains an array of maintenance elements for which to change the state. See maintenanceStateDataType .

Referenced By

Name	Type
setMaintenanceState	Method

XML Example

The following XML fragment illustrates a **setMaintenanceStateRequest** message:

```
<setMaintenanceStateRequest>
  <maintenance>
    <maintenanceIdentifier>
      <primaryKeys>
        <name>Maint_basic_updated</name>
        <version>1.1</version>
      </primaryKeys>
    </maintenanceIdentifier>
    <stateToSet>DEPLOYED</stateToSet>
  </maintenance>
</setMaintenanceStateRequest>
```

Element: setMaintenanceStateResponse

Description

A **setMaintenanceStateResponse** message contains an element of setMaintenanceStateResponseType.

Derived By

Type [setMaintenanceStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedMaintenanceStateDataListType	0..1	Information about the maintenance products whose state was not set is listed in the failedData element. See failedMaintenanceStateDataListType .									

Referenced By

Name	Type
setMaintenanceState	Method

XML Example

The following XML fragment illustrates a successful **setMaintenanceStateResponse** message:

XML Example

```
<setMaintenanceStateResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</setMaintenanceStateResponse>
```

Element: setProductStateRequest

Description

A **setProductStateRequest** message contains an element of setProductStateRequestType.

Derived By

Type [setProductStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productStateDataType	1..*	Required. A setProductState request contains an array of product elements for which to change the state. See productStateDataType .

Referenced By

Name	Type
setProductState	Method

XML Example

The following XML fragment illustrates a **setProductStateRequest** message:

```
<setProductStateRequest>
  <product>
    <productIdentifier>
      <primaryKeys>
        <name>Product_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </productIdentifier>
    <stateToSet>DEPLOYED</stateToSet>
  </product>
</setProductStateRequest>
```

Element: setProductStateResponse

Description

A **setProductStateResponse** message contains an element of **setProductStateResponseType**.

Derived By

Type [setProductStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedProductStateDataListType	0..1	Information about the products whose state was not set is listed in the failedData element. See failedProductStateDataListType .									

Referenced By

Name	Type
setProductState	Method

XML Example

The following XML fragment illustrates a successful **setProductStateResponse** message:

```
<setProductStateResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</setProductStateResponse>
```

Element: setUniformSuiteStateRequest

Description

A **setUniformSuiteStateRequest** message contains an element of setUniformSuiteStateRequestType.

Derived By

Type [setUniformSuiteStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
suite	uniformSuiteStateDataType	1..*	Required. A setUniformSuiteState request contains an array of suite elements for which to change the state. See uniformSuiteStateDataType .

Referenced By

Name	Type
setUniformSuiteState	Method

XML Example

The following XML fragment illustrates a **setUniformSuiteStateRequest** message:

```
<setUniformSuiteStateRequest>
  <suite>
    <suiteIdentifier>
      <primaryKeys>
        <name>UniformSuite_basic</name>
      </primaryKeys>
    </suiteIdentifier>
  </suite>
</setUniformSuiteStateRequest>
```

XML Example

```
<version>1.0</version>
</primaryKeys>
</suiteIdentifier>
<stateToSet>DEPLOYED</stateToSet>
</suite>
</setUniformSuiteStateRequest>
```

Element: setUniformSuiteStateResponse

Description

A **setUniformSuiteStateResponse** message contains an element of setUniformSuiteStateResponseType.

Derived By

Type [setUniformSuiteStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUniformSuiteStateDataListType	0..1	Information about the suites whose state was not set is listed in the failedData element. See failedUniformSuiteStateDataListType .									

Referenced By

Name	Type
setUniformSuiteState	Method

XML Example

The following XML fragment illustrates a successful **setUniformSuiteStateResponse** message:

```
<setUniformSuiteStateResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</setUniformSuiteStateResponse>
```

Element: updateFeatureBundleRequest

Description

An **updateFeatureBundleRequest** message contains an element of updateFeatureBundleRequestType.

Derived By

Type [updateFeatureBundleRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	updateFeatureBundleData Type	1..*	Required. An updateFeatureBundleRequest contains an array of featureBundle elements to be modified. See updateFeatureBundleData Type .

Referenced By

Name	Type
updateFeatureBundle	Method

XML Example

The following XML fragment illustrates a **updateFeatureBundleRequest** message:

```
<updateFeatureBundleRequest>
  <featureBundle>
    <featureBundleIdentifier>
      <uniqueId>HID-100236</uniqueId>
    </featureBundleIdentifier>
    <description>Basic now contains Feature_add3</description>
    <features>
      <feature>
        <featureIdentifier>
          <primaryKeys>
            <name>Feature_add3</name>
            <version>1.0</version>
          </primaryKeys>
        </featureIdentifier>
        <count>10</count>
      </feature>
      <opType>ADD</opType>
    </features>
  </featureBundle>
</updateFeatureBundleRequest>
```

Element: updateFeatureBundleResponse

Description

An **updateFeatureBundleResponse** message contains an element of `updateFeatureBundleResponseType`.

Each feature bundle in the **updateFeatureBundleRequest** is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about feature bundles that were modified successfully.

Derived By

Type [updateFeatureBundleResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All feature bundles in the request were processed. - PARTIAL_FAILURE—Some, but not all feature bundles in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the feature bundles in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateFeatureBundleDataListType	0..1	Information about the feature bundles that were not modified is listed in the failedData element. See failedUpdateFeatureBundleDataListType .									

Referenced By

Name	Type
updateFeatureBundle	Method

XML Example

The following XML fragment illustrates an unsuccessful **updateFeatureBundleResponse** message (Feature_add8 does not exist):

```
<updateFeatureBundleResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed.
      Please check the specific reasons in returned data.</reason>
  </statusInfo>
  <failedData>
    <failedFeatureBundle>
      <featureBundle>
        <featureBundleIdentifier>
          <uniqueId>HID-100016</uniqueId>
        </featureBundleIdentifier>
        <description>Now with A, B, C</description>
        <features>
          <feature>
            <featureIdentifier>
              <primaryKeys>
                <name>Feature_add8</name>
                <version>1.0</version>
              </primaryKeys>
            </featureIdentifier>
            <count>10</count>
          </feature>
          <opType>ADD</opType>
        </features>
      </featureBundle>
      <reason>Identifier Feature_add8 is invalid.</reason>
    </failedFeatureBundle>
  </failedData>
</updateFeatureBundleResponse>
```

Element: updateFeatureRequest

Description

An **updateFeatureRequest** message contains an element of updateFeatureRequestType.

Derived By

Type [updateFeatureRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	updateFeatureDataType	1..*	Required. An updateFeatureRequest contains an array of feature elements to be modified. See updateFeatureDataType .

Referenced By

Name	Type
updateFeature	Method

XML Example

The following XML fragment illustrates a **updateFeatureRequest** message:

```
<updateFeatureRequest>
  <feature>
    <featureIdentifier>
      <primaryKeys>
        <name>Feature_toUpdate</name>
        <version></version>
      </primaryKeys>
    </featureIdentifier>
    <featureName>Feature_updated</featureName>
    <versionFormat>FIXED</versionFormat>
    <version>1.0</version>
    <description>Feature_updated desc</description>
  </feature>
</updateFeatureRequest>
```

Element: updateFeatureResponse

Description

An **updateFeatureRequest** message contains an element of updateFeatureRequestType.

Derived By

Type [updateFeatureResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateFeatureDataListType	0..1	Contains one or more failedFeature elements. See failedUpdateFeatureDataListType .									

Referenced By

Name	Type
updateFeature	Method

XML Example

The following XML fragment illustrates a successful **updateFeatureResponse** message:

```
<updateFeatureResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateFeatureResponse>
```


Element: updateMaintenanceRequest

Description

An **updateMaintenanceRequest** message contains an element of updateMaintenanceRequestType.

Derived By

Type [updateMaintenanceRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenance	updateMaintenanceDataType	1..*	Required. An updateMaintenanceRequest contains an array of maintenance elements to be modified. See updateMaintenanceDataType .

Referenced By

Name	Type
updateMaintenance	Method

XML Example

The following XML fragment illustrates a **updateMaintenanceRequest** message:

```
<updateMaintenanceRequest>
  <maintenance>
    <maintenanceIdentifier>
      <primaryKeys>
        <name>Maint_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </maintenanceIdentifier>
    <name>Maint_basic_updated</name>
    <version>1.1</version>
    <description>Maint_basic_updated desc</description>
  </maintenance>
</updateMaintenanceRequest>
```

Element: updateMaintenanceResponse

Description

An **updateMaintenanceResponse** message contains an element of updateMaintenanceResponseType.

Each maintenance product in the **updateMaintenanceRequest** is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about maintenance products that were modified successfully.

Derived By

Type [updateMaintenanceResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All maintenance products in the request were processed. - PARTIAL_FAILURE—Some, but not all maintenance products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the maintenance products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateMaintenanceDataListType	0..1	Information about the maintenance products that were not modified is listed in the failedData element. See failedUpdateMaintenanceDataListType .									

Referenced By

Name	Type
updateMaintenance	Method

XML Example

The following XML fragment illustrates a **updateMaintenanceResponse** message:

```
<updateMaintenanceResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateMaintenanceResponse>
```

Element: updateProductRelationshipRequest

Description

An **updateProductRelationshipRequest** message contains an element of `updateProductRelationshipRequestType`.

Derived By

Type [updateProductRelationshipRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
relationship	updateProductRelationshipDataType	1..*	Required. An updateProductRelationshipRequest contains an array of relationship elements to be modified. See updateProductRelationshipDataType .

Referenced By

Name	Type
updateProductRelationship	Method

XML Example

The following XML fragment illustrates a **updateProductRelationshipRequest** message:

```
<updateProductRelationshipRequest>
  <relationship>
    <productToRelate>
      <primaryKeys>
        <name>P11</name>
        <version>1.0</version>
      </primaryKeys>
    </productToRelate>
    <relatedProduct>
      <primaryKeys>
        <name>P10</name>
        <version>1.0</version>
      </primaryKeys>
    </relatedProduct>
  </relationship>
</updateProductRelationshipRequest>
```

XML Example

```
<relation>UPGRADE_FROM</relation>
<newRelation>UPSELL_FROM</newRelation>
</relationship>
</updateProductRelationshipRequest>
```

Element: updateProductRelationshipResponse

Description

An **updateProductRelationshipResponse** message contains an element of updateProductRelationshipResponseType.

Each relationship in the **updateProductRelationshipRequest** is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about relationships that were modified successfully

Derived By

Type [updateProductRelationshipResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All relationships in the request were processed. - PARTIAL_FAILURE—Some, but not all relationships in the request were processed. The get operation never returns PARTIAL_FAILURE. - FAILURE—None of the relationships in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateProductRelationshipDataListType	0..1	Information about the relationships that were not modified is listed in the failedData element. See failedUpdateProductRelationshipDataListType .									

Referenced By

Name	Type
updateProductRelationship	Method

XML Example

The following XML fragment illustrates a **updateProductRelationshipResponse** message:

```
<updateProductRelationshipResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateProductRelationshipResponse>
```

Element: updateProductRequest

Description

An **updateProductRequest** message contains an element of updateProductRequestType.

Derived By

Type [updateProductRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	updateProductDataType	1..*	Required. An updateProductRequest contains an array of product elements to be modified. See updateProductDataType .

Referenced By

Name	Type
updateProduct	Method

XML Example

The following XML fragment illustrates a **updateProductRequest** message:

```
<updateProductRequest>
  <product>
    <productIdentifier>
      <primaryKeys>
        <name>Product_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </productIdentifier>
    <licenseModels>
      <licenseModelIdentifiers>
        <primaryKeys>
          <name>Floating Counted</name>
        </primaryKeys>
      </licenseModelIdentifiers>
      <opType>DELETE</opType>
    </licenseModels>
  </product>
</updateProductRequest>
```

Element: updateProductResponse

Description

An **updateProductResponse** message contains an element of **updateProductResponseType**.

Each product in the **updateProductRequest** is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about products that were modified successfully.

Derived By

Type [updateProductResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All products in the request were processed. - PARTIAL_FAILURE—Some, but not all products in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the products in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateProductDataListType	0..1	Information about the products that were not modified is listed in the failedData element. See failedUpdateProductDataListType .									

Referenced By

Name	Type
updateProduct	Method

XML Example

The following XML fragment illustrates a successful **updateProductResponse** message:

```
<updateProductResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateProductResponse>
```

Element: updateUniformSuiteRequest

Description

An **updateUniformSuiteRequest** message contains an element of `updateUniformSuiteRequestType`.

Derived By

Type [updateUniformSuiteRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniformSuite	updateUniformSuiteDataType	1..*	Required. An updateUniformSuiteRequest contains an array of uniformSuite elements to be modified. See updateUniformSuiteDataType .

Referenced By

Name	Type
updateUniformSuite	Method

XML Example

The following XML fragment illustrates a **updateUniformSuiteRequest** message:

```
<updateUniformSuiteRequest>
  <uniformSuite>
    <suiteIdentifier>
      <primaryKeys>
        <name>S1</name>
      </primaryKeys>
    </suiteIdentifier>
  </uniformSuite>
</updateUniformSuiteRequest>
```


XML Example

```
<version>1.0</version>
</primaryKeys>
</suiteIdentifier>
<description>Desc of S1</description>
<productAttributes>
  <attribute>
    <attributeName>PROD_NUM</attributeName>
    <integerValue>5</integerValue>
  </attribute>
</productAttributes>
</uniformSuite>
</updateUniformSuiteRequest>
```

Element: updateUniformSuiteResponse

Description

An **updateUniformSuiteResponse** message contains an element of updateUniformSuiteResponseType.

Each suite in the **updateUniformSuiteRequest** is modified as an atomic unit; modifying each either succeeds or fails. No specific information is returned about suites that were modified successfully.

Derived By

Type [updateUniformSuiteResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All suites in the request were processed. - PARTIAL_FAILURE—Some, but not all suites in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the suites in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateUniformSuiteDataListType	0..1	Information about the suites that were not modified is listed in the failedData element. See failedUpdateUniformSuiteDataListType .									

Referenced By

Name	Type
updateUniformSuite	Method

XML Example

The following XML fragment illustrates a **updateUniformSuiteResponse** message:

```
<updateUniformSuiteResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateUniformSuiteResponse>
```

EntitlementOrderService Web Service

Description

Web service to create, update, delete, count and query entitlements.

Introduction

The Entitlement Order service facilitates the integration of your ERP/CRM system with FlexNet Operations by creating regular and bulk entitlements.

Methods: EntitlementOrderService

Methods

Name	Description
createBulkEntitlement	The createBulkEntitlement operation creates one or more bulk entitlements. To use the Entitlement Order service to create an entitlement, there must be deployed products and license models in the FlexNet Operations database, and there must be organizations in the FlexNet Operations database. You must provide any entitlement-time data that are required by the specified license model.
createEntitlementLineItem	The createEntitlementLineItem operation adds one or more entitlement line items to a simple entitlement.
createSimpleEntitlement	The createSimpleEntitlement operation creates one or more simple entitlements. To use the Entitlement Order service to create an entitlement: • There must be deployed products and license models in the FlexNet Operations database. • There must be organizations in the FlexNet Operations database. • You must provide any entitlement-time data that are required by the specified license model. Note: Using the <i>createSimpleEntitlement</i> operation, it is possible to create a simple entitlement with no line items. Such an entitlement cannot be created through the Administrative Console. One created with web services will not appear in the Administrative Console, though it is saved in the FlexNet Operations database. Therefore, avoid using the <i>createSimpleEntitlement</i> operation to create an entitlement with no line items or with only maintenance items.
createWebRegKey	The createWebRegKey operation adds one or more web register keys to one or more bulk entitlements, either asynchronously or synchronously. By default, web register key creation is asynchronous. To use the Entitlement Order service to load web register keys: There must be bulk entitlements in the FlexNet Operations database. If web register keys are going to be imported asynchronously, the Importing Bulk Entitlement Web Register Keys alert must be configured. See the FlexNet Operations Online Help for instructions. Before checking whether the web register keys were really added, wait until after the import has triggered. With synchronous processing, the Web services client will be blocked until the request is completely processed. Therefore, use synchronous processing to load only for small numbers of web register keys at a time. The Importing Bulk Entitlement Web Register Keys alert does not have to be configured to load web register keys synchronously.
deleteEntitlement	The deleteEntitlement operation deletes one or more entitlements.
deleteEntitlementLineItem	The deleteEntitlementLineItem operation deletes one or more line items.
deleteMaintenanceLineItem	The deleteMaintenanceLineItem operation deletes one or more maintenance line items. A maintenance item cannot be deleted if it is linked to another line item or is deployed
deleteWebRegKey	The deleteWebRegKey operation deletes one or more unredeemed web register keys from one or more bulk entitlements. To use the Entitlement Order service to delete web register keys there must be unredeemed web register keys in the FlexNet Operations database.

Methods

Name	Description
emailActivatableItem	The emailActivatableItem operation sends an entitlement certificate for a single activatable item via email. To send an entitlement certificate for an activatable item as an email attachment using the Entitlement Order service: • Configure the from-address for the entitlement email. See the <i>FlexNet Operations Installation Guide</i>. • Customize the entitlement email template and entitlement certificate template, if necessary. See the <i>FlexNet Operations Producer Portal Help Guide</i>. • An activation ID for an activatable item must exist in the database. • At least one email address must be provided.
emailEntitlement	The emailEntitlement operation sends an entitlement certificate via email. To send an entitlement certificate as an email attachment using the Entitlement Order service: • Configure the from-address for the entitlement email. See the <i>FlexNet Operations Installation Guide</i>. • Customize the entitlement email template and entitlement certificate template, if necessary. See the <i>FlexNet Operations Producer Portal Help Guide</i>. • An ID for an entitlement must exist in the database. • At least one email address must be provided.
getActivatableItemCount	The getActivatableItemCount operation returns the number of activatable line items that match specified criteria.
getActivatableItemsQuery	The getActivatableItemsQuery operation returns the activatable line items that match specified criteria. Note: This operation does not return maintenance line items.
getBulkEntitlementCount	The getBulkEntitlementCount operation returns the number of bulk entitlements that match specified criteria.
getBulkEntitlementPropertiesQuery	The getBulkEntitlementPropertiesQuery operation returns the bulk entitlement details that match specified criteria.
getEntitlementAttributesFromModel	The getEntitlementAttributesFromModel operation returns all the license model attributes for the specified model that must be specified at the time the entitlement is created.
getEntitlementCount	The getEntitlementCount operation returns the number of entitlements that match specified criteria.

Methods

Name	Description
getEntitlementLineItemPropertiesQuery	The getEntitlementLineItemPropertiesQuery operation returns all entitlement line items and web register keys based on the provided search criteria, including draft entries. This operation works similarly to the operation <code>getActivatableItemsQuery</code>. However, the response from <code>getEntitlementLineItemPropertiesQuery</code> is highly configurable. You can use it to select only the data you need in a given response. Note: With this query, maintenance line items will not be returned if the product type Maintenance is used in the search criteria. Associated maintenance line items can be obtained by using the new response configuration element <code>maintenance</code>. Use caution when crafting queries that may return excessive numbers of responses. The following error, <code>ORA-01795: maximum number of expressions in a list is 1000</code>, has been seen when performing searches via FlexNet Operations landing pages or web service queries when: 1. FlexNet Operations is connected to an Oracle database 2. Certain types of searches in the UI or web services return > 1000 items, for example, the entitlements or line item landing pages and <code>getEntitlementsQuery</code> or <code>getEntitlementLineItemPropertiesQuery</code>. If the error is seen in the FlexNet Operations UI, consider setting the <code>Entitlement Records per Page</code> and <code>Line Items Page Size per Entitlement</code> settings to 1000 or less. If the error is seen in a web service query, set the batch size to 1000 or less and page through the results.
getEntitlementsQuery	The getEntitlementsQuery operation returns the entitlements that match specified criteria. Tip: For more optimal memory usage, consider using <code>getActivatableItemsQuery</code> instead of <code>getEntitlementsQuery</code> to retrieve policy information for a particular line item. <code>getActivatableItemsQuery</code> loads only the information for the specified activation while <code>getEntitlementsQuery</code> loads information for all the activations for a given <code>EntitlementID</code>. See getActivatableItemsQuery.
getExactAvailableCount	The getExactAvailableCount operation provides the exact, current available count for a specified line item. This operation allows users to obtain a potentially more precise count than those available in the administrative console UI or via other web service operations. The FlexNet Operations UI and other web service operations do not evaluate the count of available copies when an upgrade is created. Therefore it is possible to create an upgrade count that exceeds the number of available copies; however, the count is evaluated at fulfillment time. On fulfillment, upgrades that exceed the available count are rejected. To avoid errors at fulfillment time, users may use <code>getExactAvailableCount</code>, which returns exact number of copies available for an upgrade fulfillment, for example, without having to return any previous fulfillments.

Methods

Name	Description
getMatchingBulkEnts	The getMatchingBulkEnts operation returns bulk entitlements suitable to receive the web register keys from a splitBulkEntitlement operation. The getMatchingBulkEnts operation searches for bulk entitlements with the target organization in the target tier that match the bulk entitlement you want to split. Any bulk entitlement returned by this operation can receive the web register keys as the result of the split operation. To be considered a match, the bulk entitlement that is the target of the split must share the following attributes with the bulk entitlement that is the source of the split: • Orderable • License model • License term (permanent, expiration date, duration) • Version date details (options, date, duration) • Line item state • License model policies • License model attributes
getMatchingLineItems	The getMatchingLineItems operation returns line items suitable to receive the count from a splitLineItem operation. The getMatchingLineItems operation searches for entitlement line items in entitlements with the target organization in the target tier that match the line item you want to split. Any line item returned by this operation can receive the counts as the result of the split operation. To be considered a matching line item, the line item that is the target of the split must share the following attributes with the line item that is the source of the split: • Orderable • License model • License term (permanent, expiration date, duration) • Version date details (options, date, duration) • Line item state • License model policies • License model attributes Note: If the source line item has a parent line item, then the entire ancestor tree is scanned to ensure that the parent line items of the target line item also match.
getStateChangeHistory	The getStateChangeHistory operation gets the state change history of one or more features, feature bundles, products, license models, or entitlements.

Methods

Name	Description
getWebRegKeyCount	The getWebRegKeyCount operation returns the number of web register keys associated with a specified bulk entitlement.
getWebRegKeysQuery	The getWebRegKeysQuery operation returns the part numbers that match specified criteria.
linkMaintenanceLineItem	The linkMaintenanceLineItem operation is used to link a maintenance line item to a licensed product line item. As in the Administrative Console, there does not need to be an explicitly specified product-maintenance relationship between the licensed product and maintenance product on these line items.
mapEntitlementsToUser	The mapEntitlementsToUser operation maps one or more entitlement IDs or activation IDs to a self-registered Portal user or maps one or more web register keys to a user from a customer organization. To use the Entitlement Order service to map entitlement IDs or activation IDs to a user, there must be entitlements in the FlexNet Operations database as well as a self-registered Portal user or customer user in the FlexNet Operations database.
mergeEntitlements	The mergeEntitlements operation merges assets of one organization with those of another organization. The following types of assets can be merged: - Entitlements and fulfillments—The state of the transferred entitlements and fulfillments are preserved during the merge. - Users
renewLicense	The renewLicense operation renews one or more entitlement line items.
replaceEntitlementLineItem	The replaceEntitlementLineItem operation replaces one or more entitlement line items.
setEntitlementState	The setEntitlementState operation sets the state of one or more entitlements.
setLineItemState	The setLineItemState operation sets the state of one or more entitlement line items.
setMaintenanceLineItemState	The setMaintenanceLineItemState operation sets the state of a maintenance line item.
splitBulkEntitlement	The splitBulkEntitlement operation assigns a specified number of unredeemed web register keys to a related organization in a different distribution tier. The web register keys that are split can be transferred to: - A compatible existing bulk entitlement (transfers the web register keys to that bulk entitlement). - An existing line item that has been redeemed from a compatible web register key (adds the counts from the transferred web register keys to the count of the line item). - A new bulk entitlement. Only publisher users, or channel partner users with sufficient privileges in the organization that is the current owner, can perform a splitBulkEntitlement operation. Note: You cannot control the specific web register keys that splitBulkEntitlement transfers.

Methods

Name	Description
splitLineItem	The splitLineItem operation assigns some portion of an entitlement line item's count from the current owner to a related organization in a different distribution tier. This operation can either increase the count of an existing entitlement line item at the target organization or create a new entitlement, if no matching entitlements exist at the target organization. Only publisher users, or channel partner users with sufficient privileges in the organization that is the current owner, can perform a splitLineItem operation. Note: When a line item associated with a maintenance is split, the maintenance is also split. Likewise, when a new entitlement is created as the result of a split, a new maintenance is created and associated with the new entitlement.
transferEntitlement	The transferEntitlement operation transfers one or more entitlements to an organization different from the original sold-to organization. Entitlements cannot be transferred if there are active fulfillments against the entitlement. During the transfer operation, active fulfillments can be returned and new entitlement and activation IDs can be auto-generated. Entitlements are in the draft state after they are transferred.
transferLineItem	The transferLineItems operation transfers one or more entitlement line items from one entitlement to another existing entitlement. Entitlement line items cannot be transferred if there are active fulfillments against them. During the transfer operation, active fulfillments can be returned and new activation IDs can be auto-generated.
unlinkMaintenanceLineItem	The unlinkMaintenanceLineItem operation removes the link between a maintenance line item and a licensed product line item.
updateBulkEntitlement	The updateBulkEntitlement operation modifies one or more bulk entitlements.
updateEntitlementLineItem	The updateEntitlementLineItem updates one or more entitlement line items.
updateSimpleEntitlement	The updateSimpleEntitlement operation modifies one or more simple entitlements.
upgradeLicense	The upgradeLicense operation upgrades one or more entitlement line items.
upsellLicense	The upsellLicense operation upsells one or more entitlement line items. See upgradeLicense .

Method: createBulkEntitlement

Description

The **createBulkEntitlement** operation creates one or more bulk entitlements. To use the Entitlement Order service to create an entitlement, there must be deployed products and license models in the FlexNet Operations database, and there must be organizations in the FlexNet Operations database. You must provide any entitlement-time data that are required by the specified license model.

Parameters

Name	Type	Direction	Description
msgparameters	createBulkEntitlementRequestType	Input	See createBulkEntitlementRequestType .

Returns

A [createBulkEntitlementResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedBulkEntitlementDataListType	Information about the entitlements that were not added is listed in the failedData element. See failedBulkEntitlementDataListType .									
responseData	createdBulkEntitlementDataListType	Information about the entitlements that were added is listed in the responseData element. See createdBulkEntitlementDataListType .									

Method: createEntitlementLineItem

Description

The **createEntitlementLineItem** operation adds one or more entitlement line items to a simple entitlement.

Parameters

Name	Type	Direction	Description
msgparameters	addOnlyEntitlementLineItemRequestType	Input	See addOrReplaceEntitlementLineItemRequestType.

Returns

A [createEntitlementLineItemResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. - FAILURE—None of the items in the request were processed. If the opType is CREATE_OR_IGNORE, then, the operation finds out if the line item was present – if present, it ignores the line item and proceeds with the next line item. If the line item was not present, it will create that item. All items that are ignored will be copied to the responseData of the response. If the opType is CREATE_OR_UPDATE, then the operation updates the line item if present, otherwise creates it. Note: A line item request cannot succeed in the absence of an entitlement request. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. - FAILURE—None of the items in the request were processed. If the opType is CREATE_OR_IGNORE, then, the operation finds out if the line item was present – if present, it ignores the line item and proceeds with the next line item. If the line item was not present, it will create that item. All items that are ignored will be copied to the responseData of the response. If the opType is CREATE_OR_UPDATE, then the operation updates the line item if present, otherwise creates it. Note: A line item request cannot succeed in the absence of an entitlement request.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. - FAILURE—None of the items in the request were processed. If the opType is CREATE_OR_IGNORE, then, the operation finds out if the line item was present – if present, it ignores the line item and proceeds with the next line item. If the line item was not present, it will create that item. All items that are ignored will be copied to the responseData of the response. If the opType is CREATE_OR_UPDATE, then the operation updates the line item if present, otherwise creates it. Note: A line item request cannot succeed in the absence of an entitlement request.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedAddEntitlementLineItemDataListType	See failedAddEntitlementLineItemDataListType .									
responseData	addedEntitlementLineItemDataListType	See addedEntitlementLineItemDataListType .									

Method: createSimpleEntitlement

Description

The **createSimpleEntitlement** operation creates one or more simple entitlements. To use the Entitlement Order service to create an entitlement:

- There must be deployed products and license models in the FlexNet Operations database.
- There must be organizations in the FlexNet Operations database.
- You must provide any entitlement-time data that are required by the specified license model.

Note: Using the `createSimpleEntitlement` operation, it is possible to create a simple entitlement with no line items. Such an entitlement cannot be created through the Administrative Console. One created with web services will not appear in the Administrative Console, though it is saved in the FlexNet Operations database. Therefore, avoid using the `createSimpleEntitlement` operation to create an entitlement with no line items or with only maintenance items.

Parameters

Name	Type	Direction	Description
msgparameters	createSimpleEntitlementRequestType	Input	See createSimpleEntitlementRequestType .

Returns

A [createSimpleEntitlementResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description						
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. When the opType is either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the Entitlement response and the Line Item response together result in the final response. - Both the Entitlement response and the Line Item response must be a success for the final result to be a success. - If one is a success and the other is a failure, the final result is a failure. - If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request. </td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. When the opType is either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the Entitlement response and the Line Item response together result in the final response. - Both the Entitlement response and the Line Item response must be a success for the final result to be a success. - If one is a success and the other is a failure, the final result is a failure. - If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request.
Element	Data Type	Description						
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. When the opType is either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the Entitlement response and the Line Item response together result in the final response. - Both the Entitlement response and the Line Item response must be a success for the final result to be a success. - If one is a success and the other is a failure, the final result is a failure. - If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request.						

Returns

Name	Type	Description						
		<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description						
reason	string	Gives reason for partial failure or failure.						
failedData	failedSimpleEntitlementDataListType	Information about the entitlements that were not added is listed in the failedData element. See failedSimpleEntitlementDataListType .						
responseData	createdSimpleEntitlementDataListType	Information about the entitlements that were added is listed in the responseData element. See createdSimpleEntitlementDataListType .						

Method: createWebRegKey

Description

The **createWebRegKey** operation adds one or more web register keys to one or more bulk entitlements, either asynchronously or synchronously. By default, web register key creation is asynchronous. To use the Entitlement Order service to load web register keys:

There must be bulk entitlements in the FlexNet Operations database.

If web register keys are going to be imported asynchronously, the **Importing Bulk Entitlement Web Register Keys** alert must be configured. See the FlexNet Operations Online Help for instructions. Before checking whether the web register keys were really added, wait until after the import has triggered. With synchronous processing, the Web services client will be blocked until the request is completely processed. Therefore, use synchronous processing to load only for small numbers of web register keys at a time. The **Importing Bulk Entitlement Web Register Keys** alert does not have to be configured to load web register keys synchronously.

Parameters

Name	Type	Direction	Description
msgparameters	addWebRegKeyRequestType	Input	See addWebRegKeyRequestType .

Returns

A [addWebRegKeyResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of web register keys was not scheduled.
		reason	string	Gives reason for partial failure or failure.

Returns

Name	Type	Description
responseData	webRegKeyDataListType	Information about the web register keys that were added is listed in the responseData element. See webRegKeyDataListType . Not populated for asynchronous requests or for requests in which the web register keys are not autogenerated.
failedData	failedAddWebRegKeyDataListType	Information about the web register keys that were not added is listed in the failedData element. See failedAddWebRegKeyDataListType . Not populated for asynchronous requests or for requests in which the web register keys are autogenerated.

Method: deleteEntitlement

Description

The **deleteEntitlement** operation deletes one or more entitlements.

Parameters

Name	Type	Direction	Description
msgparameters	deleteEntitlementRequestType	Input	See deleteEntitlementRequestType .

Returns

A [deleteEntitlementResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteEntitlementDataListType	Information about the entitlements that were not deleted is listed in the failedData element. See failedDeleteEntitlementDataListType .									

Method: deleteEntitlementLineItem

Description

The **deleteEntitlementLineItem** operation deletes one or more line items.

Parameters

Name	Type	Direction	Description
msgparameters	removeEntitlementLineItemRequestType	Input	See removeEntitlementLineItemRequestType .

Returns

A [removeEntitlementLineItemResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedRemoveEntitlementLineItemDataListType	Information about the entitlements that were not deleted is listed in the failedData element. See failedRemoveEntitlementLineItemDataListType .									

Method: deleteMaintenanceLineItem

Description

The **deleteMaintenanceLineItem** operation deletes one or more maintenance line items. A maintenance item cannot be deleted if it is linked to another line item or is deployed

Parameters

Name	Type	Direction	Description
msgparameters	deleteMaintenanceLineItemRequestType	Input	See deleteMaintenanceLineItemRequestType .

Returns

A [deleteMaintenanceLineItemResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteMaintenanceLineItemDataListType	Information about the maintenance line items that were not deleted is listed in the failedData element. See failedDeleteMaintenanceLineItemDataListType .									

Method: deleteWebRegKey

Description

The **deleteWebRegKey** operation deletes one or more unredeemed web register keys from one or more bulk entitlements. To use the Entitlement Order service to delete web register keys there must be unredeemed web register keys in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	deleteWebRegKeyRequestType	Input	See deleteWebRegKeyRequestType .

Returns

A [deleteWebRegKeyResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of web register keys was not scheduled.
		reason	string	Gives reason for partial failure or failure.

Returns

Name	Type	Description
failedData	failedDeleteWebRegKeyListType	Information about the web register keys that were not deleted is listed in the failedData element. See failedDeleteWebRegKeyListType .

Method: emailActivatableItem

Description

The **emailActivatableItem** operation sends an entitlement certificate for a single activatable item via email. To send an entitlement certificate for an activatable item as an email attachment using the Entitlement Order service:

- Configure the from-address for the entitlement email. See the *FlexNet Operations Installation Guide*.
- Customize the entitlement email template and entitlement certificate template, if necessary. See the *FlexNet Operations Producer Portal Help Guide*.
- An activation ID for an activatable item must exist in the database.
- At least one email address must be provided.

Parameters

Name	Type	Direction	Description
msgparameters	emailActivatableItemRequestType	Input	See emailActivatableItemRequestType .

Returns

A [emailActivatableItemResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									

Method: emailEntitlement

Description

The **emailEntitlement** operation sends an entitlement certificate via email. To send an entitlement certificate as an email attachment using the Entitlement Order service:

- Configure the from-address for the entitlement email. See the *FlexNet Operations Installation Guide*.
- Customize the entitlement email template and entitlement certificate template, if necessary. See the *FlexNet Operations Producer Portal Help Guide*.
- An ID for an entitlement must exist in the database.
- At least one email address must be provided.

Parameters

Name	Type	Direction	Description
msgparameters	emailEntitlementRequestType	Input	See emailEntitlementRequestType .

Returns

A [emailEntitlementResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									

Method: getActivatableItemCount

Description

The **getActivatableItemCount** operation returns the number of activatable line items that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getActivatableItemCountRequestType	Input	See getActivatableItemCountRequestType .

Returns

A [getActivatableItemCountResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
count	integer	Number of activatable items that matched the specified criteria.									

Method: getActivatableItemsQuery

Description

The **getActivatableItemsQuery** operation returns the activatable line items that match specified criteria.

Note: This operation does not return maintenance line items.

Parameters

Name	Type	Direction	Description
msgparameters	searchActivatableItemRequestType	Input	See searchActivatableItemRequestType .

Returns

A [searchActivatableItemResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
activatableItem	activatableItemDetailType	See activatableItemDetailType .									

Method: getBulkEntitlementCount

Description

The **getBulkEntitlementCount** operation returns the number of bulk entitlements that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getBulkEntitlementCountRequestType	Input	See getBulkEntitlementCountRequestType .

Returns

A [getBulkEntitlementCountResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
count	integer	Number of bulk entitlements matching the specified criteria.									

Method: getBulkEntitlementPropertiesQuery

Description

The **getBulkEntitlementPropertiesQuery** operation returns the bulk entitlement details that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getBulkEntitlementPropertiesRequestType	Input	See getBulkEntitlementPropertiesRequestType .

Returns

A [getBulkEntitlementPropertiesResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
bulkEntitlement	bulkEntitlementPropertiesType	See bulkEntitlementPropertiesType .									

Method: getEntitlementAttributesFromModel

Description

The **getEntitlementAttributesFromModel** operation returns all the license model attributes for the specified model that must be specified at the time the entitlement is created.

Parameters

Name	Type	Direction	Description
msgparameters	getEntitlementAttributesRequestType	Input	See getEntitlementAttributesRequestType .

Returns

A [getEntitlementAttributesResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
entitlementAttributes	attributeMetaDescriptorDataType	A list of license model attributes that are set at entitlement time are contained in the entitlementAttributes element. See attributeMetaDescriptorDataType .									
policyAttributes	policyAttributesDataType	A list of policy attributes that are set at entitlement time are contained in the policyAttributes element. See policyAttributesDataType .									
needTimeZone	boolean	True if the license model includes the TZ keyword and allows it to be set at entitlement time; otherwise, false.									

Method: getEntitlementCount

Description

The **getEntitlementCount** operation returns the number of entitlements that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getEntitlementCountRequestType	Input	See getEntitlementCountRequestType .

Returns

A [getEntitlementCountResponse](#) element having the structure defined by the following table.

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.
		reason	string	Gives reason for partial failure or failure.
count	integer	Number of entitlements matching the specified criteria.		

Method: getEntitlementLineItemPropertiesQuery

Description

The **getEntitlementLineItemPropertiesQuery** operation returns all entitlement line items and web register keys based on the provided search criteria, including draft entries.

This operation works similarly to the operation `getActivatableItemsQuery`. However, the response from

Description

getEntitlementLineItemPropertiesQuery is highly configurable. You can use it to select only the data you need in a given response.

Note: With this query, maintenance line items will not be returned if the product type Maintenance is used in the search criteria. Associated maintenance line items can be obtained by using the new response configuration element maintenance.

Use caution when crafting queries that may return excessive numbers of responses. The following error, ORA-01795: maximum number of expressions in a list is 1000, has been seen when performing searches via FlexNet Operations landing pages or web service queries when:

1. FlexNet Operations is connected to an Oracle database
2. Certain types of searches in the UI or web services return > 1000 items, for example, the entitlements or line item landing pages and getEntitlementsQuery or getEntitlementLineItemPropertiesQuery.

If the error is seen in the FlexNet Operations UI, consider setting the Entitlement Records per Page and Line Items Page Size per Entitlement settings to 1000 or less. If the error is seen in a web service query, set the batch size to 1000 or less and page through the results.

Parameters

Name	Type	Direction	Description
msgparameters	searchEntitlementLineItemPropertiesRequestType	Input	See searchEntitlementLineItemPropertiesRequestType .

Returns

A [searchEntitlementLineItemPropertiesResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
entitlementLineItem	entitlementLineItemPropertiesType	See entitlementLineItemPropertiesType .									

Method: getEntitlementsQuery

Description

The **getEntitlementsQuery** operation returns the entitlements that match specified criteria.

Tip:For more optimal memory usage, consider using *getActivatableItemsQuery* instead of *getEntitlementsQuery* to retrieve policy information for a particular line item. *getActivatableItemsQuery* loads only the information for the specified activation while *getEntitlementsQuery* loads information for all the activations for a given EntitlementID. See [getActivatableItemsQuery](#).

Parameters

Name	Type	Direction	Description
msgparameters	searchEntitlementRequestType	Input	See searchEntitlementRequestType .

Returns

A [searchEntitlementResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
entitlement	entitlementDataType	See entitlementDataType .									

Method: getExactAvailableCount

Description

The **getExactAvailableCount** operation provides the exact, current available count for a specified line item. This operation allows users to obtain a potentially more precise count than those available in the administrative console UI or via other web service operations.

The FlexNet Operations UI and other web service operations do not evaluate the count of available copies when an upgrade is created. Therefore it is possible to create an upgrade count that exceeds the number of available copies; however, the count is evaluated at fulfillment time. On fulfillment, upgrades that exceed the available count are rejected. To avoid errors at fulfillment time, users may use **getExactAvailableCount**, which returns exact number of copies available for an upgrade fulfillment, for example, without having to return any previous fulfillments.

Parameters

Name	Type	Direction	Description
msgparameters	getExactAvailableCountRequestType	Input	See getExactAvailableCountRequestType .

Returns

A [getExactAvailableCountResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
count	integer	The exact available count for the line item requested.									

Method: getMatchingBulkEnts

Description

The **getMatchingBulkEnts** operation returns bulk entitlements suitable to receive the web register keys from a splitBulkEntitlement operation. The getMatchingBulkEnts operation searches for bulk entitlements with the target organization in the target tier that match the bulk entitlement you want to split. Any bulk entitlement returned by this operation can receive the web register keys as the result of the split operation.

To be considered a match, the bulk entitlement that is the target of the split must share the following attributes with the bulk entitlement that is the source of the split:

Description

- Orderable
- License model
- License term (permanent, expiration date, duration)
- Version date details (options, date, duration)
- Line item state
- License model policies
- License model attributes

Parameters

Name	Type	Direction	Description
msgparameters	getMatchingBulkEntsRequestType	Input	See getMatchingBulkEntsRequestType .

Returns

A [getMatchingBulkEntsResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getMatchingBulkEntsResponseListType	Information about bulk entitlements in the target organization that match the bulk entitlement you plan to split is listed in the responseData element. See getMatchingBulkEntsResponseListType .									
failedData	failedMatchingBulkEntsListType	Information about the bulk entitlement that could not be matched to bulk entitlements in the target organization is in the failedData element. See failedMatchingBulkEntsListType .									

Method: getMatchingLineItems

Description

The **getMatchingLineItems** operation returns line items suitable to receive the count from a **splitLineItem** operation. The **getMatchingLineItems** operation searches for entitlement line items in entitlements with the target organization in the target tier that match the line item you want to split. Any line item returned by this operation can receive the counts as the result of the split operation.

To be considered a matching line item, the line item that is the target of the split must share the following attributes with the line item that is the source of the split:

- Orderable
- License model

Description

- License term (permanent, expiration date, duration)
- Version date details (options, date, duration)
- Line item state
- License model policies
- License model attributes

Note: If the source line item has a parent line item, then the entire ancestor tree is scanned to ensure that the parent line items of the target line item also match.

Parameters

Name	Type	Direction	Description
msgparameters	getMatchingLineItemsRequestType	Input	See getMatchingLineItemsRequestType .

Returns

A [getMatchingLineItemsResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getMatchingLineItemsResponseListType	Information about entitlement line items in the target organization that match the line item you plan to split is listed in the responseData element. See getMatchingLineItemsResponseListType .									
failedData	failedMatchingLineItemsListType	Information about the entitlement line item that could not be matched to line items in the target organization is in the failedData element. See Table failedMatchingLineItemsListType .									

Method: getStateChangeHistory

Description

The **getStateChangeHistory** operation gets the state change history of one or more features, feature bundles, products, license models, or entitlements.

Parameters

Name	Type	Direction	Description
msgparameters	getStateChangeHistoryRequestType	Input	See getStateChangeHistoryRequestType .

Returns

A [getStateChangeHistoryResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	stateChangeResponseType	See stateChangeResponseType .									

Method: getWebRegKeyCount

Description

The **getWebRegKeyCount** operation returns the number of web register keys associated with a specified bulk entitlement.

Parameters

Name	Type	Direction	Description
msgparameters	getWebRegKeyCountRequestType	Input	See getWebRegKeyCountRequestType .

Returns

A [getWebRegKeyCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of web register keys was not scheduled.
		reason	string	Gives reason for partial failure or failure.

Returns

Name	Type	Description
responseData	webRegKeyCountDataType	See webRegKeyCountDataType .

Method: getWebRegKeysQuery

Description

The **getWebRegKeysQuery** operation returns the part numbers that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getWebRegKeysQueryRequestType	Input	See getWebRegKeysQueryRequestType .

Returns

A [getWebRegKeysQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description		
statusInfo	StatusInfoType	Element	Data Type	Description
		status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was asynchronous, FAILURE means that the import request of web register keys was not scheduled.
		reason	string	Gives reason for partial failure or failure.

Returns

Name	Type	Description
responseData	webRegKeysDataListType	See webRegKeysDataListType .

Method: linkMaintenanceLineItem

Description

The **linkMaintenanceLineItem** operation is used to link a maintenance line item to a licensed product line item. As in the Administrative Console, there does not need to be an explicitly specified product-maintenance relationship between the licensed product and maintenance product on these line items.

Parameters

Name	Type	Direction	Description
msgparameters	linkMaintenanceLineItemRequestType	Input	See linkMaintenanceLineItemRequestType .

Returns

A [linkMaintenanceLineItemResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedLinkMaintenanceLineItemListItemType	See failedLinkMaintenanceLineItemListItemType .									

Method: mapEntitlementsToUser

Description

The **mapEntitlementsToUser** operation maps one or more entitlement IDs or activation IDs to a self-registered Portal user or maps one or more web register keys to a user from a customer organization. To use the Entitlement Order service to map entitlement IDs or activation IDs to a user, there must be entitlements in the FlexNet Operations database as well as a self-registered Portal user or customer user in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	mapEntitlementsToUserRequestType	Input	See mapEntitlementsToUserRequestType .

Returns

A [mapEntitlementsToUserResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedMapEntitlementsToUserDataListType	Information about the IDs that were not mapped to the user is listed in the failedData element. See failedMapEntitlementsToUserDataListType .									

Method: mergeEntitlements

Description

The **mergeEntitlements** operation merges assets of one organization with those of another organization. The following types of assets can be merged:

- Entitlements and fulfillments—The state of the transferred entitlements and fulfillments are preserved during the merge.
- Users

Parameters

Name	Type	Direction	Description
msgparameters	mergeEntitlementsRequestType	Input	See mergeEntitlementsRequestType .

Returns

A [mergeEntitlementsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									

Method: renewLicense

Description

The **renewLicense** operation renews one or more entitlement line items.

Parameters

Name	Type	Direction	Description
msgparameters	renewEntitlementRequestType	Input	See renewEntitlementRequestType .

Returns

A [renewLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedRenewEntitlementDataListType	Information about the entitlements that were not renewed is listed in the failedData element. See failedRenewEntitlementDataListType .									
responseData	createdRenewEntitlementDataListType	Information about the entitlements that were renewed is listed in the responseData element. See createdRenewEntitlementDataListType .									

Method: replaceEntitlementLineItem

Description

The **replaceEntitlementLineItem** operation replaces one or more entitlement line items.

Parameters

Name	Type	Direction	Description
msgparameters	replaceOnlyEntitlementLineItemRequestType	Input	See addOrReplaceEntitlementLineItemRequestType .

Returns

A [replaceEntitlementLineItemResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedAddEntitlementLineItemDataListType	See failedAddEntitlementLineItemDataListType .									
responseData	addedEntitlementLineItemDataListType	See addedEntitlementLineItemDataListType .									

Method: setEntitlementState

Description

The **setEntitlementState** operation sets the state of one or more entitlements.

Parameters

Name	Type	Direction	Description
msgparameters	setEntitlementStateRequestType	Input	See setEntitlementStateRequestType .

Returns

A [setEntitlementStateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedEntitlementStateDataListType	Information about the entitlements whose state was not set is listed in the failedData element. See failedEntitlementStateDataListType .									

Method: setLineItemState

Description

The **setLineItemState** operation sets the state of one or more entitlement line items.

Parameters

Name	Type	Direction	Description
msgparameters	setLineItemStateRequestType	Input	See setLineItemStateRequestType .

Returns

A [setLineItemStateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedLinItemStateDataListType	Information about the line items whose state was not set is listed in the failedData element. See failedLinItemStateDataListType .									

Method: setMaintenanceLinItemState

Description

The **setMaintenanceLinItemState** operation sets the state of a maintenance line item.

Parameters

Name	Type	Direction	Description
msgparameters	setMaintenanceLinItemStateRequestType	Input	See setMaintenanceLinItemStateRequestType .

Returns

A [setMaintenanceLinItemStateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description
statusInfo	StatusInfoType	Returns one of the following: • SUCCESS—The request was processed. • FAILURE—The request was not processed.
failedMaintenanceData	failedMaintenanceLineItemStateDataListType	See failedMaintenanceLineItemStateDataListType .

Method: splitBulkEntitlement

Description

The **splitBulkEntitlement** operation assigns a specified number of unredeemed web register keys to a related organization in a different distribution tier. The web register keys that are split can be transferred to:

- A compatible existing bulk entitlement (transfers the web register keys to that bulk entitlement).
- An existing line item that has been redeemed from a compatible web register key (adds the counts from the transferred web register keys to the count of the line item).
- A new bulk entitlement.

Only publisher users, or channel partner users with sufficient privileges in the organization that is the current owner, can perform a splitBulkEntitlement operation.

Note: You cannot control the specific web register keys that splitBulkEntitlement transfers.

Parameters

Name	Type	Direction	Description
msgparameters	splitBulkEntitlementRequestType	Input	See splitBulkEntitlementRequestType .

Returns

A [splitBulkEntitlementResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	splitBulkEntitlementResponseListType	Information about the bulk entitlement that was split, and optionally the bulk entitlement to which the split web register keys went, is listed in the responseData element. See splitBulkEntitlementResponseListType .									
failedData	failedSplitBulkEntitlementListType	Information about an entitlement line item that was not split is listed in the failedData element. See failedSplitBulkEntitlementListType .									

Method: splitLineItem

Description

The **splitLineItem** operation assigns some portion of an entitlement line item's count from the current owner to a related organization in a different distribution tier. This operation can either increase the count of an existing entitlement line item at the target organization or create a new entitlement, if no matching entitlements exist at the target organization. Only publisher users, or channel partner users with sufficient privileges in the organization that is the current owner, can perform a **splitLineItem** operation.

Note: When a line item associated with a maintenance is split, the maintenance is also split. Likewise, when a new entitlement is created as the result of a split, a new maintenance is created and associated with the new entitlement.

Parameters

Name	Type	Direction	Description
msgparameters	splitLineItemRequestType	Input	See splitLineItemRequestType .

Returns

A [splitLineItemResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	splitLineItemResponseListType	Information about the entitlement line item that was split, and optionally the entitlement to which the split counts went, is listed in the responseData element. See splitLineItemResponseListType .									
failedData	failedSplitLineItemListType	Information about an entitlement line item that was not split is listed in the failedData element. See failedSplitLineItemListType .									

Method: transferEntitlement

Description

The **transferEntitlement** operation transfers one or more entitlements to an organization different from the original sold-to organization. Entitlements cannot be transferred if there are active fulfillments against the entitlement. During the transfer

Description

operation, active fulfillments can be returned and new entitlement and activation IDs can be auto-generated. Entitlements are in the draft state after they are transferred.

Parameters

Name	Type	Direction	Description
msgparameters	transferEntitlementsRequestType	Input	See transferEntitlementsRequestType

Returns

A [transferEntitlementsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	transferredEntitlementsListType	Information about the entitlements that were transferred is listed in the responseData element. See transferredEntitlementsListType .									
failedData	failedTransferEntitlementListType	Information about the entitlements that were not added is listed in the failedData element. See failedTransferEntitlementListType .									

Method: transferLineItem

Description

The **transferLineItems** operation transfers one or more entitlement line items from one entitlement to another existing entitlement. Entitlement line items cannot be transferred if there are active fulfillments against them. During the transfer operation, active fulfillments can be returned and new activation IDs can be auto-generated.

Parameters

Name	Type	Direction	Description
msgparameters	transferLineItemsRequestType	Input	See transferLineItemsRequestType .

Returns

A [transferLineItemsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	transferredLineItemsListType	Information about the entitlements that were transferred is listed in the responseData element. See transferredLineItemsListType .									
failedData	failedTransferLineItemListType	Information about the entitlements that were not added is listed in the failedData element. See failedTransferLineItemListType .									

Method: unlinkMaintenanceLineItem

Description

The **unlinkMaintenanceLineItem** operation removes the link between a maintenance line item and a licensed product line item.

Parameters

Name	Type	Direction	Description
msgparameters	unlinkMaintenanceLineItemRequestType	Input	See unlinkMaintenanceLineItemRequestType .

Returns

A [unlinkMaintenanceLineItemResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUnlinkMaintenanceLineItemListType	See failedUnlinkMaintenanceLineItemListType .									

Method: updateBulkEntitlement

Description

The **updateBulkEntitlement** operation modifies one or more bulk entitlements.

Parameters

Name	Type	Direction	Description
msgparameters	updateBulkEntitlementRequestType	Input	See updateBulkEntitlementRequestType .

Returns

A [updateBulkEntitlementResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateBulkEntitlementDataListType	Information about the entitlements that were not updated is listed in the failedData element. See failedUpdateBulkEntitlementDataListType .									

Method: updateEntitlementLineItem

Description

The **updateEntitlementLineItem** updates one or more entitlement line items.

Parameters

Name	Type	Direction	Description
msgparameters	updateEntitlementLineItemRequestType	Input	See updateEntitlementLineItemRequestType .

Returns

A [updateEntitlementLineItemResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateEntitlementLineItemDataListType	Information about the line items that were not updated is listed in the failedData element. See failedUpdateEntitlementLineItemDataListType .									

Method: updateSimpleEntitlement

Description

The **updateSimpleEntitlement** operation modifies one or more simple entitlements.

Parameters

Name	Type	Direction	Description
msgparameters	updateSimpleEntitlementRequestType	Input	See updateSimpleEntitlementRequestType .

Returns

A [updateSimpleEntitlementResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateSimpleEntitlementDataListType	Information about the entitlements that were not updated is listed in the failedData element. See failedUpdateSimpleEntitlementDataListType .									

Method: upgradeLicense

Description

The **upgradeLicense** operation upgrades one or more entitlement line items.

Parameters

Name	Type	Direction	Description
msgparameters	EntitlementLifeCycleRequestType	Input	See EntitlementLifeCycleRequestType .

Returns

A [upgradeLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedEntitlementLifeCycleDataListType	Information about the entitlements that were not upgraded is listed in the failedData element. See failedEntitlementLifeCycleDataListType .									
responseData	createdEntitlementLifeCycleDataListType	Information about the entitlements that were upgraded is listed in the responseData element. See createdEntitlementLifeCycleDataListType .									

Method: upsellLicense

Description

The **upsellLicense** operation upsells one or more entitlement line items. See [upgradeLicense](#).

Parameters

Name	Type	Direction	Description
msgparameters	EntitlementLifeCycleRequestType	Input	See EntitlementLifeCycleRequestType .

Returns

A [upsellLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedEntitlementLifeCycleDataListType	Information about the entitlements that were not upgraded is listed in the failedData element. See failedEntitlementLifeCycleDataListType .									
responseData	createdEntitlementLifeCycleDataListType	Information about the entitlements that were upgraded is listed in the responseData element. See createdEntitlementLifeCycleDataListType .									

Complex Types: EntitlementOrderService

Complex Types

Name
accountIdentifierType
accountPKType
acpiGenerationIdLicensePolicyDataType
activatableItemDetailType
addedEntitlementLineItemDataListType
addedEntitlementLineItemDataType
addEntitlementLineItemDataType
addOnlyEntitlementLineItemRequestType
addOnlyEntitlementLineItemResponseType
addressDataType
addWebRegKeyDataType
addWebRegKeyRequestType
addWebRegKeyResponseType
advancedReinstallPolicyType
attributeDescriptorDataType
attributeDescriptorType
attributeMetaDescriptorDataType
attributeMetaDescriptorType
bulkEntitlementDataType
bulkEntitlementPropertiesType
bulkEntitlementResponseConfigRequestType
cancelLicensePolicyDataType
channelPartnerDataListType
channelPartnerDataType
correlationDataType
createBulkEntitlementDataType
createBulkEntitlementRequestType
createBulkEntitlementResponseType
createdBulkEntitlementDataListType
createdBulkEntitlementDataType
createdEntitlementLifeCycleDataListType
createdEntitlementLifeCycleDataType
createdRenewEntitlementDataListType
createdRenewEntitlementDataType

Complex Types

Name
createdSimpleEntitlementDataListType
createdSimpleEntitlementDataType
createEntitlementLineItemDataType
createMaintenanceLineItemDataType
createSimpleEntitlementDataType
createSimpleEntitlementRequestType
createSimpleEntitlementResponseType
customAttributeDescriptorType
customAttributeQueryType
customAttributesQueryListType
deleteEntitlementDataType
deleteEntitlementRequestType
deleteEntitlementResponseType
deleteMaintenanceLineItemDataType
deleteMaintenanceLineItemRequestType
deleteMaintenanceLineItemResponseType
deleteWebRegKeyRequestType
deleteWebRegKeyResponseType
DurationType
emailActivatableItemRequestType
emailActivatableItemResponseType
emailContactListType
emailEntitlementRequestType
emailEntitlementResponseType
entCustomAttributeQueryType
entCustomAttributesQueryListType
entitledProductDataListType
entitledProductDataType
entitlementDataType
entitlementIdentifierType
entitlementLifeCycleDataType
EntitlementLifeCycleRequestType
EntitlementLifeCycleResponseType
entitlementLineItemDataType
entitlementLineItemIdentifierType

Complex Types

Name
entitlementLineItemPropertiesType
entitlementLineItemResponseConfigRequestType
entitlementListType
entitlementStateChangeDataType
entitlementStateChangeListType
entitlementStateDataType
expirationTermsDataType
extraActivationDataType
failedAddEntitlementLineItemDataListType
failedAddEntitlementLineItemDataType
failedAddWebRegKeyDataListType
failedAddWebRegKeyDataType
failedBulkEntitlementDataListType
failedBulkEntitlementDataType
failedDeleteEntitlementDataListType
failedDeleteEntitlementDataType
failedDeleteMaintenanceLineItemDataListType
failedDeleteMaintenanceLineItemDataType
failedDeleteWebRegKeyDataType
failedDeleteWebRegKeyListType
failedEntitlementLifeCycleDataListType
failedEntitlementLifeCycleDataType
failedEntitlementStateDataListType
failedEntitlementStateDataType
failedIdDataType
failedLineItemStateDataListType
failedLineItemStateDataType
failedLinkMaintenanceLineItemDataType
failedLinkMaintenanceLineItemListType
failedMaintenanceLineItemStateDataListType
failedMaintenanceLineItemStateDataType
failedMapEntitlementsToUserDataListType
failedMatchingBulkEntDataType
failedMatchingBulkEntsListType
failedMatchingLineItemDataType

Complex Types

Name
failedMatchingLineItemsListType
failedRemoveEntitlementLineItemDataListType
failedRemoveEntitlementLineItemDataType
failedRenewEntitlementDataListType
failedRenewEntitlementDataType
failedSimpleEntitlementDataListType
failedSimpleEntitlementDataType
failedSplitBulkEntitlementDataType
failedSplitBulkEntitlementListType
failedSplitLineItemDataType
failedSplitLineItemListType
failedTransferEntitlementDataType
failedTransferEntitlementListType
failedTransferLineItemDataType
failedTransferLineItemListType
failedUnlinkMaintenanceLineItemDataType
failedUnlinkMaintenanceLineItemListType
failedUpdateBulkEntitlementDataListType
failedUpdateBulkEntitlementDataType
failedUpdateEntitlementLineItemDataListType
failedUpdateEntitlementLineItemDataType
failedUpdateSimpleEntitlementDataListType
failedUpdateSimpleEntitlementDataType
featureBundleIdentifierType
featureBundleListType
featureBundleStateChangeDataType
featureBundleStateChangeListType
featureIdentifierType
featureListType
featureStateChangeDataType
featureStateChangeListType
fulfillmentIdentifierType
getActivatableItemCountRequestType
getActivatableItemCountResponseType
getBulkEntitlementCountRequestType

Complex Types

Name
getBulkEntitlementCountResponseType
getBulkEntitlementPropertiesRequestType
getBulkEntitlementPropertiesResponseType
getEntitlementAttributesRequestType
getEntitlementAttributesResponseType
getEntitlementCountRequestType
getEntitlementCountResponseType
getExactAvailableCountRequestType
getExactAvailableCountResponseType
getMatchingBulkEntInfoType
getMatchingBulkEntsListType
getMatchingBulkEntsRequestType
getMatchingBulkEntsResponseListType
getMatchingBulkEntsResponseType
getMatchingLineItemInfoType
getMatchingLineItemsListType
getMatchingLineItemsRequestType
getMatchingLineItemsResponseListType
getMatchingLineItemsResponseType
getStateChangeHistoryRequestType
getStateChangeHistoryResponseType
getWebRegKeyCountRequestType
getWebRegKeyCountResponseType
getWebRegKeysQueryRequestType
getWebRegKeysQueryResponseType
hostTypePKType
idListType
idType
licenseGeneratorIdentifierType
licenseModelIdentifierType
licenseModelListType
licenseModelStateChangeDataType
licenseModelStateChangeListType
licenseTechnologyIdentifierType
licenseTechnologyPKType

Complex Types

Name
lifeCycleLineItemDataType
lineItemCustomAttributeQueryType
lineItemCustomAttributesQueryListType
lineItemLifeCycleDataType
lineItemStateDataType
linkMaintenanceLineItemDataType
linkMaintenanceLineItemListType
linkMaintenanceLineItemRequestType
linkMaintenanceLineItemResponseType
maintenanceIdentifierType
maintenanceLineItemDataType
maintenanceLineItemPropertiesType
maintenanceLineItemStateDataType
mapEntitlementsToUserRequestType
mapEntitlementsToUserResponseType
matchingBulkEntDataType
matchingLineItemDataType
mergeEntitlementsRequestType
mergeEntitlementsResponseType
newEntitlementLineItemDataType
organizationIdentifierType
organizationPKType
OrgTypeList
PartnerTierQueryType
partNumberIdentifierType
partNumberIdentifierWithModelType
partNumberPKType
policyAttributesDataType
policyAttributesListType
policyTermType
productIdentifierType
productIdentifierWithCountDataType
productListType
productPKType
productStateChangeDataType

Complex Types

Name
productStateChangeListType
reinstallPolicyDataType
removeEntitlementLineItemDataType
removeEntitlementLineItemRequestType
removeEntitlementLineItemResponseType
renewedEntitlementLineItemDataType
renewEntitlementDataType
renewEntitlementRequestType
renewEntitlementResponseType
renewLineItemDataType
renewParametersDataType
replaceOnlyEntitlementLineItemRequestType
replaceOnlyEntitlementLineItemResponseType
roleIdentifierType
rolePKType
searchActivatableItemDataType
searchActivatableItemRequestType
searchActivatableItemResponseType
searchBulkEntitlementDataType
searchEntitlementDataType
searchEntitlementLineItemPropertiesRequestType
searchEntitlementLineItemPropertiesResponseType
searchEntitlementRequestType
searchEntitlementResponseType
setEntitlementStateRequestType
setEntitlementStateResponseType
setLineItemStateRequestType
setLineItemStateResponseType
setMaintenanceLineItemStateRequestType
setMaintenanceLineItemStateResponseType
simpleEntitlementDataType
splitBulkEntitlementDataType
splitBulkEntitlementInfoType
splitBulkEntitlementListType
splitBulkEntitlementRequestType

Complex Types

Name
splitBulkEntitlementResponseListType
splitBulkEntitlementResponseType
splitLineItemDataType
splitLineItemInfoType
splitLineItemListType
splitLineItemRequestType
splitLineItemResponseListType
splitLineItemResponseType
stateChangeDataType
stateChangeResponseType
suitIdentifierType
transferEntitlementInfoType
transferEntitlementsListType
transferEntitlementsRequestType
transferEntitlementsResponseType
transferLineItemInfoType
transferLineItemsListType
transferLineItemsRequestType
transferLineItemsResponseType
transferredEntitlementDataType
transferredEntitlementsListType
transferredLineItemDataType
transferredLineItemMapType
transferredLineItemsListType
trustedKeyIdentifierType
unlinkMaintenanceLineItemDataType
unlinkMaintenanceLineItemListType
unlinkMaintenanceLineItemRequestType
unlinkMaintenanceLineItemResponseType
updateBulkEntitlementDataType
updateBulkEntitlementRequestType
updateBulkEntitlementResponseType
updateEntitledProductDataListType
updateEntitlementLineItemDataType
updateEntitlementLineItemRequestType

Complex Types

Name
updateEntitlementLineItemResponseType
updateLineItemDataType
updateMaintenanceLineItemDataType
updateSimpleEntitlementDataType
updateSimpleEntitlementRequestType
updateSimpleEntitlementResponseType
userIdentifierType
userPKType
versionDateAttributesType
VersionFormatQueryType
virtualLicensePolicyDataType
webRegKeyCountDataType
webRegKeyDataListType
webRegKeyDataType
webRegKeysDataListType
webRegKeysListType

Complex Type: accountIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	
primaryKeys	accountPKType	0..1	

Complex Type: accountPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	

Complex Type: acpiGenerationIdLicensePolicyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
useACPIGenerationId	boolean	1..1	True—Deny trusted storage license repair if the ACPI Generation ID has changed. False—Allow trusted storage license repair even if the ACPI Generation ID has changed. Default. Note: By default, the FlexNet Operations UI takes the ACPI generation ID into account when evaluating repair requests. This policy is set at either the license model or entitlement level using the configuration for the Virtualization Policy. Web service clients can be made to match the FlexNet Operations UI by setting useACPIGenerationId to reflect the configuration in the UI.

Complex Type: activatableItemDetailType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
activatableItemType	ActivatableItemType	1..1	LINEITEM or WEBREGKEY
parentBulkEntitlementId	string	0..1	If the activatable line item is on a simple entitlement that was created when a web register key was redeemed, this is the entitlement ID of the bulk entitlement into which the web register key was loaded.
entitlementId	string	1..1	Entitlement ID of the entitlement that contains the activatable entitlement line item.
soldTo	string	1..1	Optional. Organization that has the right to fulfill or distribute activation IDs from this entitlement. Deprecated in favor of the channelPartners element.
shipToEmail	string	0..1	Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Postal address for the sold-to organization.
entitlementState	StateType	0..1	One of the following: • TEST • DRAFT • DEPLOYED • INACTIVE • ON_HOLD • OBSOLETE
activatableItemData	entitlementLineItemDataType	1..1	Details of the entitlement line item. See entitlementLineItemDataType .
channelPartners	channelPartnerDataListType	0..1	Optional. Either soldTo or channelPartners must be specified. If neither soldTo nor channelPartners specifies an end customer, FlexNet Operations shows the End Customer organization name as <i>Information Not Available</i> , and Current Owner is not set. See channelPartnerDataListType .
entitlementAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: addedEntitlementLineItemDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
addedLineItems	addedEntitlementLineItemDataType	0..*	Contains one or more addedLineItems elements. See addedEntitlementLineItemDataType .

Complex Type: addedEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	See entitlementIdentifierType .
lineItemUniqueIds	string	0..*	Array of activation IDs for added activatable line items.
maintenanceLineItemUniqueIds	string	0..*	Array of activation IDs for added maintenance line items.
lineItemIdentifiers	entitlementLineItemIdentifierType	0..*	Includes unique ID of line items and activation ID of created line items.
maintenanceLineItemIdentifiers	entitlementLineItemIdentifierType	0..*	Includes unique ID of maintenance line items and activation ID of created maintenance line items.

Complex Type: addEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .

Content Model

Component	Type	Occurs	Description
lineltems	createEntitlementLinelt emDataType	0..*	If the activation IDs already exist, the line items will be replaced. See createEntitlementLineltItemDataType .
maintenanceLineltms	createMaintenanceLinelt emDataType	0..*	If the activation IDs already exist, the line items will be replaced. See createMaintenanceLineltItemDataType .
autoDeploy	boolean	0..1	Whether to deploy this line item as soon as it is created or replaced.

Complex Type: addOnlyEntitlementLineltItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineltItem	addEntitlementLineltItemD ataType	1..*	See addEntitlementLineltItemDataType .
opType	CreateOrUpdateOperatio nType	0..1	One of the following: • CREATE_OR_UPDATE • CREATE_OR_IGNORE Note: If the opType is specified as either CREATE_OR_IGNORE or CREATE_OR_UPDATE, then specifying the entitlement identifier is important. If the entitlement identified by the entitlementIdentifier is not found, then the response could be a FAILURE. If the opType is set to CREATE_OR_UPDATE and the line item identifier exists, the system will try to handle the request as an update. Updates to the associatedLineltms and lineltItemType will be ignored.

Referenced By

Name	Type
createEntitlementLineltItemRequest	Element

Referenced By

Name	Type
createEntitlementLineItem	Method

Complex Type: addOnlyEntitlementLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. • FAILURE—None of the items in the request were processed. If the opType is CREATE_OR_IGNORE , then, the operation finds out if the line item was present – if present, it ignores the line item and proceeds with the next line item. If the line item was not present, it will create that item. All items that are ignored will be copied to the responseData of the response. If the opType is CREATE_OR_UPDATE , then the operation updates the line item if present, otherwise creates it. Note: A line item request cannot succeed in the absence of an entitlement request.
			reason	string	Gives reason for partial failure or failure.

Content Model

Component	Type	Occurs	Description
failedData	failedAddEntitlementLineItemDataListType	0..1	See failedAddEntitlementLineItemDataListType .
responseData	addedEntitlementLineItemDataListType	0..1	See addedEntitlementLineItemDataListType .

Referenced By

Name	Type
createEntitlementLineItemResponse	Element

Complex Type: addressDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
address1	string	0..1	First line of address.
address2	string	0..1	Second line of address.
city	string	0..1	City portion of address.
state	string	0..1	State portion of address.
zipcode	string	0..1	Postal code.
country	string	0..1	Country, in two-letter ISO-3166 code. If not provided, defaults to US.
region	string	0..1	Address region.

Complex Type: addWebRegKeyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlement	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
webRegKeys	webRegKeyDataType	1..1	Required. See webRegKeyDataType .

Complex Type: addWebRegKeyRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKeyData	addWebRegKeyDataType	1..*	Required. An addWebRegKeyRequest contains an array of webRegKeyData elements to be added. See addWebRegKeyDataType .
processSync	boolean	0..1	Optional. Set to true to create web register keys synchronously, that is, the Web services client will be blocked until the request is completely processed. Use synchronous processing only for creating small numbers of web register keys at a time. By default, web register key creation is asynchronous.

Referenced By

Name	Type
addWebRegKeyRequest	Element
createWebRegKey	Method

Complex Type: addWebRegKeyResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
responseData	webRegKeyDataListType	0..1	Information about the web register keys that were added is listed in the responseData element. See webRegKeyDataListType . Not populated for asynchronous requests or for requests in which the web register keys are not autogenerated.									
failedData	failedAddWebRegKeyDataListType	0..1	Information about the web register keys that were not added is listed in the failedData element. See failedAddWebRegKeyDataListType . Not populated for asynchronous requests or for requests in which the web register keys are autogenerated.									

Referenced By

Name	Type
addWebRegKeyResponse	Element

Complex Type: advancedReinstallPolicyType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
umn1Policy	policyDataType	1..1	umn1Policy contains the following elements: • allowedCount • policyTerm—see policyTermType.
umn2Policy	policyDataType	1..1	umn2Policy contains the following elements: • allowedCount • policyTerm—see policyTermType.
umn3Policy	policyDataType	1..1	umn3Policy contains the following elements: • allowedCount • policyTerm—see policyTermType.
midPolicy	policyDataType	1..1	midPolicy contains the following elements: • allowedCount • policyTerm—see policyTermType.

Complex Type: attributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	attributeDescriptorType	0..*	attribute contains a required string attributeName and one of the values of attributeDescriptorType .

Complex Type: attributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attributeName	string	1..1	Name of the attribute.
 CHOICE		1..1	
arrayValue	string	0..*	Array of string values of the attribute
booleanValue	boolean	0..1	Boolean value of the attribute.
dateValue	date	0..1	Date value of the attribute.
integerValue	integer	0..1	Integer value of the attribute.
stringValue	string	0..1	String value of the attribute.

Complex Type: attributeMetaDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	attributeMetaDescriptorType	0..*	entitlementAttributes contains one or more attribute elements. See attributeMetaDescriptorType .

Complex Type: attributeMetaDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attributeName	string	1..1	Name of the license model attribute.

Content Model

Component	Type	Occurs	Description
attributeDataType	AttributeDataType	1..1	Returns one of the following: • TEXT • BOOLEAN • NUMBER • DATE • MULTI_VALUED_TEXT • LONGTEXT
namespace	string	1..1	Refers to the license technology on which the attribute is created.
validValues	valueType	0..1	validValues contains an array of value strings that represent valid values for a MULTI_VALUED_TEXT license model attribute. See valueType.

Complex Type: bulkEntitlementDataType

Derived By

Extending [createBulkEntitlementDataType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementId	idType	1..1	Required. See idType .
soldTo	string	0..1	Optional. Organization that has the right to fulfill or distribute activation IDs from this entitlement. If soldTo is specified, that organization is set in the Distributor tier. The organization is not set as the current owner of the entitlement. Deprecated in favor of the channelPartners element.

Content Model

Component	Type	Occurs	Description
product	productIdentifierType	0..1	Optional element supported for backwards compatibility. - A product must be uniquely identified by product identifier, part number, or a combination of part number and license model. Specifying a product element provides the default quantity of 1 for the single product on a line item. - Only products and suites are currently supported, not maintenance. See productIdentifierType .
partNumber	partNumberIdentifierType	0..1	Optional. A part number can be used to identify a product or a unique combination of a product and license model. Only products and suites are currently supported, not maintenance. See partNumberIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Optional, but before the entitlement is deployed, a license model must be uniquely identified by a license model identifier, part number, or product. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	- Any entitlement-time attributes must be set before deployment of the entitlement. - If a request or response contains multiple license models, the accompanying license model attributes are a union of the attributes in all the license models. Therefore, if any license attributes are shared among the license models, they all must be assigned the same value. See attributeDescriptorDataType .
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
policyAttributes	policyAttributesListType	0..1	Required if any policies must be set at entitlement time. See policyAttributesListType .

Content Model

Component	Type	Occurs	Description
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization.
orderId	string	0..1	Optional. Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION
isPermanent	boolean	0..1	Whether the entitlement, and therefore, the license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set term or expirationDate , but not both.
term	DurationType	0..1	The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
expirationDate	date	0..1	The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
versionDate	date	0..1	If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionDateAttributes	versionDateAttributesType	0..1	If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See versionDateAttributesType .
description	string	0..1	Optional. Describe what makes this bulk entitlement unique.

Content Model

Component	Type	Occurs	Description
numberOfCopies	integer	0..1	Optional. Number of copies of the product entitled by each web register key on this entitlement. If not specified, it will be 1.
bulkEntitlementType	BulkEntitlementType	0..1	One of the following: • UPGRADE • UPSELL • RENEWAL
autoDeploy	boolean	0..1	Whether to deploy this entitlement as soon as it is created.
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
channelPartners	channelPartnerDataListType	0..1	Optional. Either soldTo or channelPartners must be specified. A bulk entitlement cannot be deployed without an organization specified in the Distributor tier (bo.constants.partnerTierNames.tier1). Other partner tiers (except End Customer) can be specified also. See channelPartnerDataListType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
state	StateType	0..1	One of the following: • TEST • DRAFT • DEPLOYED • INACTIVE • OBSOLETE
createdUserId	string	0..1	User name of the user who created this entitlement.
licenseTechnology	licenseTechnologyIdentifierType	0..1	License technology of the product. See licenseTechnologyIdentifierType .

Complex Type: bulkEntitlementPropertiesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementId	entitlementIdentifierType	0..1	Entitlement ID. See entitlementIdentifierType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
description	string	0..1	Description of the bulk entitlement.
state	StateType	0..1	Required. One of the following: - DRAFT - DEPLOYED - INACTIVE - OBSOLETE
soldTo	organizationIdentifierType	0..1	Optional. Organization name. Deprecated in favor of the channelPartners element. See organizationIdentifierType .
soldToDisplayName	string	0..1	Brief name of the organization.
shipToEmail	string	0..1	Email address of the organization.
shipToAddress	string	0..1	Physical address of the organization.
orderId	string	0..1	Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Order line number from CRM or ERP system.
product	productIdentifierType	0..1	Product on the bulk entitlement. See productIdentifierType .
productDescription	string	0..1	Description of the product.
partNumber	partNumberIdentifierType	0..1	Part number mapped to the product on the bulk entitlement. See partNumberIdentifierType .
partNumberDescription	string	0..1	Description of the part number.
licenseModel	licenseModelIdentifierType	0..1	License model linked to the product on the bulk entitlement. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseTechnology	licenseTechnologyIdentifierType	0..1	License technology. See licenseTechnologyIdentifierType .

Content Model

Component	Type	Occurs	Description
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_NOW • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION
isPermanent	boolean	0..1	Does the license expire?
term	DurationType	0..1	Duration defined for the bulk entitlement. See DurationType .
expirationDate	date	0..1	Expiration date of the license.
versionDate	date	0..1	Version date, if any defined for this bulk entitlement record.
versionDateAttributes	versionDateAttributesType	0..1	Version date option and duration defined in the bulk entitlement. See versionDateAttributesType .
numberOfCopies	integer	0..1	Number of copies of the bulk entitlement.
bulkEntitlementType	BulkEntitlementType	0..1	Type of the bulk entitlement, where the value is one of the following: • UPGRADE • UPSELL • RENEWAL
createdUserId	string	0..1	ID of the user who created the bulk entitlement.
customAttributes	attributeDescriptorDataType	0..1	Custom attributes associated with the bulk entitlement. See attributeDescriptorDataType .
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
channelPartners	channelPartnerDataListType	0..1	See channelPartnerDataListType .
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Complex Type: bulkEntitlementResponseConfigRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementId	boolean	0..1	Entitlement ID.
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
description	boolean	0..1	Description of the bulk entitlement.
state	boolean	0..1	ACTIVE or OBSOLETE.
soldTo	boolean	0..1	Optional. Organization name. Deprecated in favor of the channelPartners element.
soldToDisplayName	boolean	0..1	Brief name of the organization.
shipToEmail	boolean	0..1	Email address of the organization.
shipToAddress	boolean	0..1	Physical address of the organization.
orderId	boolean	0..1	Order ID.
orderLineNumber	boolean	0..1	Order line number.
product	boolean	0..1	Product.
productDescription	boolean	0..1	Product description.
partNumber	boolean	0..1	Part number.
partNumberDescription	boolean	0..1	Part number description.
licenseModel	boolean	0..1	License model.
licenseTechnology	boolean	0..1	License technology.
startDateOption	boolean	0..1	When the start date is defined.
isPermanent	boolean	0..1	Does the license expire?
term	boolean	0..1	Duration defined for the bulk entitlement.
expirationDate	boolean	0..1	Expiration date of the license.
versionDate	boolean	0..1	Version date, if any defined for this bulk entitlement record.
versionDateAttributes	boolean	0..1	Version date option and duration defined in the bulk entitlement.
numberOfCopies	boolean	0..1	Number of copies of the bulk entitlement.
bulkEntitlementType	boolean	0..1	Type of the bulk entitlement - new order, upgrade, upsell or renewal.
createdUserId	boolean	0..1	Id of the user who created the bulk entitlement.

Content Model

Component	Type	Occurs	Description
FNPTimeZoneValue	boolean	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
customAttributes	customAttributeDescriptorDataType	0..1	Custom attributes associated with the bulk entitlement.

Complex Type: cancelLicensePolicyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
isCancelLicense	boolean	1..1	True —Returned counts should not be credited back to entitlement. False —Returned counts should be credited back to entitlement. Note that this setting operates exactly opposite the same setting in the FlexNet Operations UI. The UI asks if the count should be credited. This web service element asks if the count should be cancelled.

Complex Type: channelPartnerDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
channelPartner	channelPartnerDataType	0..*	See channelPartnerDataType .

Complex Type: channelPartnerDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
tierName	string	1..1	Tier of the channel partner, specified in the OPS_PARTNER_TIER_NAME table. By default, this table includes the tier names for the End Customer and Distributor tiers. Custom tier names can be added to the table manually. In the web services, the tierName string must always be specified as the constant value, not the display value. So for example, End Customer has to be specified as bo.constants.partner-tier-names.endcustomer and Distributor as bo.constants.partner-tier-names.tier1.
organizationUnit	organizationIdentifierType	1..1	See organizationIdentifierType .
contact	userIdIdentifierType	0..1	See userIdIdentifierType .
currentOwner	boolean	0..1	True if the organization specified in organizationUnit is the current owner of the device.

Complex Type: correlationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the requested item, starting at 1.
uniqueId	string	1..1	Unique database identifier.

Complex Type: createBulkEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementId	idType	1..1	Required. See idType .
soldTo	string	0..1	Optional. Organization that has the right to fulfill or distribute activation IDs from this entitlement. If soldTo is specified, that organization is set in the Distributor tier. The organization is not set as the current owner of the entitlement. Deprecated in favor of the channelPartners element.
product	productIdentifierType	0..1	Optional element supported for backwards compatibility. - A product must be uniquely identified by product identifier, part number, or a combination of part number and license model. Specifying a product element provides the default quantity of 1 for the single product on a line item. - Only products and suites are currently supported, not maintenance. See productIdentifierType .
partNumber	partNumberIdentifierType	0..1	Optional. A part number can be used to identify a product or a unique combination of a product and license model. Only products and suites are currently supported, not maintenance. See partNumberIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Optional, but before the entitlement is deployed, a license model must be uniquely identified by a license model identifier, part number, or product. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .

Content Model

Component	Type	Occurs	Description
licenseModelAttributes	attributeDescriptorDataType	0..1	- Any entitlement-time attributes must be set before deployment of the entitlement. - If a request or response contains multiple license models, the accompanying license model attributes are a union of the attributes in all the license models. Therefore, if any license attributes are shared among the license models, they all must be assigned the same value. See attributeDescriptorDataType.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
policyAttributes	policyAttributesListType	0..1	Required if any policies must be set at entitlement time. See policyAttributesListType .
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization.
orderId	string	0..1	Optional. Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: - DEFINE_AT_FIRST_ACTIVATION - DEFINE_AT_EACH_ACTIVATION - DEFINE_ACTDATE_AT_FIRST_ACTIVATION - DEFINE_ACTDATE_AT_EACH_ACTIVATION
isPermanent	boolean	0..1	Whether the entitlement, and therefore, the license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set term or expirationDate , but not both.
term	DurationType	0..1	The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.

Content Model

Component	Type	Occurs	Description
expirationDate	date	0..1	The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
versionDate	date	0..1	If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionDateAttributes	versionDateAttributesType	0..1	If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See versionDateAttributesType .
description	string	0..1	Optional. Describe what makes this bulk entitlement unique.
numberOfCopies	integer	0..1	Optional. Number of copies of the product entitled by each web register key on this entitlement. If not specified, it will be 1.
bulkEntitlementType	BulkEntitlementType	0..1	One of the following: • UPGRADE • UPSELL • RENEWAL
autoDeploy	boolean	0..1	Whether to deploy this entitlement as soon as it is created.
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
channelPartners	channelPartnerDataListType	0..1	Optional. Either soldTo or channelPartners must be specified. A bulk entitlement cannot be deployed without an organization specified in the Distributor tier (bo.constants.partnertiernames.tier1). Other partner tiers (except End Customer) can be specified also. See channelPartnerDataListType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.

Referenced By

Name	Type
bulkEntitlementDataType	Complex Type

Complex Type: createBulkEntitlementRequestType

Description

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlement	createBulkEntitlementData Type	1..*	Required. A createBulkEntitlementRequest contains a bulkEntitlement element. See createBulkEntitlementData Type .

Referenced By

Name	Type
createBulkEntitlementRequest	Element
createBulkEntitlement	Method

Complex Type: createBulkEntitlementResponseType

Description

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedBulkEntitlementDataListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedBulkEntitlementDataListType .									
responseData	createdBulkEntitlementDataListType	0..1	Information about the entitlements that were added is listed in the responseData element. See createdBulkEntitlementDataListType .									

Referenced By

Name	Type
createBulkEntitlementResponse	Element

Complex Type: createdBulkEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdBulkEntitlement	createdBulkEntitlementDataType	0..*	responseData contains one or more createdBulkEntitlement elements. See createdBulkEntitlementDataType .

Complex Type: createdBulkEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the product in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the entitlement.
bulkEntitlementId	string	1..1	Entitlement ID of the bulk entitlement.

Complex Type: createdEntitlementLifeCycleDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
entitlementData	createdEntitlementLifeCycleDataType	0..*	responseData contains one or more entitlementData elements. See createdEntitlementLifeCycleDataType .

Complex Type: createdEntitlementLifeCycleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementRecordRefNo	string	1..1	Index of the entitlement in the request, starting at 1.
parentEntitlementIdentifier	entitlementIdentifierType	1..1	See entitlementIdentifierType .
createdLineItemData	lifeCycleLineItemDataType	0..*	See lifeCycleLineItemDataType .

Complex Type: createdRenewEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	createdRenewEntitlementDataType	0..*	responseData contains one or more entitlementData elements. See createdRenewEntitlementDataType .

Complex Type: createdRenewEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementRecordRefNo	string	1..1	Index of the entitlement in the request, starting at 1.
parentEntitlementIdentifier	entitlementIdentifierType	1..1	Entitlement ID that contains the renewed line item. See entitlementIdentifierType .
renewedLineItem	renewedEntitlementLineItemDataType	0..*	Renewed line item that was created. See renewedEntitlementLineItemDataType .

Complex Type: createdSimpleEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
createdSimpleEntitlement	createdSimpleEntitlementDataType	0..*	responseData contains one or more createdSimpleEntitlement elements. See createdSimpleEntitlementDataType .

Complex Type: createdSimpleEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
recordRefNo	string	1..1	Index of the product in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the entitlement.
entitlementId	string	1..1	Identifier of the entitlement.
lineItemUniqueIds	string	0..*	One or more activation IDs for added activatable line items.
maintenanceLineItemUniqueIds	string	0..*	One or more activation IDs for added maintenance line items.
lineItemIdentifiers	entitlementLineItemIdentifierType	0..*	Includes unique ID of line items and activation ID of created line items. See entitlementLineItemIdentifierType .
maintenanceLineItemIdentifiers	entitlementLineItemIdentifierType	0..*	Includes unique ID of maintenance line items and activation ID of created maintenance line items. See entitlementLineItemIdentifierType .

Complex Type: createEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	idType	1..1	Required. See idType .
description	string	0..1	Optional description field, used while creating or updating the entitlement line item.
product	productIdentifierType	0..1	Optional element supported for backwards compatibility. Replaced by entitledProducts element. - A product must be uniquely identified by product identifier, part number, or a combination of part number and license model. Specifying a product element provides the default quantity of 1 for the single product on a line item. - Only products and suites are supported. See productIdentifierType .

Content Model

Component	Type	Occurs	Description
partNumber	partNumberIdentifierType	0..1	Optional. A part number can be used to identify a product or a unique combination of a product and license model. Only products and suites are currently supported, not maintenance. See partNumberIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Optional, but before the entitlement is deployed, a license model must be uniquely identified by a license model identifier, part number, or product. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	- Any entitlement-time attributes must be set before deployment of the entitlement. - If a request or response contains multiple license models, the accompanying license model attributes are a union of the attributes in all the license models. Therefore, if any license attributes are shared among the license models, they all must be assigned the same value. See attributeDescriptorDataType.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
policyAttributes	policyAttributesListType	0..1	Optional if used to override policy settings specified on the license model; required if any policies settings are deferred to entitlement time. However, if all policies to be set at entitlement time should be ignored, leave out this attribute. See policyAttributesListType .
orderId	string	0..1	Optional. Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
numberOfCopies	integer	1..1	Required. Number of copies of the product entitled by this line item.
startDate	date	0..1	Start date of the entitlement. Do not set unless the startDateOption is set to DEFINE_NOW.

Content Model

Component	Type	Occurs	Description
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_NOW • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION If neither startDate or startDateOption is specified, the default is DEFINE_AT_FIRST_ACTIVATION.
isPermanent	boolean	0..1	Whether the entitlement, and therefore, license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set either term or expirationDate .
term	DurationType	0..1	The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
expirationDate	date	0..1	The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both
versionDate	date	0..1	If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionDateAttributes	versionDateAttributesType	0..1	If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See Table versionDateAttributesType .

Content Model

Component	Type	Occurs	Description
lineItemType	LineItemType	0..1	Optional. • UPGRADE • UPSELL • RENEWAL If this element is set, then the entitlement line item will be of this type.
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
lineItemAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Referenced By

Name	Type
entitlementLineItemDataType	Complex Type

Complex Type: createMaintenanceLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	idType	1..1	Required. See idType .
maintenanceProduct	productIdentifierType	0..1	Optional, but a product must be identified by product identifier or part number. See productIdentifierType . Can be inferred from the part number or specified explicitly.
partNumber	partNumberIdentifierType	0..1	Optional. See partNumberIdentifierType . A part number can identify a product. If a part number is not specified in the request, but is mapped to the specified product, that part number will be loaded into the entitlement.
orderId	string	0..1	Optional. Order ID from CRM or ERP system.

Content Model

Component	Type	Occurs	Description
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
startDate	date	0..1	Optional. Start date of the entitlement, which will also be the start date of maintenance.
expirationDate	date	0..1	Optional. The date that the entitlement line item, and maintenance, expire.
isPermanent	boolean	0..1	Whether the maintenance is permanent. If true, the maintenance line item never expires. If true, do not set term or expirationDate . If false, set term or expirationDate , but not both.
parentLineItem	entitlementLineItemIdentifierType	0..1	Optional. The entitlement line item that contains the activatable product to which the maintenance is related. See entitlementLineItemIdentifierType .
associatedLineItems	entitlementLineItemIdentifierType	0..*	Supports linking the maintenance with multiple entitlement line items. See entitlementLineItemIdentifierType .

Referenced By

Name	Type
maintenanceLineItemDataType	Complex Type

Complex Type: createSimpleEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementId	idType	1..1	Required. See idType .
description	string	0..1	Optional description field, used while creating or updating the simple entitlement.

Content Model

Component	Type	Occurs	Description
soldTo	string	0..1	Optional. Organization identifier of the organization that has the right to fulfill or distribute activation IDs from this entitlement. Deprecated in favor of the channelPartners element. If soldTo is specified, that organization is set in the End Customer tier and becomes the CurrentOwner . If neither soldTo nor channelPartners specifies an end customer, FlexNet Operations shows the End Customer organization name as <i>Information Not Available</i> , and Current Owner is not set.
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization.
lineItems	createEntitlementLineItemData Type	0..*	Optional. See createEntitlementLineItemData Type .
maintenanceLineItems	createMaintenanceLineItemData Type	0..*	Optional. See createMaintenanceLineItemData Type .
autoDeploy	boolean	0..1	Whether to deploy this entitlement as soon as it is created.
channelPartners	channelPartnerDataListType	0..1	Optional. Either soldTo or channelPartners must be specified. If neither soldTo nor channelPartners specifies an end customer, FlexNet Operations shows the End Customer organization name as <i>Information Not Available</i> , and Current Owner is not set. See channelPartnerDataListType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
entitlementAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorData Type .

Complex Type: createSimpleEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
simpleEntitlement	createSimpleEntitlementData Type	1..*	Required. A createSimpleEntitlementRequest contains an array of simpleEntitlement elements to be added. See createSimpleEntitlementData Type .

Content Model

Component	Type	Occurs	Description
opType	CreateOrUpdateOperationType	0..1	One of the following: • CREATE_OR_UPDATE • CREATE_OR_IGNORE Note: If the opType is CREATE_OR_UPDATE, then the incoming request is split internally as a createRequest (containing all entitlements that need to be created) and an updateRequest (containing all entitlements that need to be updated). If there is even a single failure in the createRequest, the whole of the createRequest fails. If there is a single failure in the updateRequest, the whole of the updateRequest fails. However if the createRequest succeeds and updateRequest fails (or vice-versa) , the overall status is PARTIAL_FAILURE. The FAILURE case arises wherein both createRequest and updateRequest fail. If the opType is set to CREATE_OR_UPDATE and the entitlement already exists in the system once the line item create/update portion is finished and then if the update of the entitlement is requested but returns an error, then the entire entitlement request will fail. However, the updates to the line items which have been completed, will not be rolled back.

Referenced By

Name	Type
createSimpleEntitlementRequest	Element
createSimpleEntitlement	Method

Complex Type: createSimpleEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed. When the opType is either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the Entitlement response and the Line Item response together result in the final response. • Both the Entitlement response and the Line Item response must be a success for the final result to be a success. • If one is a success and the other is a failure, the final

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td> result is a failure. If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			result is a failure. If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		result is a failure. If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedSimpleEntitlementDataListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedSimpleEntitlementDataListType .									
responseData	createdSimpleEntitlementDataListType	0..1	Information about the entitlements that were added is listed in the responseData element. See createdSimpleEntitlementDataListType .									

Referenced By

Name	Type
createSimpleEntitlementResponse	Element

Complex Type: customAttributeDescriptorType

Description

This should be filtered out

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	

Complex Type: customAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	The name of the custom attribute.
CHOICE		1..1	
booleanValue	boolean	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue . Set to true or false if the custom attribute is of type boolean.
dateValue	DateQueryType	0..1	Optional. A dateValue element contains: • value—a date value to compare to the version date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
numberValue	NumberQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. A numberValue element contains: • value—an integer number to match part or all of the custom attribute value. • searchType—one of the following simpleSearchType values: • GREATER_THAN • GREATER_THAN_EQUALS • LESS_THAN • LESS_THAN_EQUALS • EQUALS • NOT_EQUALS
stringValue	SimpleQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. A stringValue element contains: • value—a string to match part or all of the custom attribute value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: customAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	customAttributeQueryType	0..*	See customAttributeQueryType .

Complex Type: deleteEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .

Complex Type: deleteEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlement	deleteEntitlementDataType	1..*	Required. A deleteEntitlementRequest contains an array of entitlement elements to be deleted. See deleteEntitlementDataType .

Referenced By

Name	Type
deleteEntitlementRequest	Element

Referenced By

Name	Type
deleteEntitlement	Method

Complex Type: deleteEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedDeleteEntitlementDataListType	0..1	Information about the entitlements that were not deleted is listed in the failedData element. See failedDeleteEntitlementDataListType .

Referenced By

Name	Type
deleteEntitlementResponse	Element

Complex Type: deleteMaintenanceLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceLineItemIdentifier	entitlementLineItemIdentifierType	1..1	See entitlementLineItemIdentifierType .

Complex Type: deleteMaintenanceLineItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceLineItemData	deleteMaintenanceLineItemDataType	1..*	Required. A deleteMaintenanceLineItemRequest contains an array of maintenanceLineItemData elements to be deleted. See deleteMaintenanceLineItemDataType .

Referenced By

Name	Type
deleteMaintenanceLineItemRequest	Element
deleteMaintenanceLineItem	Method

Complex Type: deleteMaintenanceLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedDeleteMaintenanceLinItemDataListType	0..1	Information about the maintenance line items that were not deleted is listed in the failedData element. See failedDeleteMaintenanceLinItemDataListType .

Referenced By

Name	Type
deleteMaintenanceLinItemResponse	Element

Complex Type: deleteWebRegKeyRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKeyList	webRegKeysListType	1..1	Required. A deleteWebRegKeyRequest contains a webRegKeyList element to be added. See webRegKeysListType .

Referenced By

Name	Type
deleteWebRegKeyRequest	Element
deleteWebRegKey	Method

Complex Type: deleteWebRegKeyResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteWebRegKeyListType	0..1	Information about the web register keys that were not deleted is listed in the failedData element. See failedDeleteWebRegKeyListType .									

Referenced By

Name	Type
deleteWebRegKeyResponse	Element

Complex Type: DurationType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
numDuration	integer	1..1	Required. Specify the number of units of time, for example, 10, for a duration of 10 durationUnit .

Content Model

Component	Type	Occurs	Description
durationUnit	DurationUnit	1..1	Required. Specify one of the following units of time: - DAYS - WEEKS - MONTHS - YEARS

Complex Type: emailActivatableItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	string	1..1	Required. An emailActivatableItemRequest contains an activationId element identifying the activatable item for which to email a certificate.
ignoreExistingEmailList	boolean	0..1	Optional. If true, all email addresses must be specified explicitly in the request. It is not possible to specify which of a list of existing email addresses to exclude (exclude all or none). If not set, the value is false.
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false. regex: " <code>^[A-Za-z0-9-\\+\\.\\%]+@\" + \"([A-Za-z0-9-\\.]+)(\\.[A-Za-z]{1,10})\$\"</code> "
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the entitlement certificate and email templates. If the locale is valid and templates have been configured for that locale, the localized templates will be used to send the email.

Referenced By

Name	Type
emailActivatableItemRequest	Element
emailActivatableItem	Method

Complex Type: emailActivatableItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Referenced By

Name	Type
emailActivatableItemResponse	Element

Complex Type: emailContactListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
emailId	string	0..*	List of email addresses to which to send license certificate.

Complex Type: emailEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. An emailEntitlementRequest contains an entitlementIdentifier element identifying the entitlement certificate to be emailed. See entitlementIdentifierType .
ignoreExistingEmailList	boolean	0..1	Optional. If true, all email addresses must be specified explicitly in the request. It is not possible to specify which of a list of existing email addresses to exclude (exclude all or none). If not set, the value is false.
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false. regex: <code>"^[_A-Za-z0-9-\\+\\.\\%]+@\" + \"([A-Za-z0-9-\\.]+)(\\.[A-Za-z]{1,10})\$\"</code>

Content Model

Component	Type	Occurs	Description
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the entitlement certificate and email templates. If the locale is valid and templates have been configured for that locale, the localized templates will be used to send the email.

Referenced By

Name	Type
emailEntitlementRequest	Element
emailEntitlement	Method

Complex Type: emailEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed.
			reason	string	Gives reason for partial failure or failure.

Referenced By

Name	Type
emailEntitlementResponse	Element

Complex Type: entCustomAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of a text-type entitlement custom attribute by which to search for an entitlement.
stringValue	SimpleQueryType	0..1	Value of the text-type entitlement custom attribute.

Complex Type: entCustomAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	entCustomAttributeQueryType	0..*	See entCustomAttributeQueryType .

Complex Type: entitledProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitledProduct	entitledProductDataType	0..*	See entitledProductDataType .

Complex Type: entitledProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productIdentifierType	0..1	See productIdentifierType .
quantity	integer	1..1	Quantity per copy of the line item. This is a multiplier to the number of copies. If one copy of the line item is fulfilled, this many copies of the entitled product will be fulfilled.

Complex Type: entitlementDataType

Description

Either **simpleEntitlement** or **bulkEntitlement** is returned, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
bulkEntitlement	bulkEntitlementDataType	0..1	See bulkEntitlementDataType .
simpleEntitlement	simpleEntitlementDataType	0..1	See simpleEntitlementDataType .

Complex Type: entitlementIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the product, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the entitlement.
primaryKeys	entitlementPKType	0..1	Database primary key of the entitlement. See entitlementPKType.

Complex Type: entitlementLifeCycleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
parentEntitlementIdentifier	entitlementIdentifierType	0..1	Optional. If not provided, the parent entitlement is inferred from the parentLineItemIdentifier in lineItemLifeCycleDataType . See entitlementIdentifierType .
lineItemData	lineItemLifeCycleDataType	1..*	Required. See lineItemLifeCycleDataType .

Complex Type: EntitlementLifeCycleRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	entitlementLifeCycleDataType	0..*	Required. A EntitlementLifeCycleRequest contains an array of entitlementData elements. See entitlementLifeCycleDataType .

Referenced By

Name	Type
upgradeLicenseRequest	Element
upsellLicenseRequest	Element
upgradeLicense	Method
upsellLicense	Method

Complex Type: EntitlementLifeCycleResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedEntitlementLifeCycleDataListType	0..1	Information about the entitlements that were not upgraded is listed in the failedData element. See failedEntitlementLifeCycleDataListType .
responseData	createdEntitlementLifeCycleDataListType	0..1	Information about the entitlements that were upgraded is listed in the responseData element. See createdEntitlementLifeCycleDataListType .

Referenced By

Name	Type
upgradeLicenseResponse	Element
upsellLicenseResponse	Element

Complex Type: entitlementLineItemType

Derived By

Extending [createEntitlementLineItemType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	idType	1..1	Required. See idType .
description	string	0..1	Optional description field, used while creating or updating the entitlement line item.
product	productIdentifierType	0..1	Optional element supported for backwards compatibility. Replaced by entitledProducts element. - A product must be uniquely identified by product identifier, part number, or a combination of part number and license model. Specifying a product element provides the default quantity of 1 for the single product on a line item. - Only products and suites are supported. See productIdentifierType.

Content Model

Component	Type	Occurs	Description
partNumber	partNumberIdentifierType	0..1	Optional. A part number can be used to identify a product or a unique combination of a product and license model. Only products and suites are currently supported, not maintenance. See partNumberIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Optional, but before the entitlement is deployed, a license model must be uniquely identified by a license model identifier, part number, or product. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	- Any entitlement-time attributes must be set before deployment of the entitlement. - If a request or response contains multiple license models, the accompanying license model attributes are a union of the attributes in all the license models. Therefore, if any license attributes are shared among the license models, they all must be assigned the same value. See attributeDescriptorDataType.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
policyAttributes	policyAttributesListType	0..1	Optional if used to override policy settings specified on the license model; required if any policies settings are deferred to entitlement time. However, if all policies to be set at entitlement time should be ignored, leave out this attribute. See policyAttributesListType .
orderId	string	0..1	Optional. Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
numberOfCopies	integer	1..1	Required. Number of copies of the product entitled by this line item.
startDate	date	0..1	Start date of the entitlement. Do not set unless the startDateOption is set to DEFINE_NOW.

Content Model

Component	Type	Occurs	Description
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_NOW • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION If neither startDate or startDateOption is specified, the default is DEFINE_AT_FIRST_ACTIVATION.
isPermanent	boolean	0..1	Whether the entitlement, and therefore, license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set either term or expirationDate .
term	DurationType	0..1	The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
expirationDate	date	0..1	The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both
versionDate	date	0..1	If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionDateAttributes	versionDateAttributesType	0..1	If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See Table versionDateAttributesType .

Content Model

Component	Type	Occurs	Description
lineItemType	LineItemType	0..1	Optional. - UPGRADE - UPSELL - RENEWAL If this element is set, then the entitlement line item will be of this type.
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
lineItemAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
numberOfRemainingCopies	integer	0..1	Number of copies of the product entitled by this line item that have not yet been activated.
availableExtraActivations	integer	0..1	Optional number of extra activations.
isTrustedType	boolean	0..1	Whether the product is licensed with a trusted license model.
state	StateType	0..1	One of the following: - TEST - DRAFT - DEPLOYED - INACTIVE - ON_HOLD - OBSOLETE
licenseTechnology	licenseTechnologyIdentifierType	0..1	License technology of the product. See licenseTechnologyIdentifierType .
parentLineItem	entitlementLineItemIdentifierType	0..1	Optional. The entitlement line item that contains the activatable product to which the maintenance is related. See entitlementLineItemIdentifierType .
createdOnDateTime	dateTime	0..1	The date and time when the line item was created.
lastModifiedDateTime	dateTime	0..1	The date and time when the line item was last modified.
overdraftMax	integer	0..1	Maximum number of overdrafts.
remainingOverdraftCount	integer	0..1	Number of overdrafts available.

Complex Type: entitlementLineItemIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the product, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the entitlement line item.
primaryKeys	entitlementLineItemPKType	0..1	Database primary key of the entitlement line item. See entitlementLineItemPKType.

Complex Type: entitlementLineItemPropertiesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	entitlementLineItemIdentifierType	0..1	Line item activation ID. See entitlementLineItemIdentifierType .
description	string	0..1	Description of the entitlement line item.

Content Model

Component	Type	Occurs	Description
state	StateType	0..1	One of the following: • TEST • DRAFT • DEPLOYED • INACTIVE • ON_HOLD • OBSOLETE
activatableItemType	ActivatableItemType	0..1	LINEITEM or WEBREGKEY
orderId	string	0..1	Order Id.
orderLineNumber	string	0..1	Order line number.
entitlementId	entitlementIdentifierType	0..1	See entitlementIdentifierType .
soldTo	organizationIdentifierType	0..1	See organizationIdentifierType
soldToDisplayName	string	0..1	Display name of the organization.
entitlementState	StateType	0..1	One of the following: • TEST • DRAFT • DEPLOYED • INACTIVE • ON_HOLD • OBSOLETE
entitlementDescription	string	0..1	Brief description of the entitlement.
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
shipToEmail	string	0..1	Email address of the organization
shipToAddress	string	0..1	Physical shipping address of the organization.
parentBulkEntitlementId	entitlementIdentifierType	0..1	See entitlementIdentifierType .
bulkEntSoldTo	organizationIdentifierType	0..1	See organizationIdentifierType .
bulkEntSoldToDisplayName	string	0..1	Display name of the organization.

Content Model

Component	Type	Occurs	Description
product	productIdentifierType	0..1	See productIdentifierType .
productDescription	string	0..1	Brief description of the product.
partNumber	partNumberIdentifierType	0..1	See partNumberIdentifierType .
partNumberDescription	string	0..1	Brief description of the part number.
licenseTechnology	licenseTechnologyIdentifierType	0..1	Required. License technology of the product. See licenseTechnologyIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Required. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
lineItemSupportAction	LineItemType	0..1	Optional. UPGRADE, UPSELL, or RENEWAL. If this element is set, then the entitlement line item will be of this type.
parentLineItem	entitlementLineItemIdentifierType	0..1	See entitlementLineItemIdentifierType .
startDate	date	0..1	Start date of the line item.
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_NOW • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION
isPermanent	boolean	0..1	Does the line item expire?
term	DurationType	0..1	Only need to specify if modifying value. The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set either term or expirationDate .
expirationDate	date	0..1	Expiration date of the line item.

Content Model

Component	Type	Occurs	Description
versionDate	date	0..1	Version date of the line item.
versionDateAttributes	versionDateAttributesType	0..1	See versionDateAttributesType .
numberOfCopies	integer	0..1	Number of copies of the entitlement line item.
fulfilledAmount	integer	0..1	Number of copies fulfilled.
numberOfRemainingCopies	integer	0..1	Number of copies remaining.
isTrusted	boolean	0..1	Is the entitlement of trusted type?
customAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
entitledProducts	entitledProductDataListType	0..1	Deprecated. Use updatedEntitledProducts[] instead. See entitledProductDataListType .
channelPartners	channelPartnerDataListType	0..1	Optional. Only need to specify if modifying value. The organization in the specified tier will be added or replaced. See Table channelPartnerDataListType .
maintenanceLineItems	maintenanceLineItemPropertiesType	0..*	If set to 1, the following information is returned about maintenance line items linked to the returned line items: - activationId - maintenanceProduct - partNumber - orderId - orderLineNumber - startDate - expirationDate - isPermanent - state See maintenanceLineItemPropertiesType.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
createdOnDateTime	dateTime	0..1	The date and time when the line item was created.
lastModifiedDateTime	dateTime	0..1	The date and time when the line item was last modified.
lineItemAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: entitlementLineItemResponseConfigRequestType

Description

Note: Selecting too many elements for a query can negatively impact system performance. Only select the elements required for a given request.

The following error, *ORA-01795: maximum number of expressions in a list is 1000*, has been seen when performing searches via FlexNet Operations landing pages or web service queries when:

1. FlexNet Operations is connected to an Oracle database
2. Certain types of searches in the UI or web services return > 1000 items, for example, the entitlements or line item landing pages and *getEntitlementsQuery* or *getEntitlementLineItemPropertiesQuery*.

If the error is seen in the FlexNet Operations UI, consider setting the *Entitlement Records per Page* and *Line Items Page Size per Entitlement* settings to 1000 or less. If the error is seen in a web service query, set the batch size to 1000 or less and page through the results.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	boolean	0..1	
description	boolean	0..1	
state	boolean	0..1	
activatableItemType	boolean	0..1	
orderId	boolean	0..1	
orderLineNumber	boolean	0..1	
entitlementId	boolean	0..1	
allowPortalLogin	boolean	0..1	
soldTo	boolean	0..1	
soldToDisplayName	boolean	0..1	
entitlementState	boolean	0..1	
entitlementDescription	boolean	0..1	
shipToEmail	boolean	0..1	
shipToAddress	boolean	0..1	
parentBulkEntitlementId	boolean	0..1	
bulkEntSoldTo	boolean	0..1	

Content Model

Component	Type	Occurs	Description
bulkEntSoldToDisplay Name	boolean	0..1	
product	boolean	0..1	
productDescription	boolean	0..1	
partNumber	boolean	0..1	
partNumberDescription	boolean	0..1	
licenseTechnology	boolean	0..1	
licenseModel	boolean	0..1	
lineItemSupportAction	boolean	0..1	
parentLineItem	boolean	0..1	
startDate	boolean	0..1	
startDateOption	boolean	0..1	
isPermanent	boolean	0..1	
term	boolean	0..1	
expirationDate	boolean	0..1	
versionDate	boolean	0..1	
versionDateAttributes	boolean	0..1	
numberOfCopies	boolean	0..1	
fulfilledAmount	boolean	0..1	
numberOfRemainingC opies	boolean	0..1	
isTrusted	boolean	0..1	
customAttributes	customAttributeDescripto rDataType	0..1	
maintenance	boolean	0..1	
maintenancePartNumbe r	boolean	0..1	
FNPTimeZoneValue	boolean	0..1	
createdOnDateTime	boolean	0..1	
lastModifiedDateTime	boolean	0..1	
lineItemAttributes	boolean	0..1	

Complex Type: entitlementListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..*	Required. See entitlementIdentifierType .

Complex Type: entitlementStateChangeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	See licenseModelIdentifierType .
stateChangeRecord	stateChangeDataType	0..*	See stateChangeDataType .

Complex Type: entitlementStateChangeListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlement	entitlementStateChangeDataType	0..*	See entitlementStateChangeDataType .

Complex Type: entitlementStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
stateToSet	StateType	1..1	Required. One of the following: - DRAFT - DEPLOYED - INACTIVE - OBSOLETE

Complex Type: expirationTermsDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
expirationDate	date	0..1	The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
term	DurationType	0..1	The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.

Complex Type: extraActivationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
allowedCount	integer	1..1	The number of extra activations allowed per activatable item on this entitlement.

Complex Type: failedAddEntitlementLineItemDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedLineItemData	failedAddEntitlementLineItemDataType	0..*	failedData contains one or more failedLineItemData elements. See failedAddEntitlementLineItemDataType .

Complex Type: failedAddEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItem	addEntitlementLineItemDataType	0..1	See addEntitlementLineItemDataType .
reason	string	0..1	String containing the reason the line item was not added.

Complex Type: failedAddWebRegKeyDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedWebRegKeyData	failedAddWebRegKeyData Type	0..*	failedData contains one or more failedAddWebRegKey elements. See failedAddWebRegKeyDataType .

Complex Type: failedAddWebRegKeyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKeyData	addWebRegKeyData Type	0..1	See addWebRegKeyDataType .
reason	string	0..1	String containing the reason the web register key was not added.

Complex Type: failedBulkEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
failedBulkEntitlement	failedBulkEntitlementData Type	0..*	failedData contains one or more failedBulkEntitlement elements. See failedBulkEntitlementDataType

Complex Type: failedBulkEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlement	createBulkEntitlementData Type	0..1	See createBulkEntitlementDataType .
reason	string	0..1	String containing the reason the entitlement was not added.

Complex Type: failedDeleteEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedEntitlement	failedDeleteEntitlementData Type	0..*	failedData contains one or more failedEntitlement elements. See failedDeleteEntitlementDataType

Complex Type: failedDeleteEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	See entitlementIdentifierType .
reason	string	0..1	The reason the entitlement was not deleted.

Complex Type: failedDeleteMaintenanceLineItemDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedData	failedDeleteMaintenanceLineItemDataType	0..*	failedData contains one or more failedData elements. See failedDeleteMaintenanceLineItemDataType .

Complex Type: failedDeleteMaintenanceLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedData	deleteMaintenanceLineItemDataType	0..1	See deleteMaintenanceLineItemDataType .
reason	string	0..1	The reason the line item was not deleted.

Complex Type: failedDeleteWebRegKeyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
webRegKey	string	1..1	String containing the failed web register key.
reason	string	0..1	The reason the web register key was not deleted.

Complex Type: failedDeleteWebRegKeyListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedWebRegKey	failedDeleteWebRegKey DataType	0..*	failedData contains one or more failedWebRegKey elements. See failedDeleteWebRegKeyDataType .

Complex Type: failedEntitlementLifeCycleDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
failedEntitlement	failedEntitlementLifeCycleDataTypes	0..*	failedData contains one or more failedEntitlement elements. See failedEntitlementLifeCycleDataTypes .

Complex Type: failedEntitlementLifeCycleDataTypes

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	entitlementLifeCycleDataTypes	1..1	See entitlementLifeCycleDataTypes .
reason	string	1..1	String containing the reason the entitlement was not upgraded.

Complex Type: failedEntitlementStateDataListTypes

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedEntitlement	failedEntitlementStateDataTypes	0..*	A failedData element contains an array of failedEntitlement elements whose state was not set. See failedEntitlementStateDataTypes .

Complex Type: failedEntitlementStateDataTypes

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlement	entitlementStateDataType	1..1	See entitlementStateDataType .
reason	string	1..1	Reason the state of the entitlement was not set.

Complex Type: failedIdDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
id	string	1..1	Entitlement ID or activation ID string.
reason	string	1..1	String containing the reason the ID was not mapped to the user.

Complex Type: failedLineItemStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
failedLinItem	failedLinItemStateDataType	0..*	A failedData element contains an array of failedLinItem elements whose state was not set. See failedLinItemStateDataType .

Complex Type: failedLinItemStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
linItem	linItemStateDataType	1..1	See linItemStateDataType .
reason	string	1..1	Reason the state of the line item was not set.

Complex Type: failedLinkMaintenanceLinItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
linkMaintenanceLinItem	linkMaintenanceLinItemDataType	1..1	See linkMaintenanceLinItemDataType .
reason	string	1..1	Reason for failure.

Complex Type: failedLinkMaintenanceLinItemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedLinkMaintenanceLineItem	failedLinkMaintenanceLineItemDataType	0..*	See failedLinkMaintenanceLineItemDataType .

Complex Type: failedMaintenanceLineItemStateDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedMaintenanceLineItem	failedMaintenanceLineItemStateDataType	0..*	See failedMaintenanceLineItemStateDataType .

Complex Type: failedMaintenanceLineItemStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceLineItem	maintenanceLineItemStateDataType	1..1	See maintenanceLineItemStateDataType .
reason	string	1..1	Reason for failure.

Complex Type: failedMapEntitlementsToUserDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedId	failedIdDataType	1..*	failedData contains one or more failedId elements. See failedIdDataType .

Complex Type: failedMatchingBulkEntDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntInfo	getMatchingBulkEntInfoType	1..1	For the source bulk entitlement that had no matches in the target organization. See getMatchingBulkEntInfoType .
reason	string	1..1	String containing the reason no matching line items were returned.

Complex Type: failedMatchingBulkEntsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedBulkEnt	failedMatchingBulkEntDataType	1..*	failedData contains a failedBulkEnt element. See failedMatchingBulkEntDataType .

Complex Type: failedMatchingLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemInfo	getMatchingLineItemInfoType	1..1	Sor the source line item that had no matches in the target organization. See getMatchingLineItemInfoType .
reason	string	1..1	String containing the reason no matching line items were returned.

Complex Type: failedMatchingLineItemsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedLineItem	failedMatchingLineItemDataType	1..*	failedData contains a failedLineItem element. See failedMatchingLineItemDataType .

Complex Type: failedRemoveEntitlementLineItemDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedData	failedRemoveEntitlementLineItemDataType	0..*	failedData contains one or more failedData elements. See failedRemoveEntitlementLineItemDataType .

Complex Type: failedRemoveEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedData	removeEntitlementLineItemDataType	0..1	See removeEntitlementLineItemDataType .
reason	string	0..1	The reason the line item was not deleted.

Complex Type: failedRenewEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedEntitlement	failedRenewEntitlementDataType	0..*	failedData contains one or more failedRenewEntitlement elements. See failedRenewEntitlementDataType .

Complex Type: failedRenewEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	renewEntitlementDataType	1..1	See renewEntitlementDataType .
reason	string	1..1	String containing the reason the entitlement was not renewed.

Complex Type: failedSimpleEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedSimpleEntitlement	failedSimpleEntitlementDataType	0..*	failedData contains one or more failedSimpleEntitlement elements. See failedSimpleEntitlementDataType .

Complex Type: failedSimpleEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
simpleEntitlement	createSimpleEntitlementDataType	0..1	See createSimpleEntitlementDataType .

Content Model

Component	Type	Occurs	Description
reason	string	0..1	String containing the reason the entitlement was not added.

Complex Type: failedSplitBulkEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
bulkEntitlementInfo	splitBulkEntitlementInfoType	1..1	See splitBulkEntitlementInfoType .
reason	string	1..1	String containing the reason the line item's count was not split.

Complex Type: failedSplitBulkEntitlementListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedBulkEntitlement	failedSplitBulkEntitlementDataType	1..*	failedData contains one or more failedBulkEntitlement elements. See failedSplitBulkEntitlementDataType .

Complex Type: failedSplitLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltemInfo	splitLineltemInfoType	1..1	See splitLineltemInfoType .
reason	string	1..1	String containing the reason the line item's count was not split.

Complex Type: failedSplitLineltemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedLineltem	failedSplitLineltemDataType	1..*	failedData contains a failedLineltem element. See failedSplitLineltemDataType .

Complex Type: failedTransferEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementInfo	transferEntitlementInfoType	1..1	See transferEntitlementInfoType .

Content Model

Component	Type	Occurs	Description
reason	string	1..1	String containing the reason the entitlement was not transferred.

Complex Type: failedTransferEntitlementListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedEntitlement	failedTransferEntitlementDataType	1..*	failedData contains one or more failedEntitlement elements. See failedTransferEntitlementDataType .

Complex Type: failedTransferLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemInfo	transferLineItemInfoType	1..1	See transferEntitlementInfoType .
reason	string	1..1	String containing the reason the line item was not transferred.

Complex Type: failedTransferLineItemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedLinItem	failedTransferLinItemDataType	1..*	failedData contains one or more failedLinItem elements. See failedTransferLinItemDataType .

Complex Type: failedUnlinkMaintenanceLinItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
unlinkMaintenanceLinItem	unlinkMaintenanceLinItemDataType	0..1	See unlinkMaintenanceLinItemDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedUnlinkMaintenanceLinItemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUnlinkMaintenanceLinItem	failedUnlinkMaintenanceLinItemDataType	0..*	See failedUnlinkMaintenanceLinItemDataType .

Complex Type: failedUpdateBulkEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedBulkEntitlement	failedUpdateBulkEntitlementDataType	0..*	failedData contains one or more failedBulkEntitlement elements. See failedUpdateBulkEntitlementDataType .

Complex Type: failedUpdateBulkEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlement	updateBulkEntitlementDataType	0..1	See updateBulkEntitlementDataType .
reason	string	0..1	String containing the reason the entitlement was not updated.

Complex Type: failedUpdateEntitlementLineItemDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
failedData	failedUpdateEntitlementLinItemDataType	0..*	failedData contains one or more failedEntitlementLinItem elements. See failedUpdateEntitlementLinItemDataType .

Complex Type: failedUpdateEntitlementLinItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedData	updateEntitlementLinItemDataType	0..1	See updateEntitlementLinItemDataType .
reason	string	0..1	String containing the reason the line item was not updated.

Complex Type: failedUpdateSimpleEntitlementDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedSimpleEntitlement	failedUpdateSimpleEntitlementDataType	0..*	failedData contains one or more failedSimpleEntitlement elements. See failedUpdateSimpleEntitlementDataType .

Complex Type: failedUpdateSimpleEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
simpleEntitlement	updateSimpleEntitlementDataType	0..1	See updateSimpleEntitlementDataType .
reason	string	0..1	String containing the reason the entitlement was not updated.

Complex Type: featureBundleIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the feature bundle, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature bundle.
primaryKeys	featureBundlePKType	0..1	Database primary key of the feature bundle—a string containing the name of the feature bundle. See featureBundlePKType.

Complex Type: featureBundleListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundleIdentifier	featureBundleIdentifierType	1..*	Required. See featureBundleIdentifierType .

Complex Type: featureBundleStateChangeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundleIdentifier	featureBundleIdentifierType	1..1	See featureBundleIdentifierType .
stateChangeRecord	stateChangeDataType	0..*	See stateChangeDataType .

Complex Type: featureBundleStateChangeListenerType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureBundle	featureBundleStateChangeListenerType	0..*	See featureBundleStateChangeListenerType .

Complex Type: featureIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the feature, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature.
primaryKeys	featurePKType	0..1	Database primary keys of the feature—strings containing name and, if the feature version format is FIXED, the version of the feature. If the feature version format is DATE_BASED, specify only name. See featurePKType.

Complex Type: featureListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..*	Required. See featureIdentifierType .

Complex Type: featureStateChangeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureIdentifier	featureIdentifierType	1..1	See featureIdentifierType .

Content Model

Component	Type	Occurs	Description
stateChangeRecord	stateChangeDataType	0..*	See stateChangeDataType .

Complex Type: featureStateChangeListenerType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
feature	featureStateChangeDataType	0..*	See featureStateChangeDataType .

Complex Type: fulfillmentIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the fulfillment.
primaryKeys	fulfillmentPKType	0..1	Database primary key of the fulfillment. See fulfillmentPKType.

Complex Type: getActivatableItemCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	searchActivatableItemData Type	1..1	Required. See searchActivatableItemData Type . Leave this element blank to return all activatable line items.
restrictToItemsReadyToActivate	boolean	0..1	Optional. Only use for the getActivatableItemCount operation. Restricts the search to only items ready to activate.

Referenced By

Name	Type
getActivatableItemCountRequest	Element
getActivatableItemCount	Method

Complex Type: getActivatableItemCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	Number of activatable items that matched the specified criteria.									

Referenced By

Name	Type
getActivatableItemCountResponse	Element

Complex Type: getBulkEntitlementCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementSearch Criteria	searchBulkEntitlementData Type	1..1	Required. See searchBulkEntitlementDataType . Leave this element blank to return all bulk entitlements.

Referenced By

Name	Type
getBulkEntitlementCountRequest	Element
getBulkEntitlementCount	Method

Complex Type: getBulkEntitlementCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	Number of bulk entitlements matching the specified criteria.									

Referenced By

Name	Type
getBulkEntitlementCountResponse	Element

Complex Type: getBulkEntitlementPropertiesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementSearch Criteria	searchBulkEntitlementData Type	1..1	Required. See searchBulkEntitlementData Type .
bulkEntitlementRespon seConfig	bulkEntitlementResponse ConfigRequestType	1..1	See bulkEntitlementResponseConfigRequestType .
batchSize	integer	1..1	Required. Starts at 1. Say the operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
pageNumber	integer	0..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getBulkEntitlementPropertiesRequest	Element
getBulkEntitlementPropertiesQuery	Method

Complex Type: getBulkEntitlementPropertiesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
bulkEntitlement	bulkEntitlementPropertiesType	0..*	See bulkEntitlementPropertiesType .									

Referenced By

Name	Type
getBulkEntitlementPropertiesResponse	Element

Complex Type: getEntitlementAttributesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..1	Required. A getEntitlementAttributesRequest contains a licenseModelIdentifier element identifying the license model whose attributes to return. See licenseModelIdentifierType .

Referenced By

Name	Type
getEntitlementAttributesRequest	Element
getEntitlementAttributesFromModel	Method

Complex Type: getEntitlementAttributesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
entitlementAttributes	attributeMetaDescriptorDataType	0..1	A list of license model attributes that are set at entitlement time are contained in the entitlementAttributes element. See attributeMetaDescriptorDataType .									
policyAttributes	policyAttributesDataType	0..1	A list of policy attributes that are set at entitlement time are contained in the policyAttributes element. See policyAttributesDataType .									
needTimeZone	boolean	0..1	True if the license model includes the TZ keyword and allows it to be set at entitlement time; otherwise, false.									

Referenced By

Name	Type
getEntitlementAttributesResponse	Element

Complex Type: getEntitlementCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	searchEntitlementDataTy pe	1..1	Required. See searchEntitlementDataTy pe . Leave this element blank to return all entitlements.

Referenced By

Name	Type
getEntitlementCountRequest	Element
getEntitlementCount	Method

Complex Type: getEntitlementCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	Number of entitlements matching the specified criteria.									

Referenced By

Name	Type
getEntitlementCountResponse	Element

Complex Type: getExactAvailableCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	entitlementLineItemIdentifierType	0..1	Required. Identifies the line item for which you want an exact available count. See entitlementLineItemIdentifierType .

Referenced By

Name	Type
getExactAvailableCountRequest	Element
getExactAvailableCount	Method

Complex Type: getExactAvailableCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	The exact available count for the line item requested.									

Referenced By

Name	Type
getExactAvailableCountResponse	Element

Complex Type: getMatchingBulkEntInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntIdentifier	entitlementIdentifierType	1..1	Required. The identifier for the bulk entitlement you plan to split. This is the bulk entitlement for which <code>getMatchingBulkEnts</code> attempts to match bulk entitlements in the <code>targetOrganizationUnit</code> . See entitlementIdentifierType .
targetTierName	string	1..1	Required. The name of the tier that contains the target organization. The tier name exists in the OPS_PARTNER_TIER_NAME table. By default, this table includes the tier names for the End Customer and Distributor tiers. Custom tier names can be added to the table manually. In the web services, the <code>targetTierName</code> string must always be specified as the constant value, not the display value. So for example, End Customer has to be specified as <code>bo.constants.partnerTierNames.endcustomer</code> and Distributor as <code>bo.constants.partnerTierNames.tier1</code> .
targetOrganizationUnit	organizationIdentifierType	1..1	Required. The target organization in the target tier to be scanned for matching bulk entitlements. See organizationIdentifierType .

Complex Type: getMatchingBulkEntsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntInfo	getMatchingBulkEntInfoType	1..*	Required. A bulkEntList contains one or more bulkEntInfo elements. See getMatchingBulkEntInfoType .

Complex Type: getMatchingBulkEntsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntList	getMatchingBulkEntsListType	1..1	Required. See getMatchingBulkEntsListType .

Referenced By

Name	Type
getMatchingBulkEntsRequest	Element
getMatchingBulkEnts	Method

Complex Type: getMatchingBulkEntsResponseListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
matchingBulkEnt	matchingBulkEntDataTypee	1..*	responseData contains one or more matchingBulkEnt elements. See matchingBulkEntDataTypee .

Complex Type: getMatchingBulkEntsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getMatchingBulkEntsResponseListType	0..1	Information about bulk entitlements in the target organization that match the bulk entitlement you plan to split is listed in the responseData element. See getMatchingBulkEntsResponseListType .									
failedData	failedMatchingBulkEntsListType	0..1	Information about the bulk entitlement that could not be matched to bulk entitlements in the target organization is in the failedData element. See failedMatchingBulkEntsListType .									

Referenced By

Name	Type
getMatchingBulkEntsResponse	Element

Complex Type: getMatchingLineItemInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltemIdentifier	entitlementLineltemIdentifierType	1..1	Required. The indentifier for the line item you plan to split. This is the line item for which <code>getMatchingLineltems</code> attempts to match line items in the <code>targetOrganizationUnit</code> . See entitlementLineltemIdentifierType .
targetTierName	string	1..1	Required. The name of the tier that contains the target organization. The tier name exists in the <code>OPS_PARTNER_TIER_NAME</code> table. By default, this table includes the tier names for the End Customer and Distributor tiers. Custom tier names can be added to the table manually. In the web services, the <code>targetTierName</code> string must always be specified as the constant value, not the display value. So for example, End Customer has to be specified as <code>bo.constants.partnertiertnames.endcustomer</code> and Distributor as <code>bo.constants.partnertiertnames.tier1</code> .
targetOrganizationUnit	organizationIdentifierType	1..1	Required. The target organization in the target tier to be scanned for matching line items. See organizationIdentifierType .

Complex Type: getMatchingLineltemsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltemInfo	getMatchingLineltemInfoType	1..*	Required. A lineltemList contains one or more lineltemInfo elements. See getMatchingLineltemInfoType .

Complex Type: getMatchingLineltemsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linelItemList	getMatchingLineItemsListType	1..1	Required. See getMatchingLineItemsListType .

Referenced By

Name	Type
getMatchingLineItemsRequest	Element
getMatchingLineItems	Method

Complex Type: getMatchingLineItemsResponseListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
matchingLinItem	matchingLinItemDataType	1..*	responseData contains one or more matchingLinItem elements. See matchingLinItemDataType .

Complex Type: getMatchingLineItemsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getMatchingLineItemsResponseListType	0..1	Information about entitlement line items in the target organization that match the line item you plan to split is listed in the responseData element. See getMatchingLineItemsResponseListType .									
failedData	failedMatchingLineItemsListType	0..1	Information about the entitlement line item that could not be matched to line items in the target organization is in the failedData element. See Table failedMatchingLineItemsListType .									

Referenced By

Name	Type
getMatchingLineItemsResponse	Element

Complex Type: getStateChangeHistoryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureList	featureListType	0..1	Optional. See featureListType .
featureBundleList	featureBundleListType	0..1	Optional. See featureBundleListType .
productList	productListType	0..1	Optional. See productListType .
licenseModelList	licenseModelListType	0..1	Optional. See licenseModelListType .
simpleEntitlementList	entitlementListType	0..1	Optional. See entitlementListType .
bulkEntitlementList	entitlementListType	0..1	Optional. See entitlementListType .

Referenced By

Name	Type
getStateChangeHistoryRequest	Element
getStateChangeHistory	Method

Complex Type: getStateChangeHistoryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	stateChangeResponseType	0..1	See stateChangeResponseType .									

Referenced By

Name	Type
getStateChangeHistoryResponse	Element

Complex Type: getWebRegKeyCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
bulkEntitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .

Referenced By

Name	Type
getWebRegKeyCountRequest	Element
getWebRegKeyCount	Method

Complex Type: getWebRegKeyCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
responseData	webRegKeyCountDataType	0..1	See webRegKeyCountDataType .									

Referenced By

Name	Type
getWebRegKeyCountResponse	Element

Complex Type: getWebRegKeysQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
bulkEntitlementIdentifier	entitlementIdentifierType	1..1	Required. Entitlement of the bulk entitlement into which the web register keys are loaded. Required. See entitlementIdentifierType .
batchSize	integer	1..1	Required. Starts at 1. Say the getWebRegKeyCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
pageNumber	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getWebRegKeysQueryRequest	Element
getWebRegKeysQuery	Method

Complex Type: getWebRegKeysQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description											
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>			Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description												
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.												
reason	string	Gives reason for partial failure or failure.												
responseData	webRegKeysDataListType	0..1	See webRegKeysDataListType .											

Referenced By

Name	Type
getWebRegKeysQueryResponse	Element

Complex Type: hostTypePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	The name of the host type.

Complex Type: idListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
id	string	1..*	Required.

Complex Type: idType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
id	string	0..1	Optional string containing the entitlement ID, if you want to specify the ID.
autoGenerate	boolean	0..1	Optional boolean that indicates whether the entitlement ID should be autogenerated.

Complex Type: licenseGeneratorIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license generator configuration.
primaryKeys	licenseGeneratorPKType	0..1	Database primary key of the license generator configuration. See licenseGeneratorPKType.

Complex Type: licenseModelIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the license model, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license model.
primaryKeys	licenseModelPKType	0..1	Database primary key of the license model. See licenseModelPKType.

Complex Type: licenseModelListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..*	Required. See licenseModelIdentifierType .

Complex Type: licenseModelStateChangeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..1	See licenseModelIdentifierType .
stateChangeRecord	stateChangeDataType	0..*	See stateChangeDataType .

Complex Type: licenseModelStateChangeListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModel	licenseModelStateChangeDataType	0..*	See licenseModelStateChangeDataType .

Complex Type: licenseTechnologyIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license technology.
primaryKeys	licenseTechnologyPKType	0..1	Database primary key of the license technology. See licenseTechnologyPKType .

Complex Type: licenseTechnologyPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the license technology.

Complex Type: lifeCycleLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemRecordRefNo	string	1..1	Index of the entitlement line item in the request, starting at 1.
parentLineItemIdentifier	entitlementLineItemIdentifierType	1..1	See entitlementLineItemIdentifierType .
newLineItem	newEntitlementLineItemDataType	1..1	createdLineItemData contains a newLineItem element. See newEntitlementLineItemDataType .

Complex Type: lineItemCustomAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
attributeName	string	1..1	Name of a text-type line item custom attribute by which to search for a line item.
stringValue	SimpleQueryType	0..1	Value of the text-type line item custom attribute.

Complex Type: lineItemCustomAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	lineItemCustomAttributeQueryType	0..*	See lineItemCustomAttributeQueryType .

Complex Type: lineItemLifeCycleDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
parentLineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. See entitlementLineItemIdentifierType .
lineItem	createEntitlementLineItemDataType	1..1	Required. See createEntitlementLineItemDataType .
isFull	boolean	0..1	Optional. Set to true if all of the count on the parent line item is to be upgraded or upsold. Set to false if the count of the upgrade or upsell item is taken from numberOfCopies set in createEntitlementLineItemDataType .

Content Model

Component	Type	Occurs	Description
allowActivationsOnParent	boolean	0..1	Optional. Set to true if the parent line item can still be activated after it has been renewed. Set to false if the parent line item is obsolete after it has been upgraded or upsold.
autoDeploy	boolean	0..1	Whether the upgrade or upsell line item should be deployed as soon as it is created.

Complex Type: lineItemStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. See entitlementLineItemIdentifierType .
stateToSet	StateType	1..1	Required. One of the following: • DRAFT • DEPLOYED • INACTIVE • OBSOLETE
includeChildItems	boolean	0..1	Optional. If set to true, the state change will be applied to any child line items of this entitlement line item.

Complex Type: linkMaintenanceLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltemIdentifier	entitlementLineltemIdentifierType	1..1	See entitlementLineltemIdentifierType .
maintenanceLineltemIdentifier	entitlementLineltemIdentifierType	1..1	See entitlementLineltemIdentifierType .

Complex Type: linkMaintenanceLineltemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linkMaintenanceLineltem	linkMaintenanceLineltemDataType	1..*	See linkMaintenanceLineltemDataType .

Complex Type: linkMaintenanceLineltemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linkMaintenanceLineltemList	linkMaintenanceLineltemListType	1..1	See linkMaintenanceLineltemListType .

Referenced By

Name	Type
linkMaintenanceLineltemRequest	Element

Referenced By

Name	Type
linkMaintenanceLineItem	Method

Complex Type: linkMaintenanceLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedLinkMaintenanceLineItem	0..1	See failedLinkMaintenanceLineItem .									

Referenced By

Name	Type
linkMaintenanceLineItemResponse	Element

Complex Type: maintenanceIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the maintenance product.
primaryKeys	maintenancePKType	0..1	Database primary key of the maintenance product. See maintenancePKType.

Complex Type: maintenanceLineItemDataType

Derived By

Extending [createMaintenanceLineItemDataType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	idType	1..1	Required. See idType .
maintenanceProduct	productIdentifierType	0..1	Optional, but a product must be identified by product identifier or part number. See productIdentifierType . Can be inferred from the part number or specified explicitly.
partNumber	partNumberIdentifierType	0..1	Optional. See partNumberIdentifierType . A part number can identify a product. If a part number is not specified in the request, but is mapped to the specified product, that part number will be loaded into the entitlement.
orderId	string	0..1	Optional. Order ID from CRM or ERP system.

Content Model

Component	Type	Occurs	Description
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
startDate	date	0..1	Optional. Start date of the entitlement, which will also be the start date of maintenance.
expirationDate	date	0..1	Optional. The date that the entitlement line item, and maintenance, expire.
isPermanent	boolean	0..1	Whether the maintenance is permanent. If true, the maintenance line item never expires. If true, do not set term or expirationDate . If false, set term or expirationDate , but not both.
parentLineItem	entitlementLineItemIdentifierType	0..1	Optional. The entitlement line item that contains the activatable product to which the maintenance is related. See entitlementLineItemIdentifierType .
associatedLineItems	entitlementLineItemIdentifierType	0..*	Supports linking the maintenance with multiple entitlement line items. See entitlementLineItemIdentifierType .
state	StateType	0..1	One of the following: • TEST • DRAFT • DEPLOYED • INACTIVE • OBSOLETE

Complex Type: maintenanceLineItemPropertiesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	entitlementLineItemIdentifierType	1..1	See entitlementLineItemIdentifierType .
maintenanceProduct	productIdentifierType	0..1	See productIdentifierType .
partNumber	partNumberIdentifierType	0..1	See partNumberIdentifierType .

Content Model

Component	Type	Occurs	Description
orderId	string	0..1	Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
startDate	date	0..1	Start date of the maintenance line item.
expirationDate	date	0..1	Expiration date of the maintenance line item, if not permanent.
isPermanent	boolean	0..1	Whether the maintenance line item is permanent.
state	StateType	0..1	One of the following: • DRAFT • ACTIVE • INACTIVE • DEPLOYED • OBSOLETE • TEST • ON_HOLD

Complex Type: maintenanceLineItemStateDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	See entitlementLineItemIdentifierType .

Content Model

Component	Type	Occurs	Description
stateToSet	StateType	1..1	Required. One of the following: • DRAFT • ACTIVE • INACTIVE • DEPLOYED • OBSOLETE • TEST • ON_HOLD

Complex Type: mapEntitlementsToUserRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. The user ID of a self-registered Portal user.
idList	idListType	1..1	Required. See idListType .
userOrg	string	0..1	Optional. User's organization.

Referenced By

Name	Type
mapEntitlementsToUserRequest	Element
mapEntitlementsToUser	Method

Complex Type: mapEntitlementsToUserResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedMapEntitlementsToUserDataListType	0..1	Information about the IDs that were not mapped to the user is listed in the failedData element. See failedMapEntitlementsToUserDataListType .									

Referenced By

Name	Type
mapEntitlementsToUserResponse	Element

Complex Type: matchingBulkEntDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
matchingBulkEntIdentifier	entitlementIdentifierType	1..1	Required. Identifiers (entitlement ID) of one or more matching bulk entitlements. See entitlementIdentifierType .

Complex Type: matchingLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
matchingLineItemIdentifier	entitlementLineItemIdentifierType	1..1	Identifiers (activation ID) of one or more matching line items. See entitlementLineItemIdentifierType .

Complex Type: mergeEntitlementsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organizationFrom	string	1..1	Required. Organization identifier of the organization that currently owns the assets to be merged to another organization.

Content Model

Component	Type	Occurs	Description
organizationTo	string	1..1	Required. Organization identifier of the organization to which the assets are merged.
mergeUsers	boolean	0..1	Optional. Whether to merge the users of the organization specified as organizationFrom to the organization specified as organizationTo. If a value is not specified, users are merged.
mergeEntitlements	boolean	0..1	Optional. Whether to merge the entitlements and fulfillments of the organization specified as organizationFrom to the organization specified as organizationTo. If a value is not specified, entitlements and fulfillments are merged.

Referenced By

Name	Type
mergeEntitlementsRequest	Element
mergeEntitlements	Method

Complex Type: mergeEntitlementsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.
			reason	string	Gives reason for partial failure or failure.

Referenced By

Name	Type
mergeEntitlementsResponse	Element

Complex Type: newEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the new line item.
activationId	string	1..1	Activation ID of the new line item.

Complex Type: organizationIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Name of the organization.
primaryKeys	organizationPKType	0..1	See organizationPKType .

Complex Type: organizationPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the organization.

Complex Type: OrgTypeList

Description

A list of multiple **orgType** elements. Use orgTypeList when you want to query organizations of multiple types. Add an **orgType** element to the **orgTypeList** for each organization type you want to include in the query. If no **orgType** or

Description

orgTypeList is specified, the query searches only CUSTOMER organizations (the default).

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgType	OrgType	1..*	Optional. Defines the organization type. orgType can be: - CUSTOMER - PUBLISHER - CHANNEL_PARTNER - SELF_REGISTERED Default: CUSTOMER.

Complex Type: PartnerTierQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
value	string	1..1	The name of the organization.

Content Model

Component	Type	Occurs	Description
searchType	simpleSearchType	1..1	One of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
partnerTier	string	0..1	Optional. The name of the tier in which the organization exists or ANY. If set to a named tier, the format partnerTier is bo.constants.partnerTierNames.tier_name. If not specified, the partner tier searched is the End Customer tier.

Complex Type: partNumberIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the part number, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the part number.
primaryKeys	partNumberPKType	0..1	Database primary key of the part number. See partNumberPKType .

Complex Type: partNumberIdentifierWithModelType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the part number.
primaryKeys	partNumberPKType	0..1	Database primary key of the part number. See partNumberPKType .
licenseModel	licenseModelIdentifierType	0..1	Optional, if you want to map a part number for a product to one specific license model linked to the product. See licenseModelIdentifierType .

Complex Type: partNumberPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
partId	string	1..1	The partId of the part number.

Complex Type: policyAttributesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
needRehostsPolicy	boolean	1..1	Whether a policy governing the number of rehosts must be specified at entitlement time.
needReturnsPolicy	boolean	1..1	Whether a policy governing the number of returns must be specified at entitlement time.

Content Model

Component	Type	Occurs	Description
needRepairsPolicy	boolean	1..1	Whether a policy governing the number of repairs must be specified at entitlement time.
needExtraActivationsPolicy	boolean	1..1	Whether a policy governing the number of extra activations must be specified at entitlement time.
needCancelLicensePolicy	boolean	1..1	Whether a policy governing the crediting of returned license count must be specified at entitlement time.
needVirtualLicensePolicy	boolean	1..1	Whether a policy governing activations on virtual machines must be specified at entitlement time.
needReinstallPolicy	boolean	1..1	Whether a policy governing the number of reinstallations must be established at entitlement time. Applies to trusted storage-type license models only.
needServerHostIdPolicy	boolean	1..1	Whether a policy governing server hostids must be specified at entitlement time.
needNodeLockedHostIdPolicy	boolean	1..1	Whether a policy governing node-locked hostids must be specified at entitlement time.
needPortalServerHostIdPolicy	boolean	1..1	Whether a policy governing server hostids must be specified at entitlement time on the self-service portal.
needPortalNodeLockedHostIdPolicy	boolean	1..1	Whether a policy governing node-locked hostids must be specified at entitlement time on the self-service portal.
needRedundantServerPolicy	boolean	1..1	Whether a policy governing redundant servers must be specified at entitlement time.
needACPIGenerationIdLicensePolicy	boolean	1..1	Whether a policy governing ACPI Generation ID must be specified at entitlement time.

Complex Type: policyAttributesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
rehostsPolicy	policyDataType	0..1	rehostsPolicy contains the following elements: allowedCount—number of rehosts allowed per activatable item on this entitlement during the time period defined by the policyTerm element. policyTerm—see policyTermType.
returnsPolicy	policyDataType	0..1	returnsPolicy contains the following elements: allowedCount—number of returns allowed per activatable item on this entitlement during the time period defined by the policyTerm element. policyTerm—see policyTermType.
repairsPolicy	policyDataType	0..1	repairsPolicy contains the following elements: allowedCount—number of repairs allowed per activatable item on this entitlement during the time period defined by the policyTerm element. policyTerm—see policyTermType.
extraActivationsPolicy	extraActivationDataType	0..1	See extraActivationDataType .
cancelLicensePolicy	cancelLicensePolicyDataType	0..1	See cancelLicensePolicyDataType .
virtualLicensePolicy	virtualLicensePolicyDataType	0..1	See virtualLicensePolicyDataType .
reinstallPolicy	reinstallPolicyDataType	0..1	See reinstallPolicyDataType .
acpiGenerationIdLicensePolicy	acpiGenerationIdLicensePolicyDataType	0..1	See acpiGenerationIdLicensePolicyDataType .

Complex Type: policyTermType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
duration	integer	1..1	Required. Specify the number of units of time, for example, 10, for a duration of 10 durationUnit .
durationUnit	DurationUnit	1..1	Required. Specify one of the following units of time: - DAYS - WEEKS - MONTHS - YEARS

Complex Type: productIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the product, not both.

Note: In the Entitlement Order service, *productIdentifierType* is used to identify products, maintenance products, and suites. In the Product Packaging Service, each has its own identifier type.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the product.
primaryKeys	productPKType	0..1	Database primary key of the product. See productPKType .

Complex Type: productIdentifierWithCountDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .
count	positiveInteger	1..1	Required. Positive integer that indicates the cardinality of the product in the suite.

Complex Type: productListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..*	Required. See productIdentifierType .

Complex Type: productPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the product.
version	string	1..1	The version of the product.

Complex Type: productStateChangeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	See productIdentifierType .
stateChangeRecord	stateChangeDataType	0..*	See stateChangeDataType .

Complex Type: productStateChangeListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productStateChangeDataType	0..*	See productStateChangeDataType .

Complex Type: reinstallPolicyDataType

Description

A reinstall policy can designate an umbrella default policy or specify different reinstall policies for each type of machine identifier via an advanced policy, or both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
defaultPolicy	policyDataType	0..1	defaultPolicy contains the following elements: • allowedCount • policyTerm—see policyTermType.
advancedPolicy	advancedReinstallPolicyType	0..1	See advancedReinstallPolicyType .

Complex Type: removeEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
lineItemIdentifier	entitlementLineItemIdentifierType	0..*	See entitlementLineItemIdentifierType .

Complex Type: removeEntitlementLineItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemData	removeEntitlementLineItemDataType	1..*	Required. A removeEntitlementLineItemRequest contains an array of lineItemData elements to be deleted. See removeEntitlementLineItemDataType .

Referenced By

Name	Type
removeEntitlementLineItemRequest	Element
deleteEntitlementLineItem	Method

Complex Type: removeEntitlementLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedRemoveEntitlementLineItemDataListType	0..1	Information about the entitlements that were not deleted is listed in the failedData element. See failedRemoveEntitlementLineItemDataListType .

Referenced By

Name	Type
removeEntitlementLineItemResponse	Element

Complex Type: renewedEntitlementLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemRecordRefNo	string	1..1	Index of the entitlement line item in the request, starting at 1.
parentLineItemIdentifier	entitlementLineItemIdentifierType	1..1	See entitlementLineItemIdentifierType .
newLineItem	newEntitlementLineItemDataType	1..1	renewedLineItem contains a newLineItem element. See newEntitlementLineItemDataType .

Complex Type: renewEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
parentEntitlementIdentifier	entitlementIdentifierType	0..1	Optional. If not provided, the parent entitlement is inferred from the parentLineItemIdentifier in renewLineItemDataType . See entitlementIdentifierType .
renewLineItemData	renewLineItemDataType	1..*	Required. See renewLineItemDataType .

Complex Type: renewEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	renewEntitlementDataType	0..*	Required. A renewEntitlementRequest contains an array of entitlementData elements. See renewEntitlementDataType .

Referenced By

Name	Type
renewLicenseRequest	Element
renewLicense	Method

Complex Type: renewEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedRenewEntitlementDataListType	0..1	Information about the entitlements that were not renewed is listed in the failedData element. See failedRenewEntitlementDataListType .									
responseData	createdRenewEntitlementDataListType	0..1	Information about the entitlements that were renewed is listed in the responseData element. See createdRenewEntitlementDataListType .									

Referenced By

Name	Type
renewLicenseResponse	Element

Complex Type: renewLinItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
parentLineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. See entitlementLineItemIdentifierType .
renewParameters	renewParametersDataType	1..1	Required. See renewParametersDataType .
isFull	boolean	0..1	Optional. Set to true if all of the count on the parent line item is to be renewed. Set to false if the count of the renew item is taken from numberOfCopies set in renewParametersDataType .
allowActivationsOnParent	boolean	0..1	Optional. Set to true (the default) if the parent line item can still be activated after it has been renewed. Set to false to change the state of the parent line item to OBSOLETE after it has been renewed.
autoDeploy	boolean	0..1	Whether the renew line item should be deployed as soon as it is created.

Complex Type: renewParametersDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	idType	1..1	Required. See idType .
isPermanent	boolean	0..1	Whether the entitlement line item, and therefore, license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set expirationTerms . If false, set expirationTerms .
expirationTerms	expirationTermsDataType	0..1	See expirationTermsDataType .
numberOfCopies	integer	0..1	Number of copies entitled by this line item. Set if isFull is set to false in renewLineItemDataType .
startDate	date	0..1	Start date of the entitlement.

Content Model

Component	Type	Occurs	Description
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_NOW • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION Note: If neither <i>startDate</i> or <i>startDateOption</i> are specified, the expiration date of the original entitlement is used.
versionDate	date	0..1	If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionDateAttributes	versionDateAttributesType	0..1	If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See versionDateAttributesType .
description	string	0..1	A brief description of the renewal.
orderId	string	0..1	Optional. Order ID from CRM or ERP systems.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP systems.
licenseModel	licenseModelIdentifierType	0..1	Optional, but before the entitlement is deployed, a license model must be uniquely identified by a license model identifier, part number, or product. If no license model is specified here, the following license-model-related values are copied from the parent line item: All three license models (licenseModel plus the alternate license models), entitlement-time license attributes (licenseModelAttributes), entitlement-time policy attributes (policyAttributes), and entitlement-time time zone setting (FNPTimeZoneValue). If a license model is specified here, the license-model-related values are not copied from the parent line item. In such cases, any of these license-model-related values necessary for successful renewal must be specified in this request. See licenseModelIdentifierType.

Content Model

Component	Type	Occurs	Description
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	Any entitlement-time attributes must be set before deployment of the entitlement. See attributeDescriptorDataType .
policyAttributes	policyAttributesListType	0..1	Required if any policies must be set at entitlement time. See policyAttributesListType .
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
lineItemAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: replaceOnlyEntitlementLineItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItem	addEntitlementLineItemDataType	1..*	See addEntitlementLineItemDataType .

Referenced By

Name	Type
replaceEntitlementLineItemRequest	Element
replaceEntitlementLineItem	Method

Complex Type: replaceOnlyEntitlementLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedAddEntitlementLineItemDataListType	0..1	See failedAddEntitlementLineItemDataListType .									
responseData	addedEntitlementLineItemDataListType	0..1	See addedEntitlementLineItemDataListType .									

Referenced By

Name	Type
replaceEntitlementLineItemResponse	Element

Complex Type: roleIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Role ID.
primaryKeys	rolePKType	0..1	See rolePKType .

Complex Type: rolePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Name of the role.

Complex Type: searchActivatableItemDataType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
parentBulkEntitlementId	SimpleQueryType	0..1	Optional. A parentBulkEntitlementId element contains: • value—a string to match part or all of the entitlement ID of the parent bulk entitlement of a simple entitlement created when a web register key is redeemed. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
entitlementId	SimpleQueryType	0..1	Optional. An entitlementId element contains: • value—a string to match part or all of the entitlement ID value. • searchType—one of the following simpleSearchType values. • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
activationId	SimpleQueryType	0..1	Optional. An activationId element contains: • value—a string to match part or all of the activation ID value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
productName	SimpleQueryType	0..1	Optional. A productName element contains: • value—a string to match part or all of the product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
productVersion	SimpleQueryType	0..1	Optional. A productVersion element contains: • value—a string to match part or all of the product version. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
productType	ProductType	0..1	Optional. A productType element contains one of the following: - LICENSED_PRODUCT - SUITE - MAINTENANCE. Since maintenance is not attached to a license model, if selected, turn off the LicenseModel and LicenseTechnology attributes from the response.
partNumber	SimpleQueryType	0..1	Optional. A partNumber element contains: value—a string to match part or all of the part number. searchType—one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
startDate	DateQueryType	0..1	Optional. A startDate element contains: value—a date value to compare to the start date value. searchType—one of the following datedSearchType values: - BEFORE - AFTER - ON
isPermanent	boolean	0..1	Optional.

Content Model

Component	Type	Occurs	Description
expirationDate	DateQueryType	0..1	Optional. An expirationDate element contains: • value—a date value to compare to the expiration date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
versionDate	DateQueryType	0..1	Optional. An versionDate element contains: • value—a date value to compare to the version date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
licenseTechnology	SimpleQueryType	0..1	Optional. A licenseTechnology element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
orderId	SimpleQueryType	0..1	Optional. An orderId element contains: value—a string to match part or all of the order ID. searchType—one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
withNoOrderId	boolean	0..1	Optional. If true, return only activatable items with no order ID. Note: Since this field is intended to return results without the specified attribute, setting this to false will have no effect on query results.
restrictToItemsWithCount	boolean	0..1	Optional. If true, return only activatable items that have a non-zero remaining count. Note: This field is intended to return results without the specified attribute. Therefore, setting this value to false will have no effect on query results.
fulfilledAmount	NumberQueryType	0..1	The number of copies fulfilled.
userId	string	0..1	Optional. Set to the user name (login) of a portal user to return the activatable items that this user can see if logged in to the portal UI.
customAttributes	customAttributesQueryListType	0..1	Optional. See customAttributesQueryListType .
soldTo	SimpleQueryType	0..1	Optional. Organization that has the right to fulfill or distribute activation IDs from this entitlement. Deprecated in favor of the channelPartners element.
parentBulkEntSoldTo	SimpleQueryType	0..1	Organization to which the bulk entitlement was sold. Note: Not available for the operation <i>getActivatableItemsQuery</i> . For queries using this parameter, use the operation <i>getEntitlementLineItemPropertiesQuery</i> .
activatableItemType	ActivatableItemType	0..1	One of the following: - LINEITEM - WEBREGKEY
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
organizationUnitName	PartnerTierQueryType	0..1	Optional. See PartnerTierQueryType .

Content Model

Component	Type	Occurs	Description
currentOwnerName	SimpleQueryType	0..1	Optional. A currentOwnerName element contains: • value—a string to match part or all of the user name of the user who created the entitlement. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
lineItemParentLineItemId	SimpleQueryType	0..1	Optional. The line item ID (activation ID) of a parent line item. Use lineItemParentLineItemId with • getActivatableItemCount to return a count of immediate child line items of the parent line item • getActivatableItemsQuery to return immediate child line items of the parent line item. • getEntitlementLineItemPropertiesQuery to return a configurable set of properties of immediate child line items.
createdOnDateTime	DateTimeQueryType	0..1	Optional. A createdOnDateTime element contains: • value—a date and time value to compare to the created date and time value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
lastModifiedDateTime	DateTimeQueryType	0..1	Optional. A lastModifiedDateTime element contains: • value—a date and time value to compare to the last modified date and time value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lineItemAttributes	lineItemCustomAttributesQueryListType	0..1	See lineItemCustomAttributesQueryListType.

Complex Type: searchActivatableItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activatableItemSearchCriteria	searchActivatableItemDataTaType	1..1	Required. See searchActivatableItemDataTaType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Defaults to 1. Say the getActivatableItemCount operation using the same query parameters returns 100 records.If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
searchActivatableItemRequest	Element
getActivatableItemsQuery	Method

Complex Type: searchActivatableItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
activatableItem	activatableItemDetailType	0..*	See activatableItemDetailType .									

Referenced By

Name	Type
searchActivatableItemResponse	Element

Complex Type: searchBulkEntitlementDataType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementId	SimpleQueryType	0..1	Optional. An entitlementId element contains: • value—a string to match part or all of the entitlement ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
description	SimpleQueryType	0..1	Brief description of the bulk entitlement.
productName	SimpleQueryType	0..1	Optional. A productName element contains: • value—a string to match part or all of the product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
productVersion	SimpleQueryType	0..1	Optional. A productVersion element contains: • value—a string to match part or all of the product version. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
productType	ProductType	0..1	Optional. A productType element contains one of the following: • LICENSED_PRODUCT • SUITE • MAINTENANCE
partNumber	SimpleQueryType	0..1	Optional. A partNumber element contains: • value—a string to match part or all of the part number. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
soldTo	SimpleQueryType	0..1	Optional. A soldTo element contains: • value—a string to match part or all of the sold-to organization. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS Deprecated in favor of the channelPartners element.
shipToEmail	SimpleQueryType	0..1	Optional. A shipToEmail element contains: • value—a string to match part or all of the email address. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
shipToAddress	SimpleQueryType	0..1	Optional. A shipToAddress element contains: • value—a string to match part or all of the postal address. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
isPermanent	boolean	0..1	Optional. Set to true if the entitlement is permanent; false if the entitlement expires.

Content Model

Component	Type	Occurs	Description
expirationDate	DateQueryType	0..1	Optional. A expirationDate element contains: • value—a date value to compare to the expiration date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
createdOn	DateQueryType	0..1	Optional. A createdOn element contains: • value—a date value to compare to the creation date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
versionDate	DateQueryType	0..1	Optional. A versionDate element contains: • value—a date value to compare to the version date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of TEST, DRAFT, DEPLOYED, INACTIVE, OBSOLETE to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
licenseTechnology	SimpleQueryType	0..1	Optional. A licenseTechnology element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
createdUserId	SimpleQueryType	0..1	Optional. A createdUserId element contains: • value—a string to match part or all of the user name of the user who created the entitlement. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
customAttributes	customAttributesQueryListType	0..1	Any custom attributes associated with the bulk entitlement. See customAttributesQueryListType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
organizationUnitName	PartnerTierQueryType	0..1	Optional. See PartnerTierQueryType .
currentOwnerName	SimpleQueryType	0..1	Optional. A currentOwnerName element contains: • value—a string to match part or all of the user name of the user who created the entitlement. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: searchEntitlementDataType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementId	SimpleQueryType	0..1	Optional. An entitlementId element contains: • value—a string to match part or all of the entitlement ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
entDescription	SimpleQueryType	0..1	Optional. An entDescription element contains: • value—a string to match part or all of the product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
productName	SimpleQueryType	0..1	Optional. A productName element contains: • value—a string to match part or all of the product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
productVersion	SimpleQueryType	0..1	Optional. A productVersion element contains: • value—a string to match part or all of the product version. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
productType	ProductType	0..1	Optional. A productType element contains one of the following: • LICENSED_PRODUCT • SUITE • MAINTENANCE

Content Model

Component	Type	Occurs	Description
partNumber	SimpleQueryType	0..1	Optional. A partNumber element contains: • value—a string to match part or all of the part number. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
isBulk	boolean	0..1	Optional. Set to true if the entitlement is a bulk entitlement; false if the entitlement is a simple entitlement. If not specified, isBulk defaults to false.
soldTo	SimpleQueryType	0..1	Optional. A soldTo element contains: • value—a string to match part or all of the sold-to organization. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
shipToEmail	SimpleQueryType	0..1	Optional. A shipToEmail element contains: • value—a string to match part or all of the email address. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
shipToAddress	SimpleQueryType	0..1	Optional. A shipToAddress element contains: • value—a string to match part or all of the postal address. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
startDate	DateQueryType	0..1	Optional. A startDate element contains: • value—a date value to compare to the start date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON
isPermanent	boolean	0..1	Optional. Set to true if the entitlement is permanent; false if the entitlement expires.
expirationDate	DateQueryType	0..1	Optional. A expirationDate element contains: • value—a date value to compare to the expiration date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
createdOn	DateQueryType	0..1	Optional. A createdOn element contains: • value—a date value to compare to the creation date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON
versionDate	DateQueryType	0..1	Optional. A versionDate element contains: • value—a date value to compare to the version date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDate	DateQueryType	0..1	Optional. A lastModifiedDate element contains: • value—a date value to compare to the last modified date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
description	SimpleQueryType	0..1	Optional. A description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
state	StateQueryType	0..1	Optional. See StateQueryType.
licenseTechnology	SimpleQueryType	0..1	Optional. A licenseTechnology element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
createdUserId	SimpleQueryType	0..1	Optional. A createdUserId element contains: • value—a string to match part or all of the user name of the user who created the entitlement. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
organizationUnitName	PartnerTierQueryType	0..1	Optional. See PartnerTierQueryType .
currentOwnerName	SimpleQueryType	0..1	Optional. A currentOwnerName element contains: • value—a string to match part or all of the user name of the user who created the entitlement. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
maintStartDate	DateQueryType	0..1	Optional. A maintStartDate element contains: • value—a date value to compare to the maintenance start date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON Searches for entitlements that have regular line items that are linked with maintenance line items with a start date that matches the value and searchType specified here. Note that all of the line items and maintenance line items on the matching entitlements are in the response, not just the ones directly related to the maintenance query parameter. In addition, the entitlements in the response may or may not themselves contain the matching maintenance line items.

Content Model

Component	Type	Occurs	Description
maintIsPermanent	boolean	0..1	Optional. Set to true if the maintenance is permanent; false if the maintenance expires. Searches for entitlements that have regular line items that are linked with maintenance line items that are permanent (true) or expiring (false). Note that all of the line items and maintenance line items on the matching entitlements are in the response, not just the ones directly related to the maintenance query parameter. In addition, the entitlements in the response may or may not themselves contain the matching maintenance line items.
maintExpirationDate	DateQueryType	0..1	Optional. A maintExpirationDate element contains: • value—a date value to compare to the maintenance expiration date value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON. Searches for entitlements that have regular line items that are linked with maintenance line items with a expiration date that matches the value and searchType specified here. Note that all of the line items and maintenance line items on the matching entitlements are in the response, not just the ones directly related to the maintenance query parameter. In addition, the entitlements in the response may or may not themselves contain the matching maintenance line items.
entitlementAttributes	entCustomAttributesQueryListType	0..1	See entCustomAttributesQueryListType .

Complex Type: searchEntitlementLineItemPropertiesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	searchActivatableItemDataType	1..1	Required. See searchActivatableItemDataType . Leave this element blank to return all activatable line items.
entitlementLineItemResponseConfig	entitlementLineItemResponseConfigRequestType	1..1	See entitlementLineItemResponseConfigRequestType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Required. Starts at 1. Say the operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
searchEntitlementLineItemPropertiesRequest	Element
getEntitlementLineItemPropertiesQuery	Method

Complex Type: searchEntitlementLineItemPropertiesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
entitlementLinItem	entitlementLinItemPropertiesType	0..*	See entitlementLinItemPropertiesType .									

Referenced By

Name	Type
searchEntitlementLinItemPropertiesResponse	Element

Complex Type: searchEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementSearchCriteria	searchEntitlementDataType	1..1	Required. See searchEntitlementDataType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Defaults to 1. Say the getEntitlementCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
searchEntitlementRequest	Element
getEntitlementsQuery	Method

Complex Type: searchEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
entitlement	entitlementDataType	0..*	See entitlementDataType .									

Referenced By

Name	Type
searchEntitlementResponse	Element

Complex Type: setEntitlementStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlement	entitlementStateDataType	1..*	Required. A setEntitlementState request contains an array of entitlement elements for which to change the state. See entitlementStateDataType .

Referenced By

Name	Type
setEntitlementStateRequest	Element
setEntitlementState	Method

Complex Type: setEntitlementStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedEntitlementStateDataListType	0..1	Information about the entitlements whose state was not set is listed in the failedData element. See failedEntitlementStateDataListType .									

Referenced By

Name	Type
setEntitlementStateResponse	Element

Complex Type: setLineItemStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltem	lineltemStateDataType	1..*	Required. A setLineltemState request contains an array of lineltem elements for which to change the state. See lineltemStateDataType .

Referenced By

Name	Type
setLineltemStateRequest	Element
setLineltemState	Method

Complex Type: setLineltemStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedLineItemStateDataListType	0..1	Information about the line items whose state was not set is listed in the failedData element. See failedLineItemStateDataListType .									

Referenced By

Name	Type
setLineItemStateResponse	Element

Complex Type: setMaintenanceLineItemStateRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceLineItem	maintenanceLineItemStateDataType	1..*	See maintenanceLineItemStateDataType .

Referenced By

Name	Type
setMaintenanceLineItemStateRequest	Element
setMaintenanceLineItemState	Method

Complex Type: setMaintenanceLineItemStateResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.
failedMaintenanceData	failedMaintenanceLineItemStateDataListType	0..1	See failedMaintenanceLineItemStateDataListType .

Referenced By

Name	Type
setMaintenanceLineItemStateResponse	Element

Complex Type: simpleEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementId	idType	1..1	See idType .
description	string	0..1	Optional description field, used while creating or updating the simple entitlement.
soldTo	string	1..1	Optional. Organization that has the right to fulfill or distribute activation IDs from this entitlement. Deprecated in favor of the channelPartners element.
shipToEmail	string	0..1	Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Postal address for the sold-to organization.
state	StateType	0..1	One of the following: • TEST • DRAFT • DEPLOYED • INACTIVE • OBSOLETE • ON_HOLD
createdUserId	string	0..1	User name of the user who created this entitlement.
lineItems	entitlementLineItemDataType	0..*	See entitlementLineItemDataType .
maintenanceLineItems	maintenanceLineItemDataType	0..*	See maintenanceLineItemDataType .
channelPartners	channelPartnerDataListType	0..1	See channelPartnerDataListType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
entitlementAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: splitBulkEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntIdentifier	entitlementIdentifierType	1..1	Required. Identifier (entitlement ID) of the original bulk entitlement that was the source of the split. See entitlementIdentifierType .
newBulkEntIdentifier	entitlementIdentifierType	0..1	Optional. If a new bulk entitlement was created, this is the identifier (entitlement ID) of the entitlement that contains the line items that received the web register keys as a result of the split. See entitlementIdentifierType .

Complex Type: splitBulkEntitlementInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
numberOfWRKs	integer	1..1	Required. The number of unredeemed web register keys to assign.
targetTierName	string	1..1	Required. The name of the tier that contains the target organization. The tier name exists in the OPS_PARTNER_TIER_NAME table. By default, this table includes the tier names for the End Customer and Distributor tiers. Custom tier names can be added to the table manually. In the web services, the targetTierName string must always be specified as the constant value, not the display value. So for example, End Customer has to be specified as bo.constants.partnertiernames.endcustomer and Distributor as bo.constants.partnertiernames.tier1.
targetOrganizationUnit	organizationIdentifierType	1..1	Required. The target organization. See organizationIdentifierType .

Content Model

Component	Type	Occurs	Description
targetContact	userIdentifierType	0..1	Optional. The user at the target organization who you want to receive email messages about the result of this operation. See userIdentifierType .
matchingBulkEntIdentifier	entitlementIdentifierType	0..1	Optional. Existing entitlement line item to which the web register keys are to be transferred. If no matchingBulkEntIdentifier or matchingLineItemIdentifier is specified, or if the specified identifier does not match a compatible, existing bulk entitlement or redeemed web register key, the split operation creates a new bulk entitlement, at the target organization, to receive the web register keys. See entitlementLineItemIdentifierType .
matchingLineItemIdentifier	entitlementLineItemIdentifierType	0..1	Optional. Existing entitlement line item to which the web register keys are to be transferred. If no matchingBulkEntIdentifier or matchingLineItemIdentifier is specified, or if the specified identifier does not match a compatible, existing bulk entitlement or redeemed web register key, the split operation creates a new bulk entitlement, at the target organization, to receive the web register keys. See entitlementLineItemIdentifierType .

Complex Type: splitBulkEntitlementListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementInfo	splitBulkEntitlementInfoType	1..*	Required. A splitBulkEntitlementList contains one or more bulkEntitlementInfo elements. See splitBulkEntitlementInfoType .

Complex Type: splitBulkEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementList	splitBulkEntitlementListType	1..1	Required. See splitBulkEntitlementListType .

Referenced By

Name	Type
splitBulkEntitlementRequest	Element
splitBulkEntitlement	Method

Complex Type: splitBulkEntitlementResponseListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
splitBulkEntitlement	splitBulkEntitlementDataType	1..*	responseData contains one or more splitBulkEntitlement elements. See splitBulkEntitlementDataType .

Complex Type: splitBulkEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	splitBulkEntitlementResponseListType	0..1	Information about the bulk entitlement that was split, and optionally the bulk entitlement to which the split web register keys went, is listed in the responseData element. See splitBulkEntitlementResponseListType .									
failedData	failedSplitBulkEntitlementListType	0..1	Information about an entitlement line item that was not split is listed in the failedData element. See failedSplitBulkEntitlementListType .									

Referenced By

Name	Type
splitBulkEntitlementResponse	Element

Complex Type: splitLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. If a new line item was created, this is the identifier (activation ID) of the original line item that was the source of the split. See entitlementLineItemIdentifierType .
entitlementIdentifier	entitlementIdentifierType	0..1	Optional. Identifier (entitlement ID) of the entitlement that contains the line item that received the counts as a result of the split. See entitlementIdentifierType .

Complex Type: splitLineItemInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. The line item to split. See entitlementLineItemIdentifierType .
numberOfCopies	integer	1..1	Required. The number of copies to split to another line item.
targetTierName	string	1..1	Required. The name of the tier that contains the target organization. The tier name exists in the OPS_PARTNER_TIER_NAME table. By default, this table includes the tier names for the End Customer and Distributor tiers. Custom tier names can be added to the table manually. In the web services, the targetTierName string must always be specified as the constant value, not the display value. So for example, End Customer has to be specified as bo.constants.partnertiernames.endcustomer and Distributor as bo.constants.partnertiernames.tier1
targetOrganizationUnit	organizationIdentifierType	1..1	The target organization in the target tier. See organizationIdentifierType .

Content Model

Component	Type	Occurs	Description
targetContact	userIdentifierType	0..1	Optional. The user at the target organization who you want to receive email messages about the result of this operation. See userIdentifierType .
matchingLineItemIdentifier	entitlementLineItemIdentifierType	0..1	Optional. Existing entitlement line item to which the count specified as numberOfCopies is to be transferred. If no matchingLineItemIdentifier is specified, or if it does not match to an existing entitlement line item, the split operation creates a new entitlement and line item at the target organization. See entitlementLineItemIdentifierType .

Complex Type: splitLineItemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemInfo	splitLineItemInfoType	1..*	Required. A lineItemList contains one or more lineItemInfo elements. See splitLineItemInfoType .

Complex Type: splitLineItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemList	splitLineItemListType	1..1	Required. See splitLineItemListType .

Referenced By

Name	Type
splitLineItemRequest	Element
splitLineItem	Method

Complex Type: splitLineItemResponseListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
splitLineItem	splitLineItemDataType	1..*	responseData contains one or more splitLineItem elements. See splitLineItemDataType .

Complex Type: splitLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	splitLineItemResponseType	0..1	Information about the entitlement line item that was split, and optionally the entitlement to which the split counts went, is listed in the responseData element. See splitLineItemResponseType .									
failedData	failedSplitLineItemListType	0..1	Information about an entitlement line item that was not split is listed in the failedData element. See failedSplitLineItemListType .									

Referenced By

Name	Type
splitLineItemResponse	Element

Complex Type: stateChangeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
eventName	StateChangeEventType	1..1	See StateChangeEventType.
eventDate	dateTime	1..1	The date and time that the event occurred.
userId	string	1..1	The user name of the user who initiated the event.
description	string	0..1	Optional. Description of the event.

Complex Type: stateChangeResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
featureList	featureStateChangeListenerType	0..1	Optional. See featureStateChangeListenerType .
featureBundleList	featureBundleStateChangeListenerType	0..1	Optional. See featureBundleStateChangeListenerType .
productList	productStateChangeListenerType	0..1	Optional. See productStateChangeListenerType .
licenseModelList	licenseModelStateChangeListenerType	0..1	Optional. See licenseModelStateChangeListenerType .
simpleEntitlementList	entitlementStateChangeListenerType	0..1	Optional. See entitlementStateChangeListenerType .
bulkEntitlementList	entitlementStateChangeListenerType	0..1	Optional. See entitlementStateChangeListenerType .

Complex Type: suitIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the suite.
primaryKeys	suitePKType	0..1	Database primary key of the suite. See suitePKType.

Complex Type: transferEntitlementInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
organizationTo	string	1..1	Required. Organization identifier of the organization to which the entitlement is to be transferred.
retainExistingIds	boolean	0..1	Optional. Set to true to preserve entitlement and activation IDs associated with the entitlement after it is transferred. Set to false (the default) to have FlexNet Operations generate new entitlement and activation IDs for the entitlement. If custom IDs are required, they must be set in subsequent update requests.
returnActiveFulfillments	boolean	0..1	Optional. Set to true (the default) to return any active fulfillments that have been activated against this entitlement before the transfer is done. The transfer cannot proceed if there are active fulfillments against the entitlement.
forceTransferEvenIfNoTargetUsers	boolean	0..1	Optional. Set to true to force the transfer even in cases where product category constraints prevent all current users at the target organization from seeing the entitlement. Default: false.

Content Model

Component	Type	Occurs	Description
forceTransferEvenIfParentAndChildSeparated	boolean	0..1	Optional. Set to true to force the transfer even in cases where the transfer causes the parent and child line items to be separated. There are two cases in which this separation might occur: • If the entitlement has line items that are child line items that have a specified parent, and the parent line item does not belong to this same entitlement or the target organization, then all such child line items will have the parents set to null. • If the entitlement has line items such that any one is a parent (has child line items) and the child line items belong to other entitlements. Default: false.

Complex Type: transferEntitlementsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementInfo	transferEntitlementInfoType	1..*	Required. See transferEntitlementInfoType .

Complex Type: transferEntitlementsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementList	transferEntitlementsListType	1..1	Required. See transferEntitlementInfoType .

Referenced By

Name	Type
transferEntitlementsRequest	Element
transferEntitlement	Method

Complex Type: transferEntitlementsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	transferredEntitlementsListType	0..1	Information about the entitlements that were transferred is listed in the responseData element. See transferredEntitlementsListType .									
failedData	failedTransferEntitlementListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedTransferEntitlementListType .									

Referenced By

Name	Type
transferEntitlementsResponse	Element

Complex Type: transferLineItemInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. See entitlementLineItemIdentifierType .
numberOfCopies	integer	1..1	Required. The number of copies to transfer.
useSameActivationId	boolean	0..1	Optional. Set to true to preserve the activation ID associated with the entitlement line item after it is transferred. Set to false (the default) to specify a custom activation ID for the new line item or to have FlexNet Operations generate a new activation ID for the entitlement line item.
customActivationId	string	0..1	Specify a custom activation ID if useSameActivationId is false and you want assign a specific activation ID for the new line item. Set generateActivationId to false.
generateActivationId	boolean	0..1	Set to true if useSameActivationId is false and you want FlexNet Operations to generate an activation ID for the new line item. Do not set a customActivationId .
entitlementBelongsTo	entitlementIdentifierType	1..1	Required. Existing entitlement to which the line items are to be transferred. See entitlementIdentifierType .

Complex Type: transferLineItemsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemInfo	transferLineItemInfoType	1..*	Required. A lineItemList contains one or more lineItemInfo elements. See transferLineItemInfoType .

Complex Type: transferLineItemsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linelItemList	transferLinItemsListType	1..1	Required. See transferLinItemsListType .

Referenced By

Name	Type
transferLinItemsRequest	Element
transferLinItem	Method

Complex Type: transferLinItemsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	transferredLineItemsListType	0..1	Information about the entitlements that were transferred is listed in the responseData element. See transferredLineItemsListType .									
failedData	failedTransferLineItemListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedTransferLineItemListType .									

Referenced By

Name	Type
transferLineItemsResponse	Element

Complex Type: transferredEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Entitlement ID of the transferred entitlement. See entitlementIdentifierType .
lineItemIdentifierMap	transferredLineItemMapType	0..*	Array of line items on the transferred entitlement. See transferredLineItemMapType .

Complex Type: transferredEntitlementsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
transferredEntitlement	transferredEntitlementDataType	1..*	responseData contains one or more transferredEntitlement elements. See transferredEntitlementDataType .

Complex Type: transferredLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Identifier of the new line item. See entitlementLineItemIdentifierType .

Content Model

Component	Type	Occurs	Description
transferredFromId	entitlementLineItemIdentifierType	1..1	Identifier of the line item before the transfer. See entitlementLineItemIdentifierType .

Complex Type: transferredLineItemMapType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	string	1..1	Activation ID of the transferred line item.
transferredFromId	string	0..1	If the IDs on the entitlement were not retained during transfer, this element contains the previous activation ID of the entitlement line item. If the IDs were retained for the transferred entitlement, this element contains an activation ID that has been altered from the previous ID.

Complex Type: transferredLineItemsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
transferredLineItem	transferredLineItemDataType	1..*	responseData contains one or more transferredLineItem elements. See transferredLineItemDataType .

Complex Type: trustedKeyIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the transaction key.
primaryKeys	trustedKeyPKType	0..1	Database primary key of the transaction key. See trustedKeyPKType.

Complex Type: unlinkMaintenanceLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	The licensed product line item to be unlinked. See entitlementLineItemIdentifierType .
maintenanceLineItemIdentifier	entitlementLineItemIdentifierType	1..1	The maintenance line item to be unlinked. See entitlementLineItemIdentifierType .

Complex Type: unlinkMaintenanceLineItemListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
unlinkMaintenanceLineItem	unlinkMaintenanceLineItemDataType	1..*	See unlinkMaintenanceLineItemDataType .

Complex Type: unlinkMaintenanceLineItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
unlinkMaintenanceLineItemList	unlinkMaintenanceLineItemListType	1..1	See unlinkMaintenanceLineItemListType .

Referenced By

Name	Type
unlinkMaintenanceLineItemRequest	Element
unlinkMaintenanceLineItem	Method

Complex Type: unlinkMaintenanceLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUnlinkMaintenanceLineItemListType	0..1	See failedUnlinkMaintenanceLineItemListType .									

Referenced By

Name	Type
unlinkMaintenanceLineItemResponse	Element

Complex Type: updateBulkEntitlementDataType

Description

The **entitlementIdentifier** always needs to be specified, along with the new values of the elements to be updated.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
entitlementId	idType	0..1	Only need to specify if modifying value. See idType .
soldTo	string	0..1	Optional. Only need to specify if modifying the value of the Distributor organization. Organization that has the right to fulfill or distribute activation IDs from this entitlement. Deprecated in favor of the channelPartners element.
product	productIdentifierType	0..1	Only need to specify if modifying value. See productIdentifierType .
partNumber	partNumberIdentifierType	0..1	Only need to specify if modifying value. See partNumberIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Only need to specify if modifying value. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	- Any entitlement-time attributes must be set before deployment of the entitlement. - See attributeDescriptorDataType. - If a request or response contains multiple license models, the accompanying license model attributes are a union of the attributes in all the license models. Therefore, if any license attributes are shared among the license models, they all must be assigned the same value.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Content Model

Component	Type	Occurs	Description
policyAttributes	policyAttributesListType	0..1	Only need to specify if modifying values. See policyAttributesListType .
shipToEmail	string	0..1	Only need to specify if modifying value. Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Only need to specify if modifying value. Postal address for the sold-to organization.
orderId	string	0..1	Only need to specify if modifying value. Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Only need to specify if modifying value. Order line number from CRM or ERP system.
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION
isPermanent	boolean	0..1	Only need to specify if modifying value. Whether the entitlement, and therefore, license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set term or expirationDate , but not both.
term	DurationType	0..1	Only need to specify if modifying value. The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
expirationDate	date	0..1	Only need to specify if modifying value. The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set term or expirationDate , but not both.
versionDate	date	0..1	Only need to specify if modifying value. If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.

Content Model

Component	Type	Occurs	Description
versionDateAttributes	versionDateAttributesType	0..1	Only need to specify if modifying value. If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See versionDateAttributesType .
numberOfCopies	integer	0..1	Only need to specify if modifying value. Number of copies of the product entitled by each web register key on this entitlement.
description	string	0..1	Only need to specify if modifying value. Describe what makes this bulk entitlement unique.
autoDeploy	boolean	0..1	Whether to deploy this entitlement as soon as it is updated.
updatedEntitledProducts	updateEntitledProductDataListType	0..1	See updateEntitledProductDataListType .
channelPartners	channelPartnerDataListType	0..1	Optional. Only need to specify if modifying value. The organization in the specified tier will be added or replaced. See channelPartnerDataListType .
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.

Complex Type: updateBulkEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
bulkEntitlement	updateBulkEntitlementDataType	1..*	Required. An updateBulkEntitlementRequest contains a bulkEntitlement element. See updateBulkEntitlementDataType .

Referenced By

Name	Type
updateBulkEntitlementRequest	Element
updateBulkEntitlement	Method

Complex Type: updateBulkEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateBulkEntitlementDataListType	0..1	Information about the entitlements that were not updated is listed in the failedData element. See failedUpdateBulkEntitlementDataListType .									

Referenced By

Name	Type
updateBulkEntitlementResponse	Element

Complex Type: updateEntitledProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitledProducts	entitledProductDataType	0..*	See entitledProductDataType .
opType	CollectionOperationType	1..1	Required. Specify one of the following for each entitlement to be modified: - REPLACE - ADD - DELETE

Complex Type: updateEntitlementLineItemDataType

Description

The **entitlementIdentifier** always needs to be specified, along with the new values of the elements to be updated

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
lineItemData	updateLineItemDataType	0..*	See updateLineItemDataType .
maintenanceLineItemData	updateMaintenanceLineItemDataType	0..*	See updateMaintenanceLineItemDataType .
autoDeploy	boolean	0..1	Whether to deploy this line item as soon as it is updated.

Complex Type: updateEntitlementLineItemRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemData	updateEntitlementLineItemDataType	1..*	Required. An updateEntitlementLineItemRequest contains a lineItemData element. See updateEntitlementLineItemDataType .

Referenced By

Name	Type
updateEntitlementLineItemRequest	Element
updateEntitlementLineItem	Method

Complex Type: updateEntitlementLineItemResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateEntitlementLineItemDataListType	0..1	Information about the line items that were not updated is listed in the failedData element. See failedUpdateEntitlementLineItemDataListType .									

Referenced By

Name	Type
updateEntitlementLineItemResponse	Element

Complex Type: updateLineItemType

Description

The **lineItemIdentifier** always needs to be specified, along with the new values of the elements to be updated

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. See entitlementLineItemIdentifierType .
activationId	idType	0..1	Only need to specify if modifying value. See idType .
description	string	0..1	Optional description of the entitlement line item.
product	productIdentifierType	0..1	Only need to specify if modifying value. See productIdentifierType .
partNumber	partNumberIdentifierType	0..1	Only need to specify if modifying value. See partNumberIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	Only need to specify if modifying value. See licenseModelIdentifierType .
alternateLicenseModel 1	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
alternateLicenseModel 2	licenseModelIdentifierType	0..1	Optional. Up to three license models are supported on a FlexNet license technology line item, one each of a certificate-based, trusted storage, and embedded on a single line item. See licenseModelIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	- Any entitlement-time attributes must be set before deployment of the entitlement. - If a request or response contains multiple license models, the accompanying license model attributes are a union of the attributes in all the license models. Therefore, if any license attributes are shared among the license models, they all must be assigned the same value. See attributeDescriptorDataType.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
policyAttributes	policyAttributesListType	0..1	Only need to specify if modifying values. See policyAttributesListType .
orderId	string	0..1	Only need to specify if modifying value. Order ID from CRM or ERP system.

Content Model

Component	Type	Occurs	Description
orderLineNumber	string	0..1	Only need to specify if modifying value. Order line number from CRM or ERP system.
numberOfCopies	integer	0..1	Only need to specify if modifying value. Number of copies of the product entitled by this line item.
startDate	date	0..1	Only need to specify if modifying value. Start date of the entitlement, which will also be the start date of the license. If the start date is not set on the entitlement line item, it will be set when the first license is activated against the line item. Do not set unless the startDateOption is set to DEFINE_NOW.
startDateOption	StartDateOptionType	0..1	At what point the start date is defined, where this is of the following values: • DEFINE_NOW • DEFINE_AT_FIRST_ACTIVATION • DEFINE_AT_EACH_ACTIVATION • DEFINE_ACTDATE_AT_FIRST_ACTIVATION • DEFINE_ACTDATE_AT_EACH_ACTIVATION
isPermanent	boolean	0..1	Only need to specify if modifying value. Whether the entitlement, and therefore, license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set either term or expirationDate .
term	DurationType	0..1	Only need to specify if modifying value. The length of time after the start date that the entitlement, and the licenses activated from it, are valid. See DurationType . If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set either term or expirationDate .
expirationDate	date	0..1	Only need to specify if modifying value. The date that the entitlement line item, and the licenses activated from it, expire. If isPermanent is true, do not set term or expirationDate . If isPermanent is false, set either term or expirationDate .
versionDate	date	0..1	Only need to specify if modifying value. If any of the features in the product use date-based versions, and you want to set the version date when the line item is created, set versionDate and set versionDateAttributes to DEFINE_NOW. In a license, this date is converted into the Version Date Format that is specified in the system configuration.

Content Model

Component	Type	Occurs	Description
versionDateAttributes	versionDateAttributesType	0..1	Only need to specify if modifying value. If any of the features in the product use date-based versions, set versionDateAttributes to reflect when and how you want to specify the version date. See versionDateAttributesType .
parentLineItem	entitlementLineItemIdentifierType	0..1	Only need to specify if modifying value. See entitlementLineItemIdentifierType .
updatedEntitledProducts	updateEntitledProductDataListType	0..1	See updateEntitledProductDataListType .
entitledProducts	entitledProductDataListType	0..1	Deprecated. Use updatedEntitledProducts[] instead. See entitledProductDataListType .
lineItemAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: updateMaintenanceLineItemDataType

Description

The **lineItemIdentifier** always needs to be specified, along with the new values of the elements to be updated.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemIdentifier	entitlementLineItemIdentifierType	1..1	Required. See entitlementLineItemIdentifierType .
activationId	idType	0..1	Only need to specify if modifying value. See idType .
maintenanceProduct	productIdentifierType	0..1	Only need to specify if modifying value. See productIdentifierType .
partNumber	partNumberIdentifierType	0..1	Only need to specify if modifying value. See partNumberIdentifierType .
orderId	string	0..1	Optional. Order ID from CRM or ERP system.
orderLineNumber	string	0..1	Optional. Order line number from CRM or ERP system.
startDate	date	0..1	Only need to specify if modifying value. Start date of the entitlement, which will also be the start date of maintenance.

Content Model

Component	Type	Occurs	Description
expirationDate	date	0..1	Only need to specify if modifying value. The date that the entitlement line item, and maintenance, expire.
isPermanent	boolean	0..1	Only need to specify if modifying value. Whether the entitlement, and therefore, license activated from it, is permanent. If true, the entitlement line item, and the licenses activated from it, never expire. If true, do not set term or expirationDate . If false, set either term or expirationDate .
parentLineItem	entitlementLineItemIdentifierType	0..1	Only need to specify if modifying value. The entitlement line item that contains the activatable product to which the maintenance is related. See entitlementLineItemIdentifierType .

Complex Type: updateSimpleEntitlementDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .
entitlementId	idType	0..1	Only need to specify if modifying value. See idType .
description	string	0..1	Optional description of the entitlement.
soldTo	string	0..1	Optional. Only need to specify if modifying the value of the End Customer organization. Organization that has the right to fulfill or distribute activation IDs from this entitlement. Deprecated in favor of the channelPartners element.
shipToEmail	string	0..1	Only need to specify if modifying value. Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Only need to specify if modifying value. Postal address for the sold-to organization.
autoDeploy	boolean	0..1	If set, the entitlement is automatically deployed after the update.
channelPartners	channelPartnerDataListType	0..1	Optional. Only need to specify if modifying value. The organization in the specified tier will be added or replaced. See channelPartnerDataListType .

Content Model

Component	Type	Occurs	Description
allowPortalLogin	boolean	0..1	True if the entitlement ID can be used to log in to the self-service portal; otherwise, false.
entitlementAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: updateSimpleEntitlementRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
simpleEntitlement	updateSimpleEntitlementDataType	1..*	Required. An updateSimpleEntitlementRequest contains a simpleEntitlement element. See updateSimpleEntitlementDataType .

Referenced By

Name	Type
updateSimpleEntitlementRequest	Element
updateSimpleEntitlement	Method

Complex Type: updateSimpleEntitlementResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateSimpleEntitlementDataListType	0..1	Information about the entitlements that were not updated is listed in the failedData element. See failedUpdateSimpleEntitlementDataListType .									

Referenced By

Name	Type
updateSimpleEntitlementResponse	Element

Complex Type: userIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	User's unique ID.
userName	string	0..1	User's FlexNet Operations login name.
primaryKeys	userPKType	0..1	See userPKType .

Complex Type: userPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
firstName	string	1..1	User's first name.
lastName	string	1..1	User's last name.
emailAddress	string	1..1	User's email address.
phoneNumber	string	0..1	User's phone number.

Complex Type: versionDateAttributesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
versionOption	VersionDateOptionType	1..1	See VersionDateOptionType .
duration	DurationType	0..1	Optional. See DurationType .

Complex Type: VersionFormatQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
value	VersionFormatType	1..1	VersionFormatType of FIXED or DATE_BASED.
searchType	simpleSearchType	1..1	One of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Complex Type: virtualLicensePolicyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
isVirtualLicense	boolean	1..1	True —Activation permitted on a virtual machine. False —Activation prevented on a virtual machine.

Complex Type: webRegKeyCountDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
totalCount	integer	1..1	The total number of web register keys that have been added to the bulk entitlement
redeemedCount	integer	1..1	The number of totalCount that have already been redeemed

Complex Type: webRegKeyDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKeyData	addWebRegKeyDataType	1..*	responseData contains one or more webRegKeyData elements. See addWebRegKeyDataType .

Complex Type: webRegKeyDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKey	string	0..*	Optional. Provide web register keys in an array of strings, if autoGenerate is set to false.
autoGenerate	boolean	0..1	Optional. Set to false if providing your own web register key values; to true if you want the web register keys to be autogenerated.

Content Model

Component	Type	Occurs	Description
numAutoGenerate	integer	0..1	Optional. Provide the number of web register keys to be autogenerated, if autoGenerate is set to true.

Complex Type: webRegKeysDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKeys	webRegKeyType	0..1	A responseData element contains a webRegKeys element that contains an array of webRegKey strings.

Complex Type: webRegKeysListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKey	string	0..*	Provide web register keys in an array of strings.

Simple Types: EntitlementOrderService

Simple Types

Name
CreateOrUpdateOperationType
VersionDateOptionType

CREATE_OR_IGNORE

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
CREATE_OR_UPDATE	
CREATE_OR_IGNORE	

Simple Type: VersionDateOptionType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
DEFINE_NOW	
USE_START_DATE	
USE_ACTIVATION_DATE	
DEFINE_VERSION_STARTDATE_LATER	
DEFINE_VERSION_DATE_LATER	

Elements: EntitlementOrderService

Elements

Name	Description
addWebRegKeyRequest	An addWebRegKeyRequest message contains an element of addWebRegKeyRequestType.
addWebRegKeyResponse	An addWebRegKeyResponse message contains an element of addWebRegKeyResponseType. Each web register key in the addWebRegKeyRequest is added as an atomic unit; adding each either succeeds or fails
createBulkEntitlementRequest	A createBulkEntitlementRequest message contains an element of createBulkEntitlementRequestType.
createBulkEntitlementResponse	A createBulkEntitlementResponse message contains an element of createBulkEntitlementResponseType. Each entitlement in the createBulkEntitlementRequest is added as an atomic unit; adding each either succeeds or fails.
createEntitlementLineItemRequest	A createEntitlementLineItemRequest message contains an element of addOrReplaceEntitlementLineItemRequestType.
createEntitlementLineItemResponse	A createEntitlementLineItemResponse message contains an element of addOrReplaceEntitlementLineItemResponseType. Each line in the createEntitlementLineItemRequest is added as an atomic unit; adding each either succeeds or fails.
createSimpleEntitlementRequest	A createSimpleEntitlementRequest message contains an element of createSimpleEntitlementRequestType.
createSimpleEntitlementResponse	A createSimpleEntitlementResponse message contains an element of createSimpleEntitlementResponseType. Each entitlement in the createSimpleEntitlementRequest is added as an atomic unit; adding each either succeeds or fails.
deleteEntitlementRequest	A deleteEntitlementRequest message contains an element of deleteEntitlementRequestType.
deleteEntitlementResponse	A deleteEntitlementResponse message contains an element of deleteEntitlementResponseType. Each entitlement in the deleteEntitlementRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about entitlements that were deleted successfully.
deleteMaintenanceLineItemRequest	A deleteMaintenanceLineItemRequest message contains an element of deleteMaintenanceLineItemRequestType.
deleteMaintenanceLineItemResponse	A deleteMaintenanceLineItemResponse message contains an element of deleteMaintenanceLineItemResponseType. Each maintenance line item in the deleteMaintenanceLineItemRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about line items that were deleted successfully
deleteWebRegKeyRequest	A deleteWebRegKeyRequest message contains an element of deleteWebRegKeyRequestType.
deleteWebRegKeyResponse	An deleteWebRegKeyResponse message contains an element of deleteWebRegKeyResponseType. Each web register key in the deleteWebRegKeyRequest is deleted as an atomic unit; deleting each either succeeds or fails.
emailActivatableItemRequest	An emailActivatableItemRequest message contains an element of emailActivatableItemRequestType.

Elements

Name	Description
emailActivatableItemResponse	An emailActivatableItemResponse message contains an element of emailActivatableItemResponseType.
emailEntitlementRequest	An emailEntitlementRequest message contains an element of emailEntitlementRequestType.
emailEntitlementResponse	An emailEntitlementResponse message contains an element of emailEntitlementResponseType.
getActivatableItemCountRequest	A getActivatableItemCountRequest message contains an element of getActivatableItemCountRequestType.
getActivatableItemCountResponse	A getActivatableItemCountResponse message contains an element of getActivatableItemCountResponseType.
getBulkEntitlementCountRequest	A getBulkEntitlementCountRequest message contains an element of getBulkEntitlementCountRequestType.
getBulkEntitlementCountResponse	A getBulkEntitlementCountResponse message contains an element of getEntitlementCountResponseType.
getBulkEntitlementPropertiesRequest	A getBulkEntitlementPropertiesRequest message contains an element of getBulkEntitlementPropertiesRequestType.
getBulkEntitlementPropertiesResponse	A getBulkEntitlementQueryResponse message contains an element of getBulkEntitlementQueryResponseType. <i>Note: The soldTo element is supported for backwards compatibility in the response to this operation, and now the channelPartners element is also supported. Note, however, that the query parameters of the operation do not support the channelPartners element. soldTo or parentBulkEntSoldTo should still be used to specify an organization in the query request or response.</i>
getEntitlementAttributesRequest	A getEntitlementAttributesRequest message contains an element of getEntitlementAttributesRequestType.
getEntitlementAttributesResponse	A getEntitlementAttributesResponse message contains an element of getEntitlementAttributesResponseType.
getEntitlementCountRequest	A getEntitlementCountRequest message contains an element of getEntitlementCountRequestType.
getEntitlementCountResponse	A getEntitlementCountResponse message contains an element of getEntitlementCountResponseType.
getExactAvailableCountRequest	A getExactAvailableCountRequest message contains an element of getExactAvailableCountRequestType.
getExactAvailableCountResponse	A getExactAvailableCountResponse message contains an element of getExactAvailableCountResponseType.
getMatchingBulkEntsRequest	A getMatchingBulkEntsRequest message contains an element of getMatchingBulkEntsRequestType.
getMatchingBulkEntsResponse	A getMatchingBulkEntsResponse message contains an element of getMatchingBulkEntsResponseType.
getMatchingLineItemsRequest	A getMatchingLineItemsRequest message contains an element of getMatchingLineItemsRequestType.
getMatchingLineItemsResponse	A getMatchingLineItemsResponse message contains an element of getMatchingLineItemsResponseType.
getStateChangeHistoryRequest	A getStateChangeHistoryRequest message contains an element of getStateChangeHistoryRequestType.

Elements

Name	Description
getStateChangeHistoryResponse	A getStateChangeHistoryResponse message contains an element of <code>getStateChangeHistoryResponseType</code> .
getWebRegKeyCountRequest	A getWebRegKeyCountRequest message contains an element of <code>getWebRegKeyCountRequestType</code> .
getWebRegKeyCountResponse	A getWebRegKeyCountResponse message contains an element of <code>getWebRegKeyCountResponseType</code> .
getWebRegKeysQueryRequest	A getWebRegKeysQueryRequest message contains an element of <code>getWebRegKeysQueryRequestType</code> .
getWebRegKeysQueryResponse	A getWebRegKeysQueryResponse message contains an element of <code>getWebRegKeysQueryResponseType</code> .
linkMaintenanceLineItemRequest	A linkMaintenanceLineItemRequest message contains an element of <code>linkMaintenanceLineItemRequestType</code> .
linkMaintenanceLineItemResponse	A linkMaintenanceLineItemResponse message contains an element of <code>linkMaintenanceLineItemResponseType</code> .
mapEntitlementsToUserRequest	A mapEntitlementsToUserRequest message contains an element of <code>mapEntitlementsToUserRequestType</code> .
mapEntitlementsToUserResponse	A mapEntitlementsToUserResponse message contains an element of <code>mapEntitlementsToUserResponseType</code> . Each ID in the mapEntitlementsToUserRequest is added as an atomic unit; adding each either succeeds or fails.
mergeEntitlementsRequest	A mergeEntitlementsRequest message contains an element of <code>mergeEntitlementsRequestType</code> .
mergeEntitlementsResponse	A mergeEntitlementsResponse message contains an element of <code>mergeEntitlementsResponseType</code> .
removeEntitlementLineItemRequest	A removeEntitlementLineItemRequest message contains an element of <code>removeEntitlementLineItemRequestType</code> .
removeEntitlementLineItemResponse	A removeEntitlementLineItemResponse message contains an element of <code>removeEntitlementLineItemResponseType</code> . Each line item in the removeEntitlementLineItemRequest is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about line items that were deleted successfully.
renewLicenseRequest	A renewLicenseRequest message contains an element of <code>renewEntitlementRequestType</code> .
renewLicenseResponse	A renewLicenseResponse message contains an element of <code>renewEntitlementResponseType</code> . Each entitlement in the renewLicenseRequest is renewed as an atomic unit; renewing each either succeeds or fails.
replaceEntitlementLineItemRequest	A replaceEntitlementLineItemRequest message contains an element of <code>addOrReplaceEntitlementLineItemRequestType</code> .
replaceEntitlementLineItemResponse	A replaceEntitlementLineItemResponse message contains an element of <code>addOrReplaceEntitlementLineItemResponseType</code> .
searchActivatableItemRequest	A searchActivatableItemRequest message contains an element of <code>searchActivatableItemRequestType</code> .

Elements

Name	Description
searchActivatableItemResponse	A searchActivatableItemResponse message contains an element of searchActivatableItemResponseType . This operation will not return maintenance line items. Note: The <i>soldTo</i> element is supported for backwards compatibility in the response to this operation, and now the <i>channelPartners</i> element is also supported. Note, however, that the query parameters of the operation do not support the <i>channelPartners</i> element. <i>soldTo</i> or <i>parentBulkEntSoldTo</i> should still be used to specify an organization in the query request or response.
searchEntitlementLineItemPropertiesRequest	A searchEntitlementLineItemPropertiesRequest message contains an element of searchEntitlementLineItemPropertiesRequestType .
searchEntitlementLineItemPropertiesResponse	A searchEntitlementLineItemPropertiesResponse message contains an element of searchEntitlementLineItemPropertiesResponseType . A user will see only elements configured in entitlementLineItemResponseConfig . Selecting too many elements for a response can negatively impact performance. Only select the elements required for a given response Note: The <i>soldTo</i> element is supported for backwards compatibility in the response to this operation, and now the <i>channelPartners</i> element is also supported. Note, however, that the query parameters of the operation do not support the <i>channelPartners</i> element. <i>soldTo</i> or <i>parentBulkEntSoldTo</i> should still be used to specify an organization in the query request or response.
searchEntitlementRequest	A searchEntitlementRequest message contains an element of searchEntitlementRequestType .
searchEntitlementResponse	A searchEntitlementResponse message contains an element of searchEntitlementResponseType . Note: The <i>soldTo</i> element is supported for backwards compatibility in the response to this operation, and now the <i>channelPartners</i> element is also supported. Note, however, that the query parameters of the operation do not support the <i>channelPartners</i> element. <i>soldTo</i> or <i>parentBulkEntSoldTo</i> should still be used to specify an organization in the query request or response.
setEntitlementStateRequest	A setEntitlementStateRequest message contains an element of setEntitlementStateRequestType .
setEntitlementStateResponse	A setEntitlementStateResponse message contains an element of setEntitlementStateResponseType .
setLineItemStateRequest	A setLineItemStateRequest message contains an element of setLineItemStateRequestType .
setLineItemStateResponse	A setLineItemStateResponse message contains an element of setLineItemStateResponseType .
setMaintenanceLineItemStateRequest	A setMaintenanceLineItemStateRequest message contains an element of setMaintenanceLineItemStateRequestType .
setMaintenanceLineItemStateResponse	A setMaintenanceLineItemStateResponse message contains an element of setMaintenanceLineItemStateResponseType .
splitBulkEntitlementRequest	A splitBulkEntitlementRequest message contains an element of splitBulkEntitlementRequestType .
splitBulkEntitlementResponse	A splitBulkEntitlementResponse message contains an element of splitBulkEntitlementResponseType .
splitLineItemRequest	A splitLineItemRequest message contains an element of splitLineItemRequestType .

Elements

Name	Description
splitLineItemResponse	A splitLineItemResponse message contains an element of splitLineItemResponseType.
transferEntitlementsRequest	A transferEntitlementsRequest message contains an element of transferEntitlementsRequestType.
transferEntitlementsResponse	A transferEntitlementsResponse message contains an element of transferEntitlementsResponseType. Each entitlement in the transferEntitlementsRequest is transferred as an atomic unit; transferring each either succeeds or fails.
transferLineItemsRequest	A transferLineItemsRequest message contains an element of transferLineItemsRequestType.
transferLineItemsResponse	A transferLineItemsResponse message contains an element of transferLineItemsResponseType. Each entitlement line item in the transferLineItemsRequest is transferred as an atomic unit; transferring each either succeeds or fails.
unlinkMaintenanceLineItemRequest	An unlinkMaintenanceLineItemRequest message contains an element of unlinkMaintenanceLineItemRequestType.
unlinkMaintenanceLineItemResponse	An unlinkMaintenanceLineItemResponse message contains an element of unlinkMaintenanceLineItemResponseType.
updateBulkEntitlementRequest	An updateBulkEntitlementRequest message contains an element of updateBulkEntitlementRequestType.
updateBulkEntitlementResponse	An updateBulkEntitlementResponse message contains an element of updateBulkEntitlementResponseType.
updateEntitlementLineItemRequest	An updateEntitlementLineItemRequest message contains an element of updateEntitlementLineItemRequestType.
updateEntitlementLineItemResponse	A updateEntitlementLineItemResponse message contains an element of updateEntitlementLineItemResponseType. Each entitlement in the updateEntitlementLineItemRequest is updated as an atomic unit; updating each either succeeds or fails.
updateSimpleEntitlementRequest	An updateSimpleEntitlementRequest message contains an element of updateSimpleEntitlementRequestType.
updateSimpleEntitlementResponse	A updateSimpleEntitlementResponse message contains an element of updateSimpleEntitlementResponseType. Each entitlement in the updateSimpleEntitlementRequest is updated as an atomic unit; updating each either succeeds or fails.
upgradeLicenseRequest	An upgradeLicenseRequest message contains an element of EntitlementLifeCycleRequestType.
upgradeLicenseResponse	An upgradeLicenseResponse message contains an element of EntitlementLifeCycleResponseType. Each entitlement in the upgradeLicenseRequest is renewed as an atomic unit; upgrading each either succeeds or fails.
upsellLicenseRequest	An upsellLicenseRequest message contains an element of EntitlementLifeCycleRequestType.
upsellLicenseResponse	An upsellLicenseResponse message contains an element of EntitlementLifeCycleResponseType. Each entitlement in the upsellLicenseRequest is renewed as an atomic unit; upselling each either succeeds or fails.

Element: addWebRegKeyRequest

Description

An **addWebRegKeyRequest** message contains an element of addWebRegKeyRequestType.

Derived By

Type [addWebRegKeyRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
webRegKeyData	addWebRegKeyDataType	1..*	Required. An addWebRegKeyRequest contains an array of webRegKeyData elements to be added. See addWebRegKeyDataType .
processSync	boolean	0..1	Optional. Set to true to create web register keys synchronously, that is, the Web services client will be blocked until the request is completely processed. Use synchronous processing only for creating small numbers of web register keys at a time. By default, web register key creation is asynchronous.

Referenced By

Name	Type
createWebRegKey	Method

XML Example

The following XML fragment illustrates an **addWebRegKeyRequest** message:

```
<addWebRegKeyRequest>
  <webRegKeyData>
    <bulkEntitlement>
      <primaryKeys>
        <entitlementId>Ent_bulk_basic</entitlementId>
      </primaryKeys>
    </bulkEntitlement>
    <webRegKeys>
      <webRegKey>WRK-1</webRegKey>
      <webRegKey>WRK-2</webRegKey>
      <webRegKey>WRK-3</webRegKey>
      <webRegKey>WRK-4</webRegKey>
      <webRegKey>WRK-5</webRegKey>
    </webRegKeys>
  </webRegKeyData>
  <processSync>true</processSync>
</addWebRegKeyRequest>
```

Element: addWebRegKeyResponse

Description

An **addWebRegKeyResponse** message contains an element of addWebRegKeyResponseType.

Each web register key in the **addWebRegKeyRequest** is added as an atomic unit; adding each either succeeds or fails

Derived By

Type [addWebRegKeyResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
responseData	webRegKeyDataListType	0..1	Information about the web register keys that were added is listed in the responseData element. See webRegKeyDataListType . Not populated for asynchronous requests or for requests in which the web register keys are not autogenerated.									
failedData	failedAddWebRegKeyDataListType	0..1	Information about the web register keys that were not added is listed in the failedData element. See failedAddWebRegKeyDataListType . Not populated for asynchronous requests or for requests in which the web register keys are autogenerated.									

Referenced By

Name	Type
createWebRegKey	Method

XML Example

The following XML fragment illustrates a successful **addWebRegKeyResponse** message:

```
<addWebRegKeyResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</addWebRegKeyResponse>
```

Element: createBulkEntitlementRequest

Description

A **createBulkEntitlementRequest** message contains an element of createBulkEntitlementRequestType.

Derived By

Type [createBulkEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlement	createBulkEntitlementData Type	1..*	Required. A createBulkEntitlementRequest contains a bulkEntitlement element. See createBulkEntitlementDataType .

Referenced By

Name	Type
createBulkEntitlement	Method

XML Example

The following XML fragment illustrates a **createBulkEntitlementRequest** message:

```
<createBulkEntitlementRequest>
  <bulkEntitlement>
    <entitlementId>
      <id>Ent_bulk_basic</id>
    </entitlementId>
    <soldTo>SENTRY</soldTo>
    <product>
      <primaryKeys>
        <name>Product_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <partNumber>
      <primaryKeys>
        <partId>100-001</partId>
      </primaryKeys>
    </partNumber>
    <licenseModel>
      <primaryKeys>
        <name>Nodelocked Uncounted</name>
      </primaryKeys>
    </licenseModel>
    <licenseModelAttributes>
      <attribute>
        <attributeName>SERIAL_NUMBER</attributeName>
        <stringValue>test sno</stringValue>
      </attribute>
      <attribute>
        <attributeName>NOTICE</attributeName>
        <stringValue>test notice</stringValue>
      </attribute>
    </licenseModelAttributes>
    <policyAttributes>
      <repairsPolicy>
        <allowedCount>1</allowedCount>
      </repairsPolicy>
    </policyAttributes>
  </bulkEntitlement>
</createBulkEntitlementRequest>
```

XML Example

```
<policyTerm>
  <duration>1</duration>
  <durationUnit>MONTHS</durationUnit>
</policyTerm>
</repairsPolicy>
<extraActivationsPolicy>
  <allowedCount>1</allowedCount>
</extraActivationsPolicy>
<virtualLicensePolicy>
  <isVirtualLicense>false</isVirtualLicense>
</virtualLicensePolicy>
</policyAttributes>
<shipToEmail>test@example.com</shipToEmail>
<shipToAddress>San Jose</shipToAddress>
<isPermanent>false</isPermanent>
<term>
  <numDuration>90</numDuration>
  <durationUnit>DAYS</durationUnit>
</term>
<autoDeploy>true</autoDeploy>
</bulkEntitlement>
</createBulkEntitlementRequest>
```

Element: createBulkEntitlementResponse

Description

A **createBulkEntitlementResponse** message contains an element of createBulkEntitlementResponseType.

Each entitlement in the **createBulkEntitlementRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createBulkEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedBulkEntitlementDataListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedBulkEntitlementDataListType .									
responseData	createdBulkEntitlementDataListType	0..1	Information about the entitlements that were added is listed in the responseData element. See createdBulkEntitlementDataListType .									

Referenced By

Name	Type
createBulkEntitlement	Method

XML Example

The following XML fragment illustrates a successful **createBulkEntitlementResponse** message:

```
<createBulkEntitlementResponse>
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <createdBulkEntitlement>
    <recordRefNo>1</recordRefNo>
    <uniqueId>HID-100289</uniqueId>
    <bulkEntitlementId>Ent_bulk_basic</bulkEntitlementId>
  </createdBulkEntitlement>
</responseData>
</createBulkEntitlementResponse>
```

Element: createEntitlementLineItemRequest

Description

A **createEntitlementLineItemRequest** message contains an element of **addOrReplaceEntitlementLineItemRequestType**.

Derived By

Type [addOnlyEntitlementLineItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItem	addEntitlementLineItemDataType	1..*	See addEntitlementLineItemDataType .
opType	CreateOrUpdateOperationType	0..1	One of the following: - CREATE_OR_UPDATE - CREATE_OR_IGNORE Note: If the opType is specified as either CREATE_OR_IGNORE or CREATE_OR_UPDATE, then specifying the entitlement identifier is important. If the entitlement identified by the entitlementIdentifier is not found, then the response could be a FAILURE. If the opType is set to CREATE_OR_UPDATE and the line item identifier exists, the system will try to handle the request as an update. Updates to the associatedLineItems and lineItemType will be ignored.

Referenced By

Name	Type
createEntitlementLineItem	Method

XML Example

The following XML fragment illustrates a **createEntitlementLineItemRequest** message:

```
<createEntitlementLineItemRequest>
  <lineItem>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent-simple-test</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <lineItems>
      <activationId>
        <id>Ent-simple-test-1</id>
      </activationId>
      <product>
        <primaryKeys>
          <name>Basic Paint</name>
          <version>1.0</version>
        </primaryKeys>
      </product>
      <licenseModel>
        <primaryKeys>
          <name>NodeLocked Uncounted</name>
        </primaryKeys>
      </licenseModel>
      <licenseModelAttributes>
        <attribute>
          <attributeName>NOTICE</attributeName>
          <stringValue>n</stringValue>
        </attribute>
        <attribute>
          <attributeName>SERIAL_NUMBER</attributeName>
          <stringValue>sn</stringValue>
        </attribute>
      </licenseModelAttributes>
      <orderId>100</orderId>
      <orderLineNumber>1</orderLineNumber>
      <numberOfCopies>10</numberOfCopies>
      <isPermanent>true</isPermanent>
    </lineItems>
    <maintenanceLineItems>
      <activationId>
        <id>Ent-simple-test-1M</id>
      </activationId>
      <maintenanceProduct>
        <primaryKeys>
          <name>Paint Maintenance</name>
          <version>1.0</version>
        </primaryKeys>
      </maintenanceProduct>
      <startDate>2008-01-15</startDate>
      <expirationDate>2008-01-15</expirationDate>
      <parentLineItem>
        <primaryKeys>
          <activationId>Ent-simple-test-1</activationId>
        </primaryKeys>
      </parentLineItem>
    </maintenanceLineItems>
    <autoDeploy>true</autoDeploy>
  </lineItem>
</createEntitlementLineItemRequest>
```

XML Example

```
</lineltem>  
</createEntitlementLineltemRequest>
```

Element: createEntitlementLineltemResponse

Description

A **createEntitlementLineltemResponse** message contains an element of **addOrReplaceEntitlementLineltemResponseType**.

Each line in the **createEntitlementLineltemRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [addOnlyEntitlementLineltemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. • FAILURE—None of the items in the request were processed. If the opType is CREATE_OR_IGNORE, then, the operation finds out if the line item was present – if present, it ignores the line item and proceeds with the next line item. If the line item was not present, it will create that item. All items that are ignored will be copied to the responseData of the response. If the opType is CREATE_OR_UPDATE, then the operation updates the line item if present, otherwise creates it. Note: A line item request cannot succeed in the absence of an entitlement request.
			reason	string	Gives reason for partial failure or failure.

Content Model

Component	Type	Occurs	Description
failedData	failedAddEntitlementLineItemDataListType	0..1	See failedAddEntitlementLineItemDataListType .
responseData	addedEntitlementLineItemDataListType	0..1	See addedEntitlementLineItemDataListType .

Referenced By

Name	Type
createEntitlementLineItem	Method

XML Example

The following XML fragment illustrates a **createEntitlementLineItemResponse** message:

```
<createEntitlementLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <addedLineItems>
      <entitlementIdentifier>
        <primaryKeys>
          <entitlementId>Ent-simple-test</entitlementId>
        </primaryKeys>
      </entitlementIdentifier>
      <lineItemUniquelds>HID-220111</lineItemUniquelds>
      <maintenanceLineItemUniquelds>HID-220112
      </maintenanceLineItemUniquelds>
    </addedLineItems>
  </responseData>
</createEntitlementLineItemResponse>
```

Element: createSimpleEntitlementRequest

Description

A **createSimpleEntitlementRequest** message contains an element of createSimpleEntitlementRequestType.

Derived By

Type [createSimpleEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
simpleEntitlement	createSimpleEntitlementDataType	1..*	Required. A createSimpleEntitlementRequest contains an array of simpleEntitlement elements to be added. See createSimpleEntitlementDataType .
opType	CreateOrUpdateOperationType	0..1	One of the following: - CREATE_OR_UPDATE - CREATE_OR_IGNORE Note: If the opType is CREATE_OR_UPDATE, then the incoming request is split internally as a createRequest (containing all entitlements that need to be created) and an updateRequest (containing all entitlements that need to be updated). If there is even a single failure in the createRequest, the whole of the createRequest fails. If there is a single failure in the updateRequest, the whole of the updateRequest fails. However if the createRequest succeeds and updateRequest fails (or vice-versa) , the overall status is PARTIAL_FAILURE. The FAILURE case arises wherein both createRequest and updateRequest fail. If the opType is set to CREATE_OR_UPDATE and the entitlement already exists in the system once the line item create/update portion is finished and then if the update of the entitlement is requested but returns an error, then the entire entitlement request will fail. However, the updates to the line items which have been completed, will not be rolled back.

Referenced By

Name	Type
createSimpleEntitlement	Method

XML Example

The following XML fragment illustrates a **createSimpleEntitlementRequest** message:

```
<createSimpleEntitlementRequest>
  <simpleEntitlement>
    <entitlementId>
      <id>Ent_basic</id>
    </entitlementId>
    <soldTo>ACME</soldTo>
    <shipToEmail>test@example.com</shipToEmail>
    <shipToAddress>San Jose</shipToAddress>
    <lineItems>
      <activationId>
        <id>Ent_basic_1</id>
      </activationId>
      <product>
```

XML Example

```
<primaryKeys>
  <name>Product_basic</name>
  <version>1.0</version>
</primaryKeys>
</product>
<licenseModel>
  <primaryKeys>
    <name>FC Ent Policies</name>
  </primaryKeys>
</licenseModel>
<licenseModelAttributes>
  <attribute>
    <attributeName>SERIAL_NUMBER</attributeName>
    <stringValue>serial</stringValue>
  </attribute>
  <attribute>
    <attributeName>NOTICE</attributeName>
    <stringValue>notice</stringValue>
  </attribute>
</licenseModelAttributes>
<policyAttributes>
  <rehostsPolicy>
    <allowedCount>4</allowedCount>
    <policyTerm>
      <duration>1</duration>
      <durationUnit>DAYS</durationUnit>
    </policyTerm>
  </rehostsPolicy>
  <returnsPolicy>
    <allowedCount>2</allowedCount>
    <policyTerm>
      <duration>1</duration>
      <durationUnit>WEEKS</durationUnit>
    </policyTerm>
  </returnsPolicy>
  <repairsPolicy>
    <allowedCount>2</allowedCount>
    <policyTerm>
      <duration>1</duration>
      <durationUnit>MONTHS</durationUnit>
    </policyTerm>
  </repairsPolicy>
  <extraActivationsPolicy>
    <allowedCount>10</allowedCount>
  </extraActivationsPolicy>
  <virtualLicensePolicy>
    <isVirtualLicense>false</isVirtualLicense>
  </virtualLicensePolicy>
</policyAttributes>
<orderId>OR125</orderId>
<orderLineNumber>1</orderLineNumber>
<numberOfCopies>10</numberOfCopies>
<expirationDate>2008-11-30</expirationDate>
</lineItems>
</simpleEntitlement>
</createSimpleEntitlementRequest>
```

Element: createSimpleEntitlementResponse

Description

A **createSimpleEntitlementResponse** message contains an element of createSimpleEntitlementResponseType.

Description

Each entitlement in the **createSimpleEntitlementRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [createSimpleEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed. When the opType is either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the Entitlement response and the Line Item response together result in the final response. • Both the Entitlement response and the Line Item response must be a success for the final result to be a success. • If one is a success and the other is a failure, the final

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td> result is a failure. If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			result is a failure. If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		result is a failure. If one is a partial failure and one is a failure, the final result is a failure. Note: A line item request cannot succeed in the absence of an entitlement request.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedSimpleEntitlementDataListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedSimpleEntitlementDataListType .									
responseData	createdSimpleEntitlementDataListType	0..1	Information about the entitlements that were added is listed in the responseData element. See createdSimpleEntitlementDataListType .									

Referenced By

Name	Type
createSimpleEntitlement	Method

XML Example

The following XML fragment illustrates a successful **createSimpleEntitlementResponse** message:

```
<createSimpleEntitlementResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <createdSimpleEntitlement>
      <recordRefNo>1</recordRefNo>
      <uniqueId>HID-100270</uniqueId>
      <entitlementId>Ent_basic</entitlementId>
      <lineItemUniqueIds>HID-100288</lineItemUniqueIds>
    </createdSimpleEntitlement>
  </responseData>
</createSimpleEntitlementResponse>
```

Element: deleteEntitlementRequest

Description

A **deleteEntitlementRequest** message contains an element of deleteEntitlementRequestType.

Derived By

Type [deleteEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlement	deleteEntitlementDataType	1..*	Required. A deleteEntitlementRequest contains an array of entitlement elements to be deleted. See deleteEntitlementDataType .

Referenced By

Name	Type
deleteEntitlement	Method

XML Example

The following XML fragment illustrates a **deleteEntitlementRequest** message:

```
<deleteEntitlementRequest>
  <entitlement>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent_basic_a_mod</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
  </entitlement>
</deleteEntitlementRequest>
```

Element: deleteEntitlementResponse

Description

A **deleteEntitlementResponse** message contains an element of deleteEntitlementResponseType.

Each entitlement in the **deleteEntitlementRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about entitlements that were deleted successfully.

Derived By

Type [deleteEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteEntitlementDataListType	0..1	Information about the entitlements that were not deleted is listed in the failedData element. See failedDeleteEntitlementDataListType .									

Referenced By

Name	Type
deleteEntitlement	Method

XML Example

The following XML fragment illustrates a successful **deleteEntitlementResponse** message:

```
<deleteEntitlementResponse>  
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
</deleteEntitlementResponse>
```

Element: deleteMaintenanceLinItemRequest

Description

A **deleteMaintenanceLinItemRequest** message contains an element of deleteMaintenanceLinItemRequestType.

Derived By

Type [deleteMaintenanceLinItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceLinItemData	deleteMaintenanceLinItemDataType	1..*	Required. A deleteMaintenanceLinItemRequest contains an array of maintenanceLinItemData elements to be deleted. See deleteMaintenanceLinItemDataType .

Referenced By

Name	Type
deleteMaintenanceLinItem	Method

XML Example

The following XML fragment illustrates a **deleteMaintenanceLinItemRequest** message:

```
<deleteMaintenanceLinItemRequest>
  <maintenanceLinItemData>
    <maintenanceLinItemIdentifier>
      <primaryKeys>
        <activationId>Ent-trans-1</activationId>
      </primaryKeys>
    </maintenanceLinItemIdentifier>
  </maintenanceLinItemData>
</deleteMaintenanceLinItemRequest>
```

Element: deleteMaintenanceLinItemResponse

Description

A **deleteMaintenanceLineItemResponse** message contains an element of deleteMaintenanceLineItemResponseType.

Each maintenance line item in the **deleteMaintenanceLineItemRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about line items that were deleted successfully

Derived By

Type [deleteMaintenanceLineItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteMaintenanceLineItemDataListType	0..1	Information about the maintenance line items that were not deleted is listed in the failedData element. See failedDeleteMaintenanceLineItemDataListType .									

Referenced By

Name	Type
deleteMaintenanceLineItem	Method

XML Example

The following XML fragment illustrates a successful **deleteMaintenanceLineItemResponse** message:

```
<deleteMaintenanceLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteMaintenanceLineItemResponse>
```

Element: deleteWebRegKeyRequest

Description

A **deleteWebRegKeyRequest** message contains an element of deleteWebRegKeyRequestType.

Derived By

Type [deleteWebRegKeyRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
webRegKeyList	webRegKeysListType	1..1	Required. A deleteWebRegKeyRequest contains a webRegKeyList element to be added. See webRegKeysListType .

Referenced By

Name	Type
deleteWebRegKey	Method

XML Example

The following XML fragment illustrates a **deleteWebRegKeyRequest** message:

```
<deleteWebRegKeyRequest>
  <webRegKeyList>
    <webRegKeys>
      <webRegKey>WRK-1</webRegKey>
      <webRegKey>WRK-2</webRegKey>
    </webRegKeys>
  </webRegKeyList>
</deleteWebRegKeyRequest>
```

XML Example

```
<webRegKey>WRK-3</webRegKey>
<webRegKey>WRK-4</webRegKey>
<webRegKey>WRK-5</webRegKey>
</webRegKeys>
</webRegKeyList>
</deleteWebRegKeyRequest>
```

Element: deleteWebRegKeyResponse

Description

An **deleteWebRegKeyResponse** message contains an element of deleteWebRegKeyResponseType.

Each web register key in the **deleteWebRegKeyRequest** is deleted as an atomic unit; deleting each either succeeds or fails.

Derived By

Type [deleteWebRegKeyResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteWebRegKeyListType	0..1	Information about the web register keys that were not deleted is listed in the failedData element. See failedDeleteWebRegKeyListType .									

Referenced By

Name	Type
deleteWebRegKey	Method

XML Example

The following XML fragment illustrates a successful **deleteWebRegKeyResponse** message:

```
<deleteWebRegKeyResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteWebRegKeyResponse>
```

Element: emailActivatableItemRequest

Description

An **emailActivatableItemRequest** message contains an element of emailActivatableItemRequestType.

Derived By

Type [emailActivatableItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	string	1..1	Required. An emailActivatableItemRequest contains an activationId element identifying the activatable item for which to email a certificate.
ignoreExistingEmailList	boolean	0..1	Optional. If true, all email addresses must be specified explicitly in the request. It is not possible to specify which of a list of existing email addresses to exclude (exclude all or none). If not set, the value is false.
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false. regex: <code>"^[_A-Za-z0-9-\\+\\.\\%]+@" + "[A-Za-z0-9-\\.]+)(\\.[A-Za-z]{1,10})\$"</code>
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the entitlement certificate and email templates. If the locale is valid and templates have been configured for that locale, the localized templates will be used to send the email.

Referenced By

Name	Type
emailActivatableItem	Method

XML Example

The following XML fragment illustrates an **emailActivatableItemRequest** message:

```
<emailActivatableItemRequest>
  <activationId>ACT-3467923978</activationId>
  <emailIdList>
    <emailId>test@example.com</emailId>
  </emailIdList>
</emailActivatableItemRequest>
```

Element: emailActivatableItemResponse

Description

An **emailActivatableItemResponse** message contains an element of emailActivatableItemResponseType.

Derived By

Type [emailActivatableItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Referenced By

Name	Type
emailActivatableItem	Method

XML Example

The following XML fragment illustrates a successful **emailActivatableItemResponse** message:

```
<emailActivatableItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</emailActivatableItemResponse>
```

Element: emailEntitlementRequest

Description

An **emailEntitlementRequest** message contains an element of emailEntitlementRequestType.

Derived By

Type [emailEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	Required. An emailEntitlementRequest contains an entitlementIdentifier element identifying the entitlement certificate to be emailed. See entitlementIdentifierType .
ignoreExistingEmailList	boolean	0..1	Optional. If true, all email addresses must be specified explicitly in the request. It is not possible to specify which of a list of existing email addresses to exclude (exclude all or none). If not set, the value is false.
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false. regex: "^[_A-Za-z0-9-\\+\\.\\%]+@\" +\"([A-Za-z0-9-\\.]+)(\\.[A-Za-z]{1,10})\$\""
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the entitlement certificate and email templates. If the locale is valid and templates have been configured for that locale, the localized templates will be used to send the email.

Referenced By

Name	Type
emailEntitlement	Method

XML Example

The following XML fragment illustrates an **emailEntitlementRequest** message:

```
<emailEntitlementRequest>  
  <entitlementIdentifier>  
    <primaryKeys>  
      <entitlementId>186c-6b21-0c49-7f17-bf7f-f1</entitlementId>  
    </primaryKeys>  
  </entitlementIdentifier>  
</emailEntitlementRequest>
```


XML Example

```
</entitlementIdentifier>
<emailIdList>
  <emailId>test@example.com</emailId>
</emailIdList>
</emailEntitlementRequest>
```

Element: emailEntitlementResponse

Description

An **emailEntitlementResponse** message contains an element of emailEntitlementResponseType.

Derived By

Type [emailEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed.
			reason	string	Gives reason for partial failure or failure.

Referenced By

Name	Type
emailEntitlement	Method

XML Example

The following XML fragment illustrates a successful **emailEntitlementResponse** message:

```
<emailEntitlementResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</emailEntitlementResponse>
```

Element: getActivatableItemCountRequest

Description

A **getActivatableItemCountRequest** message contains an element of `getActivatableItemCountRequestType`.

Derived By

Type [getActivatableItemCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
queryParams	searchActivatableItemDataTaType	1..1	Required. See searchActivatableItemDataTaType . Leave this element blank to return all activatable line items.
restrictToItemsReadyToActivate	boolean	0..1	Optional. Only use for the getActivatableItemCount operation. Restricts the search to only items ready to activate.

Referenced By

Name	Type
getActivatableItemCount	Method

XML Example

The following XML fragment illustrates a **getActivatableItemCountRequest** message:

```
<getActivatableItemCountRequest>
  <queryParams>
    <entitlementId>
      <value>bulk</value>
    <searchType>CONTAINS</searchType>
    </entitlementId>
  </queryParams>
</getActivatableItemCountRequest>
```

Element: getActivatableItemCountResponse

Description

A **getActivatableItemCountResponse** message contains an element of `getActivatableItemCountResponseType`.

Derived By

Type [getActivatableItemCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	Number of activatable items that matched the specified criteria.									

Referenced By

Name	Type
getActivatableItemCount	Method

XML Example

The following XML fragment illustrates a successful **getActivatableItemCountResponse** message:

```
<getActivatableItemCountResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</getActivatableItemCountResponse>
```

XML Example

```
</statusInfo>
<count>5</count>
</getActivatableItemCountResponse>
```

Element: getBulkEntitlementCountRequest

Description

A **getBulkEntitlementCountRequest** message contains an element of getBulkEntitlementCountRequestType.

Derived By

Type [getBulkEntitlementCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementSearch Criteria	searchBulkEntitlementData Type	1..1	Required. See searchBulkEntitlementDataType . Leave this element blank to return all bulk entitlements.

Referenced By

Name	Type
getBulkEntitlementCount	Method

XML Example

The following XML fragment illustrates a **getBulkEntitlementCountRequest** message:

```
<getBulkEntitlementCountRequest>
  <queryParams>
    <licenseTechnology>
      <value>FLEXnet Licensing</value>
    <searchType>EQUALS</searchType>
    </licenseTechnology>
  </queryParams>
</getBulkEntitlementCountRequest>
```

Element: getBulkEntitlementCountResponse

Description

A **getBulkEntitlementCountResponse** message contains an element of **getEntitlementCountResponseType**.

Derived By

Type [getBulkEntitlementCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	Number of bulk entitlements matching the specified criteria.									

Referenced By

Name	Type
getBulkEntitlementCount	Method

XML Example

The following XML fragment illustrates a successful **getEntitlementCountResponse** message:

```
<getBulkEntitlementCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <count>31</count>
</getBulkEntitlementCountResponse>
```

Element: getBulkEntitlementPropertiesRequest

Description

A **getBulkEntitlementPropertiesRequest** message contains an element of **getBulkEntitlementPropertiesRequestType**.

Derived By

Type [getBulkEntitlementPropertiesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementSearchCriteria	searchBulkEntitlementDataType	1..1	Required. See searchBulkEntitlementDataType .
bulkEntitlementResponseConfig	bulkEntitlementResponseConfigRequestType	1..1	See bulkEntitlementResponseConfigRequestType .
batchSize	integer	1..1	Required. Starts at 1. Say the operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
pageNumber	integer	0..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getBulkEntitlementPropertiesQuery	Method

XML Example

The following XML fragment illustrates a **getBulkEntitlementPropertiesRequest** message:

```
<getBulkEntitlementPropertiesRequest>
  <bulkEntitlementSearchCriteria>
  </bulkEntitlementSearchCriteria>
  <bulkEntitlementResponseConfig>
    <entitlementId>1</entitlementId>
    <description>1</description>
    <state>1</state>
    <soldTo>1</soldTo>
    <soldToDisplayName>1</soldToDisplayName>
    <shipToEmail>1</shipToEmail>
    <shipToAddress>1</shipToAddress>
    <orderId>1</orderId>
    <orderLineNumber>1</orderLineNumber>
    <product>1</product>
    <productDescription>1</productDescription>
    <partNumber>1</partNumber>
    <partNumberDescription>1</partNumberDescription>
    <licenseModel>1</licenseModel>
    <licenseTechnology>1</licenseTechnology>
    <startDate>1</startDate>
    <startDateOption>1</startDateOption>
    <isPermanent>1</isPermanent>
    <term>1</term>
    <expirationDate>1</expirationDate>
    <versionDate>1</versionDate>
    <versionDateAttributes>1</versionDateAttributes>
    <numberOfCopies>1</numberOfCopies>
    <bulkEntitlementType>1</bulkEntitlementType>
    <createdUserId>1</createdUserId>
    <customAttributes>
    <!--Zero or more repetitions:-->
    <attribute>
      <attributeName>TextAttr</attributeName>
    </attribute>
    </customAttributes>
  </bulkEntitlementResponseConfig>
  <batchSize>10</batchSize>
  <pageNumber>1</pageNumber>
</getBulkEntitlementPropertiesRequest>
```

Element: getBulkEntitlementPropertiesResponse

Description

A **getBulkEntitlementQueryResponse** message contains an element of **getBulkEntitlementQueryResponseType**.

Note: The *soldTo* element is supported for backwards compatibility in the response to this operation, and now the *channelPartners* element is also supported. Note, however, that the query parameters of the operation do not support the *channelPartners* element. *soldTo* or *parentBulkEntSoldTo* should still be used to specify an organization in the query request or response.

Derived By

Type [getBulkEntitlementPropertiesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
bulkEntitlement	bulkEntitlementPropertiesType	0..*	See bulkEntitlementPropertiesType .									

Referenced By

Name	Type
getBulkEntitlementPropertiesQuery	Method

XML Example

The following XML fragment illustrates a successful **getBulkEntitlementQueryResponse** message:

```
<getBulkEntitlementPropertiesQueryResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</getBulkEntitlementPropertiesQueryResponse>
```

XML Example

```
</statusInfo>
<bulkEntitlement>
  <entitlementId>
    <uniqueId>HID-220046</uniqueId>
    <primaryKeys>
      <entitlementId>RamaTestBulkEnt1</entitlementId>
    </primaryKeys>
  </entitlementId>
  <description/>
  <state>TEST</state>
  <soldTo>
    <uniqueId>HID-20182</uniqueId>
    <primaryKeys>
      <name>ROADR</name>
    </primaryKeys>
  </soldTo>
  <soldToDisplayName>Road Runner Corporation</soldToDisplayName>
  <shipToEmail>jsmith@example.com</shipToEmail>
  <shipToAddress>1 Ranch Dr Milpitas, CA</shipToAddress>
  <orderId>568868</orderId>
  <orderLineNumber>Rama-Test-Linenum</orderLineNumber>
  <product>
    <uniqueId>HID-20096</uniqueId>
    <primaryKeys>
      <name>Standard Paint</name>
      <version>1.0</version>
    </primaryKeys>
  </product>
  <productDescription>This product contains what consumers need to build graphic designs.</productDescription>
  <licenseModel>
    <uniqueId>HID-501</uniqueId>
    <primaryKeys>
      <name>Floating Counted</name>
    </primaryKeys>
  </licenseModel>
  <licenseTechnology>
    <uniqueId>HID-100</uniqueId>
    <primaryKeys>
      <name>FLEXnet Licensing</name>
    </primaryKeys>
  </licenseTechnology>
  <startDateOption>DEFINE_ACTDATE_AT_FIRST_ACTIVATION</startDateOption>
  <isPermanent>false</isPermanent>
  <expirationDate>2010-09-25</expirationDate>
  <numberOfCopies>10</numberOfCopies>
  <customAttributes>
    <attribute>
      <attributeName>TextAttr</attributeName>
      <stringValue>rama test</stringValue>
    </attribute>
  </customAttributes>
</bulkEntitlement>
<bulkEntitlement>
  <entitlementId>
    <uniqueId>HID-22003</uniqueId>
    <primaryKeys>
      <entitlementId>Test Bulk Entitlement</entitlementId>
    </primaryKeys>
  </entitlementId>
  <description/>
  <state>TEST</state>
  <soldTo>
    <uniqueId>HID-20180</uniqueId>
    <primaryKeys>
      <name>ACME</name>
    </primaryKeys>
  </soldTo>
```

XML Example

```

    <soldToDisplayName>Acme Software Corporation</soldToDisplayName>
    <shipToEmail>jsmith@example.com</shipToEmail>
    <shipToAddress>1234 Main St
San Francisco, CA</shipToAddress>
    <orderId>123</orderId>
    <orderLineNumber>test-line-num</orderLineNumber>
    <product>
      <uniqueId>HID-20090</uniqueId>
      <primaryKeys>
        <name>Scientific Calculator</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <productDescription>In addition to the basic arithmetic operations, this scientific calculator
      contains transcendental functions such as sines, logarithms and powers.</productDescription>
    <partNumber>
      <uniqueId>HID-20121</uniqueId>
      <primaryKeys>
        <partId>800-111-2222-2</partId>
      </primaryKeys>
    </partNumber>
    <licenseModel>
      <uniqueId>HID-504</uniqueId>
      <primaryKeys>
        <name>Modelocked Uncounted</name>
      </primaryKeys>
    </licenseModel>
    <licenseTechnology>
      <uniqueId>HID-100</uniqueId>
      <primaryKeys>
        <name>FLEXnet Licensing</name>
      </primaryKeys>
    </licenseTechnology>
    <startDateOption>DEFINE_AT_FIRST_ACTIVATION</startDateOption>
    <isPermanent>false</isPermanent>
    <term>
      <numDuration>6</numDuration>
      <durationUnit>DAYS</durationUnit>
    </term>
    <versionDate>2008-09-09</versionDate>
    <versionDateAttributes>
      <versionOption>DEFINE_NOW</versionOption>
    </versionDateAttributes>
    <numberOfCopies>4</numberOfCopies>
    <customAttributes>
      <attribute>
        <attributeName>TextAttr</attributeName>
        <stringValue/>
      </attribute>
    </customAttributes>
  </bulkEntitlement>
</getBulkEntitlementPropertiesResponse>

```

Element: getEntitlementAttributesRequest

Description

A **getEntitlementAttributesRequest** message contains an element of getEntitlementAttributesRequestType.

Derived By

Type [getEntitlementAttributesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..1	Required. A getEntitlementAttributesRequest contains a licenseModelIdentifier element identifying the license model whose attributes to return. See licenseModelIdentifierType .

Referenced By

Name	Type
getEntitlementAttributesFromModel	Method

XML Example

The following XML fragment illustrates a **getEntitlementAttributesRequest** message:

```
<getEntitlementAttributesRequest>
  <licenseModelIdentifier>
    <primaryKeys>
      <name>Floating Counted</name>
    </primaryKeys>
  </licenseModelIdentifier>
</getEntitlementAttributesRequest>
```

Element: getEntitlementAttributesResponse

Description

A **getEntitlementAttributesResponse** message contains an element of **getEntitlementAttributesResponseType**.

Derived By

Type [getEntitlementAttributesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
entitlementAttributes	attributeMetaDescriptorDataType	0..1	A list of license model attributes that are set at entitlement time are contained in the entitlementAttributes element. See attributeMetaDescriptorDataType .									
policyAttributes	policyAttributesDataType	0..1	A list of policy attributes that are set at entitlement time are contained in the policyAttributes element. See policyAttributesDataType .									
needTimeZone	boolean	0..1	True if the license model includes the TZ keyword and allows it to be set at entitlement time; otherwise, false.									

Referenced By

Name	Type
getEntitlementAttributesFromModel	Method

XML Example

The following XML fragment illustrates a successful **getEntitlementAttributesResponse** message that indicates which license model attributes must be provided at entitlement time:

```
<getEntitlementAttributesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <entitlementAttributes>
    <attribute>
      <attributeName>NOTICE</attributeName>
      <attributeDataType>LONGTEXT</attributeDataType>
      <namespace>FlexNet Licensing</namespace>
    </attribute>
    <attribute>
      <attributeName>SERIAL_NUMBER</attributeName>
      <attributeDataType>LONGTEXT</attributeDataType>
      <namespace>FlexNet Licensing</namespace>
    </attribute>
  </entitlementAttributes>
  <policyAttributes>
    <needRehostsPolicy>false</needRehostsPolicy>
    <needReturnsPolicy>false</needReturnsPolicy>
    <needRepairsPolicy>false</needRepairsPolicy>
    <needExtraActivationsPolicy>false</needExtraActivationsPolicy>
    <needCancelLicensePolicy>false</needCancelLicensePolicy>
    <needVirtualLicensePolicy>false</needVirtualLicensePolicy>
    <needReinstallPolicy>false</needReinstallPolicy>
    <needServerHostIdPolicy>false</needServerHostIdPolicy>
    <needNodeLockedHostIdPolicy>false</needNodeLockedHostIdPolicy>
    <needPortalServerHostIdPolicy>false</needPortalServerHostIdPolicy>
    <needPortalNodeLockedHostIdPolicy>false</needPortalNodeLockedHostIdPolicy>
    <needRedundantServerPolicy>false</needRedundantServerPolicy>
    <needACPIGenerationIdLicensePolicy>false</needACPIGenerationIdLicensePolicy>
  </policyAttributes>
  <needTimeZone>false</needTimeZone>
</getEntitlementAttributesResponse>
```

Element: getEntitlementCountRequest

Description

A **getEntitlementCountRequest** message contains an element of **getEntitlementCountRequestType**.

Derived By

Type [getEntitlementCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	searchEntitlementDataType	1..1	Required. See searchEntitlementDataType . Leave this element blank to return all entitlements.

Referenced By

Name	Type
getEntitlementCount	Method

XML Example

The following XML fragment illustrates a **getEntitlementCountRequest** message:

```
<getEntitlementCountRequest>
  <queryParams>
    <licenseTechnology>
      <value>FLEXnet Licensing</value>
    </licenseTechnology>
    <searchType>EQUALS</searchType>
  </queryParams>
</getEntitlementCountRequest>
```

Element: getEntitlementCountResponse

Description

A **getEntitlementCountResponse** message contains an element of `getEntitlementCountResponseType`.

Derived By

Type [getEntitlementCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	Number of entitlements matching the specified criteria.									

Referenced By

Name	Type
getEntitlementCount	Method

XML Example

The following XML fragment illustrates a successful **getEntitlementCountResponse** message:

```
<getEntitlementCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <count>31</count>
</getEntitlementCountResponse>
```


Element: getExactAvailableCountRequest

Description

A **getExactAvailableCountRequest** message contains an element of `getExactAvailableCountRequestType`.

Derived By

Type [getExactAvailableCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	entitlementLineItemIdentifierType	0..1	Required. Identifies the line item for which you want an exact available count. See entitlementLineItemIdentifierType .

Referenced By

Name	Type
getExactAvailableCount	Method

XML Example

The following XML fragment illustrates a **getExactAvailableCountRequest** message:

```
<getExactAvailableCountRequest>
  <activationId>
    <primaryKeys>
      <activationId>se-up2-1UPGRADE</activationId>
    </primaryKeys>
  </activationId>
</getExactAvailableCountRequest>
```

Element: getExactAvailableCountResponse

Description

A **getExactAvailableCountResponse** message contains an element of `getExactAvailableCountResponseType`.

Derived By

Type [getExactAvailableCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
count	integer	0..1	The exact available count for the line item requested.									

Referenced By

Name	Type
getExactAvailableCount	Method

XML Example

The following XML fragment illustrates a successful **getExactAvailableCountResponse** message:

```
<getExactAvailableCountResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</getExactAvailableCountResponse>
```

XML Example

```
</statusInfo>
<count>5</count>
</getExactAvailableCountResponse>
```

Element: getMatchingBulkEntsRequest

Description

A **getMatchingBulkEntsRequest** message contains an element of `getMatchingBulkEntsRequestType`.

Derived By

Type [getMatchingBulkEntsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntList	getMatchingBulkEntsListType	1..1	Required. See getMatchingBulkEntsListType .

Referenced By

Name	Type
getMatchingBulkEnts	Method

XML Example

The following XML fragment illustrates a **getMatchingBulkEntsRequest** message:

```
<getMatchingBulkEntsRequest>
  <bulkEntList>
    <bulkEntInfo>
      <bulkEntIdentifier>
        <ID>HID-20103</ID>
        <primaryKeys>
          <entitlementId>Ent-split-1</entitlementId>
        </primaryKeys>
      </bulkEntIdentifier>
      <targetTierName>bo.constants.partnerTierNames.endcustomer</targetTierName>
      <targetOrganizationUnit>
        <primaryKeys>
          <name>ORG2</name>
        </primaryKeys>
      </targetOrganizationUnit>
    </bulkEntInfo>
  </bulkEntList>
</getMatchingBulkEntsRequest>
```

Element: getMatchingBulkEntsResponse

Description

A **getMatchingBulkEntsResponse** message contains an element of **getMatchingBulkEntsResponseType**.

Derived By

Type [getMatchingBulkEntsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getMatchingBulkEntsResponseListType	0..1	Information about bulk entitlements in the target organization that match the bulk entitlement you plan to split is listed in the responseData element. See getMatchingBulkEntsResponseListType .									

Content Model

Component	Type	Occurs	Description
failedData	failedMatchingBulkEntsListType	0..1	Information about the bulk entitlement that could not be matched to bulk entitlements in the target organization is in the failedData element. See failedMatchingBulkEntsListType .

Referenced By

Name	Type
getMatchingBulkEnts	Method

XML Example

The following XML fragment illustrates a successful **getMatchingBulkEntsResponse** message:

```
<getMatchingBulkEntsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <matchingBulkEnt>
      <matchingBulkEntIdentifier>
        <uniqueId>HID-101349</uniqueId>
        <primaryKeys>
          <entitlementId>Ent-split-2</entitlementId>
        </primaryKeys>
      </matchingBulkEntIdentifier>
    </matchingBulkEnt>
  </responseData>
</getMatchingBulkEntsResponse>
```

Element: getMatchingLineItemsRequest

Description

A **getMatchingLineItemsRequest** message contains an element of getMatchingLineItemsRequestType.

Derived By

Type [getMatchingLineItemsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
lineltemList	getMatchingLinItemsList Type	1..1	Required. See getMatchingLinItemsListType .

Referenced By

Name	Type
getMatchingLinItems	Method

XML Example

The following XML fragment illustrates a **getMatchingLinItemsRequest** message:

```
<getMatchingLinItemsRequest>
  <lineltemList>
    <lineltemInfo>
      <lineltemIdentifier>
        <uniqueId>HID-20103</uniqueId>
        <primaryKeys>
          <activationId>se-split-1</activationId>
        </primaryKeys>
      </lineltemIdentifier>
      <targetTierName>bo.constants.partnertiernames.endcustomer</targetTierName>
      <targetOrganizationUnit>
        <primaryKeys>
          <name>ORG2</name>
        </primaryKeys>
      </targetOrganizationUnit>
    </lineltemInfo>
  </lineltemList>
</getMatchingLinItemsRequest>
```

Element: getMatchingLinItemsResponse

Description

A **getMatchingLinItemsResponse** message contains an element of `getMatchingLinItemsResponseType`.

Derived By

Type [getMatchingLinItemsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getMatchingLineItemsResponseListType	0..1	Information about entitlement line items in the target organization that match the line item you plan to split is listed in the responseData element. See getMatchingLineItemsResponseListType .									
failedData	failedMatchingLineItemsListType	0..1	Information about the entitlement line item that could not be matched to line items in the target organization is in the failedData element. See Table failedMatchingLineItemsListType .									

Referenced By

Name	Type
getMatchingLineItems	Method

XML Example

The following XML fragment illustrates a successful **getMatchingLineItemsResponse** message:

XML Example

```
<getMatchingLineItemsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <matchingLineItem>
      <matchingLineItemIdentifier>
        <uniqueId>HID-101349</uniqueId>
        <primaryKeys>
          <activationId>se-split-2</activationId>
        </primaryKeys>
      </matchingLineItemIdentifier>
    </matchingLineItem>
  </responseData>
</getMatchingLineItemsResponse>
```

Element: getStateChangeHistoryRequest

Description

A **getStateChangeHistoryRequest** message contains an element of `getStateChangeHistoryRequestType`.

Derived By

Type [getStateChangeHistoryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureList	featureListType	0..1	Optional. See featureListType .
featureBundleList	featureBundleListType	0..1	Optional. See featureBundleListType .
productList	productListType	0..1	Optional. See productListType .
licenseModelList	licenseModelListType	0..1	Optional. See licenseModelListType .
simpleEntitlementList	entitlementListType	0..1	Optional. See entitlementListType .
bulkEntitlementList	entitlementListType	0..1	Optional. See entitlementListType .

Referenced By

Name	Type
getStateChangeHistory	Method

XML Example

The following XML fragment illustrates a **getStateChangeHistoryRequest** message:

XML Example

```
<getStateChangeHistoryRequest>
  <simpleEntitlementList>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent-basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
  </simpleEntitlementList>
</getStateChangeHistoryRequest>
```

Element: getStateChangeHistoryResponse

Description

A **getStateChangeHistoryResponse** message contains an element of getStateChangeHistoryResponseType.

Derived By

Type [getStateChangeHistoryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.
			reason	string	Gives reason for partial failure or failure.
responseData	stateChangeResponseType	0..1	See stateChangeResponseType .		

Referenced By

Name	Type
getStateChangeHistory	Method

XML Example

The following XML fragment illustrates a successful **getStateChangeHistoryResponse** message:

```
<getStateChangeHistoryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <simpleEntitlementList>
      <entitlement>
```

XML Example

```
<entitlementIdentifier>
  <primaryKeys>
    <entitlementId>18ee-9d61-1094-1748-747f-f8</entitlementId>
  </primaryKeys>
</entitlementIdentifier>
<stateChangeRecord>
  <eventName>EVENT_CREATED</eventName>
  <eventDate>2008-02-07T03:15:20.157Z</eventDate>
  <userId>admin</userId>
  <description>Created line item 18ee-9d61-1094-1748-747f-f7
    </description>
</stateChangeRecord>
<stateChangeRecord>
  <eventName>EVENT_CREATED</eventName>
  <eventDate>2008-02-07T03:15:20.300Z</eventDate>
  <userId>admin</userId>
  <description>Created line item 18ee-9d61-1094-1748-747f-f6
    </description>
</stateChangeRecord>
<stateChangeRecord>
  <eventName>EVENT_TRANSFERRED</eventName>
  <eventDate>2008-02-07T03:15:20.313Z</eventDate>
  <userId>admin</userId>
  <description>Entitlement created as a result of transfer from
    entitlement Ent-basic belonging to Acme Software
    Corporation organization.</description>
</stateChangeRecord>
</entitlement>
</simpleEntitlementList>
</responseData>
</getStateChangeHistoryResponse>
```

Element: getWebRegKeyCountRequest

Description

A **getWebRegKeyCountRequest** message contains an element of `getWebRegKeyCountRequestType`.

Derived By

Type [getWebRegKeyCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementIdentifier	entitlementIdentifierType	1..1	Required. See entitlementIdentifierType .

Referenced By

Name	Type
getWebRegKeyCount	Method

XML Example

The following XML fragment illustrates a **getWebRegKeyCountRequest** message:

```
<getWebRegKeyCountRequest>
  <bulkEntitlementIdentifier>
    <primaryKeys>
      <entitlementId>Ent_bulk_basic</entitlementId>
    </primaryKeys>
  </bulkEntitlementIdentifier>
</getWebRegKeyCountRequest>
```

Element: getWebRegKeyCountResponse

Description

A **getWebRegKeyCountResponse** message contains an element of `getWebRegKeyCountResponseType`.

Derived By

Type [getWebRegKeyCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
responseData	webRegKeyCountDataType	0..1	See webRegKeyCountDataType .									

Referenced By

Name	Type
getWebRegKeyCount	Method

XML Example

The following XML fragment illustrates a successful **getWebRegKeyCountResponse** message:

```
<getWebRegKeyCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <totalCount>5</totalCount>
    <redeemedCount>0</redeemedCount>
  </responseData>
</getWebRegKeyCountResponse>
```

Element: getWebRegKeysQueryRequest

Description

A **getWebRegKeysQueryRequest** message contains an element of **getWebRegKeysQueryRequestType**.

Derived By

Type [getWebRegKeysQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementIdentifier	entitlementIdentifierType	1..1	Required. Entitlement of the bulk entitlement into which the web register keys are loaded. Required. See entitlementIdentifierType .
batchSize	integer	1..1	Required. Starts at 1. Say the getWebRegKeyCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
pageNumber	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getWebRegKeysQuery	Method

XML Example

The following XML fragment illustrates a **getWebRegKeysQueryRequest** message:

```
<getWebRegKeysQueryRequest>
  <bulkEntitlementIdentifier>
    <primaryKeys>
      <entitlementId>Ent_bulk_basic</entitlementId>
    </primaryKeys>
  </bulkEntitlementIdentifier>
  <batchSize>50</batchSize>
  <pageNumber>1</pageNumber>
</getWebRegKeysQueryRequest>
```

Element: getWebRegKeysQueryResponse

Description

A **getWebRegKeysQueryResponse** message contains an element of [getWebRegKeysQueryResponseType](#).

Derived By

Type [getWebRegKeysQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—If the request was synchronous, all of the web register keys in the request were processed successfully. If the request was asynchronous, SUCCESS means that the import request of web register keys was scheduled; this does not necessarily mean that the request was processed successfully. • PARTIAL_FAILURE—Some, but not all web register keys in the synchronous request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—If the request was synchronous, none of the web register keys in the request were processed successfully. If the request was

Content Model

Component	Type	Occurs	Description									
			<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td></td><td></td><td>asynchronous, FAILURE means that the import request of web register keys was not scheduled.</td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description			asynchronous, FAILURE means that the import request of web register keys was not scheduled.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
		asynchronous, FAILURE means that the import request of web register keys was not scheduled.										
reason	string	Gives reason for partial failure or failure.										
responseData	webRegKeysDataListType	0..1	See webRegKeysDataListType .									

Referenced By

Name	Type
getWebRegKeysQuery	Method

XML Example

The following XML fragment illustrates a successful **getWebRegKeysQueryResponse** message:

```
<getWebRegKeysQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <webRegKeys>
      <webRegKey>WRK-1</webRegKey>
      <webRegKey>WRK-2</webRegKey>
      <webRegKey>WRK-3</webRegKey>
      <webRegKey>WRK-4</webRegKey>
      <webRegKey>WRK-5</webRegKey>
    </webRegKeys>
  </responseData>
</getWebRegKeysQueryResponse>
```

Element: linkMaintenanceLineItemRequest

Description

A **linkMaintenanceLineItemRequest** message contains an element of linkMaintenanceLineItemRequestType.

Derived By

Type [linkMaintenanceLinItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linkMaintenanceLinItem mList	linkMaintenanceLinItem ListType	1..1	See linkMaintenanceLinItemListType .

Referenced By

Name	Type
linkMaintenanceLinItem	Method

XML Example

The following XML fragment illustrates a **linkMaintenanceLinItemRequest** message:

```
<linkMaintenanceLinItemRequest>
  <linkMaintenanceLinItemList>
    <!-- 1 or more repetitions:-->
    <linkMaintenanceLinItem>
      <linItemIdentifier>
        <!--Optional:-->
        <uniqueId>?</uniqueId>
        <!--Optional:-->
        <primaryKeys>
          <activationId>?</activationId>
        </primaryKeys>
      </linItemIdentifier>
      <maintenanceLinItemIdentifier>
        <!--Optional:-->
        <uniqueId>?</uniqueId>
        <!--Optional:-->
        <primaryKeys>
          <activationId>?</activationId>
        </primaryKeys>
      </maintenanceLinItemIdentifier>
    </linkMaintenanceLinItem>
  </linkMaintenanceLinItemList>
</linkMaintenanceLinItemRequest>
```

Element: linkMaintenanceLinItemResponse

Description

A **linkMaintenanceLinItemResponse** message contains an element of linkMaintenanceLinItemResponseType.

Derived By

Type [linkMaintenanceLinItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedLinkMaintenanceLinkItemListType	0..1	See failedLinkMaintenanceLinkItemListType .									

Referenced By

Name	Type
linkMaintenanceLinItem	Method

XML Example

The following XML fragment illustrates a **linkMaintenanceLineItemResponse** message:

Sample Successful Response Data:

```
<linkMaintenanceLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</linkMaintenanceLineItemResponse>
```

Sample Failed Response Data:

```
<linkMaintenanceLineItemResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed. ...</reason>
  </statusInfo>
  <failedData>
    <failedLinkMaintenanceLineItem>
      <linkMaintenanceLineItem>
        <lineItemIdentifier>
          <primaryKeys>
            <activationId>ent-maint-1P</activationId>
          </primaryKeys>
        </lineItemIdentifier>
        <maintenanceLineItemIdentifier>
          <primaryKeys>
            <activationId>ent-maint-1</activationId>
          </primaryKeys>
        </maintenanceLineItemIdentifier>
      </linkMaintenanceLineItem>
      <reason>9999: Cannot find the specified maintenance line item</reason>
    </failedLinkMaintenanceLineItem>
  </failedData>
</linkMaintenanceLineItemResponse>
```

Element: mapEntitlementsToUserRequest

Description

A **mapEntitlementsToUserRequest** message contains an element of mapEntitlementsToUserRequestType.

Derived By

Type [mapEntitlementsToUserRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. The user ID of a self-registered Portal user.
idList	idListType	1..1	Required. See idListType .

Content Model

Component	Type	Occurs	Description
userOrg	string	0..1	Optional. User's organization.

Referenced By

Name	Type
mapEntitlementsToUser	Method

XML Example

The following XML fragment illustrates a **mapEntitlementsToUserRequest** message:

```
<mapEntitlementsToUserRequest>  
  <userId>wilyuser</userId>  
  <idList>  
    <id>18ee-9d61-10a8-c94e-fc7f-fb</id>  
  </idList>  
</mapEntitlementsToUserRequest>
```

Element: mapEntitlementsToUserResponse

Description

A **mapEntitlementsToUserResponse** message contains an element of mapEntitlementsToUserResponseType.

Each ID in the **mapEntitlementsToUserRequest** is added as an atomic unit; adding each either succeeds or fails.

Derived By

Type [mapEntitlementsToUserResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedMapEntitlementsToUserDataListType	0..1	Information about the IDs that were not mapped to the user is listed in the failedData element. See failedMapEntitlementsToUserDataListType .									

Referenced By

Name	Type
mapEntitlementsToUser	Method

XML Example

The following XML fragment illustrates a successful **mapEntitlementsToUserResponse** message:

```
<mapEntitlementsToUserResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</mapEntitlementsToUserResponse>
```

Element: mergeEntitlementsRequest

Description

A **mergeEntitlementsRequest** message contains an element of mergeEntitlementsRequestType.

Derived By

Type [mergeEntitlementsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organizationFrom	string	1..1	Required. Organization identifier of the organization that currently owns the assets to be merged to another organization.
organizationTo	string	1..1	Required. Organization identifier of the organization to which the assets are merged.
mergeUsers	boolean	0..1	Optional. Whether to merge the users of the organization specified as organizationFrom to the organization specified as organizationTo. If a value is not specified, users are merged.
mergeEntitlements	boolean	0..1	Optional. Whether to merge the entitlements and fulfillments of the organization specified as organizationFrom to the organization specified as organizationTo. If a value is not specified, entitlements and fulfillments are merged.

Referenced By

Name	Type
mergeEntitlements	Method

XML Example

The following XML fragment illustrates a **mergeEntitlementsRequest** message:

```
<mergeEntitlementsRequest>  
  <organizationFrom>Bravo</organizationFrom>  
  <organizationTo>Alpha</organizationTo>  
  <mergeUsers>true</mergeUsers>  
  <mergeEntitlements>true</mergeEntitlements>  
</mergeEntitlementsRequest>
```

Element: mergeEntitlementsResponse

Description

A **mergeEntitlementsResponse** message contains an element of mergeEntitlementsResponseType.

Derived By

Type [mergeEntitlementsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Referenced By

Name	Type
mergeEntitlements	Method

XML Example

The following XML fragment illustrates a successful **mergeEntitlementsResponse** message:

```
<mergeEntitlementsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</mergeEntitlementsResponse>
```

Element: removeEntitlementLineItemRequest

Description

A **removeEntitlementLineItemRequest** message contains an element of `removeEntitlementLineItemRequestType`.

Derived By

Type [removeEntitlementLineItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemData	removeEntitlementLineItemDataType	1..*	Required. A removeEntitlementLineItemRequest contains an array of lineItemData elements to be deleted. See removeEntitlementLineItemDataType .

Referenced By

Name	Type
deleteEntitlementLineItem	Method

XML Example

The following XML fragment illustrates a **removeEntitlementLineItemRequest** message:

```
<removeEntitlementLineItemRequest>
  <lineItemData>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent-receive</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <lineItemIdentifier>
      <primaryKeys>
        <activationId>Ent-trans-1</activationId>
      </primaryKeys>
    </lineItemIdentifier>
  </lineItemData>
</removeEntitlementLineItemRequest>
```

Element: removeEntitlementLineItemResponse

Description

A **removeEntitlementLineItemResponse** message contains an element of removeEntitlementLineItemResponseType.

Each line item in the **removeEntitlementLineItemRequest** is deleted as an atomic unit; deleting each either succeeds or fails. No specific information is returned about line items that were deleted successfully.

Derived By

Type [removeEntitlementLineItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedRemoveEntitlementLinItemDataListType	0..1	Information about the entitlements that were not deleted is listed in the failedData element. See failedRemoveEntitlementLinItemDataListType .

Referenced By

Name	Type
deleteEntitlementLinItem	Method

XML Example

The following XML fragment illustrates a successful **removeEntitlementLinItemResponse** message:

```
<removeEntitlementLinItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</removeEntitlementLinItemResponse>
```

Element: renewLicenseRequest

Description

A **renewLicenseRequest** message contains an element of **renewEntitlementRequestType**.

Derived By

Type [renewEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	renewEntitlementDataType	0..*	Required. A renewEntitlementRequest contains an array of entitlementData elements. See renewEntitlementDataType .

Referenced By

Name	Type
renewLicense	Method

XML Example

The following XML fragment illustrates a **renewLicenseRequest** message:

```
<renewLicenseRequest>
  <entitlementData>
    <parentEntitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent-renew</entitlementId>
      </primaryKeys>
    </parentEntitlementIdentifier>
    <renewLineItemData>
      <parentLineItemIdentifier>
        <primaryKeys>
          <activationId>Ent-renew-1</activationId>
        </primaryKeys>
      </parentLineItemIdentifier>
      <renewParameters>
        <activationId>
          <id>Ent-renew-1RENEW</id>
          <autoGenerate>false</autoGenerate>
        </activationId>
        <isPermanent>true</isPermanent>
      </renewParameters>
      <isFull>true</isFull>
      <allowActivationsOnParent>true</allowActivationsOnParent>
      <autoDeploy>true</autoDeploy>
    </renewLineItemData>
  </entitlementData>
</renewLicenseRequest>
```

Element: renewLicenseResponse

Description

A **renewLicenseResponse** message contains an element of **renewEntitlementResponseType**.
Each entitlement in the **renewLicenseRequest** is renewed as an atomic unit; renewing each either succeeds or fails.

Derived By

Type [renewEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedRenewEntitlementDataListType	0..1	Information about the entitlements that were not renewed is listed in the failedData element. See failedRenewEntitlementDataListType .									
responseData	createdRenewEntitlementDataListType	0..1	Information about the entitlements that were renewed is listed in the responseData element. See createdRenewEntitlementDataListType .									

Referenced By

Name	Type
renewLicense	Method

XML Example

The following XML fragment illustrates a successful **renewLicenseResponse** message:

```
<renewLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
```

XML Example

```
<entitlementData>
  <entitlementRecordRefNo>01</entitlementRecordRefNo>
  <parentEntitlementIdentifier>
    <primaryKeys>
      <entitlementId>Ent-renew</entitlementId>
    </primaryKeys>
  </parentEntitlementIdentifier>
  <renewedLinItem>
    <linItemRecordRefNo>01</linItemRecordRefNo>
    <parentLinItemIdentifier>
      <primaryKeys>
        <activationId>Ent-renew-1</activationId>
      </primaryKeys>
    </parentLinItemIdentifier>
    <newLinItem>
      <uniqueId>HID-220132</uniqueId>
      <activationId>Ent-renew-1RENEW</activationId>
    </newLinItem>
  </renewedLinItem>
</entitlementData>
</responseData>
</renewLicenseResponse>
```

Element: replaceEntitlementLinItemRequest

Description

A **replaceEntitlementLinItemRequest** message contains an element of `addOrReplaceEntitlementLinItemRequestType`.

Derived By

Type [replaceOnlyEntitlementLinItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linItem	addEntitlementLinItemData Type	1..*	See addEntitlementLinItemData Type .

Referenced By

Name	Type
replaceEntitlementLinItem	Method

XML Example

The following XML fragment illustrates a **replaceEntitlementLinItemRequest** message:

XML Example

```
<replaceEntitlementLinItemRequest>
  <linItem>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent_basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <linItems>
      <activationId>
        <id>Ent-replace-3</id>
      </activationId>
      <product>
        <primaryKeys>
          <name>Basic Paint</name>
          <version>1.0</version>
        </primaryKeys>
      </product>
      <licenseModel>
        <primaryKeys>
          <name>Nodelocked Uncounted</name>
        </primaryKeys>
      </licenseModel>
      <licenseModelAttributes>
        <attribute>
          <attributeName>NOTICE</attributeName>
          <stringValue>n</stringValue>
        </attribute>
        <attribute>
          <attributeName>SERIAL_NUMBER</attributeName>
          <stringValue>sn</stringValue>
        </attribute>
      </licenseModelAttributes>
      <numberOfCopies>10</numberOfCopies>
      <isPermanent>true</isPermanent>
    </linItems>
    <maintenanceLinItems>
      <activationId>
        <id>Ent-replace-3M</id>
      </activationId>
      <maintenanceProduct>
        <primaryKeys>
          <name>Paint Maintenance</name>
          <version>1.0</version>
        </primaryKeys>
      </maintenanceProduct>
      <startDate>2008-01-15</startDate>
      <expirationDate>2008-01-15</expirationDate>
      <parentLinItem>
        <primaryKeys>
          <activationId>Ent-replace-3</activationId>
        </primaryKeys>
      </parentLinItem>
    </maintenanceLinItems>
  </linItem>
</replaceEntitlementLinItemRequest>
```

Element: replaceEntitlementLinItemResponse

Description

A **replaceEntitlementLinItemResponse** message contains an element of **addOrReplaceEntitlementLinItemResponseType**.

Derived By

Type [replaceOnlyEntitlementLineItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedAddEntitlementLineItemDataListType	0..1	See failedAddEntitlementLineItemDataListType .									
responseData	addedEntitlementLineItemDataListType	0..1	See addedEntitlementLineItemDataListType .									

Referenced By

Name	Type
replaceEntitlementLineItem	Method

XML Example

The following XML fragment illustrates a successful **replaceEntitlementLineItemResponse** message:

```
<replaceEntitlementLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <addedLineItems>
      <entitlementIdentifier>
        <primaryKeys>
          <entitlementId>Ent_basic</entitlementId>
        </primaryKeys>
      </entitlementIdentifier>
      <lineItemUniquelds>HID-220113</lineItemUniquelds>
      <maintenanceLineItemUniquelds>HID-220114
        </maintenanceLineItemUniquelds>
    </addedLineItems>
  </responseData>
</replaceEntitlementLineItemResponse>
```

Element: searchActivatableItemRequest

Description

A **searchActivatableItemRequest** message contains an element of **searchActivatableItemRequestType**.

Derived By

Type [searchActivatableItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activatableItemSearchCriteria	searchActivatableItemDataTaType	1..1	Required. See searchActivatableItemDataType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Defaults to 1. Say the getActivatableItemCount operation using the same query parameters returns 100 records.If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
getActivatableItemsQuery	Method

XML Example

The following XML fragment illustrates a **searchActivatableItemRequest** message:

```
<searchActivatableItemRequest>
  <activatableItemSearchCriteria>
    <entitlementId>
      <value>z</value>
    <searchType>CONTAINS</searchType>
    </entitlementId>
  </activatableItemSearchCriteria>
  <batchSize>50</batchSize>
  <pageNumber>1</pageNumber>
</searchActivatableItemRequest>
```

Element: searchActivatableItemResponse

Description

A **searchActivatableItemResponse** message contains an element of searchActivatableItemResponseType.

This operation will not return maintenance line items.

Note: The *soldTo* element is supported for backwards compatibility in the response to this operation, and now the *channelPartners* element is also supported. Note, however, that the query parameters of the operation do not support the *channelPartners* element. *soldTo* or *parentBulkEntSoldTo* should still be used to specify an organization in the query request or response.

Derived By

Type [searchActivatableItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
activatableItem	activatableItemDetailType	0..*	See activatableItemDetailType .									

Referenced By

Name	Type
getActivatableItemsQuery	Method

XML Example

The following XML fragment illustrates part of a successful **searchActivatableItemResponse** message:

```
<searchActivatableItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <activatableItem>
    <activatableItemType>LINEITEM</activatableItemType>
    <entitlementId>Ent_basic_z</entitlementId>
  </activatableItem>
</searchActivatableItemResponse>
```

XML Example

```

<soldTo>ACME</soldTo>
<shipToEmail>test@example.com</shipToEmail>
<shipToAddress>San Jose</shipToAddress>
<entitlementState>DEPLOYED</entitlementState>
<activatableItemData>
  <activationId>
    <id>Ent_basic_z_1</id>
  </activationId>
  <product>
    <uniqueId>HID-20103</uniqueId>
    <primaryKeys>
      <name>Product_basic</name>
      <version>1.0</version>
    </primaryKeys>
  </product>
  <licenseModel>
    <uniqueId>HID-21005</uniqueId>
    <primaryKeys>
      <name>FC Ent Policies</name>
    </primaryKeys>
  </licenseModel>
  <licenseModelAttributes>
    <attribute>
      <attributeName>NOTICE</attributeName>
      <stringValue>notice</stringValue>
    </attribute>
    <attribute>
      <attributeName>SERIAL_NUMBER</attributeName>
      <stringValue>serial</stringValue>
    </attribute>
  </licenseModelAttributes>
  <policyAttributes>
    <cancelLicensePolicy>
      <isCancelLicense>false</isCancelLicense>
    </cancelLicensePolicy>
    <virtualLicensePolicy>
      <isVirtualLicense>true</isVirtualLicense>
    </virtualLicensePolicy>
  </policyAttributes>
  <orderId>OR125</orderId>
  <orderLineNumber>1</orderLineNumber>
  <numberOfCopies>10</numberOfCopies>
  <isPermanent>false</isPermanent>
  <expirationDate>2008-11-30</expirationDate>
  <versionDateAttributes>
    <versionOption>DEFINE_NOW</versionOption>
  </versionDateAttributes>
  <numberOfRemainingCopies>10</numberOfRemainingCopies>
  <isTrustedType>false</isTrustedType>
  <state>DEPLOYED</state>
  <licenseTechnology>
    <uniqueId>HID-100</uniqueId>
    <primaryKeys>
      <name>FLEXnet Licensing</name>
    </primaryKeys>
  </licenseTechnology>
  <createdOnDateTime>2011-08-24T20:46:44.212Z</createdOnDateTime>
  <lastModifiedDateTime>2011-08-24T20:50:17.312Z</lastModifiedDateTime>
</activatableItemData>
</activatableItem>
</searchActivatableItemResponse>

```

Element: searchEntitlementLineItemPropertiesRequest

Description

A **searchEntitlementLineItemPropertiesRequest** message contains an element of **searchEntitlementLineItemPropertiesRequestType**.

Derived By

Type [searchEntitlementLineItemPropertiesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	searchActivatableItemDataType	1..1	Required. See searchActivatableItemDataType . Leave this element blank to return all activatable line items.
entitlementLineItemResponseConfig	entitlementLineItemResponseConfigRequestType	1..1	See entitlementLineItemResponseConfigRequestType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Required. Starts at 1. Say the operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
getEntitlementLineItemPropertiesQuery	Method

XML Example

The following XML fragment illustrates a **searchEntitlementLineItemPropertiesRequest** message:

```
<searchEntitlementLineItemPropertiesRequest>
  <EntitlementLineItemSearchCriteria>
  </EntitlementLineItemSearchCriteria>
  <EntitlementLineItemResponseConfig>
    <Id>1</Id>
    <activationId>1</activationId>
    <description>1</description>
    <state>1</state>
    <EntitlementLineItemType>1</EntitlementLineItemType>
    <orderId>1</orderId>
    <orderLineNumber>1</orderLineNumber>
    <entitlementId>1</entitlementId>
    <soldTo>1</soldTo>
    <entitlementState>1</entitlementState>
    <entitlementDescription>1</entitlementDescription>
    <shipToEmail>1</shipToEmail>
    <shipToAddress>1</shipToAddress>
    <parentBulkEntitlementId>1</parentBulkEntitlementId>
```

XML Example

```

<bulkEntSoldTo>1</bulkEntSoldTo>
<product>1</product>
<productDescription>1</productDescription>
<partNumber>1</partNumber>
<partNumberDescription>1</partNumberDescription>
<licenseTechnology>1</licenseTechnology>
<licenseModel>1</licenseModel>
<linelItemSupportAction>1</linelItemSupportAction>
<parentLinelItem>1</parentLinelItem>
<startDate>1</startDate>
<startDateOption>1</startDateOption>
<isPermanent>1</isPermanent>
<term>1</term>
<expirationDate>1</expirationDate>
<versionDate>1</versionDate>
<versionDateAttributes>1</versionDateAttributes>
<numberOfCopies>1</numberOfCopies>
<fulfilledAmount>1</fulfilledAmount>
<numberOfRemainingCopies>1</numberOfRemainingCopies>
<isTrusted>1</isTrusted>
<customAttributes>
  <attribute>
    <attributeName>NumberAttr</attributeName>
  </attribute>
  <attribute>
    <attributeName>TextAttr</attributeName>
  </attribute>
  <attribute>
    <attributeName>BooleanAttr</attributeName>
  </attribute>
  <attribute>
    <attributeName>DateAttr</attributeName>
  </attribute>
</customAttributes>
</EntitlementLinelItemResponseConfig>
<batchSize>20</batchSize>
<pageNumber>1</pageNumber>
</searchEntitlementLinelItemPropertiesRequest>

```

Element: searchEntitlementLinelItemPropertiesResponse

Description

A **searchEntitlementLinelItemPropertiesResponse** message contains an element of searchEntitlementLinelItemPropertiesResponseType.

A user will see only elements configured in entitlementLinelItemResponseConfig. Selecting too many elements for a response can negatively impact performance. Only select the elements required for a given response

Note: The *soldTo* element is supported for backwards compatibility in the response to this operation, and now the *channelPartners* element is also supported. Note, however, that the query parameters of the operation do not support the *channelPartners* element. *soldTo* or *parentBulkEntSoldTo* should still be used to specify an organization in the query request or response.

Derived By

Type [searchEntitlementLinelItemPropertiesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
entitlementLinItem	entitlementLinItemPropertiesType	0..*	See entitlementLinItemPropertiesType .									

Referenced By

Name	Type
getEntitlementLinItemPropertiesQuery	Method

XML Example

The following XML fragment illustrates a successful **searchEntitlementLinItemPropertiesResponse** message:

```
<searchEntitlementLinItemPropertiesResponse xmlns="urn:com.macrovision:flexnet/operations">
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</searchEntitlementLinItemPropertiesResponse>
```


XML Example

```
</statusInfo>
<EntitlementLineItem>
  <Id>220076</Id>
  <activationId>TestEnt-li</activationId>
  <description/>
  <state>TEST</state>
  <EntitlementLineItemType>LINEITEM</EntitlementLineItemType>
  <orderLineNumber/>
  <entitlementId>TestEnt</entitlementId>
  <entitlementState>TEST</entitlementState>
  <entitlementDescription/>
  <shipToEmail/>
  <shipToAddress/>
  <product>
    <uniqueId>HID-20093</uniqueId>
    <primaryKeys>
      <name>Basic Paint</name>
      <version>1.0</version>
    </primaryKeys>
  </product>
  <productDescription>This product contains what consumers need to get started in graphic design.</productDescription>
  <partNumber>
    <uniqueId>HID-20124</uniqueId>
    <primaryKeys>
      <partId>900-111-2222-2</partId>
    </primaryKeys>
  </partNumber>
  <licenseTechnology>
    <uniqueId>HID-100</uniqueId>
    <primaryKeys>
      <name>FLEXnet Licensing</name>
    </primaryKeys>
  </licenseTechnology>
  <licenseModel>
    <uniqueId>HID-501</uniqueId>
    <primaryKeys>
      <name>Floating Counted</name>
    </primaryKeys>
  </licenseModel>
  <startDateOption>DEFINE_AT_FIRST_ACTIVATION</startDateOption>
  <isPermanent>true</isPermanent>
  <numberOfCopies>100</numberOfCopies>
  <fulfilledAmount>0</fulfilledAmount>
  <numberOfRemainingCopies>100</numberOfRemainingCopies>
  <isTrusted>false</isTrusted>
  <customAttributes>
    <attribute>
      <attributeName>TextAttr</attributeName>
      <stringValue/>
    </attribute>
    <attribute>
      <attributeName>NumberAttr</attributeName>
      <integerValue>569</integerValue>
    </attribute>
    <attribute>
      <attributeName>BooleanAttr</attributeName>
    </attribute>
    <attribute>
      <attributeName>DateAttr</attributeName>
      <dateValue>2008-09-21</dateValue>
    </attribute>
  </customAttributes>
</EntitlementLineItem>
</searchEntitlementLineItemPropertiesResponse>
```

Element: searchEntitlementRequest

Description

A **searchEntitlementRequest** message contains an element of searchEntitlementRequestType.

Derived By

Type [searchEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementSearchCriteria	searchEntitlementDataType	1..1	Required. See searchEntitlementDataType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Defaults to 1. Say the getEntitlementCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
getEntitlementsQuery	Method

XML Example

The following XML fragment illustrates a **searchEntitlementRequest** message:

```
<searchEntitlementRequest>
  <entitlementSearchCriteria>
    <entitlementId>
      <value>z</value>
      <searchType>CONTAINS</searchType>
    </entitlementId>
    <isBulk>false</isBulk>
  </entitlementSearchCriteria>
  <batchSize>50</batchSize>
  <pageNumber>1</pageNumber>
</searchEntitlementRequest>
```

Element: searchEntitlementResponse

Description

A **searchEntitlementResponse** message contains an element of searchEntitlementResponseType.

Description

Note: The *soldTo* element is supported for backwards compatibility in the response to this operation, and now the *channelPartners* element is also supported. Note, however, that the query parameters of the operation do not support the *channelPartners* element. *soldTo* or *parentBulkEntSoldTo* should still be used to specify an organization in the query request or response.

Derived By

Type [searchEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
entitlement	entitlementDataType	0..*	See entitlementDataType .									

Referenced By

Name	Type
getEntitlementsQuery	Method

XML Example

The following XML fragment illustrates a successful **searchEntitlementResponse** message:

```
<searchEntitlementResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <entitlement>
    <simpleEntitlement>
      <entitlementId>
        <id>Ent_basic_z</id>
      </entitlementId>
      <soldTo>ACME</soldTo>
      <shipToEmail>test@example.com</shipToEmail>
      <shipToAddress>San Jose</shipToAddress>
      <state>DEPLOYED</state>
      <createdUserId>admin</createdUserId>
      <lineItems>
        <activationId>
          <id>Ent_basic_z_1</id>
        </activationId>
        <product>
          <uniqueId>HID-20103</uniqueId>
          <primaryKeys>
            <name>Product_basic</name>
            <version>1.0</version>
          </primaryKeys>
        </product>
        <licenseModel>
          <uniqueId>HID-21005</uniqueId>
          <primaryKeys>
            <name>FC Ent Policies</name>
          </primaryKeys>
        </licenseModel>
        <licenseModelAttributes>
          <attribute>
            <attributeName>NOTICE</attributeName>
            <stringValue>notice</stringValue>
          </attribute>
          <attribute>
            <attributeName>SERIAL_NUMBER</attributeName>
            <stringValue>serial</stringValue>
          </attribute>
        </licenseModelAttributes>
        <orderId>OR125</orderId>
        <orderLineNumber>1</orderLineNumber>
        <numberOfCopies>10</numberOfCopies>
        <isPermanent>false</isPermanent>
        <expirationDate>2008-11-30</expirationDate>
        <versionDateAttributes>
          <versionOption>DEFINE_NOW</versionOption>
        </versionDateAttributes>
        <numberOfRemainingCopies>10</numberOfRemainingCopies>
        <isTrustedType>false</isTrustedType>
        <state>DEPLOYED</state>
        <licenseTechnology>
          <uniqueId>HID-100</uniqueId>
          <primaryKeys>
            <name>FLEXnet Licensing</name>
          </primaryKeys>
        </licenseTechnology>
      </lineItems>
    </simpleEntitlement>
  </entitlement>
</searchEntitlementResponse>
```

XML Example

```
</primaryKeys>
</licenseTechnology>
</lineItems>
</simpleEntitlement>
</entitlement>
</searchEntitlementResponse>
```

Element: setEntitlementStateRequest

Description

A **setEntitlementStateRequest** message contains an element of setEntitlementStateRequestType.

Derived By

Type [setEntitlementStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlement	entitlementStateDataType	1..*	Required. A setEntitlementState request contains an array of entitlement elements for which to change the state. See entitlementStateDataType .

Referenced By

Name	Type
setEntitlementState	Method

XML Example

The following XML fragment illustrates a **setEntitlementStateRequest** message:

```
<setEntitlementStateRequest>
  <entitlement>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent_bulk_basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <stateToSet>DEPLOYED</stateToSet>
  </entitlement>
</setEntitlementStateRequest>
```

Element: setEntitlementStateResponse

Description

A **setEntitlementStateResponse** message contains an element of **setEntitlementStateResponseType**.

Derived By

Type [setEntitlementStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedEntitlementStateDataListType	0..1	Information about the entitlements whose state was not set is listed in the failedData element. See failedEntitlementStateDataListType .									

Referenced By

Name	Type
setEntitlementState	Method

XML Example

The following XML fragment illustrates a successful **setEntitlementStateResponse** message:

```
<setEntitlementStateResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</setEntitlementStateResponse>
```

Element: setLinItemStateRequest

Description

A **setLinItemStateRequest** message contains an element of setLinItemStateRequestType.

Derived By

Type [setLinItemStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
linItem	linItemStateDataType	1..*	Required. A setLinItemState request contains an array of linItem elements for which to change the state. See linItemStateDataType .

Referenced By

Name	Type
setLinItemState	Method

XML Example

The following XML fragment illustrates a **setLinItemStateRequest** message:

```
<setLinItemStateRequest>
  <linItem>
    <linItemIdentifier>
      <primaryKeys>
        <activationId>Ent_basic_b_1</activationId>
      </primaryKeys>
    </linItemIdentifier>
  </linItem>
</setLinItemStateRequest>
```

XML Example

```
</primaryKeys>
</lineltemIdentifier>
<stateToSet>DRAFT</stateToSet>
<includeChildItems>false</includeChildItems>
</lineltem>
</setLineltemStateRequest>
```

Element: setLineltemStateResponse

Description

A **setLineltemStateResponse** message contains an element of setLineltemStateResponseType.

Derived By

Type [setLineltemStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedLineItemStateDataListType	0..1	Information about the line items whose state was not set is listed in the failedData element. See failedLineItemStateDataListType .									

Referenced By

Name	Type
setLineItemState	Method

XML Example

The following XML fragment illustrates a successful **setLineItemStateResponse** message:

```
<setLineItemStateResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</setLineItemStateResponse>
```

Element: setMaintenanceLinItemStateRequest

Description

A **setMaintenanceLinItemStateRequest** message contains an element of setMaintenanceLinItemStateRequestType.

Derived By

Type [setMaintenanceLinItemStateRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
maintenanceLinItem	maintenanceLinItemStateDataType	1..*	See maintenanceLinItemStateDataType .

Referenced By

Name	Type
setMaintenanceLinItemState	Method

XML Example

The following XML fragment illustrates a **setMaintenanceLinItemStateRequest** message:

```
<setMaintenanceLinItemStateRequest>
  <maintenanceLinItem>
    <linItemIdentifier>
      <uniqueId>HID-111373</uniqueId>
      <primaryKeys>
        <activationId>ActivationID-Parent-TestRF007_1</activationId>
      </primaryKeys>
    </linItemIdentifier>
    <stateToSet>DEPLOYED</stateToSet>
  </maintenanceLinItem>
</setMaintenanceLinItemStateRequest>
```

Element: setMaintenanceLinItemStateResponse

Description

A **setMaintenanceLinItemStateResponse** message contains an element of setMaintenanceLinItemStateResponseType.

Derived By

Type [setMaintenanceLinItemStateResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.
failedMaintenanceData	failedMaintenanceLineItemStateDataListType	0..1	See failedMaintenanceLineItemStateDataListType .

Referenced By

Name	Type
setMaintenanceLineItemState	Method

XML Example

The following XML fragment illustrates a successful **setMaintenanceLineItemStateResponse** message:

```
<setMaintenanceLineItemStateResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</setMaintenanceLineItemStateResponse>
```

The following XML fragment illustrates an unsuccessful **setMaintenanceLineItemStateResponse** message:

```
<setMaintenanceLineItemStateResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed.</reason>
  </statusInfo>
  <failedMaintenanceData>
    <failedMaintenanceLineItem>
      <maintenanceLineItem>
        <lineItemIdentifier>
          <primaryKeys>
            <activationId>se2-1M</activationId>
          </primaryKeys>
        </lineItemIdentifier>
        <stateToSet>INVALID_STATE</stateToSet>
      </maintenanceLineItem>
      <reason>xxx</reason>
    </failedMaintenanceLineItem>
  </failedMaintenanceData>
</setMaintenanceLineItemStateResponse>
```

Element: splitBulkEntitlementRequest

Description

A **splitBulkEntitlementRequest** message contains an element of splitBulkEntitlementRequestType.

Derived By

Type [splitBulkEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
bulkEntitlementList	splitBulkEntitlementListType	1..1	Required. See splitBulkEntitlementListType .

Referenced By

Name	Type
splitBulkEntitlement	Method

XML Example

The following XML fragment illustrates a **splitLineItemRequest** message:

```
<splitBulkEntitlementRequest>
  <bulkEntitlementList>
    <bulkEntitlementInfo>
      <bulkEntIdentifier>
        <primaryKeys>
          <activationId>se-split-1</activationId>
        </primaryKeys>
      </bulkEntIdentifier>
      <numberOfCopies>15</numberOfCopies>
      <targetTierName>bo.constants.partnertiernames.endcustomer</targetTierName>
    </bulkEntitlementInfo>
    <targetOrganizationUnit>
      <primaryKeys>
        <name>ORG2</name>
      </primaryKeys>
    </targetOrganizationUnit>
    <matchingBulkEntitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent-match-a</entitlementId>
      </primaryKeys>
    </matchingBulkEntitlementIdentifier>
    <matchingLineItemIdentifier>
      <primaryKeys>
        <activationId>se-match-1</activationId>
      </primaryKeys>
    </matchingLineItemIdentifier>
  </bulkEntitlementList>
</splitBulkEntitlementRequest>
```

Element: splitBulkEntitlementResponse

Description

A **splitBulkEntitlementResponse** message contains an element of splitBulkEntitlementResponseType.

Derived By

Type [splitBulkEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	splitBulkEntitlementResponseListType	0..1	Information about the bulk entitlement that was split, and optionally the bulk entitlement to which the split web register keys went, is listed in the responseData element. See splitBulkEntitlementResponseListType .									

Content Model

Component	Type	Occurs	Description
failedData	failedSplitBulkEntitlementListType	0..1	Information about an entitlement line item that was not split is listed in the failedData element. See failedSplitBulkEntitlementListType .

Referenced By

Name	Type
splitBulkEntitlement	Method

XML Example

The following XML fragment illustrates a successful **splitBulkEntitlementResponse** message:

```
<splitBulkEntitlementResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <splitBulkEntitlement>
      <bulkEntIdentifier>
        <uniqueId>HID-101349</uniqueId>
        <primaryKeys>
          <entitlementId>Ent-split-2</entitlementId>
        </primaryKeys>
      </bulkEntIdentifier>
      <newBulkEntIdentifier>
        <primaryKeys>
          <entitlementId>3da0-c6d3-128c-b87c-bc77-ffc</entitlementId>
        </primaryKeys>
      </newBulkEntIdentifier>
    </splitBulkEntitlement>
  </responseData>
</splitBulkEntitlementResponse>
```

Element: splitLineItemRequest

Description

A **splitLineItemRequest** message contains an element of splitLineItemRequestType.

Derived By

Type [splitLineItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltemList	splitLineltemListType	1..1	Required. See splitLineltemListType .

Referenced By

Name	Type
splitLineltem	Method

XML Example

The following XML fragment illustrates a **splitLineltemRequest** message:

```
<splitLineltemRequest>
  <lineltemList>
    <lineltemInfo>
      <lineltemIdentifier>
        <primaryKeys>
          <activationId>se-split-1</activationId>
        </primaryKeys>
      </lineltemIdentifier>
      <numberOfCopies>15</numberOfCopies>
      <targetTierName>bo.constants.partner-tier-names.endcustomer</targetTierName>
      <targetOrganizationUnit>
        <primaryKeys>
          <name>ORG2</name>
        </primaryKeys>
      </targetOrganizationUnit>
      <matchingLineltemIdentifier>
        <primaryKeys>
          <activationId>se-match-1</activationId>
        </primaryKeys>
      </matchingLineltemIdentifier>
    </lineltemInfo>
  </lineltemList>
</splitLineltemRequest>
```

Element: splitLineltemResponse

Description

A **splitLineltemResponse** message contains an element of `splitLineltemResponseType`.

Derived By

Type [splitLineltemResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	splitLinItemResponseType	0..1	Information about the entitlement line item that was split, and optionally the entitlement to which the split counts went, is listed in the responseData element. See splitLinItemResponseListType .									
failedData	failedSplitLinItemListType	0..1	Information about an entitlement line item that was not split is listed in the failedData element. See failedSplitLinItemListType .									

Referenced By

Name	Type
splitLinItem	Method

XML Example

The following XML fragment illustrates a successful **splitLinItemResponse** message:

XML Example

```
<splitLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <splitLineItem>
      <lineItemIdentifier>
        <uniqueId>HID-101349</uniqueId>
        <primaryKeys>
          <activationId>se-split-2</activationId>
        </primaryKeys>
      </lineItemIdentifier>
      <entitlementIdentifier>
        <primaryKeys>
          <entitlementId>3da0-c6d3-128c-b87c-bc77-ffc</entitlementId>
        </primaryKeys>
      </entitlementIdentifier>
    </splitLineItem>
  </responseData>
</splitLineItemResponse>
```

Element: transferEntitlementsRequest

Description

A **transferEntitlementsRequest** message contains an element of transferEntitlementsRequestType.

Derived By

Type [transferEntitlementsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementList	transferEntitlementsListType	1..1	Required. See transferEntitlementInfoType .

Referenced By

Name	Type
transferEntitlement	Method

XML Example

The following XML fragment illustrates a **transferEntitlementsRequest** message:

```
<transferEntitlementsRequest>
  <entitlementList>
```

XML Example

```
<entitlementInfo>
  <entitlementIdentifier>
    <primaryKeys>
      <entitlementId>Ent-basic</entitlementId>
    </primaryKeys>
  </entitlementIdentifier>
  <organizationTo>WILY</organizationTo>
  <retainExistingIds>false</retainExistingIds>
  <returnActiveFulfillments>true</returnActiveFulfillments>
</entitlementInfo>
</entitlementList>
</transferEntitlementsRequest>
```

Element: transferEntitlementsResponse

Description

A **transferEntitlementsResponse** message contains an element of transferEntitlementsResponseType.

Each entitlement in the **transferEntitlementsRequest** is transferred as an atomic unit; transferring each either succeeds or fails.

Derived By

Type [transferEntitlementsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	transferredEntitlementsListType	0..1	Information about the entitlements that were transferred is listed in the responseData element. See transferredEntitlementsListType .									
failedData	failedTransferEntitlementListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedTransferEntitlementListType .									

Referenced By

Name	Type
transferEntitlement	Method

XML Example

The following XML fragment illustrates a successful **transferEntitlementsResponse** message:

```
<transferEntitlementsResponse>  
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <transferredEntitlement>
    <entitlementIdentifier>
      <uniqueId>HID-220046</uniqueId>
      <primaryKeys>
        <entitlementId>18ee-9d61-9994-1748-747f-f8</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <lineItemIdentifierMap>
      <activationId>18ee-9d61-1094-1799-747f-f7</activationId>
      <transferredFromId>Ent-basic-2</transferredFromId>
    </lineItemIdentifierMap>
    <lineItemIdentifierMap>
      <activationId>18ee-9d61-1094-1748-747f-f6</activationId>
      <transferredFromId>Ent-basic-1</transferredFromId>
    </lineItemIdentifierMap>
  </transferredEntitlement>
</responseData>
</transferEntitlementsResponse>
```

Element: transferLineItemsRequest

Description

A **transferLineItemsRequest** message contains an element of transferLineItemsRequestType.

Derived By

Type [transferLineItemsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemList	transferLineItemsListType e	1..1	Required. See transferLineItemsListType .

Referenced By

Name	Type
transferLineItem	Method

XML Example

The following XML fragment illustrates a **transferLineItemsRequest** message:

```
<transferLineItemsRequest>
```

XML Example

```
<linelItemList>
  <linelItemInfo>
    <linelItemIdentifier>
      <primaryKeys>
        <activationId>Ent-trans-1</activationId>
      </primaryKeys>
    </linelItemIdentifier>
    <numberOfCopies>10</numberOfCopies>
    <useSameActivationId>true</useSameActivationId>
    <entitlementBelongsTo>
      <primaryKeys>
        <entitlementId>Ent-receive</entitlementId>
      </primaryKeys>
    </entitlementBelongsTo>
  </linelItemInfo>
</linelItemList>
</transferLinItemsRequest>
```

Element: transferLinItemsResponse

Description

A **transferLinItemsResponse** message contains an element of transferLinItemsResponseType.

Each entitlement line item in the **transferLinItemsRequest** is transferred as an atomic unit; transferring each either succeeds or fails.

Derived By

Type [transferLinItemsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	transferredLineItemsListType	0..1	Information about the entitlements that were transferred is listed in the responseData element. See transferredLineItemsListType .									
failedData	failedTransferLineItemListType	0..1	Information about the entitlements that were not added is listed in the failedData element. See failedTransferLineItemListType .									

Referenced By

Name	Type
transferLineItem	Method

XML Example

The following XML fragment illustrates a successful **transferLineItemsResponse** message:

```
<transferLineItemsResponse>  
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <transferredLinItem>
    <linItemIdentifier>
      <uniqueId>HID-220116</uniqueId>
      <primaryKeys>
        <activationId>Ent-trans-1</activationId>
      </primaryKeys>
    </linItemIdentifier>
    <transferredFromId>
      <primaryKeys>
        <activationId>Ent-trans-1</activationId>
      </primaryKeys>
    </transferredFromId>
  </transferredLinItem>
</responseData>
</transferLinItemsResponse>
```

Element: unlinkMaintenanceLinItemRequest

Description

An **unlinkMaintenanceLinItemRequest** message contains an element of unlinkMaintenanceLinItemRequestType.

Derived By

Type [unlinkMaintenanceLinItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
unlinkMaintenanceLinItem ItemList	unlinkMaintenanceLinItem ListType	1..1	See unlinkMaintenanceLinItemListType .

Referenced By

Name	Type
unlinkMaintenanceLinItem	Method

XML Example

The following XML fragment illustrates an **unlinkMaintenanceLinItem** message:

```
<unlinkMaintenanceLinItemRequest>
  <unlinkMaintenanceLinItemList>
    <!-- 1 or more repetitions:-->
    <unlinkMaintenanceLinItem>
```

XML Example

```
<lineltemIdentifier>
  <!--Optional:-->
  <uniqueId>?</uniqueId>
  <!--Optional:-->
  <primaryKeys>
    <activationId>?</activationId>
  </primaryKeys>
</lineltemIdentifier>
<maintenanceLineltemIdentifier>
  <!--Optional:-->
  <uniqueId>?</uniqueId>
  <!--Optional:-->
  <primaryKeys>
    <activationId>?</activationId>
  </primaryKeys>
</maintenanceLineltemIdentifier>
</unlinkMaintenanceLineltem>
</unlinkMaintenanceLineltemList>
</unlinkMaintenanceLineltemRequest>
```

Element: unlinkMaintenanceLineltemResponse

Description

An **unlinkMaintenanceLineltemResponse** message contains an element of unlinkMaintenanceLineltemResponseType.

Derived By

Type [unlinkMaintenanceLineltemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUnlinkMaintenanceLineItemListItemType	0..1	See failedUnlinkMaintenanceLineItemListItemType .									

Referenced By

Name	Type
unlinkMaintenanceLineItem	Method

XML Example

The following XML fragment illustrates a successful **unlinkMaintenanceLineItemResponse** message:

```
<unlinkMaintenanceLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</unlinkMaintenanceLineItemResponse>
```

The following XML fragment illustrates an unsuccessful **unlinkMaintenanceLineItemResponse** message:

XML Example

```
<unlinkMaintenanceLineItemResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>All input data in the request failed. ...</reason>
  </statusInfo>
  <failedData>
    <failedUnlinkMaintenanceLineItem>
      <unlinkMaintenanceLineItem>
        <lineItemIdentifier>
          <primaryKeys>
            <activationId>ent-maint-1P</activationId>
          </primaryKeys>
        </lineItemIdentifier>
        <maintenanceLineItemIdentifier>
          <primaryKeys>
            <activationId>ent-maint-1</activationId>
          </primaryKeys>
        </maintenanceLineItemIdentifier>
      </unlinkMaintenanceLineItem>
      <reason>9999: Cannot find the specified maintenance line item</reason>
    </failedUnlinkMaintenanceLineItem>
  </failedData>
</unlinkMaintenanceLineItemResponse>
```

Element: updateBulkEntitlementRequest

Description

An **updateBulkEntitlementRequest** message contains an element of updateBulkEntitlementRequestType.

Derived By

Type [updateBulkEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
bulkEntitlement	updateBulkEntitlementData Type	1..*	Required. An updateBulkEntitlementRequest contains a bulkEntitlement element. See updateBulkEntitlementData Type .

Referenced By

Name	Type
updateBulkEntitlement	Method

XML Example

The following XML fragment illustrates an **updateBulkEntitlementRequest** message (added missing entitlement-time attributes):

```
<updateBulkEntitlementRequest>
  <bulkEntitlement>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent_bulk_basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <licenseModelAttributes>
      <attribute>
        <attributeName>SERIAL_NUMBER</attributeName>
        <stringValue>serial</stringValue>
      </attribute>
      <attribute>
        <attributeName>NOTICE</attributeName>
        <stringValue>notice</stringValue>
      </attribute>
    </licenseModelAttributes>
  </bulkEntitlement>
</updateBulkEntitlementRequest>
```

Element: updateBulkEntitlementResponse

Description

An **updateBulkEntitlementResponse** message contains an element of updateBulkEntitlementResponseType.

Derived By

Type [updateBulkEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateBulkEntitlementDataListType	0..1	Information about the entitlements that were not updated is listed in the failedData element. See failedUpdateBulkEntitlementDataListType .									

Referenced By

Name	Type
updateBulkEntitlement	Method

XML Example

The following XML fragment illustrates a successful **updateBulkEntitlementResponse** message:

```
<updateBulkEntitlementResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateBulkEntitlementResponse>
```

Element: updateEntitlementLineItemRequest

Description

An **updateEntitlementLineItemRequest** message contains an element of updateEntitlementLineItemRequestType.

Derived By

Type [updateEntitlementLineItemRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineItemData	updateEntitlementLineItemData Type	1..*	Required. An updateEntitlementLineItemRequest contains a lineItemData element. See updateEntitlementLineItemData Type .

Referenced By

Name	Type
updateEntitlementLineItem	Method

XML Example

The following XML fragment illustrates an **updateEntitlementLineItemRequest** message:

```
<updateEntitlementLineItemRequest>
  <lineItemData>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent_basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <lineItemData>
      <lineItemIdentifier>
        <primaryKeys>
          <activationId>Ent_basic_1</activationId>
        </primaryKeys>
      </lineItemIdentifier>
      <numberOfCopies>20</numberOfCopies>
    </lineItemData>
  </lineItemData>
</updateEntitlementLineItemRequest>
```

Element: updateEntitlementLineItemResponse

Description

A **updateEntitlementLineItemResponse** message contains an element of **updateEntitlementLineItemResponseType**.

Each entitlement in the **updateEntitlementLineItemRequest** is updated as an atomic unit; updating each either succeeds or fails.

Derived By

Type [updateEntitlementLineItemResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateEntitlementLineItemDataListType	0..1	Information about the line items that were not updated is listed in the failedData element. See failedUpdateEntitlementLineItemDataListType .									

Referenced By

Name	Type
updateEntitlementLineItem	Method

XML Example

The following XML fragment illustrates a successful **updateEntitlementLineItemResponse** message:

```
<updateEntitlementLineItemResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateEntitlementLineItemResponse>
```

Element: updateSimpleEntitlementRequest

Description

An **updateSimpleEntitlementRequest** message contains an element of updateSimpleEntitlementRequestType.

Derived By

Type [updateSimpleEntitlementRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
simpleEntitlement	updateSimpleEntitlement DataType	1..*	Required. An updateSimpleEntitlementRequest contains a simpleEntitlement element. See updateSimpleEntitlementDataType .

Referenced By

Name	Type
updateSimpleEntitlement	Method

XML Example

The following XML fragment illustrates an **updateSimpleEntitlementRequest** message:

```
<updateSimpleEntitlementRequest>
  <simpleEntitlement>
    <entitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent_basic_a</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
  </simpleEntitlement>
</updateSimpleEntitlementRequest>
```

XML Example

```
</primaryKeys>
</entitlementIdentifier>
<entitlementId>
  <id>Ent_basic_a_mod</id>
</entitlementId>
<soldTo>Delta</soldTo>
</simpleEntitlement>
</updateSimpleEntitlementRequest>
```

Element: updateSimpleEntitlementResponse

Description

A **updateSimpleEntitlementResponse** message contains an element of updateSimpleEntitlementResponseType.

Each entitlement in the **updateSimpleEntitlementRequest** is updated as an atomic unit; updating each either succeeds or fails.

Derived By

Type [updateSimpleEntitlementResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateSimpleEntitlementDataListType	0..1	Information about the entitlements that were not updated is listed in the failedData element. See failedUpdateSimpleEntitlementDataListType .									

Referenced By

Name	Type
updateSimpleEntitlement	Method

XML Example

The following XML fragment illustrates a successful **updateSimpleEntitlementResponse** message:

```
<updateSimpleEntitlementResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateSimpleEntitlementResponse>
```

Element: upgradeLicenseRequest

Description

An **upgradeLicenseRequest** message contains an element of **EntitlementLifeCycleRequestType**.

Derived By

Type [EntitlementLifeCycleRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	entitlementLifeCycleDataType	0..*	Required. A EntitlementLifecycleRequest contains an array of entitlementData elements. See entitlementLifeCycleDataType .

Referenced By

Name	Type
upgradeLicense	Method

XML Example

The following XML fragment illustrates an **upgradeLicenseRequest** message:

```
<upgradeLicenseRequest>
  <entitlementData>
    <parentEntitlementIdentifier>
      <primaryKeys>
        <entitlementId>Ent-upgrade</entitlementId>
      </primaryKeys>
    </parentEntitlementIdentifier>
    <lineItemData>
      <parentLineItemIdentifier>
        <primaryKeys>
          <activationId>Ent-upgrade-1</activationId>
        </primaryKeys>
      </parentLineItemIdentifier>
      <lineItem>
        <activationId>
          <id>Ent-upgrade-1UPGRADE</id>
        </activationId>
        <product>
          <primaryKeys>
            <name>Basic Paint</name>
            <version>2.0</version>
          </primaryKeys>
        </product>
        <licenseModel>
          <primaryKeys>
            <name>Floating Counted</name>
          </primaryKeys>
        </licenseModel>
      </lineItem>
    </lineItemData>
  </entitlementData>
</upgradeLicenseRequest>
```

XML Example

```
</licenseModel>
<licenseModelAttributes>
  <attribute>
    <attributeName>SERIAL_NUMBER</attributeName>
    <stringValue>some thing</stringValue>
  </attribute>
  <attribute>
    <attributeName>NOTICE</attributeName>
    <stringValue>test</stringValue>
  </attribute>
</licenseModelAttributes>
<orderId>110</orderId>
<orderLineNumber>10</orderLineNumber>
<numberOfCopies>3</numberOfCopies>
<startDate>2008-02-15</startDate>
<isPermanent>true</isPermanent>
<linelItemType>UPGRADE</linelItemType>
</linelItem>
<isFull>true</isFull>
<allowActivationsOnParent>false</allowActivationsOnParent>
<autoDeploy>true</autoDeploy>
</linelItemData>
</entitlementData>
</upgradeLicenseRequest>
```

Element: upgradeLicenseResponse

Description

An **upgradeLicenseResponse** message contains an element of **EntitlementLifeCycleResponseType**.

Each entitlement in the **upgradeLicenseRequest** is renewed as an atomic unit; upgrading each either succeeds or fails.

Derived By

Type [EntitlementLifeCycleResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedEntitlementLifeCycleDataListType	0..1	Information about the entitlements that were not upgraded is listed in the failedData element. See failedEntitlementLifeCycleDataListType .									
responseData	createdEntitlementLifeCycleDataListType	0..1	Information about the entitlements that were upgraded is listed in the responseData element. See createdEntitlementLifeCycleDataListType .									

Referenced By

Name	Type
upgradeLicense	Method

XML Example

The following XML fragment illustrates a successful **upgradeLicenseResponse** message:

```
<upgradeLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
```

XML Example

```
<entitlementData>
  <entitlementRecordRefNo>01</entitlementRecordRefNo>
  <parentEntitlementIdentifier>
    <primaryKeys>
      <entitlementId>Ent-upgrade</entitlementId>
    </primaryKeys>
  </parentEntitlementIdentifier>
  <createdLineItemData>
    <lineItemRecordRefNo>01</lineItemRecordRefNo>
    <parentLineItemIdentifier>
      <primaryKeys>
        <activationId>Ent-upgrade-1</activationId>
      </primaryKeys>
    </parentLineItemIdentifier>
    <newLineItem>
      <uniqueId>HID-220134</uniqueId>
      <activationId>Ent-upgrade-1UPGRADE</activationId>
    </newLineItem>
  </createdLineItemData>
</entitlementData>
</responseData>
</upgradeLicenseResponse>
```

Element: upsellLicenseRequest

Description

An **upsellLicenseRequest** message contains an element of **EntitlementLifeCycleRequestType**.

Derived By

Type [EntitlementLifeCycleRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementData	entitlementLifeCycleDataType	0..*	Required. A EntitlementLifecycleRequest contains an array of entitlementData elements. See entitlementLifeCycleDataType .

Referenced By

Name	Type
upsellLicense	Method

XML Example

The following XML fragment illustrates an **upsellLicenseRequest** message:

```
<upsellLicenseRequest>
  <entitlementData>
    <lineItemData>
      <parentLineItemIdentifier>
        <primaryKeys>
          <activationId>Ent-upsell-1</activationId>
        </primaryKeys>
      </parentLineItemIdentifier>
    </lineItem>
    <activationId>
      <id>Ent-upsell-1UPSELL</id>
    </activationId>
    <product>
      <primaryKeys>
        <name>Premium Paint</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <licenseModel>
      <primaryKeys>
        <name>Floating Counted</name>
      </primaryKeys>
    </licenseModel>
    <licenseModelAttributes>
      <attribute>
        <attributeName>SERIAL_NUMBER</attributeName>
        <stringValue>some thing</stringValue>
      </attribute>
      <attribute>
        <attributeName>NOTICE</attributeName>
        <stringValue>test</stringValue>
      </attribute>
    </licenseModelAttributes>
    <orderId>110</orderId>
    <orderLineNumber>10</orderLineNumber>
    <startDate>2008-02-15</startDate>
    <isPermanent>true</isPermanent>
    <lineItemType>UPSELL</lineItemType>
  </lineItem>
  <isFull>true</isFull>
  <allowActivationsOnParent>true</allowActivationsOnParent>
  <autoDeploy>true</autoDeploy>
</lineItemData>
</entitlementData>
</upsellLicenseRequest>
```

Element: upsellLicenseResponse

Description

An **upsellLicenseResponse** message contains an element of **EntitlementLifeCycleResponseType**.

Each entitlement in the **upsellLicenseRequest** is renewed as an atomic unit; upselling each either succeeds or fails.

Derived By

Type [EntitlementLifeCycleResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedEntitlementLifeCycleDataListType	0..1	Information about the entitlements that were not upgraded is listed in the failedData element. See failedEntitlementLifeCycleDataListType .									
responseData	createdEntitlementLifeCycleDataListType	0..1	Information about the entitlements that were upgraded is listed in the responseData element. See createdEntitlementLifeCycleDataListType .									

Referenced By

Name	Type
upsellLicense	Method

XML Example

The following XML fragment illustrates a successful **upsellLicenseResponse** message:

```
<upsellLicenseResponse>
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <entitlementData>
    <entitlementRecordRefNo>01</entitlementRecordRefNo>
    <parentEntitlementIdentifier>
      <uniqueId>HID-220083</uniqueId>
      <primaryKeys>
        <entitlementId>Ent-upsell</entitlementId>
      </primaryKeys>
    </parentEntitlementIdentifier>
    <createdLineItemData>
      <lineItemRecordRefNo>01</lineItemRecordRefNo>
      <parentLineItemIdentifier>
        <primaryKeys>
          <activationId>Ent-upsell-1</activationId>
        </primaryKeys>
      </parentLineItemIdentifier>
      <newLineItem>
        <uniqueId>HID-220136</uniqueId>
        <activationId>Ent-upgrade-1UPSELL</activationId>
      </newLineItem>
    </createdLineItemData>
  </entitlementData>
</responseData>
</upsellLicenseResponse>
```


LicenseService Web Service

Description

Web service to create, rehost, repair, return, query of license activations.

Introduction

The License web service allows you to generate and email certificate licenses, perform license lifecycle operations for certificate licenses, and generate short code activation responses for trusted activations.

Methods: LicenseService

Methods

Name	Description
activateShortCode	The activateShortCode operation generates one keyboard activation response. To use the License service to generate a short code response: • Short code ASRs must be created and associated with deployed bulk entitlements in the FlexNet Operations database. • Short code ASRs must be delivered to customers with an activation utility. • Bulk entitlement and/or a web register key must be delivered to customers. • If web register keys are going to be loaded dynamically into a bulk entitlement at fulfillment time, a FlexNet Operations configuration setting to load web register keys as part of activation for trusted bulk entitlements must be checked
consolidateFulfillments	The consolidateFulfillments operation creates one or more consolidated license certificates from a set of fulfillments. To use the License service to create consolidated certificate licenses, there must be fulfillments in the FlexNet Operations database.
createChildLineItemFulfillment	The createChildLineItemFulfillment operation generates licenses for one or more renewal, upgrade, or upsell line items. To generate a license for a child line item, there must be an existing RENEWAL, UPGRADE, or UPSELL activatable item.
createLicense	The createLicense operation generates one or more license certificates and corresponding fulfillment records. To use the License service to generate a certificate license: • There must be deployed entitlements in the FlexNet Operations database. • You must provide any fulfillment-time data that re required by the specified license model.
createLicensesAsBatch	The createLicensesAsBatch operation generates one or more license certificates and corresponding fulfillment records from a set of activatable items that use the same license model and fulfillment-time attributes. Hostids and counts can be defined for each activatable item. To use the License service to generate certificate licenses in a batch: • There must be test or deployed entitlements in the FlexNet Operations database that use the same license model. • You must provide any fulfillment-time data that are required by the specified license model. Hostids and count can be provided for each individual fulfillment, but other fulfillment-time data applies to all the fulfillments.

Methods

Name	Description
createLicensesAsBatchAndConsolidate	The createLicensesAsBatchAndConsolidate operation generates one or more consolidated license certificates and corresponding fulfillment records from a set of activatable items that use the same license model and fulfillment-time attributes. Hostids and counts can be defined for each activatable item. To use the License service to generate consolidated certificate licenses in batch: • There must be test or deployed entitlements in the FlexNet Operations database that use the same license model. • You must provide any fulfillment-time data that are required by the specified license model. Hostids and count can be provided for each individual fulfillment, but other fulfillment-time data applies to all the fulfillments.
deleteOnholdFulfillments	The deleteOnholdFulfillments operation takes one or more on-hold fulfillmentIDs and deletes them.
emailConsolidatedLicenses	The emailConsolidatedLicenses operation sends one or more consolidated licenses via email. To send a consolidated license as an email attachment using the License service: • Configure the from-address for the license email. See the <i>FlexNet Operations Installation Guide</i>. • Customize the consolidated license email templates, if necessary. See the <i>FlexNet Operations Producer Portal Help Guide</i>. • A consolidated license must exist in the database. • At least one email address must be provided.
emailLicense	The emailLicense operation sends a license certificate. To send a license certificate as an email attachment using the License service: • Configure the from-address for the license email. See the <i>FlexNet Operations Installation Guide</i>. • Customize the license email templates, if necessary. See the <i>FlexNet Operations Producer Portal Help Guide</i>. • A fulfillment ID for a generated license must exist in the database. • At least one email address must be provided.
emergencyLicense	The emergencyLicense operation generates an emergency nodelocked or served certificate license for one or more fulfillments. To generate an emergency license, there must be existing fulfillments in the database that are eligible for an emergency license, according to their license model policies.
getConsolidatedFulfillmentCount	The getConsolidatedFulfillmentCount operation returns the number of consolidated fulfillments that match specified criteria.
getConsolidatedFulfillmentsQuery	The getConsolidatedFulfillmentsQuery operation returns the consolidated fulfillments that match specified criteria.

Methods

Name	Description
getFulfillmentAttributesForBatchActivation	The getFulfillmentAttributesForBatchActivation operation returns all the license model or entitlement attributes for the specified activation IDs that must be specified at the time the licenses are generated
getFulfillmentAttributesFromModel	The getFulfillmentAttributesFromModel operation returns all the license model attributes for the specified model that must be specified at the time the license is generated.
getFulfillmentCount	The getFulfillmentCount operation returns the number of fulfillments that match specified criteria.
getFulfillmentHistory	The getFulfillmentHistory operation returns the history of a specified fulfillment.
getFulfillmentPropertiesQuery	The getFulfillmentPropertiesQuery operation returns the fulfillment details that match specified criteria. The response from getFulfillmentProperties is highly configurable. You can use it to select only the data you need in a given response.
getFulfillmentsQuery	The getFulfillmentsQuery operation returns the fulfillments that match specified criteria.
getHostAttributesFromLicenseTechnology	The getHostAttributesFromLicenseTechnology operation takes a custom license technology and gives host attributes for the given technology in the response data. It is used to create a custom host when generating a license.
manualActivation	The manualActivation operation takes a single trusted activation XML request as a string and generates a single trusted activation XML response as a string.
manualRepair	The manualRepair operation generates one manual trusted activation repair response.
manualReturn	The manualReturn operation generates one trusted activation return response.
offlineFNPTtrustedStorageActivation	The offlineFNPTtrustedStorageActivation operation generates one or more fulfillment responses, based on the contents of the offline activation request, and returns output that can be stored as a file for subsequent processing on the machine that originated the request. The operation takes one or many activation IDs and an XML structure that contains information about the state of trusted storage on a single host machine. The operation output is an XML structure containing the fulfillment that must be saved to a file and processed on the host machine.
publisherErrorLicense	The publisherErrorLicense operation generates a publisher error nodelocked or served certificate license for one or more fulfillments. To generate a publisher error license, there must be existing fulfillments in the database that are eligible for a publisher error license, according to their license model policies.
rehostLicense	The rehostLicense operation modifies the hostids of one or more fulfillments. To rehost a license, there must be existing fulfillments in the database that are eligible to be rehosted, according to their license model policies.
renewFulfillment	The renewFulfillment operation generates renewal licenses for one or more fulfillments. To renew a fulfillment, there must be an existing RENEWAL entitlement line item for the product licensed by the parent fulfillment
repairLicense	The repairLicense operation modifies editable parameters in fulfillments other than hostids. To repair a license, there must be existing fulfillments in the database that are eligible to be repaired, according to their license model policies.

Methods

Name	Description
repairShortCode	The repairShortCode operation generates one short code repair response.
returnLicense	The returnLicense operation returns one or more fulfillments. To return a license, there must be existing fulfillments in the database that are eligible to be returned, according to their license model policies.
returnShortCode	The returnShortCode operation generates one short code return response.
setLicense	The setLicense operation sets the license text for one or more on-hold fulfillmentIDs for a manual custom license technology.
stopGapLicense	The stopGapLicense operation generates a stop-gap nodelocked or served certificate license for one or more fulfillments. To generate a stop-gap license, there must be existing fulfillments in the database that are eligible for a stop-gap license, according to their license model policies.
transferHost	The transferHost operation transfers active fulfillments from one or more hosts owned by one customer organization to another customer organization. When a host is transferred, line items that are the source of the fulfillments on that host are moved as well. The result of the move is to either create new entitlements for the target organization or to pool the line items—incrementing the counts of the target organization's existing (and matching) line items by the counts on the hosts' line items.
upgradeFulfillment	The upgradeFulfillment operation generates upgrade licenses for one or more fulfillments. To upgrade a fulfillment, there must be an existing UPGRADE entitlement line item for the product licensed by the parent fulfillment.
upsellFulfillment	The upsellFulfillment operation generates upsell licenses for one or more fulfillments. To upsell a fulfillment, there must be an existing UPSELL entitlement line item for the product licensed by the parent fulfillment.
verifyCreateLicense	The verifyCreateLicense operation checks whether licenses can be generated with the specified parameters, but does not generate fulfillment records. To use the License service to verify that licenses can be created: • There must be test or deployed entitlements in the FlexNet Operations database. • You must provide any fulfillment-time data that are required by the specified license model.

Method: activateShortCode

Description

The **activateShortCode** operation generates one keyboard activation response. To use the License service to generate a short code response:

- Short code ASRs must be created and associated with deployed bulk entitlements in the FlexNet Operations database.
- Short code ASRs must be delivered to customers with an activation utility.

Description

- Bulk entitlement and/or a web register key must be delivered to customers.
- If web register keys are going to be loaded dynamically into a bulk entitlement at fulfillment time, a FlexNet Operations configuration setting to load web register keys as part of activation for trusted bulk entitlements must be checked

Parameters

Name	Type	Direction	Description
msgparameters	activateShortCodeRequestType	Input	See activateShortCodeRequestType .

Returns

A [activateShortCodeResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: • SUCCESS—The request was processed. • FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: • SUCCESS—The request was processed. • FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: • SUCCESS—The request was processed. • FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
failedData	failedShortCodeDataType	Information about a short code response that was not generated is listed in the failedData element. See failedShortCodeDataType .									
responseData	createdShortCodeDataType	Information about an short code response that was generated is listed in the responseData element. responseData contains a shortCode short code response string. This response is delivered back to the customer to enter into an activation utility.									

Method: consolidateFulfillments

Description

The **consolidateFulfillments** operation creates one or more consolidated license certificates from a set of fulfillments. To use the License service to create consolidated certificate licenses, there must be fulfillments in the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	consolidateFulfillmentsRequestType	Input	See consolidateFulfillmentsRequestType .

Returns

A [consolidateFulfillmentsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	consolidatedResponseDataType	Information about the licenses that were generated is listed in the responseData element. See consolidatedResponseDataType .									

Method: createChildLineItemFulfillment

Description

The **createChildLineItemFulfillment** operation generates licenses for one or more renewal, upgrade, or upsell line items. To generate a license for a child line item, there must be an existing RENEWAL, UPGRADE, or UPSELL activatable item.

Parameters

Name	Type	Direction	Description
msgparameters	createChildLineItemFulfillmentRequestType	Input	See createChildLineItemFulfillmentRequestType .

Returns

A [createChildLineItemFulfillmentResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	createdChildLIFmtResponseDataType	Information about the fulfillments that were created is listed in the responseData element. See createdChildLIFmtResponseDataType .									
failedData	failedChildLIFmtResponseDataType	Information about the fulfillments that were not returned is listed in the failedData element. See failedChildLIFmtResponseDataType .									

Method: createLicense

Description

The **createLicense** operation generates one or more license certificates and corresponding fulfillment records. To use the License service to generate a certificate license:

- There must be deployed entitlements in the FlexNet Operations database.

Description

- You must provide any fulfillment-time data that re required by the specified license model.

Parameters

Name	Type	Direction	Description
msgparameters	createFulfillmentRequestType	Input	See createFulfillmentRequestType .

Returns

A [createLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedFulfillmentDataListType	Information about the licenses that were not verified is listed in the failedData element. See failedFulfillmentDataListType .									
responseData	createdFulfillmentDataListType	Information about the licenses that were verified is listed in the responseData element. See createdFulfillmentDataListType .									

Method: createLicensesAsBatch

Description

The **createLicensesAsBatch** operation generates one or more license certificates and corresponding fulfillment records from a set of activatable items that use the same license model and fulfillment-time attributes. Hostids and counts can be defined for each activatable item. To use the License service to generate certificate licenses in a batch:

- There must be test or deployed entitlements in the FlexNet Operations database that use the same license model.
- You must provide any fulfillment-time data that are required by the specified license model. Hostids and count can be provided for each individual fulfillment, but other fulfillment-time data applies to all the fulfillments.

Parameters

Name	Type	Direction	Description
msgparameters	createLicensesAsBatchRequestType	Input	See createLicensesAsBatchRequestType .

Returns

A [createLicensesAsBatchResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	createLicensesAsBatchResponseDataType	Information about the licenses that were generated is listed in the responseData element. See createLicensesAsBatchResponseDataType .									

Method: createLicensesAsBatchAndConsolidate

Description

The **createLicensesAsBatchAndConsolidate** operation generates one or more consolidated license certificates and corresponding fulfillment records from a set of activatable items that use the same license model and fulfillment-time attributes. Hostids and counts can be defined for each activatable item. To use the License service to generate consolidated certificate licenses in batch:

- There must be test or deployed entitlements in the FlexNet Operations database that use the same license model.
- You must provide any fulfillment-time data that are required by the specified license model. Hostids and count can be provided for each individual fulfillment, but other fulfillment-time data applies to all the fulfillments.

Parameters

Name	Type	Direction	Description
msgparameters	createLicensesAsBatchRequestType	Input	See createLicensesAsBatchRequestType .

Returns

A [createLicensesAsBatchAndConsolidateResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	consolidatedResponseDataType	Information about the licenses that were generated is listed in the responseData element. See consolidatedResponseDataType .									

Method: deleteOnholdFulfillments

Description

The **deleteOnholdFulfillments** operation takes one or more on-hold fulfillmentIDs and deletes them.

Parameters

Name	Type	Direction	Description
msgparameters	deleteOnholdFulfillmentsRequestType	Input	See deleteOnholdFulfillmentsRequestType .

Returns

A [deleteOnholdFulfillmentsResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedOnholdFulfillmentListType	See failedOnholdFulfillmentListType .									

Method: emailConsolidatedLicenses

Description

The **emailConsolidatedLicenses** operation sends one or more consolidated licenses via email. To send a consolidated license as an email attachment using the License service:

- Configure the from-address for the license email. See the *FlexNet Operations Installation Guide*.
- Customize the consolidated license email templates, if necessary. See the *FlexNet Operations Producer Portal Help Guide*.
- A consolidated license must exist in the database.
- At least one email address must be provided.

Parameters

Name	Type	Direction	Description
msgparameters	emailConsolidatedLicensesRequestType	Input	See emailConsolidatedLicensesRequestType .

Returns

A [emailConsolidatedLicensesResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									

Method: emailLicense

Description

The **emailLicense** operation sends a license certificate. To send a license certificate as an email attachment using the License service:

- Configure the from-address for the license email. See the *FlexNet Operations Installation Guide*.
- Customize the license email templates, if necessary. See the *FlexNet Operations Producer Portal Help Guide*.
- A fulfillment ID for a generated license must exist in the database.

Description

- At least one email address must be provided.

Parameters

Name	Type	Direction	Description
msgparameters	emailLicenseRequestType	Input	See emailLicenseRequestType .

Returns

A [emailLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									

Method: emergencyLicense

Description

The **emergencyLicense** operation generates an emergency modelocked or served certificate license for one or more fulfillments. To generate an emergency license, there must be existing fulfillments in the database that are eligible for an emergency license, according to their license model policies.

Parameters

Name	Type	Direction	Description
msgparameters	emergencyFulfillmentRequestType	Input	See emergencyFulfillmentRequestType .

Returns

A [emergencyLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	StatusInfoType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.
responseData	emergencyResponseDataType	See emergencyResponseDataType .
failedData	failedEmergencyResponseListDataType	See failedEmergencyResponseListDataType .

Method: getConsolidatedFulfillmentCount

Description

The **getConsolidatedFulfillmentCount** operation returns the number of consolidated fulfillments that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getConsolidatedFulfillmentCountRequestType	Input	See getConsolidatedFulfillmentCountRequestType .

Returns

A [getConsolidatedFulfillmentCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getConsolidatedFulfillmentCountResponseType	Contains an integer count element.									

Method: getConsolidatedFulfillmentsQuery

Description

The **getConsolidatedFulfillmentsQuery** operation returns the consolidated fulfillments that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getConsolidatedFulfillmentsQueryRequestType	Input	See getConsolidatedFulfillmentsQueryResponseType .

Returns

A [getConsolidatedFulfillmentsQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Types</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Types	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Types	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getConsolidatedFulfillmentsQueryResponseType	See getConsolidatedFulfillmentsQueryResponseType .									

Method: getFulfillmentAttributesForBatchActivation

Description

The **getFulfillmentAttributesForBatchActivation** operation returns all the license model or entitlement attributes for the specified activation IDs that must be specified at the time the licenses are generated

Parameters

Name	Type	Direction	Description
msgparameters	getFmtAttributesForBatchActivationRequestType	Input	See getFmtAttributesForBatchActivationRequestType .

Returns

A [getFmtAttributesForBatchActivationResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getFmtAttributesForBatchData Type	A list of license model attributes that are set at fulfillment time are contained in the responseData element. See getFmtAttributesForBatchData Type .									

Method: getFulfillmentAttributesFromModel

Description

The **getFulfillmentAttributesFromModel** operation returns all the license model attributes for the specified model that must be specified at the time the license is generated.

Parameters

Name	Type	Direction	Description
msgparameters	getFulfillmentAttributesRequest Type	Input	See getFulfillmentAttributesRequest Type .

Returns

A [getFulfillmentAttributesResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getFulfillmentAttributesDataType	A list of license model attributes that are set at fulfillment time are contained in the responseData element. See getFulfillmentAttributesDataType .									

Method: getFulfillmentCount

Description

The **getFulfillmentCount** operation returns the number of fulfillments that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getFulfillmentCountRequestType	Input	See getFulfillmentCountRequestType .

Returns

A [getFulfillmentCountResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getFulfillmentCountResponseDataType	Contains an integer count element.									

Method: getFulfillmentHistory

Description

The **getFulfillmentHistory** operation returns the history of a specified fulfillment.

Parameters

Name	Type	Direction	Description
msgparameters	getFulfillmentHistoryRequestType	Input	See getFulfillmentHistoryRequestType .

Returns

A [getFulfillmentHistoryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	fulfillmentHistoryDataType	See fulfillmentHistoryDataType .									

Method: getFulfillmentPropertiesQuery

Description

The **getFulfillmentPropertiesQuery** operation returns the fulfillment details that match specified criteria.

The response from getFulfillmentProperties is highly configurable. You can use it to select only the data you need in a given response.

Parameters

Name	Type	Direction	Description
msgparameters	getFulfillmentPropertiesRequestType	Input	See getFulfillmentPropertiesRequestType .

Returns

A [getFulfillmentPropertiesResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
fulfillment	fulfillmentPropertiesType	See fulfillmentPropertiesType .									

Method: getFulfillmentsQuery

Description

The **getFulfillmentsQuery** operation returns the fulfillments that match specified criteria.

Parameters

Name	Type	Direction	Description
msgparameters	getFulfillmentsQueryRequestType	Input	See getFulfillmentsQueryRequestType .

Returns

A [getFulfillmentsQueryResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getFulfillmentsQueryResponseDataType	See getFulfillmentsQueryResponseDataType .									

Method: getHostAttributesFromLicenseTechnology

Description

The **getHostAttributesFromLicenseTechnology** operation takes a custom license technology and gives host attributes for the given technology in the response data. It is used to create a custom host when generating a license.

Parameters

Name	Type	Direction	Description
msgparameters	getHostAttributesRequestType	Input	See getHostAttributesRequestType .

Returns

A [getHostAttributesResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getHostAttributesDataType	See getHostAttributesDataType .									

Method: manualActivation

Description

The **manualActivation** operation takes a single trusted activation XML request as a string and generates a single trusted activation XML response as a string.

Parameters

Name	Type	Direction	Description
msgparameters	trustedRequestType	Input	See trustedRequestType .

Returns

A [manualActivationResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
responseData	activationDataType	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Method: manualRepair

Description

The **manualRepair** operation generates one manual trusted activation repair response.

Parameters

Name	Type	Direction	Description
msgparameters	trustedRequestType	Input	See trustedRequestType .

Returns

A [manualRepairResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
responseData	activationDataType	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Method: manualReturn

Description

The **manualReturn** operation generates one trusted activation return response.

Parameters

Name	Type	Direction	Description
msgparameters	trustedRequestType	Input	See trustedRequestType .

Returns

A [manualReturnResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
responseData	activationDataType	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Method: offlineFNPTtrustedStorageActivation

Description

The **offlineFNPTtrustedStorageActivation** operation generates one or more fulfillment responses, based on the contents of the offline activation request, and returns output that can be stored as a file for subsequent processing on the machine that originated the request. The operation takes one or many activation IDs and an XML structure that contains information about the state of trusted storage on a single host machine. The operation output is an XML structure containing the fulfillment that must be saved to a file and processed on the host machine.

Parameters

Name	Type	Direction	Description
msgparameters	activateLicensesRequestType	Input	See activateLicenseRequestType .

Returns

A [activateLicensesResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
failedData	failedLineItem	Information about an entitlement line item that failed to activate in the failedData element. failedLineItem contains a single activationID element as a string.									
resultData	string	The XML response to be saved as a fulfillment response file.									

Method: publisherErrorLicense

Description

The **publisherErrorLicense** operation generates a publisher error node locked or served certificate license for one or more fulfillments. To generate a publisher error license, there must be existing fulfillments in the database that are eligible for a publisher error license, according to their license model policies.

Parameters

Name	Type	Direction	Description
msgparameters	publisherErrorFulfillmentRequestType	Input	

Returns

A [publisherErrorLicenseResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description
statusInfo	StatusInfoType	Returns one of the following: • SUCCESS—All entitlements in the request were processed. • PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. • FAILURE—None of the entitlements in the request were processed.
responseData	publisherErrorResponseDataType	See publisherErrorResponseDataType .
failedData	failedPublisherErrorResponseListDataType	See failedPublisherErrorResponseListDataType .

Method: rehostLicense

Description

The **rehostLicense** operation modifies the hostids of one or more fulfillments. To rehost a license, there must be existing fulfillments in the database that are eligible to be rehosted, according to their license model policies.

Parameters

Name	Type	Direction	Description
msgparameters	rehostFulfillmentRequestType	Input	See rehostFulfillmentRequestType .

Returns

A [rehostLicenseResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	rehostResponseDataType	Information about the fulfillments that were rehosted is listed in the responseData element. See rehostResponseDataType .									
failedData	failedRehostResponseListDataType	Information about the fulfillments that were not rehosted is listed in the failedData element. See failedRehostResponseListDataType .									

Method: renewFulfillment

Description

The **renewFulfillment** operation generates renewal licenses for one or more fulfillments. To renew a fulfillment, there must be an existing RENEWAL entitlement line item for the product licensed by the parent fulfillment

Parameters

Name	Type	Direction	Description
msgparameters	advancedFulfillmentLCRequestType	Input	See advancedFulfillmentLCRequestType .

Returns

A [renewFulfillmentResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	advancedFmtLCResponseDataListType	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataListType	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataListType .									

Method: repairLicense

Description

The **repairLicense** operation modifies editable parameters in fulfillments other than hostids. To repair a license, there must be existing fulfillments in the database that are eligible to be repaired, according to their license model policies.

Parameters

Name	Type	Direction	Description
msgparameters	repairFulfillmentRequestType	Input	See repairFulfillmentRequestType .

Returns

A [repairLicenseResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	repairResponseDataType	Information about the fulfillments that were repaired is listed in the responseData element. See repairResponseDataType .									
failedData	failedRepairResponseListDataType	Information about the fulfillments that were not repaired is listed in the failedData element. See failedRepairResponseListDataType .									

Method: repairShortCode

Description

The **repairShortCode** operation generates one short code repair response.

Parameters

Name	Type	Direction	Description
msgparameters	repairShortCodeRequestType	Input	See repairShortCodeRequestType .

Returns

A [repairShortCodeResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason if failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
failedData	failedRepairShortCodeDataType	Information about a short code repair response that was not generated is listed in the failedData element. See failedRepairShortCodeDataType .									
responseData	repairedShortCodeDataType	Information about a short code repair response that was generated is listed in the responseData element. responseData contains a shortCode repair response string. This response is delivered back to the customer to enter into an activation utility.									

Method: returnLicense

Description

The **returnLicense** operation returns one or more fulfillments. To return a license, there must be existing fulfillments in the database that are eligible to be returned, according to their license model policies.

Parameters

Name	Type	Direction	Description
msgparameters	returnFulfillmentRequestType	Input	See returnFulfillmentRequestType .

Returns

A [returnLicenseResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	returnResponseDataType	Information about the fulfillments that were returned is listed in the responseData element. For returnLicense , this data is only populated in the case of a partial return, not a successful one. See returnResponseDataType .									
failedData	failedReturnResponseListDataType	Information about the fulfillments that were not returned is listed in the failedData element. See failedReturnResponseListDataType .									

Method: returnShortCode

Description

The **returnShortCode** operation generates one short code return response.

Parameters

Name	Type	Direction	Description
msgparameters	returnShortCodeRequestType	Input	See returnShortCodeRequestType .

Returns

A [returnShortCodeResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.									
reason	string	Gives reason if failure.									
failedData	failedReturnShortCodeDataType	Information about a short code return response that was not generated is listed in the failedData element. See failedReturnShortCodeDataType .									
responseData	returnedShortCodeDataType	Information about a short code return response that was generated is listed in the responseData element. responseData contains a shortCode return response string. This response is delivered back to the customer to enter into an activation utility.									

Method: setLicense

Description

The **setLicense** operation sets the license text for one or more on-hold fulfillmentIDs for a manual custom license technology.

Parameters

Name	Type	Direction	Description
msgparameters	setLicenseRequestType	Input	See setLicenseRequestType .

Returns

A [setLicenseResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedSetLicenseOnholdFulfillmentListType	Populated if setting the license failed. See failedSetLicenseOnholdFulfillmentListType .									

Method: stopGapLicense

Description

The **stopGapLicense** operation generates a stop-gap nodelocked or served certificate license for one or more fulfillments. To generate a stop-gap license, there must be existing fulfillments in the database that are eligible for a stop-gap license, according to their license model policies.

Parameters

Name	Type	Direction	Description
msgparameters	stopGapFulfillmentRequestType	Input	

Returns

A [stopGapLicenseResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description
statusInfo	StatusInfoType	Returns one of the following: • SUCCESS—All entitlements in the request were processed. • PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. • FAILURE—None of the entitlements in the request were processed.
responseData	stopGapResponseDataType	See stopGapResponseDataType .
failedData	failedStopGapResponselistDataType	See failedStopGapResponselistDataType .

Method: transferHost

Description

The **transferHost** operation transfers active fulfillments from one or more hosts owned by one customer organization to another customer organization. When a host is transferred, line items that are the source of the fulfillments on that host are moved as well. The result of the move is to either create new entitlements for the target organization or to pool the line items—incrementing the counts of the target organization's existing (and matching) line items by the counts on the hosts' line items.

Parameters

Name	Type	Direction	Description
msgparameters	transferHostRequestType	Input	See transferHostRequestType .

Returns

A [transferHostResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table> <tr> <th>Element</th><th>Data Type</th><th>Description</th></tr> <tr> <td>status</td><td>StatusType</td><td> Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr> <tr> <td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr> </table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedTransferHostListDataType	Information about the line items that were not added is listed in the failedData element. See failedTransferHostListDataType .									

Method: upgradeFulfillment

Description

The **upgradeFulfillment** operation generates upgrade licenses for one or more fulfillments. To upgrade a fulfillment, there must be an existing UPGRADE entitlement line item for the product licensed by the parent fulfillment.

Parameters

Name	Type	Direction	Description
msgparameters	advancedFulfillmentLCRequestType	Input	See advancedFulfillmentLCRequestType .

Returns

A [upgradeFulfillmentResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	advancedFmtLCResponseDataListType	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataType	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataType .									

Method: upsellFulfillment

Description

The **upsellFulfillment** operation generates upsell licenses for one or more fulfillments. To upsell a fulfillment, there must be an existing UPSELL entitlement line item for the product licensed by the parent fulfillment.

Parameters

Name	Type	Direction	Description
msgparameters	advancedFulfillmentLCRequestType	Input	See advancedFulfillmentLCRequestType .

Returns

A [upsellFulfillmentResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	advancedFmtLCResponseDataListType	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataListType	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataListType .									

Method: verifyCreateLicense

Description

The **verifyCreateLicense** operation checks whether licenses can be generated with the specified parameters, but does not generate fulfillment records. To use the License service to verify that licenses can be created:

- There must be test or deployed entitlements in the FlexNet Operations database.
- You must provide any fulfillment-time data that are required by the specified license model.

Parameters

Name	Type	Direction	Description
msgparameters	createFulfillmentRequestType	Input	See createFulfillmentRequestType .

Returns

A [verifyCreateLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedFulfillmentDataListType	Information about the licenses that were not verified is listed in the failedData element. See failedFulfillmentDataListType .									
responseData	createdFulfillmentDataListType	Information about the licenses that were verified is listed in the responseData element. See createdFulfillmentDataListType .									

Complex Types: LicenseService

Complex Types

Name
<u>accountIdentifierType</u>
<u>accountPKType</u>
<u>accountTypeList</u>
<u>activateLicensesRequestType</u>
<u>activateLicensesResponseType</u>
<u>activateShortCodeRequestType</u>
<u>activateShortCodeResponseType</u>
<u>activationDataType</u>
<u>activationIdOverDraftMapType</u>
<u>activationIdsListType</u>
<u>addressDataType</u>
<u>advancedFmtLCResponseDataListType</u>
<u>advancedFmtLCResponseDataType</u>
<u>advancedFulfillmentLCDataType</u>
<u>advancedFulfillmentLCInfoType</u>
<u>advancedFulfillmentLCListType</u>
<u>advancedFulfillmentLCRequestType</u>
<u>advancedFulfillmentLCResponseType</u>
<u>attributeDescriptorDataType</u>
<u>attributeDescriptorType</u>
<u>attributeMetaDescriptorDataType</u>
<u>attributeMetaDescriptorType</u>
<u>commonBatchDataSetType</u>
<u>consolidatedFulfillmentsQPTYPE</u>
<u>consolidatedLicenseDataType</u>
<u>consolidatedLicenseIdListType</u>
<u>consolidatedResponseDataType</u>
<u>consolidateFulfillmentsRequestType</u>
<u>consolidateFulfillmentsResponseType</u>
<u>correlationDataType</u>
<u>countDataSetType</u>
<u>countDataType</u>
<u>countForHostsType</u>
<u>createChildLineItemFulfillmentDataType</u>

Complex Types

Name
createChildLineItemFulfillmentRequestType
createChildLineItemFulfillmentResponseType
createdChildLIFmtResponseDataType
createdChildLIFulfillmentDataType
createdChildLIFulfillmentInfoType
createdFulfillmentDataListType
createdFulfillmentDataType
createFulfillmentDataType
createFulfillmentRequestType
createFulfillmentResponseType
createLicensesAsBatchRequestType
createLicensesAsBatchResponseDataType
createLicensesAsBatchResponseType
createShortCodeDataType
customAttributeQueryType
customAttributesQueryListType
CustomHostIDType
deleteOnholdFulfillmentsRequestType
deleteOnholdFulfillmentsResponseType
Dictionary
DictionaryEntriesCollection
DictionaryEntry
duplicateFulfillmentRecordListDataType
DurationType
emailConsolidatedLicensesRequestType
emailConsolidatedLicensesResponseType
emailContactListType
emailLicenseRequestType
emailLicenseResponseType
emergencyFulfillmentDataType
emergencyFulfillmentRequestType
emergencyFulfillmentResponseDataType
emergencyFulfillmentResponseType
emergencyResponseDataType
entitledProductDataListType

Complex Types

Name
entitledProductDataType
entitlementIdentifierType
entitlementLineItemIdentifierType
failedAdvancedFmtLCDataType
failedAdvancedFmtLCResponseDataType
failedChildLIFmtResponseDataType
failedChildLIFulfillmentDataType
failedEmergencyResponseDataType
failedEmergencyResponselistDataType
failedFulfillmentDataListType
failedFulfillmentDataType
failedOnholdFulfillmentDataType
failedOnholdFulfillmentListType
failedPublisherErrorResponseDataType
failedPublisherErrorResponselistDataType
failedRehostResponseDataType
failedRehostResponselistDataType
failedRepairResponseDataType
failedRepairResponselistDataType
failedRepairShortCodeDataType
failedReturnResponseDataType
failedReturnResponselistDataType
failedReturnShortCodeDataType
failedSetLicenseOnholdFulfillmentDataType
failedSetLicenseOnholdFulfillmentListType
failedShortCodeDataType
failedStopGapResponseDataType
failedStopGapResponselistDataType
failedTransferHostDataType
failedTransferHostListDataType
featureBundleIdentifierType
featureBundlePKType
featureIdentifierType
featurePKType
fulfillmentDataType

Complex Types

Name
fulfillmentHistoryDataType
fulfillmentHistoryDetailsType
fulfillmentHistoryRecordType
fulfillmentIdentifierListType
fulfillmentIdentifierType
fulfillmentIdListType
fulfillmentPropertiesType
fulfillmentResponseConfigRequestType
fulfillmentsQueryParametersType
getConsolidatedFulfillmentCountRequestType
getConsolidatedFulfillmentCountResponseType
getConsolidatedFulfillmentsQueryRequestType
getConsolidatedFulfillmentsQueryResponseDataType
getConsolidatedFulfillmentsQueryResponseType
getFmtAttributesForBatchActivationRequestType
getFmtAttributesForBatchActivationResponseType
getFmtAttributesForBatchDataType
getFulfillmentAttributesDataType
getFulfillmentAttributesRequestType
getFulfillmentAttributesResponseType
getFulfillmentCountRequestType
getFulfillmentCountResponseDataType
getFulfillmentCountResponseType
getFulfillmentHistoryRequestType
getFulfillmentHistoryResponseType
getFulfillmentPropertiesRequestType
getFulfillmentPropertiesResponseType
getFulfillmentsQueryRequestType
getFulfillmentsQueryResponseDataType
getFulfillmentsQueryResponseType
getHostAttributesDataType
getHostAttributesRequestType
getHostAttributesResponseType
hostIdDataDetailsType
hostIdDataSetType

Complex Types

Name
hostIdDataType
hostIdDetailsType
hostTypePKType
licenseFileDataListType
licenseFileDataType
licenseGeneratorIdentifierType
licenseModelIdentifierType
licenseTechnologyIdentifierType
licenseTechnologyPKType
maintenancIdentifierType
maintenancePKType
NodeIDsType
onHoldFmtLicenseDataType
onholdFulfillmentListType
organizationIdentifierType
organizationPKType
OrgTypeList
overDraftDataListType
partNumberIdentifierWithModelType
partNumberPKType
productIdentifierType
productIdentifierWithCountDataType
publisherAttributesListDataType
publisherErrorFulfillmentDataType
publisherErrorFulfillmentRequestType
publisherErrorFulfillmentResponseDataType
publisherErrorFulfillmentResponseType
publisherErrorResponseDataType
rehostFulfillmentDataType
rehostFulfillmentRequestType
rehostFulfillmentResponseDataType
rehostFulfillmentResponseType
rehostResponseDataType
repairFulfillmentDataType
repairFulfillmentRequestType

Complex Types

Name
repairFulfillmentResponseDataType
repairFulfillmentResponseType
repairResponseDataType
repairShortCodeDataType
repairShortCodeRequestType
repairShortCodeResponseType
returnFulfillmentDataType
returnFulfillmentRequestType
returnFulfillmentResponseDataType
returnFulfillmentResponseType
returnResponseDataType
returnShortCodeDataType
returnShortCodeRequestType
returnShortCodeResponseType
ServerIDsType
setLicenseRequestType
setLicenseResponseType
stopGapFulfillmentDataType
stopGapFulfillmentRequestType
stopGapFulfillmentResponseDataType
stopGapFulfillmentResponseType
stopGapResponseDataType
suiteIdentifierType
suitePKType
transferHostIdDataType
transferHostList
transferHostRequestType
transferHostResponseType
trustedRequestType
trustedResponseType
typeLineItem
verifiedFulfillmentDataType
versionDateAttributesType
VersionFormatQueryType

Complex Type: accountIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	
primaryKeys	accountPKType	0..1	

Complex Type: accountPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
id	string	1..1	

Complex Type: accountTypeList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
accountType	accountType	1..*	

Complex Type: activateLicensesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
linelItem	typeLinelItem	1..*	Required. See typeLinelItem .
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where licenses are shipped. You can provide a different email address from any already set in the entitlement.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization. May already be set in the entitlement.
soldTo	string	0..1	Optional. Provide a sold-to organization for the license if one is required. If specified for a web register key, soldTo sets the end customer organization in the entitlement that is created.
owner	string	0..1	Optional. Specifies the end customer contact. If specified for a web register key, owner sets the end customer contact in the entitlement that is created.
hostInfo	string	1..1	Required. An XML structure that is generated by an empty –new request from a v2 activation utility on the machine where the trusted fulfillment will be applied. For successful response processing, hostInfo must reflect the state of trusted storage on the host machine at the time the response is applied.

Referenced By

Name	Type
activateLicensesRequest	Element
offlineFNPTtrustedStorageActivation	Method

Complex Type: activateLicensesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedLinItem	0..1	Information about an entitlement line item that failed to activate in the failedData element. failedLinItem contains a single activationID element as a string.									
resultData	string	0..1	The XML response to be saved as a fulfillment response file.									

Referenced By

Name	Type
activateLicensesResponse	Element

Complex Type: activateShortCodeRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	createShortCodeDataType	0..1	Required. An activateShortCodeRequest contains a single shortCodeData element. See createShortCodeDataType .

Referenced By

Name	Type
activateShortCodeRequest	Element
activateShortCode	Method

Complex Type: activateShortCodeResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedShortCodeDataType	0..1	Information about a short code response that was not generated is listed in the failedData element. See failedShortCodeDataType .									
responseData	createdShortCodeDataType	0..1	Information about an short code response that was generated is listed in the responseData element. responseData contains a shortCode short code response string. This response is delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
activateShortCodeResponse	Element

Complex Type: activationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationData	string	1..1	Activation XML request. The XML request must be read from a file generated by an activation utility and passed in the web service request as a string.

Complex Type: activationIdOverDraftMapType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	string	1..1	String containing the activation ID of the activatable item.
overDraftAllowed	boolean	1..1	Indicates whether overdraft count is allowed to be specified for this activatable item.

Complex Type: activationIdsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
activationId	string	1..*	activationIds contains one or more activationId elements.

Complex Type: addressDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
address1	string	0..1	First line of address.
address2	string	0..1	Second line of address.
city	string	0..1	City portion of address.
state	string	0..1	State portion of address.
zipcode	string	0..1	Postal code.
country	string	0..1	Country, in two-letter ISO-3166 code. If not provided, defaults to US.
region	string	0..1	Address region.

Complex Type: advancedFmtLCResponseDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	advancedFmtLCResponseDataType	1..*	responseData contains one or more fulfillment elements. See advancedFmtLCResponseDataType .

Complex Type: advancedFmtLCResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the request, starting at 1 (integer).
upgradedFulfillmentInfo	advancedFulfillmentLCInfoType	1..*	Fulfillment record of type advancedFulfillmentLCInfoType . See advancedFulfillmentLCInfoType .

Complex Type: advancedFulfillmentLCDataType

Description

This data type is used in the renewFulfillment, upgradeFulfillment, and upsellFulfillment operations, and the descriptions reflect its multiple uses.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentId	string	1..1	Required. The fulfillment ID of the fulfillment to renew (upgrade, upsell).
childActivationId	string	0..1	Required to identify the child line item to activate if the fulfillment has more than one RENEWAL (UPGRADE, UPSELL) child line item. Not needed if the fulfillment has exactly one RENEWAL (UPGRADE, UPSELL) child line item.
fulfillCount	integer	0..1	The seat count of the renewed (upgraded, upsold) fulfillment.
startDate	date	0..1	Required if not already set in the entitlement line item.

Content Model

Component	Type	Occurs	Description
versionDate	date	0..1	If any of the features in the product use date-based versions and versionDateAttributes is set to DEFINE_VERSION_DATE_LATER in the entitlement, set versionDate in this request. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionStartDate	date	0..1	If any of the features in the product use date-based versions and versionDateAttributes is set to DEFINE_VERSION_STARTDATE_LATER with a version date duration in the entitlement, set versionStartDate in this request. In a license, the version date is calculated and converted into the Version Date Format that is specified in the system configuration.
soldTo	string	0..1	Optional. Provide a sold-to organization for the license, for example, during the activation of a web register key. If not provided, the sold-to of the activation defaults to the sold-to of the entitlement.
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped. You can provide a different email address from any already set in the entitlement.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization. May already be set in the entitlement.
serverHost	ServerIDsType	0..1	Provide one or three license server machine hostids if a server hostid is required by the license model and the required hostids are not already defined in the parent fulfillment. See ServerIDsType .
nodeLockHost	string	0..1	Provide one node-locked hostid if the license model is a node-locked uncounted model and the required hostids are not already defined in the parent fulfillment.
countedNodeLockHostIds	NodeIDsType	0..1	Provide one or more node-locked hostids if the license model is a node-locked counted model and the required hostids are not already defined in the parent fulfillment. See NodeIDsType .
customHost	CustomHostIDType	0..1	Optional. See CustomHostIDType .
licenseModelAttributes	attributeDescriptorDataType	0..1	Any fulfillment-time attributes must be set before verifying that the license can be generated. See attributeDescriptorDataType .
overridePolicy	boolean	0..1	Optional. Whether to override the policy for extra activations or hostids for this fulfillment.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Complex Type: advancedFulfillmentLCInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the fulfillment.
fulfillmentId	string	1..1	Fulfillment ID of the fulfillment record created when this license was generated.
licenseText	string	0..1	Text of license certificate. Deprecated in favor of licenseFiles element; included for backwards compatibility.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license. Deprecated in favor of licenseFiles element; included for backwards compatibility.
licenseFiles	licenseFileDataListType	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .

Complex Type: advancedFulfillmentLCListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	advancedFulfillmentLCDataType	1..*	Required. A fulfillmentList contains an array of fulfillment elements. See advancedFulfillmentLCDataType .

Complex Type: advancedFulfillmentLCRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentList	advancedFulfillmentLCListType	1..1	Required. An renewFulfillmentRequest contains an array of fulfillmentList elements. See advancedFulfillmentLCListType .

Referenced By

Name	Type
renewFulfillmentRequest	Element
upgradeFulfillmentRequest	Element
upsellFulfillmentRequest	Element
renewFulfillment	Method
upgradeFulfillment	Method
upsellFulfillment	Method

Complex Type: advancedFulfillmentLCResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	advancedFmtLCResponseDataListType	0..1	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataType	0..1	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataType .									

Referenced By

Name	Type
renewFulfillmentResponse	Element
upgradeFulfillmentResponse	Element
upsellFulfillmentResponse	Element

Complex Type: attributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	attributeDescriptorType	0..*	attribute contains a required string attributeName one attribute value. See attributeDescriptorType .

Complex Type: attributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of the attribute.
CHOICE		1..1	
arrayValue	string	0..*	Array of string values of the attribute.
booleanValue	boolean	0..1	Boolean value of the attribute.
dateValue	date	0..1	Date value of the attribute.
integerValue	integer	0..1	Integer value of the attribute.
stringValue	string	0..1	String value of the attribute.

Complex Type: attributeMetaDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	attributeMetaDescriptorType	0..*	fulfillmentAttributes contains one or more attribute elements. See attributeMetaDescriptorType .

Complex Type: attributeMetaDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of the license model attribute.
attributeDataType	AttributeDataType	1..1	Returns one of the following: - TEXT - BOOLEAN - NUMBER - DATE - MULTI_VALUED_TEXT
namespace	string	1..1	Refers to the license technology on which the attribute is created.
validValues	valueType	0..1	validValues contains an array of value strings that represent valid values for a MULTI_VALUED_TEXT license model attribute.

Complex Type: commonBatchDataSetType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
startDate	date	0..1	Required if not already set in the entitlement line item.
versionDate	date	0..1	If any of the features in the products use date-based versions and versionDateAttributes is set to DEFINE_VERSION_DATE_LATER in the entitlement, set versionDate in this request. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionStartDate	date	0..1	If any of the features in the products use date-based versions and versionDateAttributes is set to DEFINE_VERSION_STARTDATE_LATER with a version date duration in the entitlement, set versionStartDate in this request. In a license, the version date is calculated and converted into the Version Date Format that is specified in the system configuration.
soldTo	string	0..1	Optional. Provide a sold-to organization for the license, for example, during the activation of web register keys. If not provided, the sold-to of the activation defaults to the sold-to of the entitlement.
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped. You can provide a different email address from any already set in the entitlement.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization. May already be set in the entitlement.
licenseModelAttributes	attributeDescriptorDataType	0..1	Any fulfillment-time attributes must be set before generating the licenses. See attributeDescriptorDataType .
overridePolicy	boolean	0..1	Optional. Whether to override the policy for extra activations for any of these activation IDs, if the limit has been reached.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Complex Type: consolidatedFulfillmentsQPType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
consolidatedLicenseId	SimpleQueryType	0..1	Optional. A consolidatedLicenseId element contains: • value—a string to match part or all of the consolidated license ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
fulfillmentId	SimpleQueryType	0..1	Optional. A fulfillmentID element contains: • value—a string to match part or all of the fulfillment ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
activationId	SimpleQueryType	0..1	Optional. An activationId element contains: • value—a string to match part or all of the activation ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
entitlementId	SimpleQueryType	0..1	Optional. An entitlementId element contains: • value—a string to match part or all of the entitlement ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
soldTo	SimpleQueryType	0..1	Optional. A soldTo element contains: • value—a string to match part or all of the sold-to organization. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
criteria	SimpleQueryType	0..1	Optional. A criteria element contains: • value—a string to match part or all of the criterion used to consolidate the licenses. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of ACTIVE or OBSOLETE to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: consolidatedLicenseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
consolidatedLicenseId	string	1..1	ID of the consolidated license.

Content Model

Component	Type	Occurs	Description
licenseText	string	0..1	Text of this consolidated license certificate. Displayed in a query response if includeLicenseText in a query request is not set to false. Optional, if license is binary.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license.
soldTo	string	1..1	Organization that has the right to use this license.
criteria	string	1..1	The criterion used to consolidate licenses.
state	StateType	0..1	ACTIVE or OBSOLETE. Not applicable to create operation responses, only query operation responses.
consolidatedFulfillments	fulfillmentIdentifierListType	1..1	See fulfillmentIdentifierListType .
licenseFiles	licenseFileDataListType	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .

Complex Type: consolidatedLicenseIdListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
consolidatedLicenseId	string	1..*	List of consolidated license IDs that identify which consolidated licenses to send as email attachments.

Complex Type: consolidatedResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
consolidatedLicense	consolidatedLicenseDataType	1..*	See consolidatedLicenseDataType .

Complex Type: consolidateFulfillmentsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillments	fulfillmentIdentifierListType	1..1	Required. See fulfillmentIdentifierListType .

Referenced By

Name	Type
consolidateFulfillmentsRequest	Element
consolidateFulfillments	Method

Complex Type: consolidateFulfillmentsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	consolidatedResponseDataType	0..1	Information about the licenses that were generated is listed in the responseData element. See consolidatedResponseDataType .									

Referenced By

Name	Type
consolidateFulfillmentsResponse	Element
createLicensesAsBatchAndConsolidateResponse	Element

Complex Type: correlationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the correlation in the request, starting at 1 (string).
uniqueId	string	1..1	Unique database identifier of the correlation (string).

Complex Type: countDataSetType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
countData	countDataType	1..*	Required. See countDataType .

Complex Type: countDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	string	1..1	Activation ID of activatable item.
countForHosts	countForHostsType	1..*	Required. See countForHostsType .

Complex Type: countForHostsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
hostDataRefId	string	1..1	Index of activatable item in countData element, starting with 1.
fulfillCount	integer	1..1	Seat count for this activatable item. Required for counted licenses.
overDraftCount	integer	0..1	Optional. Overdraft count for this activatable item.

Complex Type: createChildLineItemFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	string	1..1	Required. The activation ID of the activatable item whose license being generated.
startDate	date	0..1	Required if not already set in the entitlement line item.
versionDate	date	0..1	Renewal only. If any of the features in the product use date-based versions and versionDateAttributes is set to DEFINE_VERSION_DATE_LATER in the entitlement, set versionDate in this request. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionStartDate	date	0..1	Renewal only. If any of the features in the product use date-based versions and versionDateAttributes is set to DEFINE_VERSION_STARTDATE_LATER with a version date duration in the entitlement, set versionStartDate in this request. In a license, the version date is calculated and converted into the Version Date Format that is specified in the system configuration.

Content Model

Component	Type	Occurs	Description
soldTo	string	0..1	Optional. Provide a sold-to organization for the license, for example, during the activation of a web register key. If not provided, the sold-to of the activation defaults to the sold-to of the entitlement.
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped. You can provide a different email address from any already set in the entitlement.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization. May already be set in the entitlement.
licenseModelAttributes	attributeDescriptorDataType	0..1	Any fulfillment-time attributes must be set before verifying that the license can be generated. See attributeDescriptorDataType .
hostIdDetails	hostIdDetailsType	1..1	Required. Specify fulfill count on each host. See hostIdDetailsType .
overridePolicy	boolean	0..1	Optional. Whether to override the policy for extra activations or hostids for this activation ID.
owner	string	0..1	The userID of an existing user. Value is only required for web register key activations.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Complex Type: createChildLineItemFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	createChildLineItemFulfillmentDataType	1..*	Required. A createChildLineItemFulfillmentRequest contains an array of fulfillment elements. See createChildLineItemFulfillmentDataType .

Referenced By

Name	Type
createChildLineItemFulfillmentRequest	Element
createChildLineItemFulfillment	Method

Complex Type: createChildLineItemFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	createdChildLIFmtResponseDataType	0..1	Information about the fulfillments that were created is listed in the responseData element. See createdChildLIFmtResponseDataType .									

Content Model

Component	Type	Occurs	Description
failedData	failedChildLIFmtResponseDataType	0..1	Information about the fulfillments that were not returned is listed in the failedData element. See failedChildLIFmtResponseDataType .

Referenced By

Name	Type
createChildLineItemFulfillmentResponse	Element

Complex Type: createdChildLIFmtResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	createdChildLIFulfillmentDataType	1..*	responseData contains one or more fulfillment elements. See createdChildLIFulfillmentDataType .

Complex Type: createdChildLIFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the request, starting at 1 (integer).
fulfillmentInfo	createdChildLIFulfillmentInfoType	1..*	Fulfillment record of type createdChildLIFulfillmentInfoType . See createdChildLIFulfillmentInfoType .

Complex Type: createdChildLIFulfillmentInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	1..1	Unique database identifier of the fulfillment.
fulfillmentId	string	1..1	Fulfillment ID of the fulfillment record created when this license was generated.
licenseText	string	0..1	Text of license certificate. Deprecated in favor of licenseFiles element; included for backwards compatibility.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license. Deprecated in favor of licenseFiles element; included for backwards compatibility.
licenseFiles	licenseFileDataListType	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .

Complex Type: createdFulfillmentDataListType

Description

Either **createdFulfillment** or **verifiedFulfillment**, not both, will be returned

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
createdFulfillment	createdFulfillmentDataTy pe	0..*	Because this was a request to actually generate a license, responseData contains one or more createdFulfillment elements. See createdFulfillmentDataTy pe .

Content Model

Component	Type	Occurs	Description
verifiedFulfillment	verifiedFulfillmentDataType	0..*	Because this was a request to verify that a license could be generated, responseData contains one or more verifiedFulfillment elements. See verifiedFulfillmentDataType .

Complex Type: createdFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the fulfillment in the request, starting at 1.
uniqueId	string	1..1	Unique database identifier of the fulfillment.
fulfillmentId	string	1..1	Fulfillment ID of the fulfillment record created when this license was generated.
licenseText	string	0..1	Text of license certificate. Deprecated in favor of licenseFiles element; included for backwards compatibility.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license. Deprecated in favor of licenseFiles element; included for backwards compatibility.
licenseFiles	licenseFileDataListType	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .

Complex Type: createFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	string	1..1	Required. The activation ID of the activatable item whose license is getting verified.
fulfillCount	integer	0..1	Specify the seat count for this activatable item, if required by the license model.
overDraftCount	integer	0..1	Specify if supported by the license model, subject to the overdraft ceiling and floor settings. If not specified, and a floor value is set and enough remains of the maximum overdraft count on the entitlement line item, the floor value is applied. See the <i>FlexNet Operations Online Help</i> for details.
startDate	date	0..1	Required if not set in the entitlement line item.
versionDate	date	0..1	If any of the features in the product use date-based versions and versionDateAttributes is set to DEFINE_VERSION_DATE_LATER in the entitlement, set versionDate in this request. In a license, this date is converted into the Version Date Format that is specified in the system configuration.
versionStartDate	date	0..1	Provide a sold-to organization for the license if one is required, for example, during the activation of a web register key. If any of the features in the product use date-based versions and versionDateAttributes is set to DEFINE_VERSION_STARTDATE_LATER with a version date duration in the entitlement, set versionStartDate in this request. In a license, the version date is calculated and converted into the Version Date Format that is specified in the system configuration.
soldTo	string	0..1	Provide a sold-to organization for the license if one is required, for example, during the activation of a web register key.
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where license certificates are shipped. You can provide a different email address from any already set in the entitlement.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization. May already be set in the entitlement.
serverIds	ServerIdsType	0..1	Provide one or three license server machine hostids if a server hostid is required by the license model. See ServerIdsType .
nodeIds	NodeIdsType	0..1	Provide one or more node-locked hostids if a node-locked hostid is required by the license model. See NodeIdsType .
customHost	CustomHostIDType	0..1	Optional. See customHostIDType .
licenseModelAttributes	attributeDescriptorDataType	0..1	Any fulfillment-time attributes must be set before verifying that the license can be generated. See attributeDescriptorDataType .

Content Model

Component	Type	Occurs	Description
overridePolicy	boolean	0..1	Optional. Whether to override the policy for extra activations for this activation ID, if the limit has been reached.
owner	string	0..1	The userID of an existing user. Value is only required for web register key activations.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Complex Type: createFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	createFulfillmentDataType	1..*	Required. A createFulfillmentRequest contains an array of fulfillment elements to be verified. See createFulfillmentDataType .

Referenced By

Name	Type
createLicenseRequest	Element
verifyCreateLicenseRequest	Element
createLicense	Method
verifyCreateLicense	Method

Complex Type: createFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedFulfillmentDataListType	0..1	Information about the licenses that were not verified is listed in the failedData element. See failedFulfillmentDataListType .									
responseData	createdFulfillmentDataListType	0..1	Information about the licenses that were verified is listed in the responseData element. See createdFulfillmentDataListType .									

Referenced By

Name	Type
createLicenseResponse	Element
verifyCreateLicenseResponse	Element

Complex Type: createLicensesAsBatchRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationIds	activationIdsListType	1..1	Required. See activationIdsListType .
hostIdDataSet	hostIdDataSetType	1..1	Required. See hostIdDataSetType .
countDataSet	countDataSetType	0..1	See countDataSetType .
commonBatchDataSet	commonBatchDataSetType	1..1	See commonBatchDataSetType .

Referenced By

Name	Type
createLicensesAsBatchAndConsolidateRequest	Element
createLicensesAsBatchRequest	Element
createLicensesAsBatch	Method
createLicensesAsBatchAndConsolidate	Method

Complex Type: createLicensesAsBatchResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	fulfillmentDataType	1..*	See Complex+Types.LicenseService#tns:fulfillmentDataType fulfillmentDataType .

Complex Type: createLicensesAsBatchResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	createLicensesAsBatchResponseDataType	0..1	Information about the licenses that were generated is listed in the responseData element. See createLicensesAsBatchResponseDataType .									

Referenced By

Name	Type
createLicensesAsBatchResponse	Element

Complex Type: createShortCodeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
bulkEntitlementId	string	0..1	Needed if the specified web register key has not already been loaded into the bulk entitlement.
webRegkey	string	1..1	Required. Web register key (also known as activation ID in FlexNet Operations; entitlement ID in FlexNet Licensing) that is loaded into or will be dynamically loaded into the bulk entitlement associated with the short code ASR.
shortCode	string	1..1	Required. The short code is generated by an activation utility at the customer site and is delivered to the publisher.
publisherAttributes	publisherAttributesListDataType	0..1	Activation clients can send fulfillment time attributes along with the short code and the activation ID. See the documentation for custom policy attributes (getPublisherSpecificData() method) and see publisherAttributesListDataType .
overridePolicy	boolean	0..1	Optional. Set to true if a policy should be overridden that might prevent the generation of this short code data.
shortCodeActivationType	ShortCodeActivationType	0..1	Optional. Overrides the default activation behavior. If you set the value to REINSTALL the fulfillment (reinstallFulfillment) consumes no additional counts. If you set the value to REACTIVATE additional counts are consumed.
reinstallFulfillment	fulfillmentIdentifierType	0..1	Optional. If you specify a shortCodeActivationType of REINSTALL, provide a value for reinstallFulfillment to identify the fulfillment. See fulfillmentIdentifierType .

Complex Type: customAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	The name of the custom attribute.
CHOICE		1..1	
booleanValue	boolean	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. Set to true or false if the custom attribute is of type boolean.
dateValue	DateQueryType	0..1	Optional. A dateValue element contains: value—a date value to compare to the version date value. searchType—one of the following DateQueryType values: - BEFORE - AFTER - ON
numberValue	NumberQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue . A numberValue element contains: value—an integer number to match part or all of the custom attribute value. searchType—one of the following NumberQueryType values: - GREATER_THAN - GREATER_THAN_EQUALS - LESS_THAN - LESS_THAN_EQUALS - EQUALS - NOT_EQUALS

Content Model

Component	Type	Occurs	Description
stringValue	SimpleQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue . A stringValue element contains: • value—a string to match part or all of the custom attribute value. • searchType—one of the following SimpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: customAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	customAttributeQueryType	0..*	The attributeName . See customAttributeQueryType .

Complex Type: CustomHostIDType

Description

Either pass in a fully formed custom hostid in the <hostId> element (for example, HID-customHA=3, for the sample custom hostid generator), or pass in custom host attribute values. The fully formed hostid can be passed in only if it has already been used in a previous license (and would appear in the Use Existing Hostid selection in the Administrative Console). Otherwise, pass in the host attribute values.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostId	string	0..1	Host ID.
hostAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
hostType	hostTypePKType	0..1	See hostTypePKType .

Complex Type: deleteOnholdFulfillmentsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdList	fulfillmentIdListType	1..1	See fulfillmentIdListType .

Referenced By

Name	Type
deleteOnholdFulfillmentsRequest	Element
deleteOnholdFulfillments	Method

Complex Type: deleteOnholdFulfillmentsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedOnholdFulfillmentListType	0..1	See failedOnholdFulfillmentListType .									

Referenced By

Name	Type
deleteOnholdFulfillmentsResponse	Element

Complex Type: Dictionary

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Entries	DictionaryEntriesCollection	0..1	Required. One or more DictionaryEntries, each mapping to a fulfillment-time attribute (either FlexNet or custom license attribute). See DictionaryEntriesCollection .

Complex Type: DictionaryEntriesCollection

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Entry	DictionaryEntry	1..*	Required. A key/value pair for a fulfillment-time attribute (either FlexNet or custom license attributes). See DictionaryEntry .

Complex Type: DictionaryEntry

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Key	NonEmptyString	1..1	Values for fulfillment-time FlexNet and custom license attributes.

Content Model

Component	Type	Occurs	Description
Value	string	1..1	The value associated with Key. For multi-value attributes, pass the values as a comma-separated string enclosed in single quotes. Requests submitted through soapUI, for example, require a construction like: &apos;value1,value2&apos;; If the value of a multi-value attribute consists of only a single value, you must still enclose it in single quotes.

Complex Type: duplicateFulfillmentRecordListDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillment	fulfillmentIdentifierType	1..*	Existing duplicate fulfillment records. See fulfillmentIdentifierType .

Complex Type: DurationType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
numDuration	integer	1..1	Required. Specify the number of units of time, for example, 10, for a duration of 10 DurationUnit .

Content Model

Component	Type	Occurs	Description
durationUnit	DurationUnit	1..1	Required. Specify one of the following units of time: - DAYS - WEEKS - MONTHS - YEARS

Complex Type: emailConsolidatedLicensesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
consolidatedLicenseIdList	consolidatedLicenseIdListType	1..1	Required. An emailConsolidatedLicenseRequest contains a consolidatedLicenseIdList element identifying the licenses to be emailed. See consolidatedLicenseIdListType .
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false.
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the consolidated license email template. If the locale is valid and an email template has been configured for that locale, the localized template is used to send the email.

Referenced By

Name	Type
emailConsolidatedLicensesRequest	Element
emailConsolidatedLicenses	Method

Complex Type: emailConsolidatedLicensesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Referenced By

Name	Type
emailConsolidatedLicensesResponse	Element

Complex Type: emailContactListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
emailId	string	0..*	List of email addresses to which to send license certificate.

Complex Type: emailLicenseRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	Required. An emailLicenseRequest contains a fulfillmentIdentifier element identifying the license to be emailed. See FulfillmentIdentifierType .
ignoreExistingEmailList	boolean	0..1	Optional. If true, all email addresses must be specified explicitly in the request. It is not possible to specify which of a list of existing email addresses to exclude (exclude all or none). If not set, the value is false.
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false.
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the license email template. If the locale is valid and an email template has been configured for that locale, the localized template is used to send the email.

Referenced By

Name	Type
emailLicenseRequest	Element

Referenced By

Name	Type
emailLicense	Method

Complex Type: emailLicenseResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Referenced By

Name	Type
emailLicenseResponse	Element

Complex Type: emergencyFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	See fulfillmentIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
startDate	date	1..1	Required. Date that the license starts.
endDate	date	1..1	Required. Date that the license ends.
shipToEmail	string	0..1	Optional. Email address of a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Optional. Postal address of the sold-to organization.
serverIds	ServerIdsType	0..1	See ServerIdsType .
nodeIds	NodeIdsType	0..1	See NodeIdsType .
customHost	CustomHostIDType	0..1	See CustomHostIDType .

Complex Type: emergencyFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	emergencyFulfillmentData Type	1..*	See failedEmergencyResponseListDataType .

Referenced By

Name	Type
emergencyLicenseRequest	Element
emergencyLicense	Method

Complex Type: emergencyFulfillmentResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the emergency license request, starting at 1.
fulfillment	fulfillmentDataType	0..1	See fulfillmentDataType .

Complex Type: emergencyFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
statusInfo	StatusInfoType	1..1	Returns one of the following: • SUCCESS—All entitlements in the request were processed. • PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. • FAILURE—None of the entitlements in the request were processed.
responseData	emergencyResponseData Type	0..1	See emergencyResponseData Type .
failedData	failedEmergencyResponseListData Type	0..1	See failedEmergencyResponseListData Type .

Referenced By

Name	Type
emergencyLicenseResponse	Element

Complex Type: emergencyResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentData	emergencyFulfillmentResponseData Type	0..*	See emergencyFulfillmentResponseData Type .

Complex Type: entitledProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitledProduct	entitledProductDataType	0..*	See entitledProductDataType .

Complex Type: entitledProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productIdentifierType	0..1	See productIdentifierType .
quantity	integer	1..1	Quantity per copy of the line item. This is a multiplier to the number of copies. If one copy of the line item is fulfilled, this many copies of the entitled product will be fulfilled.

Complex Type: entitlementIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the entitlement.
primaryKeys	entitlementPKType	0..1	Database primary key of the entitlement—string containing the entitlementId of the entitlement.

Complex Type: entitlementLineItemIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the entitlement line item.
primaryKeys	entitlementLineItemPKType	0..1	Database primary key of the entitlement line item—string containing the activationId of the entitlement line item.

Complex Type: failedAdvancedFmtLCDDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	advancedFulfillmentLCDDataType	1..1	See advancedFulfillmentLCDDataType .
reason	string	1..1	String containing the reason the fulfillment was not created.

Complex Type: failedAdvancedFmtLCResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
failedFulfillment	failedAdvancedFmtLCDa taType	1..*	failedData contains one or more failedFulfillment elements. See failedAdvancedFmtLCDaType .

Complex Type: failedChildLIFmtResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedFulfillment	failedChildLIFulfillmentDa taType	1..*	failedData contains one or more failedFulfillment elements. See failedChildLIFulfillmentDataType .

Complex Type: failedChildLIFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillment	createChildLineItemFulfill mentDataType	1..1	See createChildLineItemFulfillmentDataType .
reason	string	1..1	String containing the reason the fulfillment was not created.

Complex Type: failedEmergencyResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	emergencyFulfillmentDataType	1..1	See emergencyFulfillmentDataType .
reason	string	1..1	Reason for the failure.

Complex Type: failedEmergencyResponselistDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedEmergencyResponseDataType	0..*	See failedEmergencyResponseDataType .

Complex Type: failedFulfillmentDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedFulfillmentDataType	0..*	failedData contains one or more failedFulfillment elements. See failedFulfillmentDataType .

Complex Type: failedFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	createFulfillmentDataType	1..1	See createFulfillmentDataType .
reason	string	1..1	String containing the reason the license was not verified.

Complex Type: failedOnholdFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	See fulfillmentIdentifierType .
reason	string	1..1	Reason why the delete failed.

Complex Type: failedOnholdFulfillmentListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedOnholdFulfillmentDataType	1..*	See failedOnholdFulfillmentDataType .

Complex Type: failedPublisherErrorResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	publisherErrorFulfillmentDataType	1..1	See publisherErrorFulfillmentDataType .
reason	string	1..1	Reason for failure.

Complex Type: failedPublisherErrorResponselistDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedPublisherErrorResponseDataType	0..*	See failedPublisherErrorResponseDataType .

Complex Type: failedRehostResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
fulfillment	rehostFulfillmentDataType	1..1	See rehostFulfillmentDataType .
reason	string	1..1	String containing the reason the fulfillment was not rehosted.

Complex Type: failedRehostResponselistDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedRehostResponseDataType	0..*	failedData contains one or more failedFulfillment elements. See failedRehostResponseDataType .

Complex Type: failedRepairResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	repairFulfillmentDataType	1..1	See repairFulfillmentDataType .
reason	string	1..1	String containing the reason the fulfillment was not repaired.

Complex Type: failedRepairResponselistDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedRepairResponseDataType	0..*	failedData contains one or more failedFulfillment elements. See failedRepairResponseDataType .

Complex Type: failedRepairShortCodeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	repairShortCodeDataType	1..1	See repairShortCodeDataType .
reason	string	1..1	String containing the reason the short code response was not generated.

Complex Type: failedReturnResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	returnFulfillmentDataType	1..1	See returnFulfillmentDataType .

Content Model

Component	Type	Occurs	Description
reason	string	1..1	String containing the reason the fulfillment was not returned.

Complex Type: failedReturnResponselistDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedFulfillment	failedReturnResponseDataType	0..*	failedData contains one or more failedFulfillment elements. See failedReturnResponseDataType .

Complex Type: failedReturnShortCodeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
shortCodeData	returnShortCodeDataType	1..1	See returnShortCodeDataType .
reason	string	1..1	String containing the reason the short code response was not generated.

Complex Type: failedSetLicenseOnholdFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
onholdFmtLicenseData	onHoldFmtLicenseDataType	1..1	See onholdFmtLicenseDataType .
reason	string	1..1	Reason why the fulfillment is on hold.

Complex Type: failedSetLicenseOnholdFulfillmentListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFmtData	failedSetLicenseOnholdFulfillmentDataType	1..*	See failedSetLicenseOnholdFulfillmentDataType .

Complex Type: failedShortCodeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	createShortCodeDataType	1..1	See createShortCodeDataType .
reason	string	1..1	String containing the reason the short code response was not generated.
duplicateFulfillmentRecords	duplicateFulfillmentRecordListDataType	0..1	Optional. See duplicateFulfillmentRecordListDataType .

Complex Type: failedStopGapResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	stopGapFulfillmentDataType	1..1	See stopGapFulfillmentDataType .
reason	string	1..1	Reason for the failure.

Complex Type: failedStopGapResponselistDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedFulfillment	failedStopGapResponseDataType	0..*	See failedStopGapResponseDataType .

Complex Type: failedTransferHostDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdentifier	transferHostIdDataType	0..1	See transferHostIdDataType .

Content Model

Component	Type	Occurs	Description
reason	string	0..1	String containing the reason the host was not transferred.

Complex Type: failedTransferHostListDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedHost	failedTransferHostDataType	0..*	failedData contains one or more failedHost elements. See failedTransferHosttDataType .

Complex Type: featureBundleIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature bundle.
primaryKeys	featureBundlePKType	0..1	Database primary key of the feature bundle—a string containing the name of the feature bundle.

Complex Type: featureBundlePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the feature bundle.

Complex Type: featureIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature.
primaryKeys	featurePKType	0..1	Database primary keys of the feature—strings containing name and, if the feature version format is FIXED, the version of the feature. If the feature version format is DATE_BASED, specify only name .

Complex Type: featurePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the feature.
version	string	0..1	Version of the feature.

Complex Type: fulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementIdentifier	entitlementIdentifierType	1..1	See entitlementIdentifierType .
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	Fulfillment ID of the fulfillment record created when this license was generated. See fulfillmentIdentifierType .
fulfillmentType	string	1..1	CERTIFICATE or TRUSTED.
lineItem	entitlementLineItemIdentifierType	1..1	See entitlementLineItemIdentifierType .
product	productIdentifierType	1..1	See productIdentifierType .
soldTo	string	1..1	Organization that has the right to use this license.
shipToEmail	string	0..1	Email address for a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Postal address for the sold-to organization.
serverIds	ServerIdsType	0..1	One or three license server machine hostids if a server hostid is required by the license model. See ServerIdsType .
nodeIds	NodeIdsType	0..1	One or more node-locked hostids if a node-locked hostid is required by the license model. See NodeIdsType .
customHost	CustomHostIDType	0..1	See CustomHostIDType .
fulfilledCount	string	1..1	The count in this fulfillment.
overDraftCount	string	1..1	Number of checkouts over the fulfill count that this license allows.
fulfillDate	date	1..1	Date that the license was generated.
fulfillDateTime	dateTime	1..1	Date and time that the license was generated.
isPermanent	boolean	1..1	Whether the license is permanent or expiring.
startDate	date	0..1	Date that the license begins to be valid.
expirationDate	date	0..1	Date that the license expires.
licenseText	string	0..1	Returned if includeLicenseText in the request is not set to false. Text of the license certificate for this fulfillment.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license.
consolidatedHostLicense	consolidatedHostLicenseDataType	0..1	Returned if includeConsolidatedHostLicense in the request is not set to false. consolidatedHostLicense contains an array of license elements.

Content Model

Component	Type	Occurs	Description
supportAction	SupportLicenseType	0..1	One of the following: • MASTER • REHOST • RETURN • REPAIR • STOPGAP • EMERGENCY • PUBLISHER_ERROR • REGENERATE
lastModifiedDateTime	dateTime	1..1	Date and time that the license was last modified.
parentFulfillmentId	fulfillmentIdentifierType	0..1	Fulfillment ID of the parent of this fulfillment, if this fulfillment is the result of a support action. See fulfillmentIdentifierType .
licenseTechnology	licenseTechnologyIdentifierType	0..1	License technology of the product. See licenseTechnologyIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	License model attribute. See Complex+Types.LicenseService#tns:attributeDescriptorDataType .
state	StateType	0..1	ACTIVE or OBSOLETE.
fulfillmentSource	FulfillmentSourceType	0..1	The fulfillment source type. See FulfillmentSourceType .
licenseFiles	licenseFileDataListType	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
activationType	ActivationType	0..1	The trusted activation type. See ActivationType .

Complex Type: fulfillmentHistoryDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	string	1..1	Activation ID of the activatable item whose fulfillment history is requested.
historyDetails	fulfillmentHistoryDetailsType	1..1	See fulfillmentHistoryDetailsType .

Complex Type: fulfillmentHistoryDetailsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
record	fulfillmentHistoryRecordType	1..*	See fulfillmentHistoryRecordType .

Complex Type: fulfillmentHistoryRecordType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentId	string	1..1	ID of a fulfillment generated from the requested activation ID.
action	string	1..1	Type of fulfillment or support action that was taken on this fulfillment.
actionDate	date	1..1	Date on which the fulfillment or support action was performed.

Content Model

Component	Type	Occurs	Description
actionDateTime	dateTime	1..1	Date and time at which the fulfillment or support action was performed. (Valid only for FlexNet Operations 8.3.0.3 and later.)
actionPerformedBy	string	1..1	User name of the user who performed the fulfillment or support action.
isPolicyOverridden	boolean	1..1	Whether this fulfillment or support action required the user to override any policies in order to generate the fulfillment.
count	integer	1..1	Seat count of the fulfillment.
fulfillmentSource	string	1..1	Through which path the fulfillment was generated: • APPLICATION (through the publisher or portal UI) • LEGACY (imported legacy fulfillments) • ONLINE (through web services)

Complex Type: fulfillmentIdentifierListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..*	See fulfillmentIdentifierType .

Complex Type: fulfillmentIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the fulfillment, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the fulfillment.
primaryKeys	fulfillmentPKType	0..1	Database primary key of the fulfillment—a string containing the fulfillmentID .

Complex Type: fulfillmentIdListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..*	See fulfillmentIdentifierType .

Complex Type: fulfillmentPropertiesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentId	fulfillmentIdentifierType	0..1	Fulfillment ID. See fulfillmentIdentifierType .
fulfillmentType	string	0..1	CERTIFICATE or TRUSTED.
state	StateType	0..1	ACTIVE or OBSOLETE.
entitlementId	entitlementIdentifierType	0..1	See entitlementIdentifierType .
lineItemId	entitlementLineItemIdentifierType	0..1	See entitlementLineItemIdentifierType .
product	productIdentifierType	0..1	Product. See productIdentifierType .

Content Model

Component	Type	Occurs	Description
productDescription	string	0..1	Brief description of product.
partNumber	partNumberIdentifierType	0..1	Part number.
partNumberDescription	string	0..1	Brief description of part number.
licenseTechnology	licenseTechnologyIdentifierType	0..1	License technology. See licenseTechnologyIdentifierType .
licenseModel	licenseModelIdentifierType	0..1	License model. See licenseModelIdentifierType .
soldTo	organizationIdentifierType	0..1	Organization to which the license was sold.
soldToDisplayName	string	0..1	Brief name of the organization.
shipToEmail	string	0..1	Email address of the organization.
shipToAddress	string	0..1	Physical address of the organization.
licenseHost	string	0..1	The server host or hosts in a counted license, or the nodelock host in a nodelocked uncounted or custom host. (This operation does not return the nodelocked hosts of a nodelocked counted license.)
fulfilledCount	integer	0..1	Number of fulfilled copies.
overDraftCount	integer	0..1	Amount of overdraft count allocated using this fulfillment record.
fulfillDate	date	0..1	The date when this fulfillment record was activated.
fulfillDateTime	dateTime	0..1	The date and time when this fulfillment record was activated.
isPermanent	boolean	0..1	Does the license expire?
startDate	date	0..1	Start date of the license.
expirationDate	date	0..1	Expiration date of the license.
versionDate	date	0..1	Version date, if any defined for this fulfillment record.
licenseFileType	string	0..1	TEXT or BINARY.
licenseText	string	0..1	Text of license certificate. Deprecated in favor of licenseFiles element; included for backwards compatibility.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license. Deprecated in favor of licenseFiles element; included for backwards compatibility.
supportAction	SupportLicenseType	0..1	Indicates the latest license lifecycle activity performed on a fulfillment record - MASTER (activated), RETURNED (Returned) and so on.
lastModifiedDateTime	dateTime	0..1	Date on which the license was last modified.
parentFulfillmentId	fulfillmentIdentifierType	0..1	Parent fulfillment identifier, if any. This is usually set if the fulfillment record was generated as an upgrade of another fulfillment record. See fulfillmentIdentifierType .

Content Model

Component	Type	Occurs	Description
fulfillmentSource	FulfillmentSourceType	0..1	Indicates how a particular fulfillment record was generated. See FulfillmentSourceType
orderId	string	0..1	Order ID.
orderLineNumber	string	0..1	Order line number.
lineitemDescription	string	0..1	Brief description of the line item.
totalCopies	integer	0..1	Number of copies originally purchased using the line item.
numberOfRemainingCopies	integer	0..1	Number of remaining copies on the line item.
isTrusted	boolean	0..1	True, for fulfillment records generated using trusted storage licensing.
customAttributes	attributeDescriptorDataType	0..1	Custom attributes associated with the license. See attributeDescriptorDataType .
customHostAttributes	attributeDescriptorDataType	0..1	Custom host attributes associated with the license. See attributeDescriptorDataType .
migrationId	string	0..1	Optional. An ID that can be used to track fulfillments imported from a legacy system.
vendorDaemonName	string	0..1	Name of the vendor daemon used to generate this fulfillment record.
licenseFiles	licenseFileDataListType	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
activationType	ActivationType	0..1	The trusted activation type. See ActivationType .

Complex Type: fulfillmentResponseConfigRequestType

Description

If true, that element will be included in the response.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentId	boolean	0..1	Fulfillment ID.
fulfillmentType	boolean	0..1	CERTIFICATE or TRUSTED.
state	boolean	0..1	ACTIVE or OBSOLETE.
entitlementId	boolean	0..1	Entitlement ID.
lineItemId	boolean	0..1	Line item ID.
product	boolean	0..1	Product.
productDescription	boolean	0..1	Brief description of product.
partNumber	boolean	0..1	Part number.
partNumberDescription	boolean	0..1	Brief description of part number.
licenseTechnology	boolean	0..1	License technology.
licenseModel	boolean	0..1	License model.
soldTo	boolean	0..1	Organization to which the license was sold.
soldToDisplayName	boolean	0..1	Brief name of the organization.
shipToEmail	boolean	0..1	Email address of the organization.
shipToAddress	boolean	0..1	Physical address of the organization.
licenseHost	boolean	0..1	Host on which the license is deployed.
fulfilledCount	boolean	0..1	Number of fulfilled copies.
overDraftCount	boolean	0..1	Amount of overdraft count allocated using this fulfillment record.
fulfillDate	boolean	0..1	The date when this fulfillment record was activated.
fulfillDateTime	boolean	0..1	The date and time when this fulfillment record was activated.
isPermanent	boolean	0..1	Does the license expire?
startDate	boolean	0..1	Start date of the license.
expirationDate	boolean	0..1	Expiration date of the license.
versionDate	boolean	0..1	Version date, if any defined for this fulfillment record.
licenseFileType	boolean	0..1	TEXT or BINARY.
licenseText	boolean	0..1	Text of license certificate. Deprecated in favor of licenseFiles element; included for backwards compatibility.
binaryLicense	boolean	0..1	If the license file type is binary, provide the binary license. Deprecated in favor of licenseFiles element; included for backwards compatibility.
supportAction	boolean	0..1	Indicates the latest license lifecycle activity performed on a fulfillment record - MASTER (activated), RETURNED (Returned) and so on.

Content Model

Component	Type	Occurs	Description
lastModifiedDateTime	boolean	0..1	Date on which the license was last modified.
parentFulfillmentId	boolean	0..1	Parent fulfillment identifier, if any. This is usually set if the fulfillment record was generated as an upgrade of another fulfillment record.
fulfillmentSource	boolean	0..1	Indicates how a particular fulfillment record was generated - online (from web services) or Application (from the Admin Console).
orderId	boolean	0..1	Order ID.
orderLineNumber	boolean	0..1	Order line number.
lineitemDescription	boolean	0..1	Brief description of the line item.
totalCopies	boolean	0..1	Number of copies originally purchased using the line item.
numberOfRemainingCopies	boolean	0..1	Number of remaining copies on the line item.
isTrusted	boolean	0..1	True, for fulfillment records generated using trusted storage licensing.
customAttributes	customAttributeDescriptorDataType	0..1	Custom attributes associated with the license.
customHostAttributes	customAttributeDescriptorDataType	0..1	Custom host attributes associated with the license.
migrationId	boolean	0..1	Display the migration ID. TRUE or FALSE.
vendorDaemonName	boolean	0..1	Name of the vendor daemon used to generate this fulfillment record.
licenseFiles	boolean	0..1	Contains one or more licenseFile elements that contain the license file definition name and the contents of the license file, as text or binary. See licenseFileDataListType .
FNPTimeZoneValue	boolean	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
activationType	boolean	0..1	The activation type of the fulfillment.

Complex Type: fulfillmentsQueryParametersType

Description

Specify the elements needed to construct your query.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitlementId	SimpleQueryType	0..1	Optional. An entitlementId element contains: • value—a string to match part or all of the entitlement ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
activationId	SimpleQueryType	0..1	Optional. An activationId element contains: • value—a string to match part or all of the activationId. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
fulfillmentId	SimpleQueryType	0..1	Optional. A fulfillmentID element contains: • value—a string to match part or all of the fulfillment ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
product	SimpleQueryType	0..1	Optional. A product element contains: • value—a string to match part or all of the product name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
hostId	SimpleQueryType	0..1	Optional. A hostId element contains: • value—a string to match part or all of any of the server or node-locked hostids. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
nodeLockHostId	SimpleQueryType	0..1	Optional. A nodeLockHostId contains: • value—a string to match all or part of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
soldTo	SimpleQueryType	0..1	Optional. A soldTo element contains: • value—a string to match part or all of the sold-to organization. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
fulfillDate	DateQueryType	0..1	Optional. A fulfillDate element contains: • value—a date value to compare to the fulfill date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
fulfillDateTime	DateTimeQueryType	0..1	Optional. A fulfillDateTime element contains: • value—a date and time value to compare to the fulfill date and time value. • searchType—one of the following dateSearchType values: • BEFORE • AFTER • ON

Content Model

Component	Type	Occurs	Description
startDate	DateQueryType	0..1	Optional. A startDate element contains: • value—a date value to compare to the start date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
expirationDate	DateQueryType	0..1	Optional. A expirationDate element contains: • value—a date value to compare to the expiration date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
lastModifiedDateTime	DateTimeQueryType	0..1	Optional. A lastModifiedDateTime element contains: • value—a date and time value to compare to the last modified date and time value. • searchType—which is one of the following datedSearchType values: • BEFORE • AFTER • ON • Valid only for FlexNet Operations 8.3.0.3 and later.

Content Model

Component	Type	Occurs	Description
state	StateQueryType	0..1	Optional. A state element contains: • value—a StateType value of ACTIVE, ON_HOLD or OBSOLETE to match part or all of the state value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
licenseTechnology	SimpleQueryType	0..1	Optional. A licenseTechnology element contains: • value—a string to match part or all of the license technology. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
userId	string	0..1	Optional. Set to the user name (login) of a portal user to return the fulfillments that this user can see if logged in to the portal UI.
fulfillmentSource	FulfillmentSourceType	0..1	See FulfillmentSourceType .
customAttributes	customAttributesQueryListType	0..1	See customAttributeQueryListType .
customHostAttributes	customAttributesQueryListType	0..1	See customAttributeQueryListType .
activationType	ActivationType	0..1	See ActivationType .

Complex Type: getConsolidatedFulfillmentCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	consolidatedFulfillmentsQType	0..1	Required. See consolidatedFulfillmentsQType . Leave this element blank to return all consolidated fulfillments.

Referenced By

Name	Type
getConsolidatedFulfillmentCountRequest	Element
getConsolidatedFulfillmentCount	Method

Complex Type: getConsolidatedFulfillmentCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getConsolidatedFulfillmentCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getConsolidatedFulfillmentCountResponse	Element

Complex Type: getConsolidatedFulfillmentsQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	consolidatedFulfillmentsQPTYPE	0..1	Required. See consolidatedFulfillmentsQPTYPE .
pageNumber	integer	1..1	Required. Starts at 1. Say the <code>getConsolidatedFulfillmentCount</code> operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
includeLicenseText	boolean	0..1	Optional. Whether to include the entire text of the consolidated license(s) in the response. Default is true.

Referenced By

Name	Type
getConsolidatedFulfillmentsQueryRequest	Element
getConsolidatedFulfillmentsQuery	Method

Complex Type: getConsolidatedFulfillmentsQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
consolidatedLicense	consolidatedLicenseDataType	0..*	See consolidatedLicenseDataType .

Complex Type: getConsolidatedFulfillmentsQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Types</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Types	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Types	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getConsolidatedFulfillmentsQueryResponseType	0..1	See getConsolidatedFulfillmentsQueryResponseType .									

Referenced By

Name	Type
getConsolidatedFulfillmentsQueryResponse	Element

Complex Type: getFmtAttributesForBatchActivationRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationIds	activationIdsListType	1..1	Required. A getFmtAttributesForBatchActivationRequest contains an activationIds element identifying the activation IDs whose fulfillment-time attributes to return. See activationIdsListType .

Referenced By

Name	Type
getFmtAttributesForBatchActivationRequest	Element
getFulfillmentAttributesForBatchActivation	Method

Complex Type: getFmtAttributesForBatchActivationResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getFmtAttributesForBatchDataType	0..1	A list of license model attributes that are set at fulfillment time are contained in the responseData element. See getFmtAttributesForBatchDataType .									

Referenced By

Name	Type
getFmtAttributesForBatchActivationResponse	Element

Complex Type: getFmtAttributesForBatchDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
needStartDate	boolean	1..1	Returns true if one of the activatable items requires a start date to be provided at fulfillment time.
needVersionDate	boolean	1..1	Returns true if one of the activatable items requires that a version start date is provided at fulfillment time.
needVersionStartDate	boolean	1..1	Returns true if one of the activatable items requires that a version start date is provided at fulfillment time.
needServerId	boolean	1..1	Returns true if the license model requires that a license server hostid is provided at fulfillment time.
needNodeLockId	boolean	1..1	Returns true if the license model requires that a node-locked hostid is provided at fulfillment time.
needCustomHost	boolean	1..1	Returns true if license model requires custom host attributes.
needCount	boolean	1..1	Returns true if the license model requires that a fulfill count is provided at fulfillment time.
needSoldTo	boolean	1..1	Returns true if one of the activatable items allows the sold-to organization to be specified at fulfillment time (for example, when activating a web register key). If needSoldTo returns true and a sold-to organization is not provided, the sold-to on the fulfillment defaults to the sold-to on its entitlement.
overDraftData	overDraftDataListType	1..1	See overDraftDataListType .
modelType	string	1..1	Name of the license model common to these activatable items.
modelAttributes	attributeMetaDescriptorData Type	0..1	Fulfillment attributes for the license model. See attributeMetaDescriptorData Type .
hostAttributes	attributeMetaDescriptorData Type	0..1	Host attributes for the license model. See attributeMetaDescriptorData Type .
needTimeZone	boolean	0..1	True if the TZ keyword must be set.

Complex Type: getFulfillmentAttributesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentAttributes	attributeMetaDescriptorDataType	0..1	See attributeMetaDescriptorDataType .
needTimeZone	boolean	0..1	True if time zone must be set at fulfillment time.

Complex Type: getFulfillmentAttributesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..1	Required. A getFulfillmentAttributesRequest contains a licenseModelIdentifier element identifying the license model whose attributes to return. See licenseModelIdentifierType .

Referenced By

Name	Type
getFulfillmentAttributesRequest	Element
getFulfillmentAttributesFromModel	Method

Complex Type: getFulfillmentAttributesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFulfillmentAttributesData Type	0..1	A list of license model attributes that are set at fulfillment time are contained in the responseData element. See getFulfillmentAttributesData Type .									

Referenced By

Name	Type
getFulfillmentAttributesResponse	Element

Complex Type: getFulfillmentCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	fulfillmentsQueryParametersType	0..1	Required. See fulfillmentsQueryParametersType . Leave this element blank to return all fulfillments.

Referenced By

Name	Type
getFulfillmentCountRequest	Element
getFulfillmentCount	Method

Complex Type: getFulfillmentCountResponseDataType

Description

This should be filtered out

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
count	integer	1..1	

Complex Type: getFulfillmentCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFulfillmentCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getFulfillmentCountResponse	Element

Complex Type: getFulfillmentHistoryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	string	1..1	Required. Activation ID of the activatable item whose fulfillment history is requested.
fulfillmentId	SimpleQueryType	0..1	Optional. To request a specific fulfillment ID for activationId.
userId	SimpleQueryType	0..1	Optional. To request fulfillments performed by this user on activationId.
count	NumberQueryType	0..1	Optional. To request fulfillments of activationId with this count.
policyOverridden	boolean	0..1	Optional. To request fulfillments for activationId for which a policy had to be overridden.
actionDateTime	DateTimeQueryType	0..1	Optional. To request fulfillments for activationId that were performed at this date and time. (Valid only for FlexNet Operations 8.3.0.3 and later.)
lifeCycleAction	SupportLicenseType	0..1	Optional. To request fulfillments for activationId of one of the following license lifecycle action types: - ACTIVATED - RETURN - REPAIR - REHOST - STOPGAP - EMERGENCY - PUBLISHER_ERROR - UPGRADE - UPSELL - RENEW - REINSTALL - ACTIVATED_ONHOLD
fulfillmentSource	FulfillmentSourceType	0..1	Optional. See FulfillmentSourceType .
pageNumber	integer	0..1	Required. Starts at 1. Say the getFulfillmentCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Content Model

Component	Type	Occurs	Description
batchSize	integer	0..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getFulfillmentHistoryRequest	Element
getFulfillmentHistory	Method

Complex Type: getFulfillmentHistoryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	fulfillmentHistoryDataType	0..1	See fulfillmentHistoryDataType .									

Referenced By

Name	Type
getFulfillmentHistoryResponse	Element

Complex Type: getFulfillmentPropertiesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	fulfillmentsQueryParametersType	1..1	Required. See fulfillmentsQueryParametersType .
fulfillmentResponseConfig	fulfillmentResponseConfigRequestType	1..1	See fulfillmentResponseConfigRequestType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Required. Starts at 1. Say the getFulfillmentCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
getFulfillmentPropertiesRequest	Element
getFulfillmentPropertiesQuery	Method

Complex Type: getFulfillmentPropertiesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
fulfillment	fulfillmentPropertiesType	0..*	See fulfillmentPropertiesType .									

Referenced By

Name	Type
getFulfillmentPropertiesResponse	Element

Complex Type: getFulfillmentsQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	fulfillmentsQueryParametersType	0..1	Required. See fulfillmentsQueryParametersType .
pageNumber	integer	1..1	Required. Starts at 1. Say the getFulfillmentCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
includeLicenseText	boolean	0..1	Optional. Whether to include in the response the text of each individual license for each fulfillment. Default is true.
includeConsolidatedHostLicense	boolean	0..1	Optional. Whether to include in the response the text of one or more license files consolidated by host for all the fulfillments, if FlexNet Operations has been configured to use the SUPERSEDE keyword. If FlexNet Operations is not configured to use the SUPERSEDE keyword, the fulfillment's consolidated host license text is identical to the fulfillment's license text. Default is false.

Referenced By

Name	Type
getFulfillmentsQueryRequest	Element
getFulfillmentsQuery	Method

Complex Type: getFulfillmentsQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	fulfillmentDataType	0..*	See fulfillmentDataType .

Complex Type: getFulfillmentsQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFulfillmentsQueryResponseType	0..1	See getFulfillmentsQueryResponseType .									

Referenced By

Name	Type
getFulfillmentsQueryResponse	Element

Complex Type: getHostAttributesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostAttributes	attributeMetaDescriptorDataType	0..1	See attributeMetaDescriptorDataType .

Complex Type: getHostAttributesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseTechnologyIdentifier	licenseTechnologyIdentifierType	1..1	License technology of the product. See licenseTechnologyIdentifierType .
hostType	hostTypePKType	0..1	If a license technology has more than 1 host type, the host type must be specified. See hostTypePKType .

Referenced By

Name	Type
getHostAttributesRequest	Element
getHostAttributesFromLicenseTechnology	Method

Complex Type: getHostAttributesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getHostAttributesDataType	0..1	See getHostAttributesDataType .									

Referenced By

Name	Type
getHostAttributesResponse	Element

Complex Type: hostIdDataDetailsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
serverHost	ServerIdsType	0..1	Provide one or three license server machine hostids if a server hostid is required by the license model. See ServerIdsType .
nodeLockHost	string	0..1	Provide one node-locked hostid if the license model is a node-locked uncounted model.
countedNodeLockHostIds	NodeIdsType	0..1	Provide one or more node-locked hostids if the license model is a node-locked counted model. See NodeIdsType .
customHost	CustomHostIDType	0..1	Optional. See CustomHostIDType .
countFromParent	integer	0..1	Fulfill count to be assigned to this license that comes from re-activating seats from a previous fulfillment on the same host.
countFromOwn	integer	0..1	Fulfill count to be assigned to this license that is taken directly from the available count of the child activatable item, without re-activating any previous fulfillments on the same host.
parentActivationId	string	0..1	If setting countFromParent , specify the activation ID of the fulfillment that is made obsolete to be re-activated.

Complex Type: hostIdDataSetType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdData	hostIdDataType	1..*	Required. See hostIdDataType .

Complex Type: hostIdDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
serverIds	ServerIdsType	0..1	Provide one or three license server machine hostids if a server hostid is required by the license model. See ServerIdsType .
nodeIds	NodeIdsType	0..1	Provide one or more node-locked hostids if a node-locked hostid is required by the license model. See NodeIdsType .
customHost	CustomHostIDType	0..1	Optional. See customHostIDType .

Complex Type: hostIdDetailsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdData	hostIdDataDetailsType	1..*	Required. Each hostIdData element specifies the fulfill count for a particular hostid configuration. The fulfill count that you specify for this host can come from two sources: copies that are available directly from the child line item and copies that are available by re-activating previous parent fulfillments on this host. See hostIdDataDetailsType .

Complex Type: hostTypePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
name	string	1..1	Name of the host type.

Complex Type: licenseFileDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseFile	licenseFileType	0..*	See licenseFileType .

Complex Type: licenseFileType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
licenseFileDefinitionName	string	1..1	Name of the license file definition file.
licenseText	string	0..1	Text of license certificate. Deprecated in favor of licenseFiles element; included for backwards compatibility.
binaryLicense	base64Binary	0..1	If the license file type is binary, provide the binary license. Deprecated in favor of licenseFiles element; included for backwards compatibility.
fileName	string	0..1	

Complex Type: licenseGeneratorIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license generator configuration.
primaryKeys	licenseGeneratorPKType	0..1	Database primary key of the license generator configuration—string containing the name of the license generator configuration.

Complex Type: licenseModelIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the license model, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license model.
primaryKeys	licenseModelPKType	0..1	Database primary key of the license model—a string containing the name of the license model.

Complex Type: licenseTechnologyIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license technology.
primaryKeys	licenseTechnologyPKType	0..1	Database primary key of the license technology—string containing the name of the license technology.

Complex Type: licenseTechnologyPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the license technology.

Complex Type: maintenancIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the maintenance product.
primaryKeys	maintenancePKType	0..1	Database primary key of the maintenance product—strings containing the name and version of the maintenance product.

Complex Type: maintenancePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	The name of the maintenance product.
version	string	1..1	The version of the maintenance product.

Complex Type: NodeIDsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
nodeId	string	1..*	Required. Provide one or more node-locked hostids if a node-locked hostid is required by the license model. If the license model is node-locked uncounted, one license certificate is generated (and one fulfill count is consumed) for each hostid that is provided. If the license model is node-locked counted, multiple node-locked hostids all appear together on a single feature line.

Complex Type: onHoldFmtLicenseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentId	string	1..1	FulfillmentID of the on-hold fulfillment.
textLicense	string	0..1	If the license file type for the fulfillment record is text, provide the text license.
binaryLicense	base64Binary	0..1	If the license file type for the fulfillment record is binary, provide the binary license.
licenseFiles	licenseFileDataListType	0..1	See licenseFileDataListType .

Complex Type: onholdFulfillmentListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
onholdFmtLicenseData	onHoldFmtLicenseDataType	1..*	See onHoldFmtLicenseDataType .

Complex Type: organizationIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database ID of the organization.
primaryKeys	organizationPKType	0..1	See organizationPKType .

Complex Type: organizationPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the organization.

Complex Type: OrgTypeList

Description

A list of multiple **orgType** elements. Use **orgTypeList** when you want to query organizations of multiple types. Add an **orgType** element to the **orgTypeList** for each organization type you want to include in the query. If no **orgType** or **orgTypeList** is specified, the query searches only CUSTOMER organizations (the default).

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgType	OrgType	1..*	Optional. Defines the organization type. orgType can be: - CUSTOMER - PUBLISHER - CHANNEL_PARTNER - SELF_REGISTERED Default: CUSTOMER.

Complex Type: overDraftDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationIdMap	activationIdOverDraftMapType	1..*	overDraftData contains one or more activationIdMap elements. See activationIdOverDraftMapType .

Complex Type: partNumberIdentifierWithModelType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the part number.
primaryKeys	partNumberPKType	0..1	Database primary key of the part number—a string containing the partId of the part number.
licenseModel	licenseModelIdentifierType	0..1	Optional, if you want to map a part number for a product to one specific license model linked to the product. See licenseModelIdentifierType .

Complex Type: partNumberPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
partId	string	1..1	The part ID of the part number.

Complex Type: productIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the product, not both.

Note: In the License service and Entitlement Order service, *productIdentifierType* is used to identify products, maintenance products, and suites. In the Product Packaging Service, each has its own identifier type.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the product.
primaryKeys	productPKType	0..1	Database primary key of the product—strings containing the name and version of the product.

Complex Type: productIdentifierWithCountDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
productIdentifier	productIdentifierType	1..1	Required. See productIdentifierType .
count	positiveInteger	1..1	Required. Positive integer that indicates the cardinality of the product in the suite.

Complex Type: publisherAttributesListDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	simpleAttributeDataType	1..*	An attribute element contains two strings: • attributeName • attributeValue

Complex Type: publisherErrorFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	See fulfillmentIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).
shipToEmail	string	0..1	Optional. Email address of a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Optional. Postal address of the sold-to organization.
serverIds	ServerIdsType	0..1	See ServerIdsType .
nodeIds	NodeIdsType	0..1	See NodeIdsType .
customHost	CustomHostIDType	0..1	See CustomHostIDType .
fulfillCount	integer	0..1	Required. Seat count of the fulfillment.

Content Model

Component	Type	Occurs	Description
overridePolicy	boolean	0..1	Optional. Whether to override the policy for publisher error licenses for this activation ID, if the limit has been reached.

Complex Type: publisherErrorFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillment	publisherErrorFulfillmentDataType	1..*	See publisherErrorFulfillmentDataType .

Referenced By

Name	Type
publisherErrorLicenseRequest	Element
publisherErrorLicense	Method

Complex Type: publisherErrorFulfillmentResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the publisher error license request, starting at 1.
fulfillment	fulfillmentDataType	0..1	See fulfillmentDataType .

Complex Type: publisherErrorFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.
responseData	publisherErrorResponseDataType	0..1	See publisherErrorResponseDataType .
failedData	failedPublisherErrorResponseListDataType	0..1	See failedPublisherErrorResponseListDataType .

Referenced By

Name	Type
publisherErrorLicenseResponse	Element

Complex Type: publisherErrorResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
fulfillmentData	publisherErrorFulfillmentResponseDataType	0..*	See publisherErrorFulfillmentResponseDataType .

Complex Type: rehostFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	Required. See fulfillmentIdentifierType .
serverIds	ServerIdsType	0..1	Provide one or three license server machine hostids if a server hostid is required by the license model. See ServerIdsType .
nodeIds	NodeIdsType	0..1	Provide one or more node-locked hostids if a node-locked hostid is required by the license model. See NodeIdsType .
customHost	CustomHostIDType	0..1	Optional. See CustomHostIDType .
partialCount	integer	0..1	If not specified, defaults to the entire fulfill count in the original fulfillment.
overDraftCount	integer	0..1	If not specified, defaults to the entire overdraft count in the original fulfillment. Can set only if partialCount is set.
overridePolicy	boolean	0..1	Optional. Whether to override the policy for rehosts for this activation ID, if the limit has been reached.

Complex Type: rehostFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	rehostFulfillmentDataType	1..*	Required. A rehostLicenseRequest contains an array of fulfillment elements. See rehostFulfillmentDataType .

Referenced By

Name	Type
rehostLicenseRequest	Element
rehostLicense	Method

Complex Type: rehostFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the rehost request, starting at 1 (integer).
fulfillment	fulfillmentDataType	1..2	Array of fulfillment records of type fulfillmentDataType. See fulfillmentDataType .

Complex Type: rehostFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	rehostResponseDataType	0..1	Information about the fulfillments that were rehosted is listed in the responseData element. See rehostResponseDataType .									
failedData	failedRehostResponseListDataType	0..1	Information about the fulfillments that were not rehosted is listed in the failedData element. See failedRehostResponseListDataType .									

Referenced By

Name	Type
rehostLicenseResponse	Element

Complex Type: rehostResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentData	rehostFulfillmentResponseDataType	0..*	responseData contains one or more fulfillmentData elements. See rehostFulfillmentResponseDataType .

Complex Type: repairFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	Required. See fulfillmentIdentifierType .
licenseModelAttributes	attributeDescriptorDataType	0..1	Modify editable fulfillment-time license model attributes. See attributeDescriptorDataType .
overridePolicy	boolean	0..1	Optional. Whether to override the policy for repairs for this activation ID, if the limit has been reached.
FNPTimeZoneValue	string	0..1	The time zone value is given as the contents of the name column of the time zone entry in the PROD_FNP_TIMEZONE table (not the time zone string that will be written into the license file).

Complex Type: repairFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
fulfillment	repairFulfillmentDataType	1..*	Required. A repairLicenseRequest contains an array of fulfillment elements. See repairFulfillmentDataType .

Referenced By

Name	Type
repairLicenseRequest	Element
repairLicense	Method

Complex Type: repairFulfillmentResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the repair request, starting at 1 (integer).
fulfillment	fulfillmentDataType	0..1	Fulfillment record of type fulfillmentDataType. See fulfillmentDataType .

Complex Type: repairFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	repairResponseDataType	0..1	Information about the fulfillments that were repaired is listed in the responseData element. See repairResponseDataType .									
failedData	failedRepairResponselistDataType	0..1	Information about the fulfillments that were not repaired is listed in the failedData element. See failedRepairResponselistDataType .									

Referenced By

Name	Type
repairLicenseResponse	Element

Complex Type: repairResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentData	repairFulfillmentResponseDataType	0..*	responseData contains one or more fulfillmentData elements. See repairFulfillmentResponseDataType .

Complex Type: repairShortCodeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCode	string	1..1	Required. The repair short code is generated by an activation utility at the customer site and is delivered to the publisher.
webRegKey	string	1..1	Required. Web register key (also known as activation ID in FlexNet Operations; entitlement ID in FlexNet Licensing) that was originally activated.
publisherAttributes	publisherAttributesListDataType	0..1	Activation clients can send fulfillment time attributes along with the short code and the activation ID. See the documentation for custom policy attributes (getPublisherSpecificData() method) and see publisherAttributesListDataType .
overridePolicy	boolean	0..1	Optional. Whether to override the policy for repairs for this activation ID, if the limit has been reached.

Complex Type: repairShortCodeRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	repairShortCodeDataType	0..1	Required. A repairShortCodeRequest contains a shortCodeData element. See repairShortCodeDataType .

Referenced By

Name	Type
repairShortCodeRequest	Element
repairShortCode	Method

Complex Type: repairShortCodeResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedRepairShortCodeData Type	0..1	Information about a short code repair response that was not generated is listed in the failedData element. See failedRepairShortCodeData Type .									

Content Model

Component	Type	Occurs	Description
responseData	repairedShortCodeDataType	0..1	Information about a short code repair response that was generated is listed in the responseData element. responseData contains a shortCode repair response string. This response is delivered back to the customer to enter into an activation utility.

Referenced By

Name	Type
repairedShortCodeResponse	Element

Complex Type: returnFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	Required. See fulfillmentIdentifierType .
partialCount	integer	0..1	If not specified, defaults to the entire fulfill count in the original fulfillment.
overDraftCount	integer	0..1	If not specified, defaults to the entire overdraft count in the original fulfillment. Can set only if partialCount is set.
overridePolicy	boolean	0..1	Optional. Whether to override the policy for returns for this activation ID, if the limit has been reached.
forceReturnOfThisTrustedFulfillment	boolean	0..1	Optional. Whether to force return of the trusted fulfillment.

Complex Type: returnFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	returnFulfillmentDataType	1..*	Required. A returnLicenseRequest contains an array of fulfillment elements. See returnFulfillmentDataType .

Referenced By

Name	Type
returnLicenseRequest	Element
returnLicense	Method

Complex Type: returnFulfillmentResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the return request, starting at 1 (integer).
fulfillment	fulfillmentDataType	0..1	Fulfillment record of type fulfillmentDataType. See fulfillmentDataType

Complex Type: returnFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	returnResponseDataType	0..1	Information about the fulfillments that were returned is listed in the responseData element. For returnLicense , this data is only populated in the case of a partial return, not a successful one. See returnResponseDataType .									
failedData	failedReturnResponseListDataType	0..1	Information about the fulfillments that were not returned is listed in the failedData element. See failedReturnResponseListDataType .									

Referenced By

Name	Type
returnLicenseResponse	Element

Complex Type: returnResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentData	returnFulfillmentResponseDataType	0..*	responseData contains one or more fulfillmentData elements. See returnFulfillmentResponseDataType .

Complex Type: returnShortCodeDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCode	string	1..1	Required. The return short code is generated by an activation utility at the customer site and is delivered to the publisher.
webRegKey	string	1..1	Required. Web register key (also known as activation ID in FlexNet Operations; entitlement ID in FlexNet Licensing) that was originally activated.
publisherAttributes	publisherAttributesListDataType	0..1	Activation clients can send fulfillment time attributes along with the short code and the activation ID. See the documentation for custom policy attributes (getPublisherSpecificData() method) and see publisherAttributesListDataType .
overridePolicy	boolean	0..1	Optional. Set overridePolicy to true or false to permit or prevent rehost policy overrides (when the return reason is REHOST). Default: False. Note: To successfully override the return or rehost policy, the user who submits the returnShortCode request must have the Override Policies permission.

Complex Type: returnShortCodeRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	returnShortCodeDataType	0..1	Required. A returnShortCodeRequest contains a shortCodeData element. See returnShortCodeDataType .
returnReason	ReturnedShortCodeReturnReason	0..1	Optional. The returnReason value can be: • UPGRADE • UPSELL • RENEW • REHOST The returnReason value affects which policy FlexNet Operations checks for the return—return policy or rehost policy. If the return reason is REHOST, the rehost policy is checked. For any other return reason or if no reason is specified, the return policy is checked.

Referenced By

Name	Type
returnShortCodeRequest	Element
returnShortCode	Method

Complex Type: returnShortCodeResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedReturnShortCodeDataType	0..1	Information about a short code return response that was not generated is listed in the failedData element. See failedReturnShortCodeDataType .									
responseData	returnedShortCodeDataType	0..1	Information about a short code return response that was generated is listed in the responseData element. responseData contains a shortCode return response string. This response is delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
returnShortCodeResponse	Element

Complex Type: ServerIDsType

Description

Provide exactly one or three (for a redundant license server) server hostids.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
server1	string	1..1	Required.
server2	string	0..1	Optional. Specify server1 and both server2 and server3 for a set of redundant license servers.
server3	string	0..1	Optional. Specify server1 and both server2 and server3 for a set of redundant license servers.

Complex Type: setLicenseRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
onholdFulfillmentList	onholdFulfillmentListType	1..1	See onholdFulfillmentListType .

Referenced By

Name	Type
setLicenseRequest	Element
setLicense	Method

Complex Type: setLicenseResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedSetLicenseOnholdFulfillmentListType	0..1	Populated if setting the license failed. See failedSetLicenseOnholdFulfillmentListType .									

Referenced By

Name	Type
setLicenseResponse	Element

Complex Type: stopGapFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	See fulfillmentIdentifierType .
startDate	date	1..1	Required. Date that the license starts.
endDate	date	1..1	Required. Date that the license ends.
shipToEmail	string	0..1	Optional. Email address of a contact in the sold-to organization where license certificates are shipped.
shipToAddress	string	0..1	Optional. Postal address of the sold-to organization.

Complex Type: stopGapFulfillmentRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	stopGapFulfillmentDataType	1..*	See stopGapFulfillmentDataType .

Referenced By

Name	Type
stopGapLicenseRequest	Element
stopGapLicense	Method

Complex Type: stopGapFulfillmentResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
recordRefNo	integer	1..1	Index of the fulfillment in the stop-gap license request, starting at 1.
fulfillment	fulfillmentDataType	0..1	See fulfillmentDataType .

Complex Type: stopGapFulfillmentResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.
responseData	stopGapResponseDataType	0..1	See stopGapResponseDataType .
failedData	failedStopGapResponseListDataType	0..1	See failedStopGapResponseListDataType .

Referenced By

Name	Type
stopGapLicenseResponse	Element

Complex Type: stopGapResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentData	stopGapFulfillmentResponseDataType	0..*	See stopGapFulfillmentResponseDataType .

Complex Type: suiteIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the suite.
primaryKeys	suitePKType	0..1	Database primary key of the suite—strings containing the name and version of the suite.

Complex Type: suitePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the suite.
version	string	1..1	Version of the suite.

Complex Type: transferHostIdDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
soldTo	string	1..1	The name of a source organization for the host transfer.
serverIds	ServerIdsType	0..1	Provide one or three license server machine host IDs if the host is identified by a server host ID. See ServerIdsType .
nodeId	string	0..1	Provide one or more node-locked host IDs if the host is identified by a nodelocked host ID.
customHostId	string	0..1	Provide a custom host ID if the host is identified by a custom host ID.
customHostType	string	0..1	The custom host type associated with customHostId. (Required when the host is identified by a custom host ID.)
customLicenseTechnology	string	0..1	The license technology associated with customHostId. (Required when the host is identified by a custom host ID.)

Complex Type: transferHostList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdentifier	transferHostIdDataType	1..*	One or more hosts identified with a transferHostIdDataType. See transferHostIdDataType .

Complex Type: transferHostRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
sourceHosts	transferHostList	1..1	Required. See transferHostList .
soldTo	string	0..1	A string that identifies the target organization by its organization name.
poolEntitlements	boolean	0..1	True, if existing, matching line items at the target organization are to be pooled. False, to always create new line items at the target organization.

Referenced By

Name	Type
transferHostRequest	Element
transferHost	Method

Complex Type: transferHostResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedTransferHostListDataType	0..1	Information about the line items that were not added is listed in the failedData element. See failedTransferHostListDataType .									

Referenced By

Name	Type
transferHostResponse	Element

Complex Type: trustedRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
inputData	activationDataType	1..1	Required. A manualActivationRequest contains a single inputData element. See activationDataType .

Referenced By

Name	Type
manualActivationRequest	Element
manualRepairRequest	Element
manualReturnRequest	Element
manualActivation	Method
manualRepair	Method
manualReturn	Method

Complex Type: trustedResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
responseData	activationDataType	0..1	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
manualActivationResponse	Element
manualRepairResponse	Element
manualReturnResponse	Element

Complex Type: typeLineItem

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	NonEmptyString	1..1	Required. The activation ID of the activatable item whose license being generated.

Content Model

Component	Type	Occurs	Description
Reason	string	0..1	Optional. This must be an integer value from 0 to 9. A value of 1 indicates a re-install. All other values are considered to be a new installation. (For a served trusted license model, the behavior of a reinstall is different than a new installation.)
Count	string	0..1	Optional. Specify the seat count for this activatable item, if required by the license model. The count can be an integer or the string, all . Required for served license models. The fulfill count for an uncounted license model is always 1, regardless of the count value in the request.
VendorDictionary	Dictionary	0..1	Optional. A collection of fulfillment-time attributes (either FlexNet or custom license attributes). See Dictionary .

Complex Type: verifiedFulfillmentDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
recordRefNo	string	1..1	Index of the verification in the request, starting at 1.

Complex Type: versionDateAttributesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
versionOption	VersionDateOptionType	1..1	Required. See VersionDateOptionType .

Content Model

Component	Type	Occurs	Description
duration	DurationType	0..1	See DurationType .

Complex Type: VersionFormatQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
value	VersionFormatType	1..1	VersionFormatType of FIXED or DATE_BASED.
searchType	simpleSearchType	1..1	One of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Simple Types: LicenseService

Simple Types

Name
accountType
ActivationType
CollectionOperationAccountType
CreateOrUpdateOperationAccountType
CreateOrUpdateOperationType
FulfillmentSourceType
VersionDateOptionType

Simple Type: accountType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
CUSTOMER	
PUBLISHER	
CHANNEL_PARTNER	
SELF_REGISTERED	

Simple Type: ActivationType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
PROGRAMMATIC	
MANUAL	
SHORT_CODE	
DEFAULT	

Simple Type: CollectionOperationAccountType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
REPLACE	
ADD	
DELETE	

Simple Type: CreateOrUpdateOperationAccountType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
CREATE_OR_UPDATE	
CREATE_OR_IGNORE	

Simple Type: CreateOrUpdateOperationType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
CREATE_OR_UPDATE	
CREATE_OR_IGNORE	

Simple Type: FulfillmentSourceType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
ONLINE	
APPLICATION	

Simple Type: VersionDateOptionType

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
DEFINE_NOW	
USE_START_DATE	
USE_ACTIVATION_DATE	
DEFINE_VERSION_STARTDATE_LATER	
DEFINE_VERSION_DATE_LATER	

Elements: LicenseService

Elements

Name	Description
activateLicensesRequest	An activateLicensesRequest message contains an element of activateLicensesRequestType.
activateLicensesResponse	An activateLicensesResponse message contains an element of activateLicensesResponseType.
activateShortCodeRequest	An activateShortCodeRequest message contains an element of activateShortCodeRequestType.
activateShortCodeResponse	An activateShortCodeResponse message contains an element of activateShortCodeResponseType.
consolidateFulfillmentsRequest	A consolidateFulfillmentsRequest message contains an element of consolidateFulfillmentsRequestType.
consolidateFulfillmentsResponse	A consolidateFulfillmentsResponse message contains an element of consolidateFulfillmentsResponseType.
createChildLineItemFulfillmentRequest	A createChildLineItemFulfillmentRequest message contains an element of createChildLineItemFulfillmentRequestType.
createChildLineItemFulfillmentResponse	A createChildLineItemFulfillmentResponse message contains an element of createChildLineItemFulfillmentResponseType. Each fulfillment in the createChildLineItemFulfillmentRequest is created as an atomic unit; creating each either succeeds or fails.
createLicenseRequest	A createLicenseRequest message contains an element of createFulfillmentRequestType.
createLicenseResponse	A createLicenseResponse message contains an element of createFulfillmentResponseType.
createLicensesAsBatchAndConsolidateRequest	A createLicensesAsBatchAndConsolidateRequest message contains an element of createLicensesAsBatchRequestType.
createLicensesAsBatchAndConsolidateResponse	A createLicensesAsBatchAndConsolidateResponse message contains an element of consolidateFulfillmentsResponseType.
createLicensesAsBatchRequest	A createLicensesAsBatchRequest message contains an element of createLicensesAsBatchRequestType.
createLicensesAsBatchResponse	A createLicensesAsBatchResponse message contains an element of createLicensesAsBatchResponseType.
deleteOnholdFulfillmentsRequest	A deleteOnholdFulfillments message contains an element of deleteOnholdFulfillmentsRequestType.
deleteOnholdFulfillmentsResponse	A deleteOnholdFulfillmentsResponse message contains an element of deleteOnholdFulfillmentsResponseType.
emailConsolidatedLicensesRequest	An emailConsolidatedLicensesRequest message contains an element of emailConsolidatedLicensesRequestType.
emailConsolidatedLicensesResponse	An emailConsolidatedLicenseResponse message contains an element of emailConsolidatedLicenseResponseType.
emailLicenseRequest	An emailLicenseRequest message contains an element of emailLicenseRequestType.
emailLicenseResponse	An emailLicenseResponse message contains an element of emailLicenseResponseType.

Elements

Name	Description
emergencyLicenseRequest	An emergencyLicenseRequest message contains an element of emergencyFulfillmentRequestType.
emergencyLicenseResponse	An emergencyLicenseResponse message contains an element of emergencyFulfillmentResponseType.
getConsolidatedFulfillmentCountRequest	A getConsolidatedFulfillmentCountRequest message contains an element of getConsolidatedFulfillmentCountRequestType.
getConsolidatedFulfillmentCountResponse	A getConsolidatedFulfillmentCountResponse message contains an element of getConsolidatedFulfillmentCountResponseType.
getConsolidatedFulfillmentsQueryRequest	A getConsolidatedFulfillmentsQueryRequest message contains an element of getConsolidatedFulfillmentsQueryRequestType.
getConsolidatedFulfillmentsQueryResponse	A getConsolidatedFulfillmentsQueryResponse message contains an element of getConsolidatedFulfillmentsQueryResponseType.
getFmtAttributesForBatchActivationRequest	A getFmtAttributesForBatchActivationRequest message contains an element of getFmtAttributesForBatchActivationRequestType.
getFmtAttributesForBatchActivationResponse	A getFmtAttributesForBatchActivationResponse message contains an element of getFmtAttributesForBatchActivationResponseType.
getFulfillmentAttributesRequest	A getFulfillmentAttributesRequest message contains an element of getFulfillmentAttributesRequestType.
getFulfillmentAttributesResponse	A getFulfillmentAttributesResponse message contains an element of getFulfillmentAttributesResponseType.
getFulfillmentCountRequest	A getFulfillmentCountRequest message contains an element of getFulfillmentCountRequestType.
getFulfillmentCountResponse	A getFulfillmentCountResponse message contains an element of getFulfillmentCountResponseType.
getFulfillmentHistoryRequest	A getFulfillmentHistoryRequest message contains an element of getFulfillmentHistoryRequestType.
getFulfillmentHistoryResponse	A getFulfillmentHistoryResponse message contains an element of getFulfillmentHistoryResponseType.
getFulfillmentPropertiesRequest	A getFulfillmentPropertiesRequest message contains an element of getFulfillmentPropertiesRequestType.
getFulfillmentPropertiesResponse	A getFulfillmentPropertiesResponse message contains an element of getFulfillmentPropertiesResponseType.
getFulfillmentsQueryRequest	A getFulfillmentsQueryRequest message contains an element of getFulfillmentsQueryRequestType.
getFulfillmentsQueryResponse	A getFulfillmentsQueryResponse message contains an element of getFulfillmentsQueryResponseType.
getHostAttributesRequest	A getHostAttributesRequest message contains an element of getHostAttributesRequestType.
getHostAttributesResponse	A getHostAttributesFromLicenseTechnology message contains an element of getHostAttributesResponseType.
manualActivationRequest	A manualActivationRequest message contains an element of trustedRequestType.
manualActivationResponse	A manualActivationResponse message contains an element of trustedResponseType.

Elements

Name	Description
manualRepairRequest	A manualRepairRequest message contains an element of <code>trustedRequestType</code> .
manualRepairResponse	A manualRepairResponse message contains an element of <code>trustedResponseType</code> .
manualReturnRequest	A manualReturnRequest message contains an element of <code>trustedRequestType</code> .
manualReturnResponse	A manualReturnResponse message contains an element of <code>trustedResponseType</code> .
publisherErrorLicenseRequest	A publisherErrorLicenseRequest message contains an element of <code>publisherErrorFulfillmentRequestType</code> .
publisherErrorLicenseResponse	A publisherErrorLicenseResponse message contains an element of <code>publisherErrorFulfillmentResponseType</code> .
rehostLicenseRequest	A rehostLicenseRequest message contains an element of <code>rehostFulfillmentRequestType</code> .
rehostLicenseResponse	A rehostLicenseResponse message contains an element of <code>rehostFulfillmentResponseType</code> . Each fulfillment in the rehostLicenseRequest is rehosted as an atomic unit; rehosting each either succeeds or fails.
renewFulfillmentRequest	A renewFulfillmentRequest message contains an element of <code>advancedFulfillmentLCRequestType</code> .
renewFulfillmentResponse	A renewFulfillmentResponse message contains an element of <code>advancedFulfillmentLCResponseType</code> . Each fulfillment in the renewFulfillmentRequest is created as an atomic unit; creating each either succeeds or fails.
repairLicenseRequest	A repairLicenseRequest message contains an element of <code>repairFulfillmentRequestType</code> .
repairLicenseResponse	A repairLicenseResponse message contains an element of <code>repairFulfillmentResponseType</code> . Each fulfillment in the repairLicenseRequest is repaired as an atomic unit; repairing each either succeeds or fails.
repairShortCodeRequest	A repairShortCodeRequest message contains an element of <code>repairShortCodeRequestType</code> .
repairShortCodeResponse	A repairShortCodeResponse message contains an element of <code>repairShortCodeResponseType</code> .
returnLicenseRequest	A returnLicenseRequest message contains an element of <code>returnFulfillmentRequestType</code> .
returnLicenseResponse	A returnLicenseResponse message contains an element of <code>returnFulfillmentResponseType</code> . Each fulfillment in the returnLicenseRequest is returned as an atomic unit; returning each either succeeds or fails.
returnShortCodeRequest	A returnShortCodeRequest message contains an element of <code>returnShortCodeRequestType</code> .
returnShortCodeResponse	A returnShortCodeResponse message contains an element of <code>returnShortCodeResponseType</code> .

Elements

Name	Description
setLicenseRequest	A setLicenseRequest message contains an element of <code>setLicenseRequestType</code> .
setLicenseResponse	A setLicenseResponse message contains an element of <code>setLicenseResponseType</code> .
stopGapLicenseRequest	A stopGapLicenseRequest message contains an element of <code>stopGapFulfillmentRequestType</code> .
stopGapLicenseResponse	A stopGapLicenseResponse message contains an element of <code>stopGapFulfillmentResponseType</code> .
transferHostRequest	A transferHostRequest message contains an element of <code>transferHostRequestType</code> .
transferHostResponse	A transferHostResponse message contains an element of <code>transferHostResponseType</code> . Each entitlement in the transferHostResponseType is transferred as an atomic unit; transferring each either succeeds or fails.
upgradeFulfillmentRequest	An upgradeFulfillmentRequest message contains an element of <code>advancedFulfillmentLCRequestType</code> .
upgradeFulfillmentResponse	An upgradeFulfillmentResponse message contains an element of <code>advancedFulfillmentLCResponseType</code> . Each fulfillment in the upgradeFulfillmentRequest is created as an atomic unit; creating each either succeeds or fails.
upsellFulfillmentRequest	An upsellFulfillmentRequest message contains an element of <code>advancedFulfillmentLCRequestType</code> .
upsellFulfillmentResponse	An upsellFulfillmentResponse message contains an element of <code>advancedFulfillmentLCResponseType</code> . Each fulfillment in the upsellFulfillmentRequest is created as an atomic unit; creating each either succeeds or fails.
verifyCreateLicenseRequest	A verifyCreateLicenseRequest message contains an element of <code>createFulfillmentRequestType</code> .
verifyCreateLicenseResponse	A verifyCreateLicenseResponse message contains an element of <code>createFulfillmentResponseType</code> .

Element: activateLicensesRequest

Description

An **activateLicensesRequest** message contains an element of `activateLicensesRequestType`.

Derived By

Type [activateLicensesRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	
linelItem	typeLinelItem	1..*	Required. See typeLinelItem .
shipToEmail	string	0..1	Optional. Email address for a contact in the sold-to organization where licenses are shipped. You can provide a different email address from any already set in the entitlement.
shipToAddress	string	0..1	Optional. Postal address for the sold-to organization. May already be set in the entitlement.
soldTo	string	0..1	Optional. Provide a sold-to organization for the license if one is required. If specified for a web register key, soldTo sets the end customer organization in the entitlement that is created.
owner	string	0..1	Optional. Specifies the end customer contact. If specified for a web register key, owner sets the end customer contact in the entitlement that is created.
hostInfo	string	1..1	Required. An XML structure that is generated by an empty -new request from a v2 activation utility on the machine where the trusted fulfillment will be applied. For successful response processing, hostInfo must reflect the state of trusted storage on the host machine at the time the response is applied.

Referenced By

Name	Type
offlineFNPTtrustedStorageActivation	Method

XML Example

The following XML fragment illustrates an **activateLicensesRequest** message:

```

<activateLicensesRequest>
  <linelItem>
    <activationId>Ent_basic_1</activationId>
    <Reason>5</Reason>
    <Count>5</Count>
    <VendorDictionary>
      <Entries>
        <Entry>
          <Key>Key1</Key>
          <Value>Value1</Value>
        </Entry>
      </Entries>
    </VendorDictionary>
  </linelItem>
  <soldTo>MyCustomerOrg</soldTo>
  <hostInfo>****</hostInfo>
</activateLicensesRequest>

```

Element: activateLicensesResponse

Description

An **activateLicensesResponse** message contains an element of activateLicensesResponseType.

Derived By

Type [activateLicensesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedLinItem	0..1	Information about an entitlement line item that failed to activate in the failedData element. failedLinItem contains a single activationID element as a string.									
resultData	string	0..1	The XML response to be saved as a fulfillment response file.									

Referenced By

Name	Type
offlineFNPTtrustedStorageActivation	Method

XML Example

The following XML fragment illustrates a successful **activateLicensesResponse** message:

```
<activateLicensesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <resultData>***</resultData>
</activateLicensesResponse>
```

XML Example

The following XML fragment illustrates a failed **activateLicensesResponse** message:

```
<activateLicensesResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>9999; The activation of the fulfillment is denied by the activation policy because fulfill count
    exceeded the available seat count. [Incident# 8961-7529]</reason>
  </statusInfo>
  <failedData>
    <activationId>se-ea-1</activationId>
  </failedData>
</activateLicensesResponse>
```

Element: activateShortCodeRequest

Description

An **activateShortCodeRequest** message contains an element of `activateShortCodeRequestType`.

Derived By

Type [activateShortCodeRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	createShortCodeDataType	0..1	Required. An activateShortCodeRequest contains a single shortCodeData element. See createShortCodeDataType .

Referenced By

Name	Type
activateShortCode	Method

XML Example

The following XML fragment illustrates an **activateShortCodeRequest** message that overrides default activation behavior to do a reinstall:

```
<activateShortCodeRequest>
  <shortCodeData>
    <webRegkey>WRK-1</webRegkey>
    <shortCode>189603928568052437252111063433875295</shortCode>
    <shortCodeActivationType>REINSTALL</shortCodeActivationType>
    <!--optional-->
    <reinstallFulfillment>
```

XML Example

```
<primaryKeys>
  <fulfillmentId>FID__52cc8d30_1320356c5cd__7ff8</fulfillmentId>
</primaryKeys>
</reinstallFulfillment>
</shortCodeData>
</activateShortCodeRequest>
```

Element: activateShortCodeResponse

Description

An **activateShortCodeResponse** message contains an element of activateShortCodeResponseType.

Derived By

Type [activateShortCodeResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedShortCodeDataType	0..1	Information about a short code response that was not generated is listed in the failedData element. See failedShortCodeDataType .									
responseData	createdShortCodeDataType	0..1	Information about an short code response that was generated is listed in the responseData element. responseData contains a shortCode short code response string. This response is delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
activateShortCode	Method

XML Example

The following XML fragment illustrates a successful **activateShortCodeResponse** message:

```
<activateShortCodeResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <shortCode>...</shortCode>
  </responseData>
</activateShortCodeResponse>
```

The following XML fragment illustrates a failed **activateShortCodeResponse** message:

```
<activateShortCodeResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <shortCodeData>
      <webRegkey>be-sc-1</webRegkey>
      <shortCode>189603928568052437252111063433875295</shortCode>
    </shortCodeData>
    <reason>Short Code Activation failed : One or more fulfillment records found for the given Short Code and activationID.</reason>
    <duplicateFulfillmentRecords>
      <fulfillment>
        <uniqueId>HID-100333</uniqueId>
        <primaryKeys>
          <fulfillmentId>FID__52cc8d30_1320356c5cd__7ff8</fulfillmentId>
        </primaryKeys>
      </fulfillment>
    </duplicateFulfillmentRecords>
  </failedData>
</activateShortCodeResponse>
```

Element: consolidateFulfillmentsRequest

Description

A **consolidateFulfillmentsRequest** message contains an element of consolidateFulfillmentsRequestType.

Derived By

Type [consolidateFulfillmentsRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillments	fulfillmentIdentifierListType	1..1	Required. See fulfillmentIdentifierListType .

Referenced By

Name	Type
consolidateFulfillments	Method

XML Example

The following XML fragment illustrates a **consolidateFulfillmentsRequest** message:

```
<consolidateFulfillmentsRequest>
  <fulfillments>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_1256ea2_10b1a2bcf0a__7ffa</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_1256ea2_10b1a2bcf0a__7ff9</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
  </fulfillments>
</consolidateFulfillmentsRequest>
```

Element: consolidateFulfillmentsResponse

Description

A **consolidateFulfillmentsResponse** message contains an element of consolidateFulfillmentsResponseType.

Derived By

Type [consolidateFulfillmentsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	consolidatedResponseDataType	0..1	Information about the licenses that were generated is listed in the responseData element. See consolidatedResponseDataType .									

Referenced By

Name	Type
consolidateFulfillments	Method

XML Example

The following XML fragment illustrates a successful **consolidateFulfillmentsResponse** message:

```
<consolidateFulfillmentsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <consolidatedLicense>
```

XML Example

```
<consolidatedLicenseId>CID_1256ea2_10b1bcf0a__7fee</consolidatedLicenseId>
<licenseText>...</licenseText>
<soldTo>WILY</soldTo>
<criteria>Server 123412341234</criteria>
<consolidatedFulfillments>
  <fulfillmentIdentifier>
    <uniqueId>HID-1</uniqueId>
    <primaryKeys>
      <fulfillmentId>FID_1256ea2_10b1a2bcf0a__7ffa</fulfillmentId>
    </primaryKeys>
  </fulfillmentIdentifier>
  <fulfillmentIdentifier>
    <uniqueId>HID-2</uniqueId>
    <primaryKeys>
      <fulfillmentId>FID_1256ea2_10b1a2bcf0a__7ff9</fulfillmentId>
    </primaryKeys>
  </fulfillmentIdentifier>
</consolidatedFulfillments>
</consolidatedLicense>
</responseData>
</consolidateFulfillmentsResponse>
```

Element: createChildLineItemFulfillmentRequest

Description

A **createChildLineItemFulfillmentRequest** message contains an element of createChildLineItemFulfillmentRequestType.

Derived By

Type [createChildLineItemFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillment	createChildLineItemFulfillmentDataType	1..*	Required. A createChildLineItemFulfillmentRequest contains an array of fulfillment elements. See createChildLineItemFulfillmentDataType .

Referenced By

Name	Type
createChildLineItemFulfillment	Method

XML Example

The following XML fragment illustrates a **createChildLineItemFulfillmentRequest** message:

```
<createChildLineItemFulfillmentRequest>
  <fulfillment>
    <activationId>E-upgrade1-1U</activationId>
    <startDate>2008-02-12</startDate>
    <licenseModelAttributes>
      <attribute>
        <attributeName>VENDOR_STRING</attributeName>
        <stringValue>vs</stringValue>
      </attribute>
    </licenseModelAttributes>
    <hostIdDetails>
      <hostIdData>
        <serverHost>
          <server1>987698769876</server1>
        </serverHost>
        <countFromParent>4</countFromParent>
        <countFromOwn>5</countFromOwn>
      </hostIdData>
    </hostIdDetails>
    <overridePolicy>false</overridePolicy>
  </fulfillment>
</createChildLineItemFulfillmentRequest>
```

Element: createChildLineItemFulfillmentResponse

Description

A **createChildLineItemFulfillmentResponse** message contains an element of **createChildLineItemFulfillmentResponseType**.

Each fulfillment in the **createChildLineItemFulfillmentRequest** is created as an atomic unit; creating each either succeeds or fails.

Derived By

Type [createChildLineItemFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	createdChildLIFmtResponseDataType	0..1	Information about the fulfillments that were created is listed in the responseData element. See createdChildLIFmtResponseDataType .									
failedData	failedChildLIFmtResponseDataType	0..1	Information about the fulfillments that were not returned is listed in the failedData element. See failedChildLIFmtResponseDataType .									

Referenced By

Name	Type
createChildLineItemFulfillment	Method

XML Example

The following XML fragment illustrates a successful **createChildLineItemFulfillmentResponse** message:

```
<createChildLineItemFulfillmentResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
```

XML Example

```
<fulfillment>
  <recordRefNo>1</recordRefNo>
  <fulfillmentInfo>
    <uniqueId>HID-11</uniqueId>
    <fulfillmentId>FID_18ee9d6_110b73ab7b0__7ffb</fulfillmentId>
    <licenseText>entire_license_text</licenseText>
  </fulfillmentInfo>
  <fulfillmentInfo>
    <uniqueId>HID-12</uniqueId>
    <fulfillmentId>FID_18ee9d6_110b73ab7b0__7ffa</fulfillmentId>
    <licenseText>entire_license_text</licenseText>
  </fulfillmentInfo>
</fulfillment>
</responseData>
</createChildLineItemFulfillmentResponse>
```

Element: createLicenseRequest

Description

A **createLicenseRequest** message contains an element of **createFulfillmentRequestType**.

Derived By

Type [createFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillment	createFulfillmentDataType e	1..*	Required. A createFulfillmentRequest contains an array of fulfillment elements to be verified. See createFulfillmentDataType .

Referenced By

Name	Type
createLicense	Method

XML Example

The following XML fragment illustrates a **createLicenseRequest** message:

```
<createLicenseRequest>
  <fulfillment>
    <activationId>Ent_basic_1</activationId>
    <fulfillCount>5</fulfillCount>
    <overDraftCount>3</overDraftCount>
    <startDate>2005-11-30</startDate>
  </fulfillment>
</createLicenseRequest>
```

XML Example

```
<serverIds>
  <server1>HOSTNAME=testserver</server1>
</serverIds>
<licenseModelAttributes>
  <attribute>
    <attributeName>VENDOR_STRING</attributeName>
    <stringValue>vendor string</stringValue>
  </attribute>
</licenseModelAttributes>
</fulfillment>
</createLicenseRequest>
```

Element: createLicenseResponse

Description

A **createLicenseResponse** message contains an element of createFulfillmentResponseType.

Derived By

Type [createFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedFulfillmentDataListType	0..1	Information about the licenses that were not verified is listed in the failedData element. See failedFulfillmentDataListType .									
responseData	createdFulfillmentDataListType	0..1	Information about the licenses that were verified is listed in the responseData element. See createdFulfillmentDataListType .									

Referenced By

Name	Type
createLicense	Method

XML Example

The following XML fragment illustrates a successful **createLicenseResponse** message:

```
<createLicenseResponse>  
  <statusInfo>
```


XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <createdFulfillment>
    <recordRefNo>1</recordRefNo>
    <uniqueId>HID-100349</uniqueId>
    <fulfillmentId>FID_18c5...86f1__7ffb</fulfillmentId>
    <licenseText>entire_license_text</licenseText>
  </createdFulfillment>
</responseData>
</createLicenseResponse>
```

Element: createLicensesAsBatchAndConsolidateRequest

Description

A **createLicensesAsBatchAndConsolidateRequest** message contains an element of **createLicensesAsBatchRequestType**.

Derived By

Type [createLicensesAsBatchRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationIds	activationIdsListType	1..1	Required. See activationIdsListType .
hostIdDataSet	hostIdDataSetType	1..1	Required. See hostIdDataSetType .
countDataSet	countDataSetType	0..1	See countDataSetType .
commonBatchDataSet	commonBatchDataSetType	1..1	See commonBatchDataSetType .

Referenced By

Name	Type
createLicensesAsBatchAndConsolidate	Method

XML Example

The following XML fragment illustrates a **createLicensesAsBatchAndConsolidateRequest** message:

```
<createLicensesAsBatchAndConsolidateRequest>
  <activationIds>
    <activationId>ACT-3</activationId>
    <activationId>ACT-4</activationId>
```

XML Example

```
</activationIds>
<hostIdDataSet>
  <hostIdData>
    <serverIds>
      <server1>456745674567</server1>
    </serverIds>
  </hostIdData>
  <hostIdData>
    <serverIds>
      <server1>567856785678</server1>
    </serverIds>
  </hostIdData>
</hostIdDataSet>
<countDataSet>
  <countData>
    <activationId>ACT-3</activationId>
    <countForHosts>
      <hostDataRefId>1</hostDataRefId>
      <fulfillCount>1</fulfillCount>
    </countForHosts>
    <countForHosts>
      <hostDataRefId>2</hostDataRefId>
      <fulfillCount>2</fulfillCount>
    </countForHosts>
  </countData>
  <countData>
    <activationId>ACT-4</activationId>
    <countForHosts>
      <hostDataRefId>1</hostDataRefId>
      <fulfillCount>2</fulfillCount>
    </countForHosts>
    <countForHosts>
      <hostDataRefId>2</hostDataRefId>
      <fulfillCount>1</fulfillCount>
    </countForHosts>
  </countData>
</countDataSet>
<commonBatchDataSet>
  <startDate>2006-05-10</startDate>
  <shipToEmail>test@example.com</shipToEmail>
  <shipToAddress>12345 main st, san jose</shipToAddress>
  <licenseModelAttributes>
    <attribute>
      <attributeName>VENDOR_STRING</attributeName>
      <stringValue>test string</stringValue>
    </attribute>
  </licenseModelAttributes>
  <overridePolicy>true</overridePolicy>
</commonBatchDataSet>
</createLicensesAsBatchAndConsolidateRequest>
```

Element: createLicensesAsBatchAndConsolidateResponse

Description

A **createLicensesAsBatchAndConsolidateResponse** message contains an element of consolidateFulfillmentsResponseType.

Derived By

Type [consolidateFulfillmentsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	consolidatedResponseDataType	0..1	Information about the licenses that were generated is listed in the responseData element. See consolidatedResponseDataType .									

Referenced By

Name	Type
createLicensesAsBatchAndConsolidate	Method

XML Example

The following XML fragment illustrates a successful **createLicensesAsBatchAndConsolidateResponse** message:

```
<createLicensesAsBatchAndConsolidateResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <consolidatedLicense>
      <consolidatedLicenseId>CID_1256ea2_11a2bcf0a__7ff0
        </consolidatedLicenseId>
      <licenseText>...</licenseText>
      <soldTo>WILY</soldTo>
      <criteria>Server 456745674567</criteria>
      <consolidatedFulfillments>
        <fulfillmentIdentifier>
          <uniqueId>HID-9</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_1256ea2_10cf0a__7ff2</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
        <fulfillmentIdentifier>
          <uniqueId>HID-7</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_1256ea2_10b2ba__7ff4</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
      </consolidatedFulfillments>
    </consolidatedLicense>
    <consolidatedLicense>
      <consolidatedLicenseId>CID_1256ea2_10b1a2bcf0a__7fef
        </consolidatedLicenseId>
      <licenseText>...</licenseText>
      <soldTo>WILY</soldTo>
      <criteria>Server 567856785678</criteria>
      <consolidatedFulfillments>
        <fulfillmentIdentifier>
          <uniqueId>HID-10</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_125a2_10b10a__7ff1</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
        <fulfillmentIdentifier>
          <uniqueId>HID-8</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_12562_10b1aa__7ff3</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
      </consolidatedFulfillments>
    </consolidatedLicense>
  </responseData>
</createLicensesAsBatchAndConsolidateResponse>
```

Element: createLicensesAsBatchRequest

Description

A **createLicensesAsBatchRequest** message contains an element of createLicensesAsBatchRequestType.

Derived By

Type [createLicensesAsBatchRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationIds	activationIdsListType	1..1	Required. See activationIdsListType .
hostIdDataSet	hostIdDataSetType	1..1	Required. See hostIdDataSetType .
countDataSet	countDataSetType	0..1	See countDataSetType .
commonBatchDataSet	commonBatchDataSetType	1..1	See commonBatchDataSetType .

Referenced By

Name	Type
createLicensesAsBatch	Method

XML Example

The following XML fragment illustrates a **createLicensesAsBatchRequest** message:

```
<createLicensesAsBatchRequest>
  <activationIds>
    <activationId>ACT-1</activationId>
    <activationId>ACT-2</activationId>
  </activationIds>
  <hostIdDataSet>
    <hostIdData>
      <nodeIds>
        <nodeId>121212121212</nodeId>
      </nodeIds>
    </hostIdData>
  </hostIdDataSet>
  <commonBatchDataSet>
    <startDate>2006-05-06</startDate>
    <shipToEmail>test@example.com</shipToEmail>
    <licenseModelAttributes>
      <attribute>
        <attributeName>VENDOR_STRING</attributeName>
        <stringValue>test string</stringValue>
      </attribute>
    </licenseModelAttributes>
    <overridePolicy>true</overridePolicy>
  </commonBatchDataSet>
</createLicensesAsBatchRequest>
```

Element: createLicensesAsBatchResponse

Description

A **createLicensesAsBatchResponse** message contains an element of createLicensesAsBatchResponseType.

Derived By

Type [createLicensesAsBatchResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	createLicensesAsBatchResponseDataType	0..1	Information about the licenses that were generated is listed in the responseData element. See createLicensesAsBatchResponseDataType .									

Referenced By

Name	Type
createLicensesAsBatch	Method

XML Example

The following XML fragment illustrates a successful **createLicensesAsBatchResponse** message:

```
<createLicensesAsBatchResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillment>
      <entitlementIdentifier>
        <uniqueId>HID-100134</uniqueId>
        <primaryKeys>
          <entitlementId>1fcf-0ce1-0b14-a567-037f-fd</entitlementId>
        </primaryKeys>
      </entitlementIdentifier>
      <fulfillmentIdentifier>
        <uniqueId>HID-100360</uniqueId>
        <primaryKeys>
          <fulfillmentId>FID_1fcf0ce_10b16cf863c__7ffe</fulfillmentId>
        </primaryKeys>
      </fulfillmentIdentifier>
      <fulfillmentType>CERTIFICATE</fulfillmentType>
      <lineItem>
        <uniqueId>HID-100137</uniqueId>
        <primaryKeys>
          <activationId>ACT-1</activationId>
        </primaryKeys>
      </lineItem>
      <product>
        <uniqueId>HID-20090</uniqueId>
        <primaryKeys>
          <name>Scientific Calculator</name>
          <version>1.0</version>
        </primaryKeys>
      </product>
      <soldTo>Callaway</soldTo>
      <shipToEmail>test@example.com</shipToEmail>
      <nodeIds>
        <nodeId>121212121212</nodeId>
      </nodeIds>
      <fulfilledCount>1</fulfilledCount>
      <overDraftCount>0</overDraftCount>
      <fulfillDate>2006-05-08</fulfillDate>
      <isPermanent>false</isPermanent>
      <startDate>2006-05-06</startDate>
      <expirationDate>2006-08-04</expirationDate>
      <licenseText>...</licenseText>
      <supportAction>MASTER</supportAction>
      <licenseModelAttributes>
        <attribute>
          <attributeName>VENDOR_STRING</attributeName>
          <stringValue>test string</stringValue>
        </attribute>
      </licenseModelAttributes>
      <state>ACTIVE</state>
    </fulfillment>
    <fulfillment>
      <entitlementIdentifier>
        <uniqueId>HID-100134</uniqueId>
        <primaryKeys>
          <entitlementId>1fcf-0ce1-0b14-a567-037f-fd</entitlementId>
        </primaryKeys>
      </entitlementIdentifier>
      <fulfillmentIdentifier>
        <uniqueId>HID-100374</uniqueId>
        <primaryKeys>
          <fulfillmentId>FID_1fcf0ce_10b16cf863c__7ffd</fulfillmentId>
        </primaryKeys>
      </fulfillmentIdentifier>
    </fulfillment>
  </responseData>
</createLicensesAsBatchResponse>
```

XML Example

```
</fulfillmentIdentifier>
<fulfillmentType>CERTIFICATE</fulfillmentType>
<lineItem>
  <uniqueId>HID-100166</uniqueId>
  <primaryKeys>
    <activationId>ACT-2</activationId>
  </primaryKeys>
</lineItem>
<product>
  <uniqueId>HID-20090</uniqueId>
  <primaryKeys>
    <name>Scientific Calculator</name>
    <version>1.0</version>
  </primaryKeys>
</product>
<soldTo>Callaway</soldTo>
<shipToEmail>test@example.com</shipToEmail>
<nodeIds>
  <nodeId>121212121212</nodeId>
</nodeIds>
<fulfilledCount>1</fulfilledCount>
<overDraftCount>0</overDraftCount>
<fulfillDate>2006-05-08</fulfillDate>
<isPermanent>false</isPermanent>
<startDate>2006-05-08</startDate>
<expirationDate>2006-08-06</expirationDate>
<licenseText>...</licenseText>
<supportAction>MASTER</supportAction>
<licenseModelAttributes>
  <attribute>
    <attributeName>VENDOR_STRING</attributeName>
    <stringValue>test string</stringValue>
  </attribute>
</licenseModelAttributes>
<state>ACTIVE</state>
</fulfillment>
</responseData>
</createLicensesAsBatchResponse>
```

Element: deleteOnholdFulfillmentsRequest

Description

A **deleteOnholdFulfillments** message contains an element of deleteOnholdFulfillmentsRequestType.

Derived By

Type [deleteOnholdFulfillmentsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentIdList	fulfillmentIdListType	1..1	See fulfillmentIdListType .

Referenced By

Name	Type
deleteOnholdFulfillments	Method

XML Example

The following XML fragment illustrates a **deleteOnholdFulfillmentsRequest** message:

```
<deleteOnholdFulfillmentsRequest>
  <fulfillmentIdList>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_647dcddc_11a3a76677d__7ff2</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
  </fulfillmentIdList>
</deleteOnholdFulfillmentsRequest>
```

Element: deleteOnholdFulfillmentsResponse

Description

A **deleteOnholdFulfillmentsResponse** message contains an element of deleteOnholdFulfillmentsResponseType.

Derived By

Type [deleteOnholdFulfillmentsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedOnholdFulfillmentListType	0..1	See failedOnholdFulfillmentListType .									

Referenced By

Name	Type
deleteOnholdFulfillments	Method

XML Example

The following XML fragment illustrates a successful **deleteOnholdFulfillmentsResponse** message:

```
<deleteOnholdFulfillmentsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteOnholdFulfillmentsResponse>
```

Element: emailConsolidatedLicensesRequest

Description

An **emailConsolidatedLicensesRequest** message contains an element of emailConsolidatedLicensesRequestType.

Derived By

Type [emailConsolidatedLicensesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
consolidatedLicenseIdList	consolidatedLicenseIdListType	1..1	Required. An emailConsolidatedLicenseRequest contains a consolidatedLicenseIdList element identifying the licenses to be emailed. See consolidatedLicenseIdListType .
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false.
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the consolidated license email template. If the locale is valid and an email template has been configured for that locale, the localized template is used to send the email.

Referenced By

Name	Type
emailConsolidatedLicenses	Method

XML Example

The following XML fragment illustrates an **emailConsolidatedLicenseRequest** message:

```
<emailConsolidatedLicensesRequest>
  <consolidatedLicenseIdList>
    <consolidatedLicenseId>CID_1256ea2_10b1a2bcf0a_7fee</consolidatedLicenseId>
    <consolidatedLicenseId>CID_1256ea2_10b1a2bcf0a_7fef</consolidatedLicenseId>
  </consolidatedLicenseIdList>
  <emailIdList>
    <emailId>test@example.com</emailId>
  </emailIdList>
</emailConsolidatedLicensesRequest>
```

Element: emailConsolidatedLicensesResponse

Description

An **emailConsolidatedLicenseResponse** message contains an element of emailConsolidatedLicenseResponseType.

Derived By

Type [emailConsolidatedLicensesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Referenced By

Name	Type
emailConsolidatedLicenses	Method

XML Example

The following XML fragment illustrates a successful **emailConsolidatedLicenseResponse** message:

```
<emailConsolidatedLicensesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</emailConsolidatedLicensesResponse>
```

Element: emailLicenseRequest

Description

An **emailLicenseRequest** message contains an element of emailLicenseRequestType.

Derived By

Type [emailLicenseRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentIdentifier	fulfillmentIdentifierType	1..1	Required. An emailLicenseRequest contains a fulfillmentIdentifier element identifying the license to be emailed. See FulfillmentIdentifierType .
ignoreExistingEmailList	boolean	0..1	Optional. If true, all email addresses must be specified explicitly in the request. It is not possible to specify which of a list of existing email addresses to exclude (exclude all or none). If not set, the value is false.
validateEmailAddresses	boolean	0..1	Optional. Perform simple validation of email addresses in the request? Default is false.
emailIdList	emailContactListType	0..1	See emailContactListType .
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Set to the preferred locale for the license email template. If the locale is valid and an email template has been configured for that locale, the localized template is used to send the email.

Referenced By

Name	Type
emailLicense	Method

XML Example

The following XML fragment illustrates an **emailLicenseRequest** message:

```
<emailLicenseRequest>
  <fulfillmentIdentifier>
    <primaryKeys>
      <fulfillmentId>FID_18c56d_10777ff86f1__7ffb</fulfillmentId>
    </primaryKeys>
  </fulfillmentIdentifier>
  <emailIdList>
    <emailId>test@example.com</emailId>
  </emailIdList>
</emailLicenseRequest>
```

Element: emailLicenseResponse

Description

An **emailLicenseResponse** message contains an element of emailLicenseResponseType.

Derived By

Type [emailLicenseResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed.
			reason	string	Gives reason for partial failure or failure.

Referenced By

Name	Type
emailLicense	Method

XML Example

The following XML fragment illustrates a successful **emailLicenseResponse** message:

```
<emailLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</emailLicenseResponse>
```

Element: emergencyLicenseRequest

Description

An **emergencyLicenseRequest** message contains an element of emergencyFulfillmentRequestType.

Derived By

Type [emergencyFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	emergencyFulfillmentData Type	1..*	See failedEmergencyResponseListDataType .

Referenced By

Name	Type
emergencyLicense	Method

XML Example

The following XML fragment illustrates an **emergencyLicenseRequest** message:

```
<emergencyLicenseRequest>
  <fulfillment>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_828cab6_14ddc48ce2a__7ff5</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <startDate>2015-06-06</startDate>
    <endDate>2015-09-09</endDate>
    <serverIds>
      <server1>HOSTNAME=h-h2</server1>
    </serverIds>
    <nodeIds>
      <nodeId>HOSTNAME=d-d2</nodeId>
    </nodeIds>
  </fulfillment>
</emergencyLicenseRequest>
```

Element: emergencyLicenseResponse

Description

An **emergencyLicenseResponse** message contains an element of emergencyFulfillmentResponseType.

Derived By

Type [emergencyFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.
responseData	emergencyResponseData Type	0..1	See emergencyResponseData Type.
failedData	failedEmergencyResponse listDataType	0..1	See failedEmergencyResponse listDataType.

Referenced By

Name	Type
emergencyLicense	Method

XML Example

The following XML fragment illustrates a successful **emergencyLicenseResponse** message:

```
<emergencyLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillmentData>
      <recordRefNo>1</recordRefNo>
      <fulfillment>
        <entitlementIdentifier>
          <uniqueId>HID-2</uniqueId>
          <primaryKeys>
            <entitlementId>e2</entitlementId>
          </primaryKeys>
        </entitlementIdentifier>
        <fulfillmentIdentifier>
          <uniqueId>HID-5</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_828cab6_14ddc48ce2a__7ff4</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
      </fulfillment>
    </fulfillmentData>
  </responseData>
</emergencyLicenseResponse>
```

XML Example

```

</fulfillmentIdentifier>
<fulfillmentType>CERTIFICATE</fulfillmentType>
<lineItem>
  <uniqueId>HID-2</uniqueId>
  <primaryKeys>
    <activationId>a2</activationId>
  </primaryKeys>
</lineItem>
<product>
  <uniqueId>HID-1</uniqueId>
  <primaryKeys>
    <name>p1</name>
    <version>1.0</version>
  </primaryKeys>
</product>
<soldTo>UNKNOWN_ORG_UNIT</soldTo>
<shipToEmail/>
<shipToAddress/>
<serverIds>
  <server1>HOSTNAME=h-h2</server1>
</serverIds>
<nodeIds>
  <nodeId>HOSTNAME=d-d2</nodeId>
</nodeIds>
<fulfilledCount>2</fulfilledCount>
<overDraftCount>0</overDraftCount>
<fulfillDate>2015-06-10</fulfillDate>
<fulfillDateTime>2015-06-10T08:50:01.142Z</fulfillDateTime>
<isPermanent>false</isPermanent>
<startDate>2015-06-05</startDate>
<expirationDate>2015-09-08</expirationDate>
<licenseText>SERVER this_host HOSTNAME=h-h2

```

```

VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 8-sep-2015 2 HOSTID=HOSTNAME=d-d2 ISSUER="My \
Corporation" ISSUED=10-jun-2015 START=5-jun-2015 SIGN="00A2 \
B496 80E0 D993 5958 6D65 98DB 5700 694B 165F 2100 AB68 4EBF \
2FCC 0AC2"</licenseText>

```

```

  <consolidatedHostLicense>
    <license>#Please Do not delete this comment line.

```

```

SERVER this_host HOSTNAME=h-h2

```

```

VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 8-sep-2015 2 HOSTID=HOSTNAME=d-d2 ISSUER="My \
Corporation" ISSUED=10-jun-2015 START=5-jun-2015 SIGN="00A2 \
B496 80E0 D993 5958 6D65 98DB 5700 694B 165F 2100 AB68 4EBF \
2FCC 0AC2"</license>

```

```

  </consolidatedHostLicense>
  <supportAction>EMERGENCY</supportAction>
  <lastModifiedDateTime>2015-06-10T08:50:01.148Z</lastModifiedDateTime>
  <parentFulfillmentId>
    <uniqueId>HID-4</uniqueId>
    <primaryKeys>
      <fulfillmentId>FID_828cab6_14ddc48ce2a__7ff5</fulfillmentId>
    </primaryKeys>
  </parentFulfillmentId>
  <licenseTechnology>
    <uniqueId>HID-100</uniqueId>
    <primaryKeys>
      <name>FlexNet Licensing</name>
    </primaryKeys>
  </licenseTechnology>
  <licenseModelAttributes>
    <attribute>
      <attributeName>ISSUER</attributeName>
      <stringValue>My Corporation</stringValue>
    </attribute>

```

XML Example

```

    <attribute>
      <attributeName>INCLUDE_USE_SERVER</attributeName>
      <booleanValue>true</booleanValue>
    </attribute>
    <attribute>
      <attributeName>ALLOW_ONE_TERMINAL_SERVER</attributeName>
      <booleanValue>>false</booleanValue>
    </attribute>
    <attribute>
      <attributeName>NOTICE</attributeName>
    </attribute>
    <attribute>
      <attributeName>SERIAL_NUMBER</attributeName>
    </attribute>
    <attribute>
      <attributeName>VENDOR_STRING</attributeName>
    </attribute>
  </licenseModelAttributes>
  <state>ACTIVE</state>
  <fulfillmentSource>APPLICATION</fulfillmentSource>
  <licenseFiles>
    <licenseFile>
      <licenseFileDefinitionName>FNP License</licenseFileDefinitionName>
      <licenseText>SERVER this_host HOSTNAME=h-h2
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 8-sep-2015 2 HOSTID=HOSTNAME=d-d2 ISSUER="My \
Corporation" ISSUED=10-jun-2015 START=5-jun-2015 SIGN="00A2 \
B496 80E0 D993 5958 6D65 98DB 5700 694B 165F 2100 AB68 4EBF \
2FCC 0AC2"</licenseText>
    </licenseFile>
  </licenseFiles>
  <entitledProducts>
    <entitledProduct>
      <product>
        <uniqueId>HID-1</uniqueId>
        <primaryKeys>
          <name>p1</name>
          <version>1.0</version>
        </primaryKeys>
      </product>
      <quantity>1</quantity>
    </entitledProduct>
  </entitledProducts>
  <activationType>DEFAULT</activationType>
</fulfillment>
</fulfillmentData>
</responseData>
</emergencyLicenseResponse>

```

Element: getConsolidatedFulfillmentCountRequest

Description

A **getConsolidatedFulfillmentCountRequest** message contains an element of **getConsolidatedFulfillmentCountRequestType**.

Derived By

Type [getConsolidatedFulfillmentCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	consolidatedFulfillmentsQType	0..1	Required. See consolidatedFulfillmentsQType . Leave this element blank to return all consolidated fulfillments.

Referenced By

Name	Type
getConsolidatedFulfillmentCount	Method

XML Example

The following XML fragment illustrates a **getConsolidatedFulfillmentCountRequest** message:

```
<getConsolidatedFulfillmentCountRequest>
  <queryParams>
    <consolidatedLicenseId>
      <value>CID</value>
      <searchType>STARTS_WITH</searchType>
    </consolidatedLicenseId>
  </queryParams>
</getConsolidatedFulfillmentCountRequest>
```

Element: getConsolidatedFulfillmentCountResponse

Description

A **getConsolidatedFulfillmentCountResponse** message contains an element of [getConsolidatedFulfillmentCountResponseType](#).

Derived By

Type [getConsolidatedFulfillmentCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getConsolidatedFulfillmentCountResponseType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getConsolidatedFulfillmentCount	Method

XML Example

The following XML fragment illustrates a successful **getConsolidatedFulfillmentCountResponse** message:

```
<getConsolidatedFulfillmentCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>3</count>
  </responseData>
</getConsolidatedFulfillmentCountResponse>
```

XML Example

```
</responseData>  
</getConsolidatedFulfillmentCountResponse>
```

Element: getConsolidatedFulfillmentsQueryRequest

Description

A **getConsolidatedFulfillmentsQueryRequest** message contains an element of **getConsolidatedFulfillmentsQueryRequestType**.

Derived By

Type [getConsolidatedFulfillmentsQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	consolidatedFulfillmentsQPTType	0..1	Required. See consolidatedFulfillmentsQPTType .
pageNumber	integer	1..1	Required. Starts at 1. Say the getConsolidatedFulfillmentCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
includeLicenseText	boolean	0..1	Optional. Whether to include the entire text of the consolidated license(s) in the response. Default is true.

Referenced By

Name	Type
getConsolidatedFulfillmentsQuery	Method

XML Example

The following XML fragment illustrates a **getConsolidatedFulfillmentsQueryRequest** message:

```
<getConsolidatedFulfillmentsQueryRequest>  
  <queryParams>  
    <consolidatedLicenseId>  
      <value>CID</value>  
    <searchType>STARTS_WITH</searchType>
```

XML Example

```
</consolidatedLicenseId>
<soldTo>
  <value>ACME</value>
  <searchType>EQUALS</searchType>
</soldTo>
</queryParams>
<pageNumber>1</pageNumber>
<batchSize>30</batchSize>
<includeLicenseText>true</includeLicenseText>
</getConsolidatedFulfillmentsQueryRequest>
```

Element: getConsolidatedFulfillmentsQueryResponse

Description

A **getConsolidatedFulfillmentsQueryResponse** message contains an element of **getConsolidatedFulfillmentsQueryResponseType**.

Derived By

Type [getConsolidatedFulfillmentsQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Types</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Types	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Types	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getConsolidatedFulfillmentsQueryResponseType	0..1	See getConsolidatedFulfillmentsQueryResponseType .									

Referenced By

Name	Type
getConsolidatedFulfillmentsQuery	Method

XML Example

The following XML fragment illustrates a successful **getConsolidatedFulfillmentsQueryResponse** message:

```
<getConsolidatedFulfillmentsQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <consolidatedLicense>
```


XML Example

```
<consolidatedLicenseId>CID_1256ea2_10b1a2bcf0a__7fee</consolidatedLicenseId>
<licenseText>...</licenseText>
<soldTo>ACME</soldTo>
<criteria>Server 123412341234</criteria>
<consolidatedFulfillments>
  <fulfillmentIdentifier>
    <uniqueId>HID-1</uniqueId>
    <primaryKeys>
      <fulfillmentId>FID_1256ea2_10b1a2bcf0a__7ffa</fulfillmentId>
    </primaryKeys>
  </fulfillmentIdentifier>
  <fulfillmentIdentifier>
    <uniqueId>HID-2</uniqueId>
    <primaryKeys>
      <fulfillmentId>FID_1256ea2_10b1a2bcf0a__7ff9</fulfillmentId>
    </primaryKeys>
  </fulfillmentIdentifier>
</consolidatedFulfillments>
</consolidatedLicense>
</responseData>
</getConsolidatedFulfillmentsQueryResponse>
```

Element: getFmtAttributesForBatchActivationRequest

Description

A **getFmtAttributesForBatchActivationRequest** message contains an element of **getFmtAttributesForBatchActivationRequestType**.

Derived By

Type [getFmtAttributesForBatchActivationRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationIds	activationIdsListType	1..1	Required. A getFmtAttributesForBatchActivationRequest contains an activationIds element identifying the activation IDs whose fulfillment-time attributes to return. See activationIdsListType .

Referenced By

Name	Type
getFulfillmentAttributesForBatchActivation	Method

XML Example

The following XML fragment illustrates a **getFmtAttributesForBatchActivationRequest** message:

```
<getFmtAttributesForBatchActivationRequest>  
  <activationIds>  
    <activationId>ACT-1</activationId>  
    <activationId>ACT-2</activationId>  
  </activationIds>  
</getFmtAttributesForBatchActivationRequest>
```

Element: getFmtAttributesForBatchActivationResponse

Description

A **getFmtAttributesForBatchActivationResponse** message contains an element of **getFmtAttributesForBatchActivationResponseType**.

Derived By

Type [getFmtAttributesForBatchActivationResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getFmtAttributesForBatchDataType	0..1	A list of license model attributes that are set at fulfillment time are contained in the responseData element. See getFmtAttributesForBatchDataType .									

Referenced By

Name	Type
getFulfillmentAttributesForBatchActivation	Method

XML Example

The following XML fragment illustrates a successful **getFmtAttributesForBatchActivationResponse** message:

```
<getFmtAttributesForBatchActivationResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <needStartDate>true</needStartDate>
  </responseData>
</getFmtAttributesForBatchActivationResponse>
```

XML Example

```
<needServerId>false</needServerId>
<needNodeLockId>true</needNodeLockId>
<needCount>false</needCount>
<overDraftData>
  <activationIdMap>
    <activationId>ACT-1</activationId>
    <overDraftAllowed>false</overDraftAllowed>
  </activationIdMap>
  <activationIdMap>
    <activationId>ACT-2</activationId>
    <overDraftAllowed>false</overDraftAllowed>
  </activationIdMap>
</overDraftData>
<modelType>NODE_LOCKED</modelType>
<modelAttributes>
  <attribute>
    <attributeName>VENDOR_STRING</attributeName>
    <attributeDataType>LONGTEXT</attributeDataType>
    <namespace>FlexNet Licensing</namespace>
  </attribute>
</modelAttributes>
</responseData>
</getFmtAttributesForBatchActivationResponse>
```

Element: getFulfillmentAttributesRequest

Description

A **getFulfillmentAttributesRequest** message contains an element of **getFulfillmentAttributesRequestType**.

Derived By

Type [getFulfillmentAttributesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
licenseModelIdentifier	licenseModelIdentifierType	1..1	Required. A getFulfillmentAttributesRequest contains a licenseModelIdentifier element identifying the license model whose attributes to return. See licenseModelIdentifierType .

Referenced By

Name	Type
getFulfillmentAttributesFromModel	Method

XML Example

The following XML fragment illustrates a **getFulfillmentAttributesRequest** message:

```
<getFulfillmentAttributesRequest>
  <licenseModelIdentifier>
    <primaryKeys>
      <name>Floating Counted</name>
    </primaryKeys>
  </licenseModelIdentifier>
</getFulfillmentAttributesRequest>
```

Element: getFulfillmentAttributesResponse

Description

A **getFulfillmentAttributesResponse** message contains an element of getFulfillmentAttributesResponseType.

Derived By

Type [getFulfillmentAttributesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFulfillmentAttributesData Type	0..1	A list of license model attributes that are set at fulfillment time are contained in the responseData element. See getFulfillmentAttributesData Type .									

Referenced By

Name	Type
getFulfillmentAttributesFromModel	Method

XML Example

The following XML fragment illustrates a successful **getFulfillmentAttributesResponse** message:

```
<getFulfillmentAttributesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillmentAttributes>
```

XML Example

```
<attribute>
  <attributeName>VENDOR_STRING</attributeName>
  <attributeDataType>LONGTEXT</attributeDataType>
  <namespace>FlexNet Licensing</namespace>
</attribute>
</fulfillmentAttributes>
</responseData>
</getFulfillmentAttributesResponse>
```

Element: getFulfillmentCountRequest

Description

A **getFulfillmentCountRequest** message contains an element of getFulfillmentCountRequestType.

Derived By

Type [getFulfillmentCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	fulfillmentsQueryParametersType	0..1	Required. See fulfillmentsQueryParametersType . Leave this element blank to return all fulfillments.

Referenced By

Name	Type
getFulfillmentCount	Method

XML Example

The following XML fragment illustrates a **getFulfillmentCountRequest** message:

```
<getFulfillmentCountRequest>
  <queryParams>
    <activationId>
      <value>Ent_basic_1</value>
      <searchType>EQUALS</searchType>
    </activationId>
  </queryParams>
</getFulfillmentCountRequest>
```

Element: getFulfillmentCountResponse

Description

A **getFulfillmentCountResponse** message contains an element of **getFulfillmentCountResponseType**.

Derived By

Type [getFulfillmentCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFulfillmentCountResponseDataType	0..1	Contains an integer count element.									

Referenced By

Name	Type
getFulfillmentCount	Method

XML Example

The following XML fragment illustrates a successful **getFulfillmentCountResponse** message:

```
<getFulfillmentCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>1</count>
  </responseData>
</getFulfillmentCountResponse>
```

Element: getFulfillmentHistoryRequest

Description

A **getFulfillmentHistoryRequest** message contains an element of `getFulfillmentHistoryRequestType`.

Derived By

Type [getFulfillmentHistoryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	string	1..1	Required. Activation ID of the activatable item whose fulfillment history is requested.
fulfillmentId	SimpleQueryType	0..1	Optional. To request a specific fulfillment ID for activationId.
userId	SimpleQueryType	0..1	Optional. To request fulfillments performed by this user on activationId.
count	NumberQueryType	0..1	Optional. To request fulfillments of activationId with this count.
policyOverridden	boolean	0..1	Optional. To request fulfillments for activationId for which a policy had to be overridden.
actionDateTime	DateTimeQueryType	0..1	Optional. To request fulfillments for activationId that were performed at this date and time. (Valid only for FlexNet Operations 8.3.0.3 and later.)

Content Model

Component	Type	Occurs	Description
lifeCycleAction	SupportLicenseType	0..1	Optional. To request fulfillments for activationId of one of the following license lifecycle action types: • ACTIVATED • RETURN • REPAIR • REHOST • STOPGAP • EMERGENCY • PUBLISHER_ERROR • UPGRADE • UPSELL • RENEW • REINSTALL • ACTIVATED_ONHOLD
fulfillmentSource	FulfillmentSourceType	0..1	Optional. See FulfillmentSourceType .
pageNumber	integer	0..1	Required. Starts at 1. Say the getFulfillmentCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getFulfillmentHistory	Method

XML Example

The following XML fragment illustrates a **getFulfillmentHistoryRequest** message:

```
<getFulfillmentHistoryRequest>  
  <activationId>se-test-1</activationId>  
  <pageNumber>1</pageNumber>  
  <batchSize>50</batchSize>  
</getFulfillmentHistoryRequest>
```

Element: getFulfillmentHistoryResponse

Description

A **getFulfillmentHistoryResponse** message contains an element of **getFulfillmentHistoryResponseType**.

Derived By

Type [getFulfillmentHistoryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	fulfillmentHistoryDataType	0..1	See fulfillmentHistoryDataType .									

Referenced By

Name	Type
getFulfillmentHistory	Method

XML Example

The following XML fragment illustrates a successful **getFulfillmentHistoryResponse** message:

```
<getFulfillmentHistoryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <activationId>se-test-1</activationId>
    <historyDetails>
      <record>
        <fulfillmentId>FID_24541f56_12cbd1fe4ba__7ffb</fulfillmentId>
        <action>UPGRADE</action>
        <actionDate>2010-12-06</actionDate>
        <actionDateTime>2010-12-06T21:55:57.766Z</actionDateTime>
        <actionPerformedBy>admin</actionPerformedBy>
        <isPolicyOverridden>false</isPolicyOverridden>
        <count>10</count>
        <fulfillmentSource>APPLICATION</fulfillmentSource>
      </record>
      <record>
        <fulfillmentId>FID_24541f56_12cbd1fe4ba__7ffb</fulfillmentId>
        <action>ACTIVATED</action>
        <actionDate>2010-12-06</actionDate>
        <actionDateTime>2010-12-06T19:54:16.008Z</actionDateTime>
        <actionPerformedBy>admin</actionPerformedBy>
        <isPolicyOverridden>false</isPolicyOverridden>
        <count>10</count>
        <fulfillmentSource>APPLICATION</fulfillmentSource>
      </record>
    </historyDetails>
  </responseData>
</getFulfillmentHistoryResponse>
```

Element: getFulfillmentPropertiesRequest

Description

A **getFulfillmentPropertiesRequest** message contains an element of **getFulfillmentPropertiesRequestType**.

Derived By

Type [getFulfillmentPropertiesRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	fulfillmentsQueryParametersType	1..1	Required. See fulfillmentsQueryParametersType .
fulfillmentResponseConfig	fulfillmentResponseConfigRequestType	1..1	See fulfillmentResponseConfigRequestType .
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
pageNumber	integer	0..1	Required. Starts at 1. Say the getFulfillmentCount operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.

Referenced By

Name	Type
getFulfillmentPropertiesQuery	Method

XML Example

The following XML fragment illustrates a **getFulfillmentPropertiesRequest** message:

```
<getFulfillmentPropertiesRequest>
  <queryParams>
  </queryParams>
  <fulfillmentResponseConfig>
    <fulfillmentId>1</fulfillmentId>
    <fulfillmentType>1</fulfillmentType>
    <state>1</state>
    <entitlementId>1</entitlementId>
    <lineItemId>1</lineItemId>
    <product>1</product>
    <productDescription>1</productDescription>
    <partNumber>1</partNumber>
    <partNumberDescription>1</partNumberDescription>
    <licenseTechnology>1</licenseTechnology>
    <licenseModel>1</licenseModel>
    <soldTo>1</soldTo>
    <shipToEmail>1</shipToEmail>
    <shipToAddress>1</shipToAddress>
    <licenseHost>1</licenseHost>
    <fulfilledCount>1</fulfilledCount>
    <overDraftCount>1</overDraftCount>
    <fulfillDate>1</fulfillDate>
    <fulfillDateTime>1</fulfillDateTime>
    <isPermanent>1</isPermanent>
    <startDate>1</startDate>
    <expirationDate>1</expirationDate>
    <versionDate>1</versionDate>
    <licenseFileType>1</licenseFileType>
    <licenseText>1</licenseText>
    <binaryLicense>1</binaryLicense>
    <supportAction>1</supportAction>
    <lastModifiedDateTime>1</lastModifiedDateTime>
  </fulfillmentResponseConfig>
</getFulfillmentPropertiesRequest>
```

XML Example

```
<parentFulfillmentId>1</parentFulfillmentId>
<fulfillmentSource>1</fulfillmentSource>
<owner>1</owner>
<orderId>1</orderId>
<orderLineNumber>1</orderLineNumber>
<lineitemDescription>1</lineitemDescription>
<totalCopies>1</totalCopies>
<numberOfRemainingCopies>1</numberOfRemainingCopies>
<isTrusted>1</isTrusted>
<customAttributes>
  <attribute>
    <attributeName>NumberAttr</attributeName>
  </attribute>
  <attribute>
    <attributeName>Attr1</attributeName>
  </attribute>
  <attribute>
    <attributeName>BinAttr1</attributeName>
  </attribute>
  <attribute>
    <attributeName>Attr3</attributeName>
  </attribute>
</customAttributes>
<customHostAttributes>
  <attribute>
    <attributeName>HostAttr2</attributeName>
  </attribute>
  <attribute>
    <attributeName>BinHostAttr2</attributeName>
  </attribute>
</customHostAttributes>
<migrationId>1</migrationId>
<vendorDaemonName>1</vendorDaemonName>
</fulfillmentResponseConfig>
<batchSize>15</batchSize>
<pageNumber>1</pageNumber>
</getFulfillmentPropertiesRequest>
```

Element: getFulfillmentPropertiesResponse

Description

A **getFulfillmentPropertiesResponse** message contains an element of **getFulfillmentPropertiesResponseType**.

Derived By

Type [getFulfillmentPropertiesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: • SUCCESS—All items in the request were processed. • PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the items in the request were processed.
			reason	string	Gives reason for partial failure or failure.
fulfillment	fulfillmentPropertiesType	0..*	See fulfillmentPropertiesType .		

Referenced By

Name	Type
getFulfillmentPropertiesQuery	Method

XML Example

The following XML fragment illustrates a successful **getFulfillmentPropertiesResponse** message:

```
<getFulfillmentPropertiesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <fulfillment>
    <fulfillmentId>
      <uniqueId>HID-111407</uniqueId>
      <primaryKeys>
```

XML Example

```

    <fulfillmentId>FID__d79b1d8_11c9a8bfb08__7d93</fulfillmentId>
  </primaryKeys>
</fulfillmentId>
<fulfillmentType>CERTIFICATE</fulfillmentType>
<state>ACTIVE</state>
<entitlementId>
  <uniqueId>HID-111361</uniqueId>
  <primaryKeys>
    <entitlementId>EntitleId_TestRF007</entitlementId>
  </primaryKeys>
</entitlementId>
<lineItemId>
  <uniqueId>HID-111373</uniqueId>
  <primaryKeys>
    <activationId>ActivationID-Parent-TestRF007_1</activationId>
  </primaryKeys>
</lineItemId>
<product>
  <uniqueId>HID-111339</uniqueId>
  <primaryKeys>
    <name>PROD-TestRF007_1</name>
    <version>3.0</version>
  </primaryKeys>
</product>
<productDescription>Product for TestRF007</productDescription>
<partNumber>
  <uniqueId>HID-111335</uniqueId>
  <primaryKeys>
    <partId>PART-ID-TestRF007_1</partId>
  </primaryKeys>
</partNumber>
<partNumberDescription>part id for TestRF007</partNumberDescription>
<licenseTechnology>
  <uniqueId>HID-100</uniqueId>
  <primaryKeys>
    <name>FLEXnet Licensing</name>
  </primaryKeys>
</licenseTechnology>
<soldTo>SRC-ORG-TestRF007</soldTo>
<licenseHost>HOSTNAME=son1334</licenseHost>
<fulfilledCount>30</fulfilledCount>
<overDraftCount>0</overDraftCount>
<fulfillDate>2008-09-26</fulfillDate>
<fulfillDateTime>2008-09-26T00:16:00.400Z</fulfillDateTime>
<isPermanent>false</isPermanent>
<startDate>2008-09-25</startDate>
<expirationDate>2008-12-15</expirationDate>
<versionDate>2008-09-25</versionDate>
<licenseFileType>TEXT</licenseFileType>
<licenseText>SERVER this_host HOSTNAME=son1334
VENDOR opsqa
USE_SERVER
INCREMENT Feature-TestRF007_1 opsqa 2.0 15-dec-2008 300 6DDB0CA76B84 \
VENDOR_STRING=vendorString ISSUER="My Corporation" \
ISSUED=25-sep-2008 NOTICE=notice SN=serialNumber \
START=25-sep-2008 SIGN="0002 1FE0 6A82 3666 9B42 0EB2 2D50 \
0300 A167 52A0 9811 B156 F88B F764 F360" SIGN2="00D2 75DC 4567 \
80E4 D2C6 5C22 6546 6300 6C15 B7A9 AFAA 8860 B027 78A0 9E9D"</licenseText>
  <supportAction>MASTER</supportAction>
  <lastModifiedDateTime>2008-09-26T00:16:00.588Z</lastModifiedDateTime>
<parentFulfillmentId>
  <uniqueId>HID-111384</uniqueId>
  <primaryKeys>
    <fulfillmentId>FID__d79b1d8_11c9a8bfb08__7d96</fulfillmentId>
  </primaryKeys>
</parentFulfillmentId>
<fulfillmentSource>ONLINE</fulfillmentSource>

```


XML Example

```
<totalCopies>100</totalCopies>
<numberOfRemainingCopies>50</numberOfRemainingCopies>
<isTrusted>false</isTrusted>
<vendorDaemonName>opsqa</vendorDaemonName>
</fulfillment>
</getFulfillmentPropertiesResponse>
```

Element: getFulfillmentsQueryRequest

Description

A **getFulfillmentsQueryRequest** message contains an element of `getFulfillmentsQueryRequestType`.

Derived By

Type [getFulfillmentsQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	fulfillmentsQueryParametersType	0..1	Required. See fulfillmentsQueryParametersType .
pageNumber	integer	1..1	Required. Starts at 1. Say the <code>getFulfillmentCount</code> operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.
includeLicenseText	boolean	0..1	Optional. Whether to include in the response the text of each individual license for each fulfillment. Default is true.
includeConsolidatedHostLicense	boolean	0..1	Optional. Whether to include in the response the text of one or more license files consolidated by host for all the fulfillments, if FlexNet Operations has been configured to use the SUPERSEDE keyword. If FlexNet Operations is not configured to use the SUPERSEDE keyword, the fulfillment's consolidated host license text is identical to the fulfillment's license text. Default is false.

Referenced By

Name	Type
getFulfillmentsQuery	Method

XML Example

The following XML fragment illustrates a **getFulfillmentsQueryRequest** message:

```
<getFulfillmentsQueryRequest>
  <queryParams>
    <activationId>
      <value>Ent_basic_1</value>
      <searchType>EQUALS</searchType>
    </activationId>
  </queryParams>
  <pageNumber>1</pageNumber>
  <batchSize>50</batchSize>
</getFulfillmentsQueryRequest>
```

Element: getFulfillmentsQueryResponse

Description

A **getFulfillmentsQueryResponse** message contains an element of `getFulfillmentsQueryResponseType`.

Derived By

Type [getFulfillmentsQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getFulfillmentsQueryResponseDataType	0..1	See getFulfillmentsQueryResponseDataType .									

Referenced By

Name	Type
getFulfillmentsQuery	Method

XML Example

The following XML fragment illustrates a successful **getFulfillmentsQueryResponse** message:

```
<getFulfillmentsQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillment>
      <entitlementIdentifier>
```

XML Example

```

    <uniqueId>HID-100270</uniqueId>
    <primaryKeys>
      <entitlementId>Ent_basic</entitlementId>
    </primaryKeys>
  </entitlementIdentifier>
  <fulfillmentIdentifier>
    <uniqueId>HID-100349</uniqueId>
    <primaryKeys>
      <fulfillmentId>FID_18c5...86f1__7ffb</fulfillmentId>
    </primaryKeys>
  </fulfillmentIdentifier>
  <fulfillmentType>CERTIFICATE</fulfillmentType>
  <lineItem>
    <uniqueId>HID-100288</uniqueId>
    <primaryKeys>
      <activationId>Ent_basic_1</activationId>
    </primaryKeys>
  </lineItem>
  <product>
    <uniqueId>HID-100245</uniqueId>
    <primaryKeys>
      <name>Product_basic</name>
      <version>1.0</version>
    </primaryKeys>
  </product>
  <soldTo>SENTRY</soldTo>
  <serverIds>
    <server1>HOSTNAME=testserver</server1>
  </serverIds>
  <fulfilledCount>5</fulfilledCount>
  <overDraftCount>3</overDraftCount>
  <fulfillDate>2005-11-12</fulfillDate>
  <isPermanent>false</isPermanent>
  <startDate>2005-11-30</startDate>
  <expirationDate>2006-11-30</expirationDate>
  <licenseText>entire_license_text</licenseText>
  <supportAction>MASTER</supportAction>
  <licenseModelAttributes>
    <attribute>
      <attributeName>VENDOR_STRING</attributeName>
      <stringValue>vendor string</stringValue>
    </attribute>
  </licenseModelAttributes>
  <state>ACTIVE</state>
</fulfillment>
</responseData>
</getFulfillmentsQueryResponse>

```

Element: getHostAttributesRequest

Description

A **getHostAttributesRequest** message contains an element of `getHostAttributesRequestType`.

Derived By

Type [getHostAttributesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
licenseTechnologyIdentifier	licenseTechnologyIdentifierType	1..1	License technology of the product. See licenseTechnologyIdentifierType .
hostType	hostTypePKType	0..1	If a license technology has more than 1 host type, the host type must be specified. See hostTypePKType .

Referenced By

Name	Type
getHostAttributesFromLicenseTechnology	Method

XML Example

The following XML fragment illustrates a **getHostAttributesRequest** message:

```
<getHostAttributesRequest>
  <licenseTechnologyIdentifier>
    <primaryKeys>
      <name>CustomLT</name>
    </primaryKeys>
  </licenseTechnologyIdentifier>
</getHostAttributesRequest>
```

Element: getHostAttributesResponse

Description

A **getHostAttributesFromLicenseTechnology** message contains an element of **getHostAttributesResponseType**.

Derived By

Type [getHostAttributesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getHostAttributesDataType	0..1	See getHostAttributesDataType .									

Referenced By

Name	Type
getHostAttributesFromLicenseTechnology	Method

XML Example

The following XML fragment illustrates a successful **getHostAttributesResponse** message:

```
<getHostAttributesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <hostAttributes>
      <attribute>
```

XML Example

```
<attributeName>HostAttr1</attributeName>
<attributeDataType>NUMBER</attributeDataType>
<namespace>CustomLT</namespace>
</attribute>
</hostAttributes>
</responseData>
</getHostAttributesResponse>
```

Element: manualActivationRequest

Description

A **manualActivationRequest** message contains an element of `trustedRequestType`.

Derived By

Type [trustedRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
inputData	activationDataType	1..1	Required. A manualActivationRequest contains a single inputData element. See activationDataType .

Referenced By

Name	Type
manualActivation	Method

XML Example

The following XML fragment illustrates a **manualActivationRequest** message:

```
<manualActivationRequest>
  <inputData>
    <activationData>...</activationData>
  </inputData>
</manualActivationRequest>
```

Element: manualActivationResponse

Description

A **manualActivationResponse** message contains an element of **trustedResponseType**.

Derived By

Type [trustedResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
responseData	activationDataType	0..1	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
manualActivation	Method

XML Example

The following XML fragment illustrates a successful **manualActivationResponse** message:

```
<manualActivationResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <activationData>...</activationData>
  </responseData>
</manualActivationResponse>
```


Element: manualRepairRequest

Description

A **manualRepairRequest** message contains an element of trustedRequestType.

Derived By

Type [trustedRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
inputData	activationDataType	1..1	Required. A manualActivationRequest contains a single inputData element. See activationDataType .

Referenced By

Name	Type
manualRepair	Method

XML Example

The following XML fragment illustrates a **manualRepairRequest** message:

```
<manualRepairRequest>  
  <inputData>  
    <activationData>...</activationData>  
  </inputData>  
</manualRepairRequest>
```

Element: manualRepairResponse

Description

A **manualRepairResponse** message contains an element of trustedResponseType.

Derived By

Type [trustedResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
responseData	activationDataType	0..1	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
manualRepair	Method

XML Example

The following XML fragment illustrates a successful **manualRepairResponse** message:

```
<manualRepairResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <activationData>...</activationData>
  </responseData>
</manualRepairResponse>
```

Element: manualReturnRequest

Description

A **manualReturnRequest** message contains an element of trustedRequestType.

Derived By

Type [trustedRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
inputData	activationDataType	1..1	Required. A manualActivationRequest contains a single inputData element. See activationDataType .

Referenced By

Name	Type
manualReturn	Method

XML Example

The following XML fragment illustrates a **manualReturnRequest** message:

```
<manualReturnRequest>
  <inputData>
    <activationData>...</activationData>
  </inputData>
</manualReturnRequest>
```

Element: manualReturnResponse

Description

A **manualReturnResponse** message contains an element of [trustedResponseType](#).

Derived By

Type [trustedResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
responseData	activationDataType	0..1	If the request was processed successfully, responseData contains an XML response string in an activationData element. This response is saved in a file and delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
manualReturn	Method

XML Example

The following XML fragment illustrates a successful **manualReturnResponse** message:

```
<manualReturnResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <activationData>...</activationData>
  </responseData>
</manualReturnResponse>
```

Element: publisherErrorLicenseRequest

Description

A **publisherErrorLicenseRequest** message contains an element of publisherErrorFulfillmentRequestType.

Derived By

Type [publisherErrorFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	publisherErrorFulfillmentData Type	1..*	See publisherErrorFulfillmentData Type .

Referenced By

Name	Type
publisherErrorLicense	Method

XML Example

The following XML fragment illustrates a **publisherErrorLicenseRequest** message:

```
<publisherErrorLicenseRequest>
  <fulfillment>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_828cab6_14ddc48ce2a__7feb</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <serverIds>
      <server1>HOSTNAME=pe2-myserver1</server1>
    </serverIds>
    <nodeIds>
      <nodeId>HOSTNAME=pe2-mynode1</nodeId>
    </nodeIds>
    <fulfillCount>1</fulfillCount>
  </fulfillment>
</publisherErrorLicenseRequest>
```

Element: publisherErrorLicenseResponse

Description

A **publisherErrorLicenseResponse** message contains an element of publisherErrorFulfillmentResponseType.

Derived By

Type [publisherErrorFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.
responseData	publisherErrorResponseDataType	0..1	See publisherErrorResponseDataType .
failedData	failedPublisherErrorResponseListDataType	0..1	See failedPublisherErrorResponseListDataType .

Referenced By

Name	Type
publisherErrorLicense	Method

XML Example

The following XML fragment illustrates a successful **publisherErrorLicenseResponse** message:

```
<publisherErrorLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillmentData>
      <recordRefNo>1</recordRefNo>
      <fulfillment>
        <entitlementIdentifier>
          <uniqueId>HID-4</uniqueId>
          <primaryKeys>
            <entitlementId>pe1</entitlementId>
          </primaryKeys>
        </entitlementIdentifier>
        <fulfillmentIdentifier>
          <uniqueId>HID-13</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_828cab6_14ddc48ce2a__7fea</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
        <fulfillmentType>CERTIFICATE</fulfillmentType>
      </fulfillment>
      <lineltem>
        <uniqueId>HID-4</uniqueId>
        <primaryKeys>
          <activationId>pe-a1</activationId>
        </primaryKeys>
      </lineltem>
    </fulfillmentData>
  </responseData>
</publisherErrorLicenseResponse>
```

XML Example

```

    </primaryKeys>
  </lineltem>
<product>
  <uniqueId>HID-1</uniqueId>
  <primaryKeys>
    <name>p1</name>
    <version>1.0</version>
  </primaryKeys>
</product>
<soldTo>UNKNOWN_ORG_UNIT</soldTo>
<shipToEmail/>
<shipToAddress/>
<serverIds>
  <server1>HOSTNAME=pe2-myserver1</server1>
</serverIds>
<nodeIds>
  <nodeId>HOSTNAME=pe2-mynode1</nodeId>
</nodeIds>
<fulfilledCount>1</fulfilledCount>
<overDraftCount>0</overDraftCount>
<fulfillDate>2015-06-10</fulfillDate>
<fulfillDateTime>2015-06-10T09:18:35.622Z</fulfillDateTime>
<isPermanent>true</isPermanent>
<startDate>2015-06-10</startDate>
<licenseText>SERVER this_host HOSTNAME=pe2-myserver1
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 permanent 1 HOSTID=HOSTNAME=pe2-mynode1 \
ISSUER="My Corporation" ISSUED=10-jun-2015 START=9-jun-2015 \
SIGN="002F 6162 5139 1979 B943 0C62 44DF 9E00 5BD6 3711 DEB0 \
4641 9C51 BC4B EA91"</licenseText>
<consolidatedHostLicense>
  <license>#Please Do not delete this comment line.
SERVER this_host HOSTNAME=pe2-myserver1
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 permanent 1 HOSTID=HOSTNAME=pe2-mynode1 \
ISSUER="My Corporation" ISSUED=10-jun-2015 START=9-jun-2015 \
SIGN="002F 6162 5139 1979 B943 0C62 44DF 9E00 5BD6 3711 DEB0 \
4641 9C51 BC4B EA91"</license>
</consolidatedHostLicense>
<supportAction>MASTER</supportAction>
<lastModifiedDateTime>2015-06-10T09:18:35.646Z</lastModifiedDateTime>
<parentFulfillmentId>
  <uniqueId>HID-12</uniqueId>
  <primaryKeys>
    <fulfillmentId>FID_828cab6_14ddc48ce2a__7feb</fulfillmentId>
  </primaryKeys>
</parentFulfillmentId>
<licenseTechnology>
  <uniqueId>HID-100</uniqueId>
  <primaryKeys>
    <name>FlexNet Licensing</name>
  </primaryKeys>
</licenseTechnology>
<licenseModelAttributes>
  <attribute>
    <attributeName>ISSUER</attributeName>
    <stringValue>My Corporation</stringValue>
  </attribute>
  <attribute>
    <attributeName>INCLUDE_USE_SERVER</attributeName>
    <booleanValue>true</booleanValue>
  </attribute>
  <attribute>
    <attributeName>ALLOW_ONE_TERMINAL_SERVER</attributeName>
    <booleanValue>>false</booleanValue>
  </attribute>

```

XML Example

```

    </attribute>
    <attribute>
      <attributeName>NOTICE</attributeName>
    </attribute>
    <attribute>
      <attributeName>SERIAL_NUMBER</attributeName>
    </attribute>
    <attribute>
      <attributeName>VENDOR_STRING</attributeName>
    </attribute>
  </licenseModelAttributes>
  <state>ACTIVE</state>
  <fulfillmentSource>ONLINE</fulfillmentSource>
  <licenseFiles>
    <licenseFile>
      <licenseFileDefinitionName>FNP License</licenseFileDefinitionName>
      <licenseText>SERVER this_host HOSTNAME=pe2-myserver1
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 permanent 1 HOSTID=HOSTNAME=pe2-mynode1 \
ISSUER="My Corporation" ISSUED=10-jun-2015 START=9-jun-2015 \
SIGN="002F 6162 5139 1979 B943 0C62 44DF 9E00 5BD6 3711 DEB0 \
4641 9C51 BC4B EA91"</licenseText>
    </licenseFile>
  </licenseFiles>
  <entitledProducts>
    <entitledProduct>
      <product>
        <uniqueId>HID-1</uniqueId>
        <primaryKeys>
          <name>p1</name>
          <version>1.0</version>
        </primaryKeys>
      </product>
      <quantity>1</quantity>
    </entitledProduct>
  </entitledProducts>
  <activationType>DEFAULT</activationType>
</fulfillment>
</fulfillmentData>
</responseData>
</publisherErrorLicenseResponse>

```

Element: rehostLicenseRequest

Description

A **rehostLicenseRequest** message contains an element of rehostFulfillmentRequestType.

Derived By

Type [rehostFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	rehostFulfillmentData Type	1..*	Required. A rehostLicenseRequest contains an array of fulfillment elements. See rehostFulfillmentData Type .

Referenced By

Name	Type
rehostLicense	Method

XML Example

The following XML fragment illustrates a **rehostLicenseRequest** message:

```
<rehostLicenseRequest>
  <fulfillment>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_18c5...1__7ffb</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <serverIds>
      <server1>432143214321</server1>
    </serverIds>
    <partialCount>3</partialCount>
    <overDraftCount>1</overDraftCount>
  </fulfillment>
</rehostLicenseRequest>
```

Element: rehostLicenseResponse

Description

A **rehostLicenseResponse** message contains an element of **rehostFulfillmentResponseType**.

Each fulfillment in the **rehostLicenseRequest** is rehosted as an atomic unit; rehosting each either succeeds or fails

Derived By

Type [rehostFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	rehostResponseDataType	0..1	Information about the fulfillments that were rehosted is listed in the responseData element. See rehostResponseDataType .									
failedData	failedRehostResponseListDataType	0..1	Information about the fulfillments that were not rehosted is listed in the failedData element. See failedRehostResponseListDataType .									

Referenced By

Name	Type
rehostLicense	Method

XML Example

The following XML fragment illustrates a successful **rehostLicenseResponse** message:

```
<rehostLicenseResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
  <responseData>
```

XML Example

```
<fulfillmentData>
  <recordRefNo>1</recordRefNo>
  <fulfillment>
    <entitlementIdentifier>
      <uniqueId>HID-100270</uniqueId>
      <primaryKeys>
        <entitlementId>Ent_basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <fulfillmentIdentifier>
      <uniqueId>HID-100418</uniqueId>
      <primaryKeys>
        <fulfillmentId>FID_18c5...86f1__7ff6</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <fulfillmentType>CERTIFICATE</fulfillmentType>
    <lineltem>
      <uniqueId>HID-100288</uniqueId>
      <primaryKeys>
        <activationId>Ent_basic_1</activationId>
      </primaryKeys>
    </lineltem>
    <product>
      <uniqueId>HID-100245</uniqueId>
      <primaryKeys>
        <name>Product_basic</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <soldTo>SENTRY</soldTo>
    <serverIds>
      <server1>HOSTNAME=newserver</server1>
    </serverIds>
    <fulfilledCount>3</fulfilledCount>
    <overDraftCount>1</overDraftCount>
    <fulfillDate>2005-11-12</fulfillDate>
    <isPermanent>false</isPermanent>
    <startDate>2005-11-30</startDate>
    <expirationDate>2006-11-30</expirationDate>
    <licenseText>entire_license_text</licenseText>
    <supportAction>REHOST</supportAction>
    <licenseModelAttributes>
      <attribute>
        <attributeName>VENDOR_STRING</attributeName>
        <stringValue>vendor string</stringValue>
      </attribute>
    </licenseModelAttributes>
    <state>ACTIVE</state>
  </fulfillment>
  <fulfillment>
    <entitlementIdentifier>
      <uniqueId>HID-100270</uniqueId>
      <primaryKeys>
        <entitlementId>Ent_basic</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <fulfillmentIdentifier>
      <uniqueId>HID-100433</uniqueId>
      <primaryKeys>
        <fulfillmentId>FID_18c5...ff86f1__7ff5</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <fulfillmentType>CERTIFICATE</fulfillmentType>
    <lineltem>
      <uniqueId>HID-100288</uniqueId>
      <primaryKeys>
        <activationId>Ent_basic_1</activationId>
```

XML Example

```
</primaryKeys>
</lineltem>
<product>
  <uniqueId>HID-100245</uniqueId>
  <primaryKeys>
    <name>Product_basic</name>
    <version>1.0</version>
  </primaryKeys>
</product>
<soldTo>SENTRY</soldTo>
<serverIds>
  <server1>HOSTNAME=testserver</server1>
</serverIds>
<fulfilledCount>2</fulfilledCount>
<overDraftCount>2</overDraftCount>
<fulfillDate>2005-11-12</fulfillDate>
<isPermanent>false</isPermanent>
<startDate>2005-11-30</startDate>
<expirationDate>2006-11-30</expirationDate>
<licenseText>entire_license_text</licenseText>
<supportAction>REHOST</supportAction>
<licenseModelAttributes>
  <attribute>
    <attributeName>VENDOR_STRING</attributeName>
    <stringValue>vendor string</stringValue>
  </attribute>
</licenseModelAttributes>
<state>ACTIVE</state>
</fulfillment>
</fulfillmentData>
</responseData>
</rehostLicenseResponse>
```

Element: renewFulfillmentRequest

Description

A **renewFulfillmentRequest** message contains an element of advancedFulfillmentLCRequestType.

Derived By

Type [advancedFulfillmentLCRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillmentList	advancedFulfillmentLCListType	1..1	Required. An renewFulfillmentRequest contains an array of fulfillmentList elements. See advancedFulfillmentLCListType .

Referenced By

Name	Type
renewFulfillment	Method

XML Example

The following XML fragment illustrates a **renewFulfillmentRequest** message:

```
<renewFulfillmentRequest>
  <fulfillmentList>
    <fulfillment>
      <fulfillmentId>FID_1fcf0ce_567236d5d31__7ffd</fulfillmentId>
      <childActivationId>A-Renew-1R</childActivationId>
      <fulfillCount>1</fulfillCount>
      <licenseModelAttributes>
        <attribute>
          <attributeName>VENDOR_STRING</attributeName>
          <stringValue>vs</stringValue>
        </attribute>
      </licenseModelAttributes>
      <overridePolicy>false</overridePolicy>
    </fulfillment>
  </fulfillmentList>
</renewFulfillmentRequest>
```

Element: renewFulfillmentResponse

Description

A **renewFulfillmentResponse** message contains an element of advancedFulfillmentLCResponseType.

Each fulfillment in the **renewFulfillmentRequest** is created as an atomic unit; creating each either succeeds or fails.

Derived By

Type [advancedFulfillmentLCResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	advancedFmtLCResponseDataListType	0..1	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataType	0..1	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataType .									

Referenced By

Name	Type
renewFulfillment	Method

XML Example

The following XML fragment illustrates a successful **renewFulfillmentResponse** message:

```
<renewFulfillmentResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
```

XML Example

```
<fulfillment>
  <recordRefNo>1</recordRefNo>
  <upgradedFulfillmentInfo>
    <uniqueId>HID-104188</uniqueId>
    <fulfillmentId>FID_1fcf0ce_1467f05f9df__7ffd</fulfillmentId>
    <licenseText>...</licenseText>
  </upgradedFulfillmentInfo>
</fulfillment>
</responseData>
</renewFulfillmentResponse>
```

Element: repairLicenseRequest

Description

A **repairLicenseRequest** message contains an element of `repairFulfillmentRequestType`.

Derived By

Type [repairFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	repairFulfillmentDataType	1..*	Required. A repairLicenseRequest contains an array of fulfillment elements. See repairFulfillmentDataType .

Referenced By

Name	Type
repairLicense	Method

XML Example

The following XML fragment illustrates a **repairLicenseRequest** message:

```
<repairLicenseRequest>
  <fulfillment>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_34085e71_7f2d_4ec9_9669_312f2e85bcde</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <licenseModelAttributes>
      <attribute>
        <attributeName>VENDOR_STRING</attributeName>
        <stringValue>MyVendorString</stringValue>
      </attribute>
    </licenseModelAttributes>
  </fulfillment>
</repairLicenseRequest>
```

XML Example

```
</attribute>
</licenseModelAttributes>
<overridePolicy>false</overridePolicy>
</fulfillment>
</repairLicenseRequest>
```

Element: repairLicenseResponse

Description

A **repairLicenseResponse** message contains an element of repairFulfillmentResponseType.

Each fulfillment in the **repairLicenseRequest** is repaired as an atomic unit; repairing each either succeeds or fails.

Derived By

Type [repairFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	repairResponseDataType	0..1	Information about the fulfillments that were repaired is listed in the responseData element. See repairResponseDataType .									
failedData	failedRepairResponseListDataType	0..1	Information about the fulfillments that were not repaired is listed in the failedData element. See failedRepairResponseListDataType .									

Referenced By

Name	Type
repairLicense	Method

XML Example

The following XML fragment illustrates a successful **repairLicenseResponse** message:

```
<repairLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
```

XML Example

```
<fulfillmentData>
  <recordRefNo>1</recordRefNo>
  <fulfillment>
    <entitlementIdentifier>
      <uniqueId>HID-1</uniqueId>
      <primaryKeys>
        <entitlementId>se1</entitlementId>
      </primaryKeys>
    </entitlementIdentifier>
    <fulfillmentIdentifier>
      <uniqueId>HID-2</uniqueId>
      <primaryKeys>
        <fulfillmentId>FID_09455881_9759_45f4_9eab_25a0cf21ddb</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <fulfillmentType>CERTIFICATE</fulfillmentType>
    <linelItem>
      <uniqueId>HID-1</uniqueId>
      <primaryKeys>
        <activationId>se1-1</activationId>
      </primaryKeys>
    </linelItem>
    <product>
      <uniqueId>HID-1</uniqueId>
      <primaryKeys>
        <name>P1</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <soldTo>O1</soldTo>
    <shipToEmail/>
    <shipToAddress/>
    <serverIds>
      <server1>DISPLAY=test</server1>
    </serverIds>
    <fulfilledCount>1</fulfilledCount>
    <overDraftCount>0</overDraftCount>
    <fulfillDate>2015-10-01</fulfillDate>
    <fulfillDateTime>2015-10-01T21:52:07.041Z</fulfillDateTime>
    <isPermanent>false</isPermanent>
    <startDate>2015-10-01</startDate>
    <expirationDate>2015-10-30</expirationDate>
    <licenseText>SERVER this_host DISPLAY=test
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 30-oct-2015 1 VENDOR_STRING=MyVendorString \
ISSUER="My Corporation" ISSUED=1-oct-2015 START=30-sep-2015 \
SIGN="0076 6AE8 ABD2 354B BD51 8F7B B077 6200 F018 DB16 941C \
97A5 E0EA 450C 5EB0"</licenseText>
  <consolidatedHostLicense>
    <license>#Please Do not delete this comment line.
SERVER this_host DISPLAY=test
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 30-oct-2015 1 VENDOR_STRING=MyVendorString \
ISSUER="My Corporation" ISSUED=1-oct-2015 START=30-sep-2015 \
SIGN="0076 6AE8 ABD2 354B BD51 8F7B B077 6200 F018 DB16 941C \
97A5 E0EA 450C 5EB0"</license>
  <consolidatedHostLicense>
    <supportAction>MASTER</supportAction>
    <lastModifiedDateTime>2015-10-01T21:52:07.096Z</lastModifiedDateTime>
    <parentFulfillmentId>
      <uniqueId>HID-1</uniqueId>
      <primaryKeys>
        <fulfillmentId>FID_34085e71_7f2d_4ec9_9669_312f2e85bcde</fulfillmentId>
      </primaryKeys>
    </parentFulfillmentId>
```

XML Example

```

<licenseTechnology>
  <uniqueId>HID-2</uniqueId>
  <primaryKeys>
    <name>FlexNet Licensing</name>
  </primaryKeys>
</licenseTechnology>
<licenseModelAttributes>
  <attribute>
    <attributeName>ISSUER</attributeName>
    <stringValue>My Corporation</stringValue>
  </attribute>
  <attribute>
    <attributeName>INCLUDE_USE_SERVER</attributeName>
    <booleanValue>true</booleanValue>
  </attribute>
  <attribute>
    <attributeName>ALLOW_ONE_TERMINAL_SERVER</attributeName>
    <booleanValue>false</booleanValue>
  </attribute>
  <attribute>
    <attributeName>NOTICE</attributeName>
  </attribute>
  <attribute>
    <attributeName>SERIAL_NUMBER</attributeName>
  </attribute>
  <attribute>
    <attributeName>VENDOR_STRING</attributeName>
    <stringValue>MyVendorString</stringValue>
  </attribute>
</licenseModelAttributes>
<state>ACTIVE</state>
<fulfillmentSource>APPLICATION</fulfillmentSource>
<licenseFiles>
  <licenseFile>
    <licenseFileDefinitionName>FNP License</licenseFileDefinitionName>
    <licenseText>SERVER this_host DISPLAY=test
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 30-oct-2015 1 VENDOR_STRING=MyVendorString \
ISSUER="My Corporation" ISSUED=1-oct-2015 START=30-sep-2015 \
SIGN="0076 6AE8 ABD2 354B BD51 8F7B B077 6200 F018 DB16 941C \
97A5 E0EA 450C 5EB0"</licenseText>
  </licenseFile>
</licenseFiles>
<entitledProducts>
  <entitledProduct>
    <product>
      <uniqueId>HID-1</uniqueId>
      <primaryKeys>
        <name>P1</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <quantity>1</quantity>
  </entitledProduct>
</entitledProducts>
<activationType>DEFAULT</activationType>
</fulfillment>
</fulfillmentData>
</responseData>
</repairLicenseResponse>

```

Element: repairShortCodeRequest

Description

A **repairShortCodeRequest** message contains an element of repairShortCodeRequestType.

Derived By

Type [repairShortCodeRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	repairShortCodeDataType	0..1	Required. A repairShortCodeRequest contains a shortCodeData element. See repairShortCodeDataType .

Referenced By

Name	Type
repairShortCode	Method

XML Example

The following XML fragment illustrates a **repairShortCodeRequest** message:

```
<repairShortCodeRequest>
  <shortCodeData>
    <shortCode>...</shortCode>
    <webRegkey>WRK-1</webRegkey>
  </shortCodeData>
</repairShortCodeRequest>
```

Element: repairShortCodeResponse

Description

A **repairShortCodeResponse** message contains an element of repairShortCodeResponseType.

Derived By

Type [repairShortCodeResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedRepairShortCodeDataType	0..1	Information about a short code repair response that was not generated is listed in the failedData element. See failedRepairShortCodeDataType .									
responseData	repairedShortCodeDataType	0..1	Information about a short code repair response that was generated is listed in the responseData element. responseData contains a shortCode repair response string. This response is delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
repairShortCode	Method

XML Example

The following XML fragment illustrates a successful **repairShortCodeResponse** message:

```
<repairShortCodeResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <shortCode>...</shortCode>
  </responseData>
</repairShortCodeResponse>
```

Element: returnLicenseRequest

Description

A **returnLicenseRequest** message contains an element of `returnFulfillmentRequestType`.

Derived By

Type [returnFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
fulfillment	returnFulfillmentDataType e	1..*	Required. A returnLicenseRequest contains an array of fulfillment elements. See returnFulfillmentDataType .

Referenced By

Name	Type
returnLicense	Method

XML Example

The following XML fragment illustrates a **returnLicenseRequest** message:

```
<returnLicenseRequest>
  <fulfillment>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_f614ad8f_c508_4648_aeaa_29e18bab3a8</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
    <partialCount>1</partialCount>
    <overridePolicy>false</overridePolicy>
  </fulfillment></returnLicenseRequest>
```

Element: returnLicenseResponse

Description

A **returnLicenseResponse** message contains an element of `returnFulfillmentResponseType`.

Each fulfillment in the **returnLicenseRequest** is returned as an atomic unit; returning each either succeeds or fails.

Derived By

Type [returnFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	returnResponseDataType	0..1	Information about the fulfillments that were returned is listed in the responseData element. For returnLicense , this data is only populated in the case of a partial return, not a successful one. See returnResponseDataType .									
failedData	failedReturnResponseListDataType	0..1	Information about the fulfillments that were not returned is listed in the failedData element. See failedReturnResponseListDataType .									

Referenced By

Name	Type
returnLicense	Method

XML Example

The following XML fragment illustrates a successful **returnLicenseResponse** message:

XML Example

```

<returnLicenseResponse xmlns="urn:com.macrovision:flexnet/operations">
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillmentData>
      <recordRefNo>1</recordRefNo>
      <fulfillment>
        <entitlementIdentifier>
          <uniqueId>HID-1</uniqueId>
          <primaryKeys>
            <entitlementId>se1</entitlementId>
          </primaryKeys>
        </entitlementIdentifier>
        <fulfillmentIdentifier>
          <uniqueId>HID-4</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_fabb1487_940d_4c4f_9e66_d468cace5bb7</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
        <fulfillmentType>CERTIFICATE</fulfillmentType>
        <lineltem>
          <uniqueId>HID-1</uniqueId>
          <primaryKeys>
            <activationId>se1-1</activationId>
          </primaryKeys>
        </lineltem>
        <product>
          <uniqueId>HID-1</uniqueId>
          <primaryKeys>
            <name>P1</name>
            <version>1.0</version>
          </primaryKeys>
        </product>
        <soldTo>O1</soldTo>
        <shipToEmail/>
        <shipToAddress/>
        <serverIds>
          <server1>DISPLAY=test</server1>
        </serverIds>
        <fulfilledCount>2</fulfilledCount>
        <overDraftCount>0</overDraftCount>
        <fulfillDate>2015-10-01</fulfillDate>
        <fulfillDateTime>2015-10-01T21:57:23.238Z</fulfillDateTime>
        <isPermanent>false</isPermanent>
        <startDate>2015-10-01</startDate>
        <expirationDate>2015-10-30</expirationDate>
        <licenseText>SERVER this_host DISPLAY=test
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 30-oct-2015 2 ISSUER="My Corporation" \
ISSUED=1-oct-2015 START=30-sep-2015 SIGN="002A 4DB7 4541 C283 \
8C82 F10A 5F6C 3B00 AAE3 3CC2 9203 8367 FA9F 05A8 1D06"</licenseText>
      <consolidatedHostLicense>
        <license>#Please Do not delete this comment line.
SERVER this_host DISPLAY=test
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 30-oct-2015 2 ISSUER="My Corporation" \
ISSUED=1-oct-2015 START=30-sep-2015 SIGN="002A 4DB7 4541 C283 \
8C82 F10A 5F6C 3B00 AAE3 3CC2 9203 8367 FA9F 05A8 1D06"</license>
      </consolidatedHostLicense>
      <supportAction>MASTER</supportAction>
      <lastModifiedDateTime>2015-10-01T21:57:23.280Z</lastModifiedDateTime>
      <parentFulfillmentId>
        <uniqueId>HID-3</uniqueId>
        <primaryKeys>

```


XML Example

```

        <fulfillmentId>FID_f614ad8f_c508_4648_aaaa_29e18bab3a8</fulfillmentId>
    </primaryKeys>
</parentFulfillmentId>
<licenseTechnology>
    <uniqueId>HID-2</uniqueId>
    <primaryKeys>
        <name>FlexNet Licensing</name>
    </primaryKeys>
</licenseTechnology>
<licenseModelAttributes>
    <attribute>
        <attributeName>ISSUER</attributeName>
        <stringValue>My Corporation</stringValue>
    </attribute>
    <attribute>
        <attributeName>INCLUDE_USE_SERVER</attributeName>
        <booleanValue>true</booleanValue>
    </attribute>
    <attribute>
        <attributeName>ALLOW_ONE_TERMINAL_SERVER</attributeName>
        <booleanValue>>false</booleanValue>
    </attribute>
    <attribute>
        <attributeName>NOTICE</attributeName>
    </attribute>
    <attribute>
        <attributeName>SERIAL_NUMBER</attributeName>
    </attribute>
    <attribute>
        <attributeName>VENDOR_STRING</attributeName>
    </attribute>
</licenseModelAttributes>
<state>ACTIVE</state>
<fulfillmentSource>ONLINE</fulfillmentSource>
<licenseFiles>
    <licenseFile>
        <licenseFileDefinitionName>FNP_License</licenseFileDefinitionName>
        <licenseText>SERVER this_host DISPLAY=test
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 30-oct-2015 2 ISSUER="My Corporation" \
ISSUED=1-oct-2015 START=30-sep-2015 SIGN="002A 4DB7 4541 C283 \
8C82 F10A 5F6C 3B00 AAE3 3CC2 9203 8367 FA9F 05A8 1D06"</licenseText>
    </licenseFile>
</licenseFiles>
<entitledProducts>
    <entitledProduct>
        <product>
            <uniqueId>HID-1</uniqueId>
            <primaryKeys>
                <name>P1</name>
                <version>1.0</version>
            </primaryKeys>
        </product>
        <quantity>1</quantity>
    </entitledProduct>
</entitledProducts>
<activationType>DEFAULT</activationType>
</fulfillment>
</fulfillmentData>
</responseData>
</returnLicenseResponse>

```

Element: returnShortCodeRequest

Description

A **returnShortCodeRequest** message contains an element of returnShortCodeRequestType.

Derived By

Type [returnShortCodeRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
shortCodeData	returnShortCodeDataType	0..1	Required. A returnShortCodeRequest contains a shortCodeData element. See returnShortCodeDataType .
returnReason	ReturnedShortCodeReturnReason	0..1	Optional. The returnReason value can be: • UPGRADE • UPSELL • RENEW • REHOST The returnReason value affects which policy FlexNet Operations checks for the return—return policy or rehost policy. If the return reason is REHOST, the rehost policy is checked. For any other return reason or if no reason is specified, the return policy is checked.

Referenced By

Name	Type
returnShortCode	Method

XML Example

The following XML fragment illustrates a **returnShortCodeRequest** message:

```
<returnShortCodeRequest>
  <shortCodeData>
    <shortCode>...</shortCode>
    <webRegkey>WRK-1</webRegkey>
  </shortCodeData>
  <returnReason>REHOST</returnReason>
</returnShortCodeRequest>
```

Element: returnShortCodeResponse

Description

A **returnShortCodeResponse** message contains an element of returnShortCodeResponseType.

Derived By

Type [returnShortCodeResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason if failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.	reason	string	Gives reason if failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—The request was processed. - FAILURE—The request was not processed.										
reason	string	Gives reason if failure.										
failedData	failedReturnShortCodeDataType	0..1	Information about a short code return response that was not generated is listed in the failedData element. See failedReturnShortCodeDataType .									
responseData	returnedShortCodeDataType	0..1	Information about a short code return response that was generated is listed in the responseData element. responseData contains a shortCode return response string. This response is delivered back to the customer to enter into an activation utility.									

Referenced By

Name	Type
returnShortCode	Method

XML Example

The following XML fragment illustrates a successful **returnShortCodeResponse** message:

XML Example

```
<returnShortCodeResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <shortCode>...</shortCode>
  </responseData>
</returnShortCodeResponse>
```

Element: setLicenseRequest

Description

A **setLicenseRequest** message contains an element of setLicenseRequestType.

Derived By

Type [setLicenseRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
onholdFulfillmentList	onholdFulfillmentListType	1..1	See onholdFulfillmentListType .

Referenced By

Name	Type
setLicense	Method

XML Example

The following XML fragment illustrates a **setLicenseRequest** message:

```
<setLicenseRequest>
  <onholdFulfillmentList>
    <onholdFmtLicenseData>
      <fulfillmentId>FID_293c149a_11a36fd4eab__7ff2</fulfillmentId>
      <textLicense>test license</textLicense>
    </onholdFmtLicenseData>
  </onholdFulfillmentList>
</setLicenseRequest>
```

Element: setLicenseResponse

Description

A **setLicenseResponse** message contains an element of **setLicenseResponseType**.

Derived By

Type [setLicenseResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedSetLicenseOnholdFulfillmentListType	0..1	Populated if setting the license failed. See failedSetLicenseOnholdFulfillmentListType .									

Referenced By

Name	Type
setLicense	Method

XML Example

The following XML fragment illustrates a successful **setLicenseResponse** message:

```
<setLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</setLicenseResponse>
```

Element: stopGapLicenseRequest

Description

A **stopGapLicenseRequest** message contains an element of stopGapFulfillmentRequestType.

Derived By

Type [stopGapFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	stopGapFulfillmentDataType	1..*	See stopGapFulfillmentDataType .

Referenced By

Name	Type
stopGapLicense	Method

XML Example

The following XML fragment illustrates a **stopGapLicenseRequest** message:

```
<stopGapLicenseRequest>
  <fulfillment>
    <fulfillmentIdentifier>
      <primaryKeys>
        <fulfillmentId>FID_828cab6_14ddc48ce2a__7ff0</fulfillmentId>
      </primaryKeys>
    </fulfillmentIdentifier>
  </fulfillment>
</stopGapLicenseRequest>
```

XML Example

```
</fulfillmentIdentifier>
<startDate>2015-06-06</startDate>
<endDate>2015-08-09</endDate>
</fulfillment>
</stopGapLicenseRequest>
```

Element: stopGapLicenseResponse

Description

A **stopGapLicenseResponse** message contains an element of stopGapFulfillmentResponseType.

Derived By

Type [stopGapFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	StatusInfoType	1..1	Returns one of the following: • SUCCESS—All entitlements in the request were processed. • PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. • FAILURE—None of the entitlements in the request were processed.
responseData	stopGapResponseDataType	0..1	See stopGapResponseDataType .
failedData	failedStopGapResponseListDataType	0..1	See failedStopGapResponseListDataType .

Referenced By

Name	Type
stopGapLicense	Method

XML Example

The following XML fragment illustrates a successful **stopGapLicenseResponse** message:

XML Example

```

<stopGapLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <fulfillmentData>
      <recordRefNo>1</recordRefNo>
      <fulfillment>
        <entitlementIdentifier>
          <uniqueId>HID-3</uniqueId>
          <primaryKeys>
            <entitlementId>sg1</entitlementId>
          </primaryKeys>
        </entitlementIdentifier>
        <fulfillmentIdentifier>
          <uniqueId>HID-9</uniqueId>
          <primaryKeys>
            <fulfillmentId>FID_828cab6_14ddc48ce2a__7fef</fulfillmentId>
          </primaryKeys>
        </fulfillmentIdentifier>
        <fulfillmentType>CERTIFICATE</fulfillmentType>
        <lineltem>
          <uniqueId>HID-3</uniqueId>
          <primaryKeys>
            <activationId>sga1</activationId>
          </primaryKeys>
        </lineltem>
        <product>
          <uniqueId>HID-1</uniqueId>
          <primaryKeys>
            <name>p1</name>
            <version>1.0</version>
          </primaryKeys>
        </product>
        <soldTo>UNKNOWN_ORG_UNIT</soldTo>
        <shipToEmail/>
        <shipToAddress/>
        <serverIds>
          <server1>HOSTNAME=sgh2</server1>
        </serverIds>
        <nodeIds>
          <nodeId>HOSTNAME=sghh2</nodeId>
        </nodeIds>
        <fulfilledCount>2</fulfilledCount>
        <overDraftCount>0</overDraftCount>
        <fulfillDate>2015-06-10</fulfillDate>
        <fulfillDateTime>2015-06-10T09:00:43.635Z</fulfillDateTime>
        <isPermanent>false</isPermanent>
        <startDate>2015-06-05</startDate>
        <expirationDate>2015-08-08</expirationDate>
        <licenseText>SERVER this_host HOSTNAME=sgh2
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 8-aug-2015 2 HOSTID=HOSTNAME=sghh2 ISSUER="My \
Corporation" ISSUED=10-jun-2015 START=5-jun-2015 SIGN="0050 \
D5D5 3608 DE22 36D4 46C1 71F5 DB00 9F39 5D06 FE37 C792 0D8B \
4F42 13FD"</licenseText>
      <consolidatedHostLicense>
        <license>#Please Do not delete this comment line.
SERVER this_host HOSTNAME=sgh2
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 8-aug-2015 2 HOSTID=HOSTNAME=sghh2 ISSUER="My \
Corporation" ISSUED=10-jun-2015 START=5-jun-2015 SIGN="0050 \
D5D5 3608 DE22 36D4 46C1 71F5 DB00 9F39 5D06 FE37 C792 0D8B \
4F42 13FD"</license>
      </consolidatedHostLicense>
    </fulfillment>
  </fulfillmentData>
</responseData>
</stopGapLicenseResponse>

```


XML Example

```

<supportAction>STOPGAP</supportAction>
<lastModifiedDateTime>2015-06-10T09:00:43.642Z</lastModifiedDateTime>
<parentFulfillmentId>
  <uniqueId>HID-8</uniqueId>
  <primaryKeys>
    <fulfillmentId>FID_828cab6_14ddc48ce2a__7ff0</fulfillmentId>
  </primaryKeys>
</parentFulfillmentId>
<licenseTechnology>
  <uniqueId>HID-100</uniqueId>
  <primaryKeys>
    <name>FlexNet Licensing</name>
  </primaryKeys>
</licenseTechnology>
<licenseModelAttributes>
  <attribute>
    <attributeName>ISSUER</attributeName>
    <stringValue>My Corporation</stringValue>
  </attribute>
  <attribute>
    <attributeName>INCLUDE_USE_SERVER</attributeName>
    <booleanValue>true</booleanValue>
  </attribute>
  <attribute>
    <attributeName>ALLOW_ONE_TERMINAL_SERVER</attributeName>
    <booleanValue>false</booleanValue>
  </attribute>
  <attribute>
    <attributeName>NOTICE</attributeName>
  </attribute>
  <attribute>
    <attributeName>SERIAL_NUMBER</attributeName>
  </attribute>
  <attribute>
    <attributeName>VENDOR_STRING</attributeName>
  </attribute>
</licenseModelAttributes>
<state>ACTIVE</state>
<fulfillmentSource>APPLICATION</fulfillmentSource>
<licenseFiles>
  <licenseFile>
    <licenseFileDefinitionName>FNP License</licenseFileDefinitionName>
    <licenseText>SERVER this_host HOSTNAME=sgh2
VENDOR demo
USE_SERVER
INCREMENT f1 demo 1.0 8-aug-2015 2 HOSTID=HOSTNAME=sghh2 ISSUER="My \
Corporation" ISSUED=10-jun-2015 START=5-jun-2015 SIGN="0050 \
D5D5 3608 DE22 36D4 46C1 71F5 DB00 9F39 5D06 FE37 C792 0D8B \
4F42 13FD"</licenseText>
  </licenseFile>
</licenseFiles>
<entitledProducts>
  <entitledProduct>
    <product>
      <uniqueId>HID-1</uniqueId>
      <primaryKeys>
        <name>p1</name>
        <version>1.0</version>
      </primaryKeys>
    </product>
    <quantity>1</quantity>
  </entitledProduct>
</entitledProducts>
<activationType>DEFAULT</activationType>
</fulfillment>
</fulfillmentData>
</responseData>

```

XML Example

```
</stopGapLicenseResponse>
```

Element: transferHostRequest

Description

A **transferHostRequest** message contains an element of transferHostRequestType.

Derived By

Type [transferHostRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
sourceHosts	transferHostList	1..1	Required. See transferHostList .
soldTo	string	0..1	A string that identifies the target organization by its organization name.
poolEntitlements	boolean	0..1	True, if existing, matching line items at the target organization are to be pooled. False, to always create new line items at the target organization.

Referenced By

Name	Type
transferHost	Method

XML Example

The following XML fragment illustrates a **transferHostRequest** message:

```
<transferHostRequest>
  <sourceHosts>
    <hostIdentifier>
      <soldTo>ACME</soldTo>
      <serverIds>
        <server1>DISPLAY=up</server1>
      </serverIds>
    </hostIdentifier>
  </sourceHosts>
  <soldTo>WILY</soldTo>
  <poolEntitlements>false</poolEntitlements>
</transferHostRequest>
```

Element: transferHostResponse

Description

A **transferHostResponse** message contains an element of transferHostResponseType.

Each entitlement in the **transferHostResponseType** is transferred as an atomic unit; transferring each either succeeds or fails.

Derived By

Type [transferHostResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedTransferHostListData Type	0..1	Information about the line items that were not added is listed in the failedData element. See failedTransferHostListDataType .

Referenced By

Name	Type
transferHost	Method

XML Example

The following XML fragment illustrates a successful **transferEntitlementsResponse** message:

```
<transferHostResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</transferHostResponse>
```

The following XML fragment illustrates a failed **transferEntitlementsResponse** message:

```
<transferHostResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failedHost>
      <hostIdentifier>
        <soldTo>ACME</soldTo>
        <serverIds>
          <server1>DISPLAY=up1</server1>
        </serverIds>
      </hostIdentifier>
      <reason>20257:Host ID is invalid.</reason>
    </failedHost>
  </failedData>
</transferHostResponse>
```

Element: upgradeFulfillmentRequest

Description

An **upgradeFulfillmentRequest** message contains an element of advancedFulfillmentLCRequestType.

Derived By

Type [advancedFulfillmentLCRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentList	advancedFulfillmentLCListType	1..1	Required. An renewFulfillmentRequest contains an array of fulfillmentList elements. See advancedFulfillmentLCListType .

Referenced By

Name	Type
upgradeFulfillment	Method

XML Example

The following XML fragment illustrates an **upgradeFulfillmentRequest** message:

```
<upgradeFulfillmentRequest>
  <fulfillmentList>
    <fulfillment>
      <fulfillmentId>FID_1fcf0ce_1112f05f9df__7ffc</fulfillmentId>
      <startDate>2008-03-04</startDate>
      <licenseModelAttributes>
        <attribute>
          <attributeName>VENDOR_STRING</attributeName>
          <stringValue>vs</stringValue>
        </attribute>
      </licenseModelAttributes>
      <overridePolicy>false</overridePolicy>
    </fulfillment>
  </fulfillmentList>
</upgradeFulfillmentRequest>
```

Element: upgradeFulfillmentResponse

Description

An **upgradeFulfillmentResponse** message contains an element of **advancedFulfillmentLCResponseType**.

Each fulfillment in the **upgradeFulfillmentRequest** is created as an atomic unit; creating each either succeeds or fails.

Derived By

Type [advancedFulfillmentLCResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	advancedFmtLCResponseDataListType	0..1	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataType	0..1	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataType .									

Referenced By

Name	Type
upgradeFulfillment	Method

XML Example

The following XML fragment illustrates a successful **upgradeFulfillmentResponse** message:

```
<upgradeFulfillmentResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
  <responseData>
```

XML Example

```
<fulfillment>
  <recordRefNo>1</recordRefNo>
  <upgradedFulfillmentInfo>
    <uniqueId>HID-104314</uniqueId>
    <fulfillmentId>FID_1fcf0ce_1112f05f9df__7ffa</fulfillmentId>
    <licenseText>...</licenseText>
  </upgradedFulfillmentInfo>
</fulfillment>
</responseData>
</upgradeFulfillmentResponse>
```

Element: upsellFulfillmentRequest

Description

An **upsellFulfillmentRequest** message contains an element of **advancedFulfillmentLCRequestType**.

Derived By

Type [advancedFulfillmentLCRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillmentList	advancedFulfillmentLCListType	1..1	Required. An renewFulfillmentRequest contains an array of fulfillmentList elements. See advancedFulfillmentLCListType .

Referenced By

Name	Type
upsellFulfillment	Method

XML Example

The following XML fragment illustrates an **upsellFulfillmentRequest** message:

```
<upsellFulfillmentRequest>
  <fulfillmentList>
    <fulfillment>
      <fulfillmentId>FID_1fcf0ce_1e52f05f9df__7ffb</fulfillmentId>
      <startDate>2008-03-04</startDate>
      <licenseModelAttributes>
        <attribute>
          <attributeName>VENDOR_STRING</attributeName>
          <stringValue>vs</stringValue>
        </attribute>
      </licenseModelAttributes>
    </fulfillment>
  </fulfillmentList>
</upsellFulfillmentRequest>
```

XML Example

```
<overridePolicy>false</overridePolicy>
</fulfillment>
</fulfillmentList>
</upsellFulfillmentRequest>
```

Element: upsellFulfillmentResponse

Description

An **upsellFulfillmentResponse** message contains an element of **advancedFulfillmentLCResponseType**.

Each fulfillment in the **upsellFulfillmentRequest** is created as an atomic unit; creating each either succeeds or fails.

Derived By

Type [advancedFulfillmentLCResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All entitlements in the request were processed. - PARTIAL_FAILURE—Some, but not all entitlements in the request were processed. - FAILURE—None of the entitlements in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	advancedFmtLCResponseDataListType	0..1	Information about the fulfillments that were created is listed in the responseData element. See advancedFmtLCResponseDataListType .									
failedData	failedAdvancedFmtLCResponseDataType	0..1	Information about the fulfillments that were not created is listed in the failedData element. See failedAdvancedFmtLCResponseDataType .									

Referenced By

Name	Type
upsellFulfillment	Method

XML Example

The following XML fragment illustrates a successful **upsellFulfillmentResponse** message:

```
<upsellFulfillmentResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
```

XML Example

```
<fulfillment>
  <recordRefNo>1</recordRefNo>
  <upgradedFulfillmentInfo>
    <uniqueId>HID-104360</uniqueId>
    <fulfillmentId>FID_1fcf0ce_1112f05f9df__7ff9</fulfillmentId>
    <licenseText>...</licenseText>
  </upgradedFulfillmentInfo>
</fulfillment>
</responseData>
</upsellFulfillmentResponse>
```

Element: verifyCreateLicenseRequest

Description

A **verifyCreateLicenseRequest** message contains an element of `createFulfillmentRequestType`.

Derived By

Type [createFulfillmentRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
fulfillment	createFulfillmentDataType	1..*	Required. A createFulfillmentRequest contains an array of fulfillment elements to be verified. See createFulfillmentDataType .

Referenced By

Name	Type
verifyCreateLicense	Method

XML Example

The following XML fragment illustrates a **verifyCreateLicenseRequest** message:

```
<verifyCreateLicenseRequest>
  <fulfillment>
    <activationId>Ent_basic_1</activationId>
    <fulfillCount>5</fulfillCount>
    <overDraftCount>3</overDraftCount>
    <startDate>2005-11-30</startDate>
    <serverIds>
      <server1>HOSTNAME=testserver</server1>
    </serverIds>
    <licenseModelAttributes>
      <attribute>
```

XML Example

```
<attributeName>VENDOR_STRING</attributeName>  
<stringValue>vendor string</stringValue>  
</attribute>  
</licenseModelAttributes>  
</fulfillment>  
</verifyCreateLicenseRequest>
```

Element: verifyCreateLicenseResponse

Description

A **verifyCreateLicenseResponse** message contains an element of createFulfillmentResponseType.

Derived By

Type [createFulfillmentResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All items in the request were processed. - PARTIAL_FAILURE—Some, but not all items in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the items in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedFulfillmentDataListType	0..1	Information about the licenses that were not verified is listed in the failedData element. See failedFulfillmentDataListType .									
responseData	createdFulfillmentDataListType	0..1	Information about the licenses that were verified is listed in the responseData element. See createdFulfillmentDataListType .									

Referenced By

Name	Type
verifyCreateLicense	Method

XML Example

The following XML fragment illustrates a successful **verifyCreateLicenseResponse** message:

```
<verifyCreateLicenseResponse>
  <statusInfo>
```

XML Example

```
<status>SUCCESS</status>
</statusInfo>
<responseData>
  <createdFulfillment>
    <recordRefNo>1</recordRefNo>
    <uniqueId>HID-100349</uniqueId>
    <fulfillmentId>FID_18c5...86f1__7ffb</fulfillmentId>
    <licenseText>entire_license_text</licenseText>
  </createdFulfillment>
</responseData>
</verifyCreateLicenseResponse>
```

UserOrgHierarchyService Web Service

Description

Web service to create, update and query organizational hierarchies as well as to create, update or delete users and user roles in an organization.

Introduction

The Organization Hierarchy service manages organizational hierarchies.

Methods: UserOrgHierarchyService

Methods

Name	Description
createOrganization	The createOrganization operation takes the details of one or more organizations and adds them to the system.
createUser	The createUser operation is used to create one or more FlexNet domain users or contacts and link them to one or more organizations.
deleteOrganization	The deleteOrganization operation is used to delete one or more organizations.
deleteUser	The deleteUser operation is used to delete users and contacts in an organization, including FlexNet domain users and domain users from the FlexNet Operations database.
getOrganizationCount	The getOrganizationCount operation takes one or more query parameters and returns the matching number of organizations.
getOrganizationsQuery	The getOrganizationsQuery operation takes one or more query parameters and returns the matching organizations.
getParentOrganizations	The getParentOrganizations operation takes one organization and returns its first-level parents.
getRelatedOrganizations	The getRelatedOrganizations takes the name of an organization and returns the CHANNEL_PARTNER or CUSTOMER organizations to which the organization is related. The response will be SUCCESS but return no records if the organization is - A CHANNEL_PARTNER or CUSTOMER organization without any relationships - An organization of a type other than CHANNEL_PARTNER or CUSTOMER
getSubOrganizations	The getSubOrganizations operation takes one organization and returns its first-level child suborganizations.
getUserCount	The getUserCount operation takes one or more query parameters and returns the matching number of users.
getUserPermissions	The getUserPermissions operation returns a list of permissions based on the roles a given user has within their organizations. This takes in a username and domain name as inputs and returns out a list of permissions, the user's name and org type.
getUsersQuery	The getUsersQuery operation takes one or more query parameters and returns the matching users.
linkOrganizations	The linkOrganizations operation is used to build an organization hierarchy from existing organizations.
relateOrganizations	The relateOrganizations operation connects two organizations into channel partner relationships.
updateOrganization	The updateOrganization operation is used to update organization details.
updateUser	The updateUser operation is used to update user details.
updateUserRoles	The updateUserRoles operation is used to update user roles in an organization.

Method: createOrganization

Description

The **createOrganization** operation takes the details of one or more organizations and adds them to the system.

Parameters

Name	Type	Direction	Description
msgparameters	createOrgRequestType	Input	See createOrgRequestType .

Returns

A [createOrgResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedCreateOrgDataListType	See failedCreateOrgDataListType .									
responseData	createdOrganizationDataListType	See createdOrganizationDataListType .									

Method: createUser

Description

The **createUser** operation is used to create one or more FlexNet domain users or contacts and link them to one or more organizations.

Parameters

Name	Type	Direction	Description
msgparameters	createUserRequestType	Input	See createUserRequestType .

Returns

A [createUserResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedCreateUserDataListType	See failedCreateUserDataListType .									
responseData	createdUserDataListType	See createdUserDataListType .									

Method: deleteOrganization

Description

The **deleteOrganization** operation is used to delete one or more organizations.

Parameters

Name	Type	Direction	Description
msgparameters	deleteOrganizationRequestType	Input	See deleteOrganizationRequestType .

Returns

A [deleteOrganizationResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteOrgDataListType	See failedDeleteOrgDataListType .									

Method: deleteUser

Description

The **deleteUser** operation is used to delete users and contacts in an organization, including FlexNet domain users and domain users from the FlexNet Operations database.

Parameters

Name	Type	Direction	Description
msgparameters	deleteUserRequestType	Input	See deleteUserRequestType .

Returns

A [deleteUserResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedDeleteUserDataListType	See failedDeleteUserDataListType .									

Method: getOrganizationCount

Description

The **getOrganizationCount** operation takes one or more query parameters and returns the matching number of organizations.

Parameters

Name	Type	Direction	Description
msgparameters	getOrganizationCountRequestType	Input	See getOrganizationCountRequestType .

Returns

A [getOrganizationCountResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getOrganizationCountResponseDataType	See getOrganizationCountResponseDataType .									

Method: getOrganizationsQuery

Description

The **getOrganizationsQuery** operation takes one or more query parameters and returns the matching organizations.

Parameters

Name	Type	Direction	Description
msgparameters	getOrganizationsQueryRequestType	Input	See getOrganizationsQueryRequestType .

Returns

A [getOrganizationsQueryResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getOrganizationsQueryResponseDataType	See getOrganizationsQueryResponseDataType .									

Method: getParentOrganizations

Description

The **getParentOrganizations** operation takes one organization and returns its first-level parents.

Parameters

Name	Type	Direction	Description
msgparameters	getParentOrganizationsRequestType	Input	See getParentOrganizationsRequestType .

Returns

A [getParentOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getOrganizationsQueryResponseDataType	See getOrganizationsQueryResponseDataType .									

Method: getRelatedOrganizations

Description

The **getRelatedOrganizations** takes the name of an organization and returns the CHANNEL_PARTNER or CUSTOMER organizations to which the organization is related.

The response will be SUCCESS but return no records if the organization is

Description

- A CHANNEL_PARTNER or CUSTOMER organization without any relationships
- An organization of a type other than CHANNEL_PARTNER or CUSTOMER

Parameters

Name	Type	Direction	Description
msgparameters	getRelatedOrganizationsRequestType	Input	See getRelatedOrganizationsRequestType .

Returns

A [getRelatedOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: • SUCCESS—All features in the request were processed. • PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: • SUCCESS—All features in the request were processed. • PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: • SUCCESS—All features in the request were processed. • PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. • FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getOrganizationsQueryResponseDataType	See getOrganizationsQueryResponseDataType .									

Method: getSubOrganizations

Description

The **getSubOrganizations** operation takes one organization and returns its first-level child suborganizations.

Parameters

Name	Type	Direction	Description
msgparameters	getSubOrganizationsRequestType	Input	See getSubOrganizationsRequestType .

Returns

A [getSubOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getOrganizationsQueryResponseDataType	See getOrganizationsQueryResponseDataType .									

Method: getUserCount

Description

The **getUserCount** operation takes one or more query parameters and returns the matching number of users.

Parameters

Name	Type	Direction	Description
msgparameters	getUserCountRequestType	Input	See getUserCountRequestType .

Returns

A [getUserCountResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getUserCountResponseDataType	See getUserCountResponseDataType .									

Method: getUserPermissions

Description

The **getUserPermissions** operation returns a list of permissions based on the roles a given user has within their organizations. This takes in a username and domain name as inputs and returns out a list of permissions, the user's name and org type.

Parameters

Name	Type	Direction	Description
msgparameters	getUserPermissionsRequestType	Input	See getUserPermissionsRequestType .

Returns

A [getUserPermissionsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Status Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Status Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Status Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getUserPermissionsResponseDataType	See getUserPermissionsResponseDataType .									

Method: getUsersQuery

Description

The **getUsersQuery** operation takes one or more query parameters and returns the matching users.

Parameters

Name	Type	Direction	Description
msgparameters	getUsersQueryRequestType	Input	See getUsersQueryRequestType .

Returns

A [getUsersQueryResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
responseData	getUsersQueryResponseData Type	See getUsersQueryResponseData Type .									

Method: linkOrganizations

Description

The **linkOrganizations** operation is used to build an organization hierarchy from existing organizations.

Parameters

Name	Type	Direction	Description
msgparameters	linkOrganizationsRequestType	Input	See linkOrganizationsRequestType .

Returns

A [linkOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedLinkOrgDataListType	See failedLinkOrgDataListType .									

Method: relateOrganizations

Description

The **relateOrganizations** operation connects two organizations into channel partner relationships.

Parameters

Name	Type	Direction	Description
msgparameters	relateOrganizationsRequestType	Input	See relateOrganizationsRequestType .

Returns

A [relateOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedRelateOrganizationsDataListType	See failedRelateOrganizationsDataListType .									

Method: updateOrganization

Description

The **updateOrganization** operation is used to update organization details.

Parameters

Name	Type	Direction	Description
msgparameters	updateOrganizationRequestType	Input	See updateOrganizationRequestType .

Returns

A [updateOrganizationResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateOrgDataListType	See failedUpdateOrgDataListType .									

Method: updateUser

Description

The **updateUser** operation is used to update user details.

Parameters

Name	Type	Direction	Description
msgparameters	updateUserRequestType	Input	See updateUserRequestType .

Returns

A [updateUserResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateUserDataListType	See failedUpdateUserDataListType .									

Method: updateUserRoles

Description

The **updateUserRoles** operation is used to update user roles in an organization.

Parameters

Name	Type	Direction	Description
msgparameters	updateUserRolesRequestType	Input	See updateUserRolesRequestType .

Returns

A [updateUserRolesResponse](#) element having the structure defined by the following table.

Name	Type	Description									
statusInfo	StatusInfoType	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description									
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.									
reason	string	Gives reason for partial failure or failure.									
failedData	failedUpdateUserRolesDataListType	See failedUpdateUserRolesDataListType .									

Complex Types: UserOrgHierarchyService

Complex Types

Name
accountIdentifierType
accountPKType
addressDataType
attributeDescriptorDataType
attributeDescriptorType
createdOrganizationDataListType
createdUserDataListType
createOrgRequestType
createOrgResponseType
createUserDataType
createUserOrganizationRolesListType
createUserOrganizationsListType
createUserOrganizationType
createUserRequestType
createUserResponseType
DateTimeQueryType
deleteOrganizationRequestType
deleteOrganizationResponseType
deleteOrgDataType
deleteUserRequestType
deleteUserResponseType
failedCreateOrgDataListType
failedCreateOrgDataType
failedCreateUserDataListType
failedCreateUserDataType
failedDeleteOrgDataListType
failedDeleteOrgDataType
failedDeleteUserDataListType
failedDeleteUserDataType
failedLinkOrgDataListType
failedLinkOrgDataType
failedRelateOrganizationsDataListType
failedRelateOrganizationsDataType
failedUpdateOrgDataListType

Complex Types

Name
failedUpdateOrgDataType
failedUpdateUserDataListType
failedUpdateUserDataType
failedUpdateUserRolesDataListType
failedUpdateUserRolesDataType
featureIdentifierType
getOrganizationCountRequestType
getOrganizationCountResponseDataType
getOrganizationCountResponseType
getOrganizationsQueryRequestType
getOrganizationsQueryResponseDataType
getOrganizationsQueryResponseType
getParentOrganizationsRequestType
getParentOrganizationsResponseType
getRelatedOrganizationsRequestType
getRelatedOrganizationsResponseType
getSubOrganizationsRequestType
getSubOrganizationsResponseType
getUserCountRequestType
getUserCountResponseDataType
getUserCountResponseType
getUserPermissionsRequestType
getUserPermissionsResponseDataType
getUserPermissionsResponseType
getUsersQueryRequestType
getUsersQueryResponseDataType
getUsersQueryResponseType
linkOrganizationsDataType
linkOrganizationsRequestType
linkOrganizationsResponseType
organizationDataType
organizationDetailDataType
organizationIdentifierType
organizationPKType
organizationQueryParametersType

Complex Types

Name
OrgTypeList
relateOrganizationsDataType
relateOrganizationsRequestType
relateOrganizationsResponseType
roleIdentifierType
rolePKType
updateOrganizationRequestType
updateOrganizationResponseType
updateOrgDataType
updateRelatedOrganizationsListType
updateSubOrganizationsListType
updateUserDataTypes
updateUserOrganizationRolesListType
updateUserOrganizationsListType
updateUserOrganizationType
updateUserRequestType
updateUserResponseType
updateUserRolesDataType
updateUserRolesListType
updateUserRolesOrganizationDataType
updateUserRolesRequestType
updateUserRolesResponseType
userCustomAttributeQueryType
userCustomAttributesQueryListType
userDetailDataType
userIdentifierType
userPKType
userQueryParametersType
versionDateAttributesType

Complex Type: accountIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	
primaryKeys	accountPKType	0..1	

Complex Type: accountPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	

Complex Type: addressDataType

Description

All of these elements are optional.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
address1	string	0..1	First line of address.
address2	string	0..1	Second line of address.
city	string	0..1	City portion of address.
state	string	0..1	State portion of address.

Content Model

Component	Type	Occurs	Description
zipcode	string	0..1	Postal code.
country	string	0..1	Country, in two-letter ISO-3166 code. If not provided, defaults to US.
region	string	0..1	Address region.

Complex Type: attributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	attributeDescriptorType	0..*	attribute contains a required string attributeName and one attributeDescriptorType .

Complex Type: attributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attributeName	string	1..1	Name of the attribute.
 CHOICE		1..1	
arrayValue	string	0..*	Array of string values of the attribute.
booleanValue	boolean	0..1	Boolean value of the attribute.
dateValue	date	0..1	Date value of the attribute.
integerValue	integer	0..1	Integer value of the attribute.
stringValue	string	0..1	String value of the attribute.

Complex Type: createdOrganizationDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	0..*	See organizationIdentifierType .

Complex Type: createdUserDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	0..*	See userIdentifierType .

Complex Type: createOrgRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationDataType	1..*	Required. See organizationDataType .

Content Model

Component	Type	Occurs	Description
opType	CreateOrUpdateOperationType	0..1	Specifies how FlexNet Operations behaves when creating organizations. For details, see CreateOrUpdateOperationType. If no opType is set, FlexNet Operations creates the specified organization unless the organization already exists. When the organization already exists, the operation fails. Note: opType is available in UserOrgHierarchyService v1 and later.

Referenced By

Name	Type
createOrgRequest	Element
createOrganization	Method

Complex Type: createOrgResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedCreateOrgDataListType	0..1	See failedCreateOrgDataListType .									
responseData	createdOrganizationDataListType	0..1	See createdOrganizationDataListType .									

Referenced By

Name	Type
createOrgResponse	Element

Complex Type: createUserDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
firstName	string	1..1	User first name. Required.
lastName	string	1..1	User last name. Required.
displayName	string	0..1	User's display name.
emailAddress	string	1..1	User's email address. Required.
optIn	boolean	0..1	Required. Does the user wish to receive email?
phoneNumber	string	0..1	User's phone number.
faxNumber	string	0..1	User's fax number.
street	string	0..1	Street portion of address.
city	string	0..1	City portion of address.
state	string	0..1	State portion of address.
zipcode	string	0..1	Postal code.
country	string	0..1	Two-letter country code.
locale	string	0..1	User's locale.
canLogin	boolean	1..1	Can the user log in? If not, user information is kept only for contact purposes.
userName	string	0..1	User's FlexNet Operations login name. - If canLogin is set to false, this field is ignored. - if canLogin is set to true, this field is required.
status	UserStatusType	0..1	Status can be one of the following values: - Active - Inactive
timezone	UserTimeZoneType	0..1	Optional. Provide time zone setting in ISO-8601 format (+/-hh:mm) as an offset from GMT. For example, -08:00 or +05:30 (note that the string GMT is not included in the value). A value of Z corresponds to GMT. When a user is saved, this offset is converted to a time zone string and the time zone string is displayed when a user is retrieved.
shared	boolean	0..1	Is this a shared login among several users?
orgRolesList	createUserOrganizationsListType	1..1	Required. Set user's organization and list of the user's roles. User name and roles are required if the user can log in. See createUserOrganizationsListType .

Content Model

Component	Type	Occurs	Description
customAttributes	attributeDescriptorDataType	0..1	Custom attributes attached to this user. See attributeDescriptorDataType .

Complex Type: createUserOrganizationRolesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
role	roleIdentifierType	1..*	See roleIdentifierType .

Complex Type: createUserOrganizationsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgRoles	createUserOrganizationType	1..*	See createUserOrganizationType .

Complex Type: createUserOrganizationType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	See organizationIdentifierType .
roles	createUserOrganizationRolesListType	0..1	See createUserOrganizationRolesListType .

Complex Type: createUserRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	createUserDataTypes	1..*	Required. See createUserDataTypes .

Content Model

Component	Type	Occurs	Description
opType	CreateOrUpdateOperationType	0..1	Specifies how FlexNet Operations behaves when creating users. For details, see CreateOrUpdateOperationType. - If no opType is set, FlexNet Operations creates the specified user unless the user or contact already exists. When the user or contact already exists, the operation fails. - If the user does not exist and the opType is set to either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the operation will succeed unless the existing contact already belongs to another user. If the contact exists but does not belong to another user, it will create the user and update the contact with the new user. - If both the user and contact exist and the opType is set to CREATE_OR_UPDATE, the request will update the contact. - If both the user and contact exist and the opType is set to CREATE_OR_IGNORE, the request will not update the contact. Note: opType is available in UserOrgHierarchyService v1 and later.

Referenced By

Name	Type
createUserRequest	Element
createUser	Method

Complex Type: createUserResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedCreateUserDataListType	0..1	See failedCreateUserDataListType .									
responseData	createdUserDataListType	0..1	See createdUserDataListType .									

Referenced By

Name	Type
createUserResponse	Element

Complex Type: DateTimeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
value	dateTime	1..1	A date and time value to compare to the last modified date and time value. For example, 2011-05-04T22:00:00.
searchType	datedSearchType	1..1	One of the following datedSearchType values: • BEFORE • AFTER • ON

Complex Type: deleteOrganizationRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgData	deleteOrgDataType	1..*	Organization to be deleted. See deleteOrgDataType .

Referenced By

Name	Type
deleteOrganizationRequest	Element
deleteOrganization	Method

Complex Type: deleteOrganizationResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteOrgDataListType	0..1	See failedDeleteOrgDataListType .									

Referenced By

Name	Type
deleteOrganizationResponse	Element

Complex Type: deleteOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of parent organization. See organizationIdentifierType .
deleteSubTree	boolean	0..1	If true, deletes the entire organization subtree as well. (Default value is true.)

Complex Type: deleteUserRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
user	userIdentifierType	1..*	User to be deleted. See userIdentifierType .

Referenced By

Name	Type
deleteUserRequest	Element
deleteUser	Method

Complex Type: deleteUserResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteUserDataListType	0..1	See failedDeleteUserDataListType .									

Referenced By

Name	Type
deleteUserResponse	Element

Complex Type: failedCreateOrgDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedOrg	failedCreateOrgDataType	0..*	See failedCreateOrgDataType .

Complex Type: failedCreateOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationDataType	0..1	See organizationDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedCreateUserDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUser	failedCreateUserDataType	0..*	See failedCreateUserDataType .

Complex Type: failedCreateUserDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	createUserDataTypes	0..1	See createUserDataTypes .
reason	string	0..1	Reason for failure.

Complex Type: failedDeleteOrgDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedOrg	failedDeleteOrgDataTypes	0..*	See failedDeleteOrgDataTypes .

Complex Type: failedDeleteOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	deleteOrgDataType	0..1	See deleteOrgDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedDeleteUserDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUser	failedDeleteUserDataTy e	0..*	See failedDeleteUserDataTy e .

Complex Type: failedDeleteUserDataTy

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	0..1	See userIdentifierType .
reason	string	0..1	Reason for failure.

Complex Type: failedLinkOrgDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedOrgData	failedLinkOrgDataType	0..*	See failedLinkOrgDataType .

Complex Type: failedLinkOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	linkOrganizationsDataType	0..1	See linkOrganizationsDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedRelateOrganizationsDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedOrgData	failedRelateOrganizationsDataType	0..*	See failedRelateOrganizationsDataType .

Complex Type: failedRelateOrganizationsDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	relateOrganizationsDataType	0..1	See relateOrganizationsDataType .

Content Model

Component	Type	Occurs	Description
reason	string	0..1	Reason for failure.

Complex Type: failedUpdateOrgDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedOrg	failedUpdateOrgDataType	0..*	See failedUpdateOrgDataType .

Complex Type: failedUpdateOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	updateOrgDataType	0..1	See updateOrgDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedUpdateUserDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUser	failedUpdateUserDataTy pe	0..*	See failedUpdateUserDataType .

Complex Type: failedUpdateUserDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userData	updateUserDataTy pe	0..1	See updateUserDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedUpdateUserRolesDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedUser	failedUpdateUserRolesD ataType	0..*	See failedUpdateUserRolesDataType .

Complex Type: failedUpdateUserRolesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userData	updateUserRolesDataType	0..1	See updateUserRolesDataType .
reason	string	0..1	Reason for failure.

Complex Type: featureIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the feature, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the feature.
primaryKeys	featurePKType	0..1	Database primary keys of the feature—strings containing name and, if the feature version format is FIXED, the version of the feature. If the feature version format is DATE_BASED, specify only name.

Complex Type: getOrganizationCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	organizationQueryParametersType	0..1	Required. See organizationQueryParametersType . Leave this element blank to return all CUSTOMER organizations.

Referenced By

Name	Type
getOrganizationCountRequest	Element
getOrganizationCount	Method

Complex Type: getOrganizationCountResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
count	integer	1..1	Number of matching organizations.

Complex Type: getOrganizationCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationCountResponseDataType	0..1	See getOrganizationCountResponseDataType .									

Referenced By

Name	Type
getOrganizationCountResponse	Element

Complex Type: getOrganizationsQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	organizationQueryParametersType	0..1	Required. See organizationQueryParametersType . Leave this element blank to return all CUSTOMER organizations.
pageNumber	integer	1..1	Required. Starts at 1. Say the getOrganizationsQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getOrganizationsQueryRequest	Element
getOrganizationsQuery	Method

Complex Type: getOrganizationsQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	organizationDetailDataType	0..*	See organizationDetailDataType .

Complex Type: getOrganizationsQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseDataType	0..1	See getOrganizationsQueryResponseDataType .									

Referenced By

Name	Type
getOrganizationsQueryResponse	Element

Complex Type: getParentOrganizationsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of organization. See organizationIdentifierType .

Referenced By

Name	Type
getParentOrganizationsRequest	Element
getParentOrganizations	Method

Complex Type: getParentOrganizationsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseDataType	0..1	See getOrganizationsQueryResponseDataType .									

Referenced By

Name	Type
getParentOrganizationsResponse	Element

Complex Type: getRelatedOrganizationsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of organization. See organizationIdentifierType .

Referenced By

Name	Type
getRelatedOrganizationsRequest	Element
getRelatedOrganizations	Method

Complex Type: getRelatedOrganizationsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseDataType	0..1	See getOrganizationsQueryResponseDataType .									

Referenced By

Name	Type
getRelatedOrganizationsResponse	Element

Complex Type: getSubOrganizationsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of organization. See organizationIdentifierType .

Referenced By

Name	Type
getSubOrganizationsRequest	Element
getSubOrganizations	Method

Complex Type: getSubOrganizationsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseDataType	0..1	See getOrganizationsQueryResponseDataType .									

Referenced By

Name	Type
getSubOrganizationsResponse	Element

Complex Type: getUserCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	userQueryParametersType	0..1	Required. See userQueryParametersType . Leave this element blank to return all users.

Referenced By

Name	Type
getUserCountRequest	Element
getUserCount	Method

Complex Type: getUserCountResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
count	integer	1..1	Number of matching users.

Complex Type: getUserCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUserCountResponseDataType	0..1	See getUserCountResponseDataType .									

Referenced By

Name	Type
getUserCountResponse	Element

Complex Type: getUserPermissionsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userName	string	1..1	The username for which permissions will be retrieved.
domainName	string	0..1	The previous username's domain.

Referenced By

Name	Type
getUserPermissionsRequest	Element
getUserPermissions	Method

Complex Type: getUserPermissionsResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userName	string	1..1	The username from the input.
orgType	string	1..1	The org type of the first org the user belongs to.
permissions	permissionListType	1..1	The list of permissions that the user has been granted. This will be shown as a string roughly in the format "platform:view.and.manage.users".

Complex Type: getUserPermissionsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Status Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Status Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Status Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUserPermissionsResponseDataType	0..1	See getUserPermissionsResponseDataType .									

Referenced By

Name	Type
getUserPermissionsResponse	Element

Complex Type: getUsersQueryRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	userQueryParametersType	0..1	Required. See userQueryParametersType . Leave this element blank to return all users.
pageNumber	integer	1..1	Required. Starts at 1. Say the getUsersQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getUsersQueryRequest	Element
getUsersQuery	Method

Complex Type: getUsersQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userDetailDataType	0..*	See userDetailDataType .

Complex Type: getUsersQueryResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUsersQueryResponseDataType	0..1	See getUsersQueryResponseDataType .									

Referenced By

Name	Type
getUsersQueryResponse	Element

Complex Type: linkOrganizationsDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
parentOrg	organizationIdentifierType	1..1	Organization identifier of parent organization. See organizationIdentifierType .
subOrg	organizationIdentifierType	1..1	Organization identifier of suborganization. See organizationIdentifierType .

Complex Type: linkOrganizationsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	linkOrganizationsDataType	1..*	Required. A link between exactly one root organization and exactly one suborganization is expressed as an orgData element. A hierarchy with multiple root organizations or multiple sub organizations is constructed link by link with multiple orgData elements in a request. See linkOrganizationsDataType .

Referenced By

Name	Type
linkOrganizationsRequest	Element
linkOrganizations	Method

Complex Type: linkOrganizationsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedLinkOrgDataListType	0..1	See failedLinkOrgDataListType .									

Referenced By

Name	Type
linkOrganizationsResponse	Element

Complex Type: organizationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Required. Displayed as Organization Identifier (short organization name) in the web interface.
displayName	string	1..1	Required. Displayed as Display Name (full organization name) in the web interface.
description	string	0..1	Optional. Description of the organization.
address	addressDataType	0..1	Optional. Organization physical address. See addressDataType .
visible	boolean	0..1	Optional. Applicable to CUSTOMER and CHANNEL_PARTNER organizations, visible determines whether or not an organization unrelated to this organization can see the name of this organization when it is in a channel partner tier of an entitlement, line item, or device. If visible is false, this organization will appear as Name Withheld to unrelated organizations. Default: true.
orgType	OrgType	0..1	Optional. Defines the organization type. Valid values: - CUSTOMER - PUBLISHER - CHANNEL_PARTNER Default: CUSTOMER. (You cannot use web services to create a new organization with an orgType of SELF_REGISTERED.)
customAttributes	attributeDescriptorDataType	0..1	Custom attributes attached to this organization. See attributeDescriptorDataType .

Complex Type: organizationDetailDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
organization	organizationIdentifierType	1..1	Organization identifier. See organizationIdentifierType .
displayName	string	1..1	Organization display name.
description	string	0..1	Organization description.
address	addressDataType	0..1	Organization physical address. See addressDataType .
visible	boolean	0..1	Optional. Applicable to CUSTOMER and CHANNEL_PARTNER organizations, visible determines whether or not an organization unrelated to this organization can see the name of this organization when it is in a channel partner tier of an entitlement, line item, or device. If visible is false, this organization will appear as Name Withheld to unrelated organizations. Default: true.
orgType	OrgType	0..1	Optional. Defines the organization type. orgType can be CUSTOMER, PUBLISHER, or CHANNEL_PARTNER. Default: CUSTOMER. (You cannot use web services to create a new organization with an orgType of SELF_REGISTERED.)
customAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
dateLastModified	dateTime	0..1	Timestamp representing the last time the organization was modified.

Complex Type: organizationIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Name of the organization.
primaryKeys	organizationPKType	0..1	See organizationPKType .

Complex Type: organizationPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the organization.

Complex Type: organizationQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgName	SimpleQueryType	0..1	Organization name.
orgDisplayName	SimpleQueryType	0..1	Organization display name.
description	SimpleQueryType	0..1	Organization description.
address1	SimpleQueryType	0..1	First line of address.
address2	SimpleQueryType	0..1	Second line of address.
city	SimpleQueryType	0..1	City.
state	SimpleQueryType	0..1	State.
zipcode	SimpleQueryType	0..1	Postal code.
country	SimpleQueryType	0..1	Two-letter country code.
region	SimpleQueryType	0..1	Region.
onlyRootOrgs	boolean	0..1	If true, returns only root organizations.

Content Model

Component	Type	Occurs	Description
orgType	OrgType	0..1	Optional. Defines the organization type. orgType can be: - CUSTOMER - PUBLISHER - CHANNEL_PARTNER Default: CUSTOMER. (You cannot use web services to create a new organization with an orgType of SELF_REGISTERED.)
orgTypeList	OrgTypeList	0..1	See OrgTypeList .
customAttributes	orgCustomAttributesQueryListType	0..1	See orgCustomAttributesQueryListType.
lastModifiedDateTime	DateTimeQueryType	0..1	See DateTimeQueryType .

Complex Type: OrgTypeList

Description

A list of multiple **orgType** elements. Use **orgTypeList** when you want to query organizations of multiple types. Add an **orgType** element to the **orgTypeList** for each organization type you want to include in the query. If no **orgType** or **orgTypeList** is specified, the query searches only CUSTOMER organizations (the default).

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgType	OrgType	1..*	Optional. Defines the organization type. orgType can be: - CUSTOMER - PUBLISHER - CHANNEL_PARTNER - SELF_REGISTERED Default: CUSTOMER.

Complex Type: relateOrganizationsDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organizationToRelate	organizationIdentifierType	1..1	Organization identifier of organization for which you want to define a channel partner relationship. See organizationIdentifierType .
relatedOrganization	organizationIdentifierType	1..1	Organization identifier of the organization to relate to organizationToRelate. See organizationIdentifierType .

Complex Type: relateOrganizationsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	relateOrganizationsDataType	1..*	Required. A relationship between two organizations is expressed as an orgData element. The organizations can be two CHANNEL_PARTNER organizations or a CHANNEL_PARTNER organization and a CUSTOMER organization. See relateOrganizationsDataType .

Referenced By

Name	Type
relateOrganizationsRequest	Element
relateOrganizations	Method

Complex Type: relateOrganizationsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedRelateOrganizationsDataListType	0..1	See failedRelateOrganizationsDataListType .									

Referenced By

Name	Type
relateOrganizationsResponse	Element

Complex Type: roleIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Role ID.
primaryKeys	rolePKType	0..1	Name of the role.

Complex Type: rolePKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Name of the role

Complex Type: updateOrganizationRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgData	updateOrgDataType	1..*	Organization to be updated. See Table updateOrgDataType .

Referenced By

Name	Type
updateOrganizationRequest	Element
updateOrganization	Method

Complex Type: updateOrganizationResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										

Content Model

Component	Type	Occurs	Description
failedData	failedUpdateOrgDataListType	0..1	See failedUpdateOrgDataListType .

Referenced By

Name	Type
updateOrganizationResponse	Element

Complex Type: updateOrgDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of an organization to be updated. See organizationIdentifierType .
name	string	0..1	Name of the organization.
displayName	string	0..1	Display name of the organization.
description	string	0..1	Description of the organization.
address	addressDataType	0..1	Organization physical address. See addressDataType .
subOrganizations	updateSubOrganizationsListType	0..1	See updateSubOrganizationsListType .
relatedOrganizations	updateRelatedOrganizationsListType	0..1	See updateRelatedOrganizationsListType .
visible	boolean	0..1	Optional. Applicable to CUSTOMER and CHANNEL_PARTNER organizations, visible determines whether or not an organization unrelated to this organization can see the name of this organization when it is in a channel partner tier of an entitlement, line item, or device. If visible is false, this organization will appear as Name Withheld to unrelated organizations. Default: true.
customAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .

Complex Type: updateRelatedOrganizationsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
relatedOrganization	organizationIdentifierType	1..*	Array of organization identifiers of related organizations. See organizationIdentifierType .
opType	CollectionOperationType	1..1	Type of operation performed on the organization. • ADD—add a link to this related organization. • REPLACE—replace all current links to related organizations with a link to this organization. • DELETE—remove the link between the organization and this related organization.

Complex Type: updateSubOrganizationsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
subOrganization	organizationIdentifierType	1..*	Array of organization identifiers of suborganizations. See organizationIdentifierType .

Content Model

Component	Type	Occurs	Description
opType	CollectionOperationType	1..1	Type of operation performed on the organization. • ADD—add a link to this suborganization. • REPLACE—replace all current links to first-level suborganizations with a link to this one. • DELETE—remove the link between the parent and this suborganization, promoting the suborganization to a root organization if it is not linked to any other parent organizations.

Complex Type: updateUserDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
user	userIdentifierType	1..1	Identifies the user being updated. See userIdentifierType . Required. All other elements are optional.
firstName	string	0..1	User first name.
lastName	string	0..1	User last name.
displayName	string	0..1	User's display name.
emailAddress	string	0..1	User's email address.
optIn	boolean	0..1	Does the user wish to receive email?
phoneNumber	string	0..1	User's phone number.
faxNumber	string	0..1	User's fax number.
street	string	0..1	Street portion of address.
city	string	0..1	City portion of address.
state	string	0..1	State portion of address.
zipcode	string	0..1	Postal code.

Content Model

Component	Type	Occurs	Description
country	string	0..1	Optional. Country in which contact is located. Provide country in the two-character ISO-3166 format.
status	UserStatusType	0..1	Status can be one of the following values: - Active - Inactive
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US.
timezone	UserTimeZoneType	0..1	Optional. Provide time zone setting in ISO-8601 format (+/-hh:mm) as an offset from GMT. For example, -08:00 or +05:30 (note that the string GMT is not included in the value). A value of Z corresponds to GMT. When a user is saved, this offset is converted to a time zone string and the time zone string is displayed when a user is retrieved.
shared	boolean	0..1	Is this a shared login among several users?
orgRolesList	updateUserOrganizationsListType	0..1	List of the user's roles. See updateUserOrganizationsListType .
customAttributes	attributeDescriptorDataType	0..1	Custom attributes attached to this user. See attributeDescriptorDataType .

Complex Type: updateUserOrganizationRolesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
role	roleIdentifierType	1..*	See roleIdentifierType .

Complex Type: updateUserOrganizationsListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgRoles	updateUserOrganizationType	1..*	List of organization identifiers and roles. See updateUserOrganizationType .
opType	CollectionOperationType	1..1	Type of operation performed on the user's organizations and roles. • ADD—add the user to the organization. • REPLACE—replace all current links to organizations. Unlike in the Admin Console, it is possible to replace a link from one type of organization to another type. • DELETE—remove the link between the user and organization, only if the user is linked to another organization.

Complex Type: updateUserOrganizationType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	See organizationIdentifierType .
roles	updateUserOrganizationRolesListType	0..1	See updateUserOrganizationRolesListType .

Complex Type: updateUserRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userData	updateUserData	1..*	User to be updated. See updateUserData .

Referenced By

Name	Type
updateUserRequest	Element
updateUser	Method

Complex Type: updateUserResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateUserDataListType	0..1	See failedUpdateUserDataListType .									

Referenced By

Name	Type
updateUserResponse	Element

Complex Type: updateUserRolesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
user	userIdentifierType	1..1	See userIdentifierType .
orgRoles	updateUserRolesOrganizationDataType	1..1	See updateUserRolesOrganizationDataType .

Complex Type: updateUserRolesListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
role	roleIdentifierType	1..*	See roleIdentifierType .
opType	CollectionOperationType	1..1	Type of operation performed on the user. • ADD—assign the user to a role. • REPLACE—replace a current role assignment. • DELETE—remove the link between the user and a role.

Complex Type: updateUserRolesOrganizationDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
organization	organizationIdentifierType	1..1	See organizationIdentifierType .
roles	updateUserRolesListType	1..1	See updateUserRolesListType .

Complex Type: updateUserRolesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userData	updateUserRolesDataType	1..*	User to be updated. See updateUserRolesDataType .

Referenced By

Name	Type
updateUserRolesRequest	Element
updateUserRoles	Method

Complex Type: updateUserRolesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateUserRolesDataListType	0..1	See failedUpdateUserRolesDataListType .									

Referenced By

Name	Type
updateUserRolesResponse	Element

Complex Type: userCustomAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	Name of the custom attribute.
stringValue	SimpleQueryType	0..1	Value of the custom attribute.

Complex Type: userCustomAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	userCustomAttributeQueryType	0..*	See userCustomAttributesQueryType .

Complex Type: userDetailDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userIdentifier	userIdentifierType	1..1	See userIdentifierType .
displayName	string	0..1	User's display name.
optIn	boolean	0..1	Does the user wish to receive email?
faxNumber	string	0..1	User's fax number.
street	string	0..1	Street portion of address.
city	string	0..1	City portion of address.

Content Model

Component	Type	Occurs	Description
state	string	0..1	State portion of address.
zipcode	string	0..1	Postal code.
country	string	0..1	Country in which contact is located. Provide country in the two-character ISO-3166 format.
status	UserStatusType	0..1	Status can be one of the following values: • Active • Inactive
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US.
timezone	UserTimeZoneType	0..1	Optional. Provide time zone setting in ISO-8601 format (+/-hh:mm) as an offset from GMT. For example, -08:00 or +05:30 (note that the string GMT is not included in the value). A value of Z corresponds to GMT. When a user is saved, this offset is converted to a time zone string, and the time zone string is displayed when a user is retrieved.
shared	boolean	0..1	Optional. Corresponds to the Shared Login control in the administrative console UI. The shared element can be true or false. • true—Shared Login is enabled for the user account. This is useful when the same user account is used to log in to FlexNet Operations simultaneously from different instances. Logged in history is not written to the database. • false—Shared Login is not enabled for the user account.
domain	string	0..1	User's domain.
dateCreated	dateTime	0..1	Date user was created.
dateLastModified	dateTime	0..1	Date the user account was last modified.
dateLastLogin	dateTime	0..1	Date of user's last login.
orgRolesList	userOrganizationsListType	0..1	List of the user's roles. See userOrganizationsListType.
customAttributes	attributeDescriptorDataType	0..1	Custom attributes attached to this user. See Table attributeDescriptorDataType .

Complex Type: userIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	User's unique ID.
userName	string	0..1	User's FlexNet Operations login name.
primaryKeys	userPKType	0..1	See userPKType .

Complex Type: userPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
firstName	string	1..1	User's first name.
lastName	string	1..1	User's last name.
emailAddress	string	1..1	User's email address.
phoneNumber	string	0..1	User's phone number.

Complex Type: userQueryParametersType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
userName	SimpleQueryType	0..1	User's FNO user name. - If canLogin is set to false, this field is ignored. - If canLogin is set to true, this field is required.
firstName	SimpleQueryType	0..1	User first name.
lastName	SimpleQueryType	0..1	User last name.
displayName	SimpleQueryType	0..1	User's display name.
emailAddress	SimpleQueryType	0..1	User's email address.
phoneNumber	SimpleQueryType	0..1	User's phone number.
faxNumber	SimpleQueryType	0..1	User's fax number.
street	SimpleQueryType	0..1	Street portion of address.
city	SimpleQueryType	0..1	City portion of address.
state	SimpleQueryType	0..1	State portion of address.
zipcode	SimpleQueryType	0..1	Postal code.
country	SimpleQueryType	0..1	Country in which contact is located. Provide country in the two-character ISO-3166 format.
isActive	boolean	0..1	Is the user currently active?
canLogin	boolean	0..1	Can the user log in? If not, user information is kept only for contact purposes.
orgName	SimpleQueryType	0..1	Name of any organization to which the user belongs.
orgDisplayName	SimpleQueryType	0..1	Display name of any organization to which the user belongs.
customAttributes	userCustomAttributesQueryListType	0..1	Custom attributes attached to this user. See userCustomAttributeQueryListType .
lastModifiedDateTime	DateTimeQueryType	0..1	Optional. The date and time at which the user account was last modified.
orgType	OrgType	0..1	Optional. Defines the organization type. orgType can be - CUSTOMER - PUBLISHER - CHANNEL_PARTNER - SELF_REGISTERED Default: CUSTOMER.

Complex Type: versionDateAttributesType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
versionOption	VersionDateOptionType	1..1	See VersionDateOptionType.
duration	DurationType	0..1	Optional. See DurationType.

Elements: UserOrgHierarchyService

Elements

Name	Description
createOrgRequest	A createOrgRequest message contains an element of createOrgRequestType.
createOrgResponse	A createOrganizationsResponse message contains an element of createOrgResponseType.
createUserRequest	A createUserRequest message contains an element of createUserRequestType.
createUserResponse	A createUserResponse message contains an element of createUserResponseType.
deleteOrganizationRequest	A deleteOrganizationRequest message contains an element of deleteOrganizationRequestType.
deleteOrganizationResponse	A deleteOrganizationResponse message contains an element of deleteOrganizationResponseType.
deleteUserRequest	A deleteUserRequest message contains an element of deleteUserRequestType.
deleteUserResponse	A deleteUserResponse message contains an element of deleteUserResponseType.
getOrganizationCountRequest	A getOrganizationCountRequest message contains an element of getOrganizationCountRequestType.
getOrganizationCountResponse	A getOrganizationCountResponse message contains an element of getOrganizationQueryResponseType.
getOrganizationsQueryRequest	A getOrganizationsQueryRequest message contains an element of getOrganizationsRequestType.
getOrganizationsQueryResponse	A getOrganizationsQueryResponse message contains an element of getOrganizationsQueryResponseType.
getParentOrganizationsRequest	A getParentOrganizationsRequest message contains an element of getParentOrganizationsRequestType.
getParentOrganizationsResponse	A ParentOrganizationsResponse message contains an element of getParentOrganizationsResponseType.
getRelatedOrganizationsRequest	A getRelatedOrganizationsRequest message contains an element of getRelatedOrganizationsRequestType.
getRelatedOrganizationsResponse	A getRelatedOrganizationsResponse message contains an element of getRelatedOrganizationsResponseType.
getSubOrganizationsRequest	A getSubOrganizationsRequest message contains an element of getSubOrganizationsRequestType.
getSubOrganizationsResponse	A getSubOrganizationsResponse message contains an element of getSubOrganizationsResponseType.
getUserCountRequest	A getUserCountRequest message contains an element of getOrganizationsRequestType.
getUserCountResponse	A getUserCountResponse message contains an element of getUserCountResponseType.
getUserPermissionsRequest	A getUserPermissionsRequest message contains an element of getUserPermissionsRequestType.

Elements

Name	Description
getUserPermissionsResponse	A getUserPermissionsResponse message contains an element of <code>getUserPermissionsResponseType</code> .
getUsersQueryRequest	A getUsersQueryRequest message contains an element of <code>getOrganizationsRequestType</code> .
getUsersQueryResponse	A getUsersQueryResponse message contains an element of <code>getUsersQueryResponseType</code> .
linkOrganizationsRequest	A linkOrganizationsRequest message contains an element of <code>linkOrganizationsRequestType</code> .
linkOrganizationsResponse	A linkOrganizationsResponse message contains an element of <code>linkOrganizationsResponseType</code> .
relateOrganizationsRequest	A relateOrganizationsRequest message contains an element of <code>relateOrganizationsRequestType</code> .
relateOrganizationsResponse	A relateOrganizationsResponse message contains an element of <code>relateOrganizationsResponseType</code> .
updateOrganizationRequest	An updateOrganizationRequest message contains one or more elements of <code>updateOrganizationRequestType</code> .
updateOrganizationResponse	An updateOrganizationResponse message contains an element of <code>updateOrganizationResponseType</code> .
updateUserRequest	An updateUserRequest message contains an element of <code>updateUserRequestType</code> .
updateUserResponse	An updateUserResponse message contains an element of <code>updateUserResponseType</code> .
updateUserRolesRequest	An updateUserRolesRequest message contains an element of <code>updateUserRolesRequestType</code> .
updateUserRolesResponse	An updateUserRolesResponse message contains an element of <code>updateUserRolesResponseType</code> .

Element: createOrgRequest

Description

A **createOrgRequest** message contains an element of `createOrgRequestType`.

Derived By

Type [createOrgRequestType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationDataType	1..*	Required. See organizationDataType .
opType	CreateOrUpdateOperationType	0..1	Specifies how FlexNet Operations behaves when creating organizations. For details, see CreateOrUpdateOperationType. If no opType is set, FlexNet Operations creates the specified organization unless the organization already exists. When the organization already exists, the operation fails. Note: opType is available in UserOrgHierarchyService v1 and later.

Referenced By

Name	Type
createOrganization	Method

XML Example

The following XML fragment illustrates a **createOrgRequest** message:

```
<createOrgRequest>
  <organization>
    <name>ACME-ENG</name>
    <displayName>ACME Engineering</displayName>
    <description>ACME Engineering Organization</description>
    <address>
      <address1>1234 Main Street</address1>
      <address2>Suite B</address2>
      <city>New York</city>
      <state>NY</state>
      <zipcode>12345</zipcode>
      <country>US</country>
      <region>North America</region>
    </address>
  </organization>
</createOrgRequest>
```

Element: createOrgResponse

Description

A **createOrganizationsResponse** message contains an element of createOrgResponseType.

Derived By

Type [createOrgResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedCreateOrgDataListType	0..1	See failedCreateOrgDataListType .									
responseData	createdOrganizationDataListType	0..1	See createdOrganizationDataListType .									

Referenced By

Name	Type
createOrganization	Method

XML Example

The following XML fragment illustrates a successful **createOrgResponse** message:

XML Example

```
<createOrgResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <organization>
      <uniqueId>HID-20194</uniqueId>
      <primaryKeys>
        <name>ACME-ENG</name>
      </primaryKeys>
    </organization>
  </responseData>
</createOrgResponse>
```

Element: createUserRequest

Description

A **createUserRequest** message contains an element of createUserRequestType.

Derived By

Type [createUserRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
user	createUserDataTypes	1..*	Required. See createUserDataTypes .

Content Model

Component	Type	Occurs	Description
opType	CreateOrUpdateOperationType	0..1	Specifies how FlexNet Operations behaves when creating users. For details, see CreateOrUpdateOperationType. - If no opType is set, FlexNet Operations creates the specified user unless the user or contact already exists. When the user or contact already exists, the operation fails. - If the user does not exist and the opType is set to either CREATE_OR_UPDATE or CREATE_OR_IGNORE, the operation will succeed unless the existing contact already belongs to another user. If the contact exists but does not belong to another user, it will create the user and update the contact with the new user. - If both the user and contact exist and the opType is set to CREATE_OR_UPDATE, the request will update the contact. - If both the user and contact exist and the opType is set to CREATE_OR_IGNORE, the request will not update the contact. Note: opType is available in UserOrgHierarchyService v1 and later.

Referenced By

Name	Type
createUser	Method

XML Example

The following XML fragment illustrates a **createUserRequest** message:

```
<createUserRequest>
  <user>
    <firstName>John</firstName>
    <lastName>Smith</lastName>
    <displayName>John Smith</displayName>
    <emailAddress>jsmith@example.com</emailAddress>
    <optIn>false</optIn>
    <phoneNumber>408-123-4567</phoneNumber>
    <faxNumber>408-123-7654</faxNumber>
    <street>1234 Main Street</street>
    <city>San Francisco</city>
    <state>CA</state>
    <zipCode>12345</zipCode>
    <country>US</country>
    <locale>en_US</locale>
  </user>
</createUserRequest>
```

XML Example

```
<canLogin>1</canLogin>
<userName>jsmith</userName>
<status>Active</status>
<timezone>+05:30</timezone>
<shared>false</shared>
<orgRolesList>
  <orgRoles>
    <organization>
      <primaryKeys>
        <name>ACME</name>
      </primaryKeys>
    </organization>
  </orgRoles>
  <roles>
    <role>
      <primaryKeys>
        <name>Portal User Role</name>
      </primaryKeys>
    </role>
  </roles>
</orgRoles>
<orgRoles>
  <organization>
    <primaryKeys>
      <name>Delta</name>
    </primaryKeys>
  </organization>
</orgRoles>
<roles>
  <role>
    <primaryKeys>
      <name>Portal User Role</name>
    </primaryKeys>
  </role>
</roles>
</orgRoles>
</orgRolesList>
<customAttributes>
  <attribute>
    <attributeName>NO_OF_OTHER_PRODUCTS</attributeName>
    <integerValue>1</integerValue>
  </attribute>
</customAttributes>
</user>
</createUserRequest>
```

Element: createUserResponse

Description

A **createUserResponse** message contains an element of createUserResponseType.

Derived By

Type [createUserResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedCreateUserDataListType	0..1	See failedCreateUserDataListType .									
responseData	createdUserDataListType	0..1	See createdUserDataListType .									

Referenced By

Name	Type
createUser	Method

XML Example

The following XML fragment illustrates a successful **createUserResponse** message:

```
<createUserResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
```

XML Example

```
<responseData>
  <user>
    <uniqueId>HID-20204</uniqueId>
    <userName>jsmith</userName>
    <primaryKeys>
      <firstName>John</firstName>
      <lastName>Smith</lastName>
      <emailAddress>jsmith@example.com</emailAddress>
      <phoneNumber>408-123-4567</phoneNumber>
    </primaryKeys>
  </user>
</responseData>
</createUserResponse>
```

Element: deleteOrganizationRequest

Description

A **deleteOrganizationRequest** message contains an element of deleteOrganizationRequestType.

Derived By

Type [deleteOrganizationRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgData	deleteOrgDataType	1..*	Organization to be deleted. See deleteOrgDataType .

Referenced By

Name	Type
deleteOrganization	Method

XML Example

The following XML fragment illustrates a **deleteOrganizationRequest** message:

```
<deleteOrganizationRequest>
  <organization>
    <primaryKeys>
      <name>ACME-MARK</name>
    </primaryKeys>
  </organization>
  <deleteSubTree>false</deleteSubTree>
</deleteOrganizationRequest>
```

Element: deleteOrganizationResponse

Description

A **deleteOrganizationResponse** message contains an element of deleteOrganizationResponseType.

Derived By

Type [deleteOrganizationResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteOrgDataListType	0..1	See failedDeleteOrgDataListType .									

Referenced By

Name	Type
deleteOrganization	Method

XML Example

The following XML fragment illustrates a successful **deleteOrganizationResponse** message:

```
<deleteOrganizationResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteOrganizationResponse>
```

Element: deleteUserRequest

Description

A **deleteUserRequest** message contains an element of deleteUserRequestType.

Derived By

Type [deleteUserRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
user	userIdentifierType	1..*	User to be deleted. See userIdentifierType .

Referenced By

Name	Type
deleteUser	Method

XML Example

The following XML fragment illustrates a **deleteUserRequest** message:

```
<deleteUserRequest>
  <user>
    <userName>jsmith</userName>
  </user>
</deleteUserRequest>
```

Element: deleteUserResponse

Description

A **deleteUserResponse** message contains an element of deleteUserResponseType.

Derived By

Type [deleteUserResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedDeleteUserDataListType	0..1	See failedDeleteUserDataListType .									

Referenced By

Name	Type
deleteUser	Method

XML Example

The following XML fragment illustrates a successful **deleteUserResponse** message:

```
<deleteUserResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteUserResponse>
```

Element: getOrganizationCountRequest

Description

A **getOrganizationCountRequest** message contains an element of `getOrganizationCountRequestType`.

Derived By

Type [getOrganizationCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	organizationQueryParametersType	0..1	Required. See organizationQueryParametersType . Leave this element blank to return all CUSTOMER organizations.

Referenced By

Name	Type
getOrganizationCount	Method

XML Example

The following XML fragment illustrates a **getOrganizationCountRequest** message:

```
<getOrganizationCountRequest>
  <queryParams>
    <orgName>
      <value>acme</value>
    <searchType>CONTAINS</searchType>
  </queryParams>
</getOrganizationCountRequest>
```

XML Example

```
</orgName>  
<onlyRootOrgs>true</onlyRootOrgs>  
</queryParams>  
<pageNumber>1</pageNumber>  
<batchSize>10</batchSize>  
</getOrganizationCountRequest>
```

Element: getOrganizationCountResponse

Description

A **getOrganizationCountResponse** message contains an element of `getOrganizationQueryResponseType`.

Derived By

Type [getOrganizationCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationCountResponseDataType	0..1	See getOrganizationCountResponseDataType .									

Referenced By

Name	Type
getOrganizationCount	Method

XML Example

The following XML fragment illustrates a successful **getOrganizationsQueryResponse** message:

```
<getOrganizationCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>3</count>
  </responseData>
```


XML Example

```
</getOrganizationCountResponse>
```

Element: getOrganizationsQueryRequest

Description

A **getOrganizationsQueryRequest** message contains an element of **getOrganizationsRequestType**.

Derived By

Type [getOrganizationsQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	organizationQueryParametersType	0..1	Required. See organizationQueryParametersType . Leave this element blank to return all CUSTOMER organizations.
pageNumber	integer	1..1	Required. Starts at 1. Say the getOrganizationsQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getOrganizationsQuery	Method

XML Example

The following XML fragment illustrates a **getOrganizationsQueryRequest** message:

```
<getOrganizationsQueryRequest>
  <queryParams>
    <orgName>
      <value>acme</value>
      <searchType>CONTAINS</searchType>
    </orgName>
  </queryParams>
  <pageNumber>1</pageNumber>
  <batchSize>10</batchSize>
</getOrganizationsQueryRequest>
```

Element: getOrganizationsQueryResponse

Description

A **getOrganizationsQueryResponse** message contains an element of **getOrganizationsQueryResponseType**.

Derived By

Type [getOrganizationsQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseType	0..1	See getOrganizationsQueryResponseType .									

Referenced By

Name	Type
getOrganizationsQuery	Method

XML Example

The following XML fragment illustrates a successful **getOrganizationsQueryResponse** message:

```
<getOrganizationsQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <orgData>
      <organization>
        <uniqueId>HID-20197</uniqueId>
        <primaryKeys>
          <name>ACME-MARK-WEST</name>
        </primaryKeys>
      </organization>
      <displayName>ACME Marketing West</displayName>
      <description>ACME western marketing group</description>
    </orgData>
    <orgData>
      <organization>
        <uniqueId>HID-20194</uniqueId>
        <primaryKeys>
          <name>ACME-ENG</name>
        </primaryKeys>
      </organization>
      <displayName>ACME Engineering</displayName>
      <description>Description of ACME Engineering</description>
    </orgData>
    <orgData>
      <organization>
        <uniqueId>HID-20180</uniqueId>
        <primaryKeys>
          <name>ACME</name>
        </primaryKeys>
      </organization>
      <displayName>Acme Software Corporation</displayName>
      <description>Description of ACME</description>
    </orgData>
  </responseData>
</getOrganizationsQueryResponse>
```

Element: getParentOrganizationsRequest

Description

A **getParentOrganizationsRequest** message contains an element of `getParentOrganizationsRequestType`.

Derived By

Type [getParentOrganizationsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of organization. See organizationIdentifierType .

Referenced By

Name	Type
getParentOrganizations	Method

XML Example

The following XML fragment illustrates a **getParentOrganizationRequest** message:

```
<getParentOrganizationsRequest>
  <organization>
    <primaryKeys>
      <name>ACME-ENG</name>
    </primaryKeys>
  </organization>
</getParentOrganizationsRequest>
```

Element: getParentOrganizationsResponse

Description

A **ParentOrganizationsResponse** message contains an element of `getParentOrganizationsResponseType`.

Derived By

Type [getParentOrganizationsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseDataType	0..1	See getOrganizationsQueryResponseDataType .									

Referenced By

Name	Type
getParentOrganizations	Method

XML Example

The following XML fragment illustrates a **getParentOrganizationResponse** message:

```
<getParentOrganizationsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <orgData>
      <organization>
```

XML Example

```
<uniqueId>HID-20180</uniqueId>
<primaryKeys>
  <name>ACME</name>
</primaryKeys>
</organization>
<displayName>Acme Software Corporation</displayName>
<description>Acme description</description>
</orgData>
</responseData>
</getParentOrganizationsResponse>
```

Element: getRelatedOrganizationsRequest

Description

A **getRelatedOrganizationsRequest** message contains an element of `getRelatedOrganizationsRequestType`.

Derived By

Type [getRelatedOrganizationsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of organization. See organizationIdentifierType .

Referenced By

Name	Type
getRelatedOrganizations	Method

XML Example

The following XML fragment illustrates a **getRelatedOrganizationsRequest** message:

```
<getRelatedOrganizationsRequest>
  <organization>
    <primaryKeys>
      <name>ACME</name>
    </primaryKeys>
  </organization>
</getRelatedOrganizationsRequest>
```

Element: getRelatedOrganizationsResponse

Description

A **getRelatedOrganizationsResponse** message contains an element of **getRelatedOrganizationsResponseType**.

Derived By

Type [getRelatedOrganizationsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getOrganizationsQueryResponseType	0..1	See getOrganizationsQueryResponseType .									

Referenced By

Name	Type
getRelatedOrganizations	Method

XML Example

The following XML fragment illustrates a successful **getRelatedOrganizationsResponse** message:

```
<getRelatedOrganizationsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <orgData>
      <organization>
        <uniqueId>HID-20199</uniqueId>
        <primaryKeys>
          <name>ACME-PART</name>
        </primaryKeys>
      </organization>
      <displayName>ACME Partner</displayName>
      <description>ACME Partner Reseller</description>
    </orgData>
  </responseData>
</getRelatedOrganizationsResponse>
```

Element: getSubOrganizationsRequest

Description

A **getSubOrganizationsRequest** message contains an element of `getSubOrganizationsRequestType`.

Derived By

Type [getSubOrganizationsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organization	organizationIdentifierType	1..1	Organization identifier of organization. See organizationIdentifierType .

Referenced By

Name	Type
getSubOrganizations	Method

XML Example

The following XML fragment illustrates a **getSubOrganizationsRequest** message:

```
<getSubOrganizationsRequest>
  <organization>
    <primaryKeys>
      <name>ACME</name>
    </primaryKeys>
  </organization>
</getSubOrganizationsRequest>
```

Element: getSubOrganizationsResponse

Description

A **getSubOrganizationsResponse** message contains an element of `getSubOrganizationsResponseType`.

Derived By

Type [getSubOrganizationsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description		
statusInfo	StatusInfoType	1..1	Element	Data Type	Description
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.
			reason	string	Gives reason for partial failure or failure.
responseData	getOrganizationsQueryResponseDataType	0..1	See getOrganizationsQueryResponseDataType .		

Referenced By

Name	Type
getSubOrganizations	Method

XML Example

The following XML fragment illustrates a successful **getSubOrganizationsResponse** message:

```
<getSubOrganizationsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <orgData>
      <organization>
```

XML Example

```
<uniqueId>HID-20194</uniqueId>
<primaryKeys>
  <name>ACME-ENG</name>
</primaryKeys>
</organization>
<displayName>ACME Engineering</displayName>
<description>ACME Engineering Group</description>
</orgData>
</responseData>
</getSubOrganizationsResponse>
```

Element: getUserCountRequest

Description

A **getUserCountRequest** message contains an element of `getOrganizationsRequestType`.

Derived By

Type [getUserCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	userQueryParametersType	0..1	Required. See userQueryParametersType . Leave this element blank to return all users.

Referenced By

Name	Type
getUserCount	Method

XML Example

The following XML fragment illustrates a **getUserCountRequest** message:

```
<getUserCountRequest>
  <queryParams>
    <displayName>
      <value>john</value>
      <searchType>CONTAINS</searchType>
    </displayName>
    <lastModifiedDateTime>
      <value>2011-05-04T22:00:00</value>
      <searchType>AFTER</searchType>
    </lastModifiedDateTime>
    <orgType>PUBLISHER</orgType>
  </queryParams>
```

XML Example

```
</getUserCountRequest>
```

Element: getUserCountResponse

Description

A **getUserCountResponse** message contains an element of `getUserCountResponseType`.

Derived By

Type [getUserCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description											
 SEQUENCE		1..1												
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>			Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description												
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.												
reason	string	Gives reason for partial failure or failure.												

Content Model

Component	Type	Occurs	Description
responseData	getUserCountResponseDataType	0..1	See getUserCountResponseDataType .

Referenced By

Name	Type
getUserCount	Method

XML Example

The following XML fragment illustrates a successful **getUserCountResponse** message:

```
<getUserCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>1</count>
  </responseData>
</getUserCountResponse>
```

Element: getUserPermissionsRequest

Description

A **getUserPermissionsRequest** message contains an element of `getUserPermissionsRequestType`.

Derived By

Type [getUserPermissionsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userName	string	1..1	The username for which permissions will be retrieved.
domainName	string	0..1	The previous username's domain.

Referenced By

Name	Type
getUserPermissions	Method

XML Example

The following XML fragment illustrates a **getUserPermissionsRequest** message:

```
<getUserPermissionsRequest>  
  <userName>jsmith</userName>  
  <domainName>domain.com</domainName>  
</getUserPermissionsRequest>
```

Element: getUserPermissionsResponse

Description

A **getUserPermissionsResponse** message contains an element of `getUserPermissionsResponseType`.

Derived By

Type [getUserPermissionsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Status Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Status Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Status Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUserPermissionsResponseDataType	0..1	See getUserPermissionsResponseDataType .									

Referenced By

Name	Type
getUserPermissions	Method

XML Example

The following XML fragment illustrates a successful **getUserPermissionsResponse** message:

```
<getUserPermissionsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <userName>TESTadmin</userName>
    <orgType>PUBLISHER</orgType>
  </responseData>
</getUserPermissionsResponse>
```

XML Example

```
<permissions>
  <permission>operations:permission.feature.UPDATE</permission>
  <permission>platform:view.and.manage.users</permission>
</permissions>
</responseData>
</getUserPermissionsResponse>
```

The following XML fragment illustrates an unsuccessful **getUserPermissionsResponse** message:

```
<getUserPermissionsResponse>
  <statusInfo>
    <status>FAILURE</status>
    <reason>9000:No data records were found.</reason>
  </statusInfo>
</getUserPermissionsResponse>
```

Element: getUsersQueryRequest

Description

A **getUsersQueryRequest** message contains an element of **getOrganizationsRequestType**.

Derived By

Type [getUsersQueryRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	userQueryParametersType	0..1	Required. See userQueryParametersType . Leave this element blank to return all users.
pageNumber	integer	1..1	Required. Starts at 1. Say the getUsersQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getUsersQuery	Method

XML Example

The following XML fragment illustrates a **getUsersQueryRequest** message, querying by display name, last modified date/time, and organization type:

```
<getUsersQueryRequest>
  <queryParams>
    <displayName>
      <value>john</value>
      <searchType>CONTAINS</searchType>
    </displayName>
    <lastModifiedDateTime>
      <value>2011-05-04T22:00:00</value>
      <searchType>AFTER</searchType>
    </lastModifiedDateTime>
    <orgType>PUBLISHER</orgType>
  </queryParams>
  <pageNumber>1</pageNumber>
  <batchSize>10</batchSize>
</getUsersQueryRequest>
```

Element: getUsersQueryResponse

Description

A **getUsersQueryResponse** message contains an element of getUsersQueryResponseType.

Derived By

Type [getUsersQueryResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
responseData	getUsersQueryResponseDataType	0..1	See getUsersQueryResponseDataType .									

Referenced By

Name	Type
getUsersQuery	Method

XML Example

The following XML fragment illustrates a successful **getUsersQueryResponse** message:

```
<getUsersQueryResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <user>
      <userIdentifier>
```

XML Example

```
<uniqueId>HID-20204</uniqueId>
<userName>jsmith</userName>
<primaryKeys>
  <firstName>John</firstName>
  <lastName>Smith</lastName>
  <emailAddress>jsmith@example.com</emailAddress>
  <phoneNumber>408-123-4567</phoneNumber>
</primaryKeys>
</userIdentifier>
<displayName>Smith John</displayName>
<optIn>false</optIn>
<street>1234 Main Street</street>
<city>San Francisco</city>
<state>CA</state>
<zipcode>12345</zipcode>
<country>US</country>
<status>Active</status>
<locale>en_US</locale>
<timezone>America/Dawson</timezone>
<shared>false</shared>
<domain>FLEXnet</domain>
<orgRolesList>
  <orgRoles>
    <organization>
      <uniqueId>HID-100040</uniqueId>
      <primaryKeys>
        <name>ACME</name>
      </primaryKeys>
    </organization>
    <roles>
      <roleName>Portal Admin User Role</roleName>
    </roles>
  </orgRoles>
  <orgRoles>
    <organization>
      <primaryKeys>
        <name>Delta</name>
      </primaryKeys>
    </organization>
    <roles>
      <roleName>Portal Admin User Role</roleName>
    </roles>
  </orgRoles>
</orgRolesList>
</user>
</responseData>
</getUsersQueryResponse>
```

Element: linkOrganizationsRequest

Description

A **linkOrganizationsRequest** message contains an element of linkOrganizationsRequestType.

Derived By

Type [linkOrganizationsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	linkOrganizationsDataTy pe	1..*	Required. A link between exactly one root organization and exactly one suborganization is expressed as an orgData element. A hierarchy with multiple root organizations or multiple sub organizations is constructed link by link with multiple orgData elements in a request. See linkOrganizationsDataType .

Referenced By

Name	Type
linkOrganizations	Method

XML Example

The following XML fragment illustrates a **linkOrganizationsRequest** message:

```
<linkOrganizationsRequest>
  <orgData>
    <parentOrg>
      <primaryKeys>
        <name>ACME</name>
      </primaryKeys>
    </parentOrg>
    <subOrg>
      <primaryKeys>
        <name>ACME-ENG</name>
      </primaryKeys>
    </subOrg>
  </orgData>
  <orgData>
    <parentOrg>
      <primaryKeys>
        <name>ACME</name>
      </primaryKeys>
    </parentOrg>
    <subOrg>
      <primaryKeys>
        <name>ACME-MARK</name>
      </primaryKeys>
    </subOrg>
  </orgData>
</linkOrganizationsRequest>
```

Element: linkOrganizationsResponse

Description

A **linkOrganizationsResponse** message contains an element of linkOrganizationsResponseType.

Derived By

Type [linkOrganizationsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedLinkOrgDataListType	0..1	See failedLinkOrgDataListType .									

Referenced By

Name	Type
linkOrganizations	Method

XML Example

The following XML fragment illustrates a successful **linkOrganizationsResponse** message:

```
<linkOrganizationsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</linkOrganizationsResponse>
```

Element: relateOrganizationsRequest

Description

A **relateOrganizationsRequest** message contains an element of `relateOrganizationsRequestType`.

Derived By

Type [relateOrganizationsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgData	relateOrganizationsData Type	1..*	Required. A relationship between two organizations is expressed as an orgData element. The organizations can be two CHANNEL_PARTNER organizations or a CHANNEL_PARTNER organization and a CUSTOMER organization. See relateOrganizationsData Type .

Referenced By

Name	Type
relateOrganizations	Method

XML Example

The following XML fragment illustrates a **relateOrganizationsRequest** message:

```
<relateOrganizationsRequest>
  <orgData>
    <organizationToRelate>
      <primaryKeys>
        <name>ACME</name>
      </primaryKeys>
    </organizationToRelate>
    <relatedOrganization>
      <primaryKeys>
        <name>ACME-PART</name>
      </primaryKeys>
    </relatedOrganization>
  </orgData>
</relateOrganizationsRequest>
```

XML Example

```
</primaryKeys>
</relatedOrganization>
</orgData>
</relateOrganizationsRequest>
```

Element: relateOrganizationsResponse

Description

A **relateOrganizationsResponse** message contains an element of relateOrganizationsResponseType.

Derived By

Type [relateOrganizationsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedRelateOrganizationsDataListType	0..1	See failedRelateOrganizationsDataListType .									

Referenced By

Name	Type
relateOrganizations	Method

XML Example

The following XML fragment illustrates a successful **relateOrganizationsResponse** message:

```
<relateOrganizationsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</relateOrganizationsResponse>
```


Element: updateOrganizationRequest

Description

An **updateOrganizationRequest** message contains one or more elements of updateOrganizationRequestType.

Derived By

Type [updateOrganizationRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgData	updateOrgDataType	1..*	Organization to be updated. See Table updateOrgDataType .

Referenced By

Name	Type
updateOrganization	Method

XML Example

The following XML fragment illustrates an **updateOrganizationRequest** message:

```
<updateOrganizationRequest>
  <orgData>
    <organization>
      <primaryKeys>
        <name>ACME-MARK</name>
      </primaryKeys>
    </organization>
    <name>ACME-MARKET</name>
    <displayName>ACME Marketing</displayName>
    <description>ACME Marketing North America</description>
    <address>
      <address1>456 Bush Street</address1>
      <address2>Suite 100</address2>
      <city>San Francisco</city>
      <state>CA</state>
      <zipcode>92222</zipcode>
      <country>US</country>
      <region>North America</region>
    </address>
    <relatedOrganizations>
      <relatedOrganization>
        <primaryKeys>
          <name>ACME-MARK-WEST</name>
        </primaryKeys>
      </relatedOrganization>
      <opType>ADD</opType>
    </relatedOrganizations>
  </orgData>
</updateOrganizationRequest>
```

XML Example

```
<subOrganization>
  <primaryKeys>
    <name>ACME-MARK-WEST</name>
  </primaryKeys>
</subOrganization>
<opType>ADD</opType>
</subOrganizations>
</orgData>
</updateOrganizationRequest>
```

Element: updateOrganizationResponse

Description

An **updateOrganizationResponse** message contains an element of updateOrganizationResponseType.

Derived By

Type [updateOrganizationResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
			Element	Data Type	Description							
			status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.							
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateOrgDataListType	0..1	See failedUpdateOrgDataListType .									

Referenced By

Name	Type
updateOrganization	Method

XML Example

The following XML fragment illustrates a successful **updateOrganizationResponse** message:

```
<updateOrganizationResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateOrganizationResponse>
```

Element: updateUserRequest

Description

An **updateUserRequest** message contains an element of updateUserRequestType.

Derived By

Type [updateUserRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userData	updateUserDataTypes	1..*	User to be updated. See updateUserDataTypes .

Referenced By

Name	Type
updateUser	Method

XML Example

The following XML fragment illustrates an **updateUserRequest** message:

```
<updateUserRequest>
  <userData>
    <user>
      <userName>jsmith</userName>
    </user>
    <firstName>Jack</firstName>
    <lastName>Smith</lastName>
    <displayName>Jack Smith</displayName>
    <emailAddress>jsmith@example.com</emailAddress>
    <optIn>false</optIn>
    <phoneNumber>408-123-5678</phoneNumber>
    <faxNumber>408-123-8765</faxNumber>
    <street>4321 Main Street</street>
    <city>San Jose</city>
    <state>CA</state>
    <zipcode>95025</zipcode>
    <country>US</country>
    <status>Active</status>
    <locale>en_US</locale>
    <timezone>-08:00</timezone>
    <shared>false</shared>
    <orgRolesList>
      <orgRoles>
        <organization>
          <primaryKeys>
            <name>WILY</name>
          </primaryKeys>
        </organization>
      </roles>
    </orgRolesList>
  </userData>
</updateUserRequest>
```

XML Example

```
<role>
  <primaryKeys>
    <name>Portal User Role</name>
  </primaryKeys>
</role>
</roles>
</orgRoles>
<opType>ADD</opType>
</orgRolesList>
<customAttributes>
  <attribute>
    <attributeName>NO_OF_OTHER_PRODUCTS</attributeName>
    <integerValue>2</integerValue>
  </attribute>
</customAttributes>
</userData>
</updateUserRequest>
```

Element: updateUserResponse

Description

An **updateUserResponse** message contains an element of updateUserResponseType.

Derived By

Type [updateUserResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description									
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateUserDataListType	0..1	See failedUpdateUserDataListType .									

Referenced By

Name	Type
updateUser	Method

XML Example

The following XML fragment illustrates a successful **updateUserResponse** message:

```
<updateOrganizationResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</updateOrganizationResponse>
```

Element: updateUserRolesRequest

Description

An **updateUserRolesRequest** message contains an element of updateUserRolesRequestType.

Derived By

Type [updateUserRolesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userData	updateUserRolesDataTy pe	1..*	User to be updated. See updateUserRolesData Type .

Referenced By

Name	Type
updateUserRoles	Method

XML Example

The following XML fragment illustrates an **updateUserRolesRequest** message:

```
<updateUserRolesRequest>
  <userData>
    <user>
      <userName>jsmith</userName>
    </user>
    <orgRoles>
      <organization>
        <primaryKeys>
          <name>Delta</name>
        </primaryKeys>
      </organization>
      <roles>
        <role>
          <primaryKeys>
            <name>Portal Admin User Role</name>
          </primaryKeys>
        </role>
        <opType>REPLACE</opType>
      </roles>
    </orgRoles>
  </userData>
</updateUserRolesRequest>
```

Element: updateUserRolesResponse

Description

An **updateUserRolesResponse** message contains an element of `updateUserRolesResponseType`.

Derived By

Type [updateUserRolesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description									
 SEQUENCE		1..1										
statusInfo	StatusInfoType	1..1	<table><tr><th>Element</th><th>Data Type</th><th>Description</th></tr><tr><td>status</td><td>StatusType</td><td>Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed. </td></tr><tr><td>reason</td><td>string</td><td>Gives reason for partial failure or failure.</td></tr></table>	Element	Data Type	Description	status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.	reason	string	Gives reason for partial failure or failure.
Element	Data Type	Description										
status	StatusType	Returns one of the following: - SUCCESS—All features in the request were processed. - PARTIAL_FAILURE—Some, but not all features in the request were processed. The getCount and getQuery operations never return PARTIAL_FAILURE. - FAILURE—None of the features in the request were processed.										
reason	string	Gives reason for partial failure or failure.										
failedData	failedUpdateUserRolesDataListType	0..1	See failedUpdateUserRolesDataListType .									

Referenced By

Name	Type
updateUserRoles	Method

XML Example

The following XML fragment illustrates a successful **updateUserRolesResponse** message:

```
<updateUserRolesResponse>  
  <statusInfo>  
    <status>SUCCESS</status>  
  </statusInfo>  
</updateUserRolesResponse>
```

UserAdministration Web Service

Description

Web service to manage users.

Introduction

The User Administration service manages users (by creating, importing, updating, and querying operations) in both the FlexNet and directory service domains. The service also imports user groups from directory service domains and manages their access to FlexNet Operations. To add a user, there must be existing roles in the FlexNet Operations database.

Methods: UserAdministration

Methods

Name	Description
addGroups	The addGroups operation imports one or more groups. To import groups, there must be a non-FlexNet domain in the database.
addUsers	The addUsers operation adds one or more users. To add users, there must be roles in the database.
changeGroupStatus	The changeGroupStatus operation changes the status of a group of users.
changeUserStatus	The changeUserStatus operation changes the status of a user.
countUsers	The countUsers operation returns users who match a specified criterion.
deleteUsers	The deleteUsers operation deletes one or more users.
findUsers	The findUsers operation returns information about one or more users that match a specified criterion Important: The <i>findUsers</i> operation replaces the deprecated <i>retrieveAllUsers</i> operation. <i>findUsers</i> supports filtering users and paging the response to better support large numbers of users.
resetPassword	The resetPassword operation sends a new system-generated password to a user belonging to the default FlexNet domain.
retrieveAllGroups	The retrieveAllGroups operation returns a list of all groups.
retrieveAllUsers	The retrieveAllUsers operation returns information about all users. Important: This operation was deprecated. Instead, use the <i>findUsers</i> operation because it supports filtering users and paging the response to better support large numbers of users.
retrieveCustomAttrMetaData	The retrieveCustomAttrMetaData operation returns metadata for custom user attributes. Sample custom user attributes are provided in <install_dir>/site/samples/userCustomAttributes.
retrieveGroup	The retrieveGroup operation returns details of a single group.
retrieveUser	The retrieveUser operation returns details of a single user.
updateGroups	The updateGroups operation updates the characteristics of groups. This operations does not add or remove users from a group.
updateUsers	The updateUsers operation updates users.

Method: addGroups

Description

The **addGroups** operation imports one or more groups. To import groups, there must be a non-FlexNet domain in the database.

Parameters

Name	Type	Direction	Description
addGroupsRequest	GroupList	Input	See GroupList.

Returns

A [addGroupsResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: addUsers

Description

The **addUsers** operation adds one or more users. To add users, there must be roles in the database.

Parameters

Name	Type	Direction	Description
addUsersRequest	UserList	Input	See UserList.

Returns

A [addUsersResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: changeGroupStatus

Description

The **changeGroupStatus** operation changes the status of a group of users.

Parameters

Name	Type	Direction	Description
changeGroupStatusRequest	GroupStatus	Input	See GroupStatus.

Returns

A [changeGroupStatusResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusCorelation	string	
statusCode	string	
statusMessage	string	

Method: changeUserStatus

Description

The **changeUserStatus** operation changes the status of a user.

Parameters

Name	Type	Direction	Description
changeUserStatusRequest	UserStatus	Input	See UserStatus.

Returns

A [changeUserStatusResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusCorelation	string	
statusCode	string	
statusMessage	string	

Method: countUsers

Description

The **countUsers** operation returns users who match a specified criterion.

Parameters

Name	Type	Direction	Description
countUsersRequest	CountUsersQuery	Input	See CountUsersQuery.

Returns

A [countUsersResponse](#) element having the structure defined by the following table.

Name	Type	Description
count	integer	Number of users who match the specified criterion.
error	StatusResponse	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: deleteUsers

Description

The **deleteUsers** operation deletes one or more users.

Parameters

Name	Type	Direction	Description
deleteUsersRequest	DeleteUserList	Input	See DeleteUserList.

Returns

A [deleteUsersResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: findUsers

Description

The **findUsers** operation returns information about one or more users that match a specified criterion

Important: The *findUsers* operation replaces the deprecated *retrieveAllUsers* operation. *findUsers* supports filtering users and paging the response to better support large numbers of users.

Parameters

Name	Type	Direction	Description
findUsersRequest	FindUsersQuery	Input	See FindUsersQuery.

Returns

A [findUsersResponse](#) element having the structure defined by the following table.

Name	Type	Description
users	DisplayUser	See DisplayUser .
error	StatusResponse	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: resetPassword

Description

The **resetPassword** operation sends a new system-generated password to a user belonging to the default FlexNet domain.

Parameters

Name	Type	Direction	Description
resetPasswordRequest	UserReset	Input	See UserReset.

Returns

A [resetPasswordResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusCorelation	string	

Returns

Name	Type	Description
statusCode	string	
statusMessage	string	

Method: retrieveAllGroups

Description

The **retrieveAllGroups** operation returns a list of all groups.

Parameters

Name	Type	Direction	Description
retrieveAllGroupsRequest	EmptyRequest	Input	See EmptyRequest.

Returns

A [retrieveAllGroupsResponse](#) element having the structure defined by the following table.

Name	Type	Description
groups	DisplayGroup	See DisplayGroup .
error	StatusResponse	error contains the following string elements: • statusCode • statusMessage

Method: retrieveAllUsers

Description

The **retrieveAllUsers** operation returns information about all users.

Important: This operation was deprecated. Instead, use the findUsers operation because it supports filtering users and paging the response to better support large numbers of users.

Parameters

Name	Type	Direction	Description
retrieveAllUsersRequest	EmptyRequest	Input	See EmptyRequest.

Returns

A [retrieveAllUsersResponse](#) element having the structure defined by the following table.

Name	Type	Description
users	DisplayUser	See DisplayUser .
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: retrieveCustomAttrMetaData

Description

The **retrieveCustomAttrMetaData** operation returns metadata for custom user attributes. Sample custom user attributes are provided in <install_dir>/site/samples/userCustomAttributes.

Parameters

Name	Type	Direction	Description
customAttrMetaDataRequest	EmptyRequest	Input	See EmptyRequest.

Returns

A [customAttrMetaDataResponse](#) element having the structure defined by the following table.

Name	Type	Description
attributes	CustomAttributeMetaData	Returned custom user attribute metadata. See customAttrMetaData .
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: retrieveGroup

Description

The **retrieveGroup** operation returns details of a single group.

Parameters

Name	Type	Direction	Description
retrieveGroupRequest	GroupQuery	Input	See GroupQuery.

Returns

A [retrieveGroupResponse](#) element having the structure defined by the following table.

Name	Type	Description
domainGroup	DomainGroup	See DomainGroup .
error	StatusResponse	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: retrieveUser

Description

The **retrieveUser** operation returns details of a single user.

Parameters

Name	Type	Direction	Description
retrieveUserRequest	UserQuery	Input	See UserQuery.

Returns

A [retrieveUserResponse](#) element having the structure defined by the following table.

Name	Type	Description
user	User	See User . The organization display name is returned, not the organization identifier.
domainUser	DomainUser	See DomainUser . The organization display name is returned, not the organization identifier.

Returns

Name	Type	Description
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: updateGroups

Description

The **updateGroups** operation updates the characteristics of groups. This operations does not add or remove users from a group.

Parameters

Name	Type	Direction	Description
updateGroupsRequest	GroupList	Input	See GroupList.

Returns

A [updateGroupsResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: updateUsers

Description

The **updateUsers** operation updates users.

Parameters

Name	Type	Direction	Description
updateUsersRequest	UserList	Input	See UserList.

Returns

A [updateUsersResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: • statusCorrelation • statusCode • statusMessage

Complex Types: UserAdministration

Complex Types

Name
AllGroupsResponse
AllUsersResponse
CountUsersQuery
CountUsersResponse
CustomAttribute
CustomAttributeMetaData
CustomAttrMetaDataResponse
DeleteUserList
DisplayGroup
DisplayUser
DomainGroup
DomainUser
EmptyRequest
FindUsersQuery
FindUsersResponse
GroupList
GroupQuery
GroupResponse
GroupStatus
Role
StatusResponseList
User
UserList
UserQuery
UserReset
UserResponse
UserStatus

Complex Type: AllGroupsResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
groups	DisplayGroup	1..*	See DisplayGroup .

Referenced By

Name	Type
retrieveAllGroupsResponse	Element

Complex Type: AllUsersResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
users	DisplayUser	1..*	See DisplayUser .

Referenced By

Name	Type
retrieveAllUsersResponse	Element

Complex Type: CountUsersQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
CHOICE		1..1	
userSearchColumn	UserSearchColumnType	0..1	userSearchColumn can be one of the following: • UserName • DisplayName • OrganizationName Note: Use either the userSearchColumn or the UserSearchCustomAttribute elements, but not both.
userSearchCustomAttribute	string	0..1	You can search for a user with the specified value of a text-type attribute, where the attribute name is appended by the string <_customattribute> (for example, OTHER_PRODUCTS_USED_customattribute). Note: Use either the userSearchColumn or the userSearchCustomAttribute elements, but not both.
userSearchValue	string	0..1	Value of the attribute to match.

Referenced By

Name	Type
countUsersRequest	Element
countUsers	Method

Complex Type: CountUsersResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
count	integer	1..1	Number of users who match the specified criterion.
error	StatusResponse	1..1	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
countUsersResponse	Element

Complex Type: CustomAttribute

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the custom attribute defined for the user entity.
CHOICE		1..1	
multiValue	string	1..*	If the custom attribute is of type multivalue, this is the actual value or values.
value	string	1..1	Value for the custom attribute.

Complex Type: CustomAttributeMetaData

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Attribute name.
required	boolean	1..1	Whether or not the attribute is required.
type	string (restriction)	1..1	Required. One of the following values: • TEXT • LONGTEXT • NUMBER • BOOLEAN • DATE • MULTI_VALUED_TEXT
hasRangeValues	boolean	1..1	Whether or not the attribute has a range of values.
minRange	string	0..1	Minimum value of the attribute.
maxRange	string	0..1	Maximum value of the attribute.
hasValidValues	boolean	1..1	Whether or not the attribute has a set of valid values.
validValues	string	0..*	Valid values for the attribute.

Complex Type: CustomAttrMetaDataResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 CHOICE		1..1	

Content Model

Component	Type	Occurs	Description
attributes	CustomAttributeMetaDat a	1..*	Returned custom user attribute metadata. See customAttrMetaData .
error	StatusResponse	1..1	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Referenced By

Name	Type
customAttrMetaApiResponse	Element

Complex Type: DeleteUserList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..*	Required. The user name to log in to FlexNet Operations.
domain	string	0..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Referenced By

Name	Type
deleteUsersRequest	Element
deleteUsers	Method

Complex Type: DisplayGroup

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
displayName	string	1..1	Display name of the group.
domain	string	1..1	Domain that contains user and group information (for example, the name of a directory service configured in FlexNet Operations).
status	StatusType	1..1	Optional. StatusType can be one of the following values: • Active • Inactive If not set, the status defaults to Active. Only need to specify if modifying value.

Complex Type: DisplayUser

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	User name to log in to FlexNet Operations.
shared	boolean	0..1	Whether the login is shared among multiple users.
displayName	string	1..1	First and last name.
domain	string	1..1	Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).
dateCreated	string	1..1	Date the user was created.
dateLastLogin	string	0..1	Date a non-shared user last logged in, if the user has ever logged in.

Content Model

Component	Type	Occurs	Description
status	StatusType	1..1	Optional. StatusType can be one of the following values: • Active • Inactive If not set, the status defaults to Active. Only need to specify if modifying value.
organization	string	1..1	Optional. The organization to which the user belongs. Specify the organization identifier, not the organization display name. Could be the Home organization (MYORG), a Customer organization, or the organization for self-registered Portal accounts (PORTAL_ORG_UNIT). If not specified, the Home organization is set.

Complex Type: DomainGroup

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
groupDN	string	1..1	Required. Distinguished name of the group in the directory service domain.
domain	string	1..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).
displayName	string	0..1	Not supported in a web service request. Its value is taken from the required Group Display Name Attribute specified in the domain configuration.
status	StatusType	0..1	Optional. StatusType can be one of the following values: • Active • Inactive If not set, the status defaults to Active. Only need to specify if modifying value.

Content Model

Component	Type	Occurs	Description
roles	Role	0..*	At least one role must be assigned to a user. Only need to specify if modifying value. See Role.

Complex Type: DomainUser

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.
domain	string	1..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).
displayName	string	0..1	Not supported in a web service request. Its value is taken from the required User Display Name Attribute specified in the domain configuration.
email	string	0..1	Email address of user. Not supported in a web service request. Only need to specify if modifying value.
optIn	boolean	0..1	Optional. Whether a user (usually a Customer user) wants to receive email from the Home organization. If not specified, defaults to false. Only need to specify if modifying value.
locale	string	0..1	A string containing one of the locale settings supported by Java, for example, en_US. Only need to specify if modifying value.
timeZone	string	0..1	Only need to specify if modifying value. Provide timezone setting in ISO 8601 format (+/-hh:mm) as an offset from GMT. For example, -08:00 or +05:30. A value of Z corresponds to GMT. When a user is saved, this offset is converted to a time zone string and the time zone string is displayed when a user is retrieved.

Content Model

Component	Type	Occurs	Description
status	StatusType	0..1	Optional. StatusType can be one of the following values: • Active • Inactive If not set, the status defaults to Active. Only need to specify if modifying value.
organization	string	0..1	Optional. The organization to which the user belongs. Specify the organization identifier, not the organization display name. Could be the Home organization (MYORG), a Customer organization, or the organization for self-registered Portal accounts (PORTAL_ORG_UNIT). If not specified, the Home organization is set.
roles	Role	0..*	At least one role must be assigned to a user. Only need to specify if modifying value. See Role.
customAttribute	CustomAttribute	0..*	Optional. Set if custom attributes are defined for the user entity. See CustomAttribute.

Complex Type: EmptyRequest

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
empty	string	0..1	Required. Leave value blank.

Referenced By

Name	Type
customAttrMetaDataRequest	Element
retrieveAllGroupsRequest	Element
retrieveAllUsersRequest	Element
retrieveAllGroups	Method
retrieveAllUsers	Method

Referenced By

Name	Type
retrieveCustomAttrMetaData	Method

Complex Type: FindUsersQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
 CHOICE		1..1	
userSearchColumn	UserSearchColumnType	0..1	userSearchColumn can be one of the following: • UserName • DisplayName • OrganizationName Note: Use either the userSearchColumn or the UserSearchCustomAttribute elements, but not both.
userSearchCustomAttribute	string	0..1	You can search for a user with the specified value of a text-type attribute, where the attribute name is appended by the string <_customattribute> (for example, OTHER_PRODUCTS_USED_customattribute). Note: Use either the userSearchColumn or the userSearchCustomAttribute elements, but not both.
userSearchValue	string	0..1	Value of the attribute to match.
pageNumber	integer	0..1	Optional. Starts at 1. Say the findUsers operation using the query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Optional. Maximum number of records to return in the response. If not provided, all results are returned.

Referenced By

Name	Type
findUsersRequest	Element
findUsers	Method

Complex Type: FindUsersResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
users	DisplayUser	1..*	See DisplayUser .

Referenced By

Name	Type
findUsersResponse	Element

Complex Type: GroupList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
domainGroups	DomainGroup	1..*	Optional. See DomainGroup .

Referenced By

Name	Type
addGroupsRequest	Element
updateGroupsRequest	Element
addGroups	Method
updateGroups	Method

Complex Type: GroupQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
groupDN	string	1..1	Required. Distinguished name of the group in the directory service domain.
domain	string	1..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Referenced By

Name	Type
GroupStatus	Complex Type
retrieveGroupRequest	Element
retrieveGroup	Method

Complex Type: GroupResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 CHOICE		1..1	
domainGroup	DomainGroup	1..1	See DomainGroup .
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
retrieveGroupResponse	Element

Complex Type: GroupStatus

Derived By

Extending [GroupQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
groupDN	string	1..1	Required. Distinguished name of the group in the directory service domain.
domain	string	1..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Content Model

Component	Type	Occurs	Description
status	StatusType	1..1	Optional. StatusType can be one of the following values: • Active • Inactive If not set, the status defaults to Active. Only need to specify if modifying value.

Referenced By

Name	Type
changeGroupStatusRequest	Element
changeGroupStatus	Method

Complex Type: Role

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Required. Role name.
dataServiceName	string	0..1	Not currently supported by FlexNet Operations.
description	string	0..1	Not currently supported by FlexNet Operations.

Complex Type: StatusResponseList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
addGroupsResponse	Element
addUsersResponse	Element
deleteUsersResponse	Element
updateGroupsResponse	Element
updateUsersResponse	Element

Complex Type: User

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.
firstName	string	1..1	Required. User's first name.
lastName	string	1..1	Required. User's last name.
email	string	0..1	Optional, but a FlexNet user cannot be sent the system-generated password email if the email address is not set. Only need to specify if modifying value.
optIn	boolean	0..1	Optional. Whether a user (usually a Customer user) wants to receive email from the Home organization. If not specified, defaults to false.

Content Model

Component	Type	Occurs	Description
phoneNumber	string	0..1	Optional. Phone number of user. Only need to specify if modifying value.
faxNumber	string	0..1	Optional. Fax number of user. Only need to specify if modifying value.
street	string	0..1	Optional. Street address of user. Only need to specify if modifying value.
city	string	0..1	Optional. City in which user is located. Only need to specify if modifying value.
state	string	0..1	Optional. State in which user is located. Only need to specify if modifying value.
postalCode	string	0..1	Optional. Zip or postal code in which user is located. Only need to specify if modifying value.
country	string	0..1	Optional. Country in which user is located. Provide country in the two-character ISO-3166 format. Only need to specify if modifying value.
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US. Only need to specify if modifying value.
timeZone	string	0..1	Only need to specify if modifying value. Provide timezone setting in ISO 8601 format (+/-hh:mm) as an offset from GMT. For example, -08:00 or +05:30. A value of Z corresponds to GMT. When a user is saved, this offset is converted to a time zone string and the time zone string is displayed when a user is retrieved.
status	StatusType	0..1	Optional. StatusType can be one of the following values: - Active - Inactive If not set, the status defaults to Active. Only need to specify if modifying value.
organization	string	0..1	Optional. The organization to which the user belongs. Specify the organization identifier, not the organization display name. Could be the Home organization (MYORG), a Customer organization, or the organization for self-registered Portal accounts (PORTAL_ORG_UNIT). If not specified, the Home organization is set.
shared	boolean	0..1	Optional. If not specified, defaults to false. Only need to specify if modifying value.

Content Model

Component	Type	Occurs	Description
externalAuthentication	boolean	0..1	Optional. Set to true if this user's authentication is done by an application other than FlexNet Operations (that is, FlexNet Operations does not maintain the user's password in its database), though the user is in the FlexNet domain. If not specified, defaults to false. Authentication scheme can not be changed once it has been set when a user is created.
roles	Role	0..*	At least one role must be assigned to a user. Only need to specify if modifying value. See Role.
customAttribute	CustomAttribute	0..*	Optional. Set if custom attributes are defined for the user entity. See Table CustomAttribute.

Complex Type: UserList

Description

Specify **users[]** or **domainUsers[]**, not both, in a single request.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
domainUsers	DomainUser	1..*	Users in a directory service domain. The directory service domain must be configured in FlexNet Operations before domain users can be imported. See DomainUser .
users	User	1..*	Users in the FlexNet domain. See User .

Referenced By

Name	Type
addUsersRequest	Element
updateUsersRequest	Element
addUsers	Method
updateUsers	Method

Complex Type: UserQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.
domain	string	0..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Referenced By

Name	Type
UserStatus	Complex Type
retrieveUserRequest	Element
retrieveUser	Method

Complex Type: UserReset

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.

Referenced By

Name	Type
resetPasswordRequest	Element
resetPassword	Method

Complex Type: UserResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
domainUser	DomainUser	1..1	See DomainUser . The organization display name is returned, not the organization identifier.
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
user	User	1..1	See User . The organization display name is returned, not the organization identifier.

Referenced By

Name	Type
retrieveUserResponse	Element

Complex Type: UserStatus

Derived By

Extending [UserQuery](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.
domain	string	0..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).
status	StatusType	1..1	Optional. StatusType can be one of the following values: • Active • Inactive If not set, the status defaults to Active. Only need to specify if modifying value.

Referenced By

Name	Type
changeUserStatusRequest	Element
changeUserStatus	Method

Elements: UserAdministration

Elements

Name	Description
addGroupsRequest	An addGroupsRequest message contains an element of type GroupList.
addGroupsResponse	An addGroupsResponse message contains an element of StatusResponseList. Each group in the addGroupsRequest is imported as an atomic unit; importing each either succeeds or fails
addUsersRequest	An addUsersRequest message contains an element of type UserList. . Specify users[] or domainUsers[] ,not both, in a single request.
addUsersResponse	An addUsersResponse message contains an element of StatusResponseList.
changeGroupStatusRequest	A changeGroupStatusRequest message contains an element of GroupStatus.
changeGroupStatusResponse	A changeGroupStatusResponse message contains an element of StatusResponse.
changeUserStatusRequest	A changeUserStatusRequest message contains an element of UserStatus.
changeUserStatusResponse	A changeUserStatusResponse message contains an element of StatusResponse.
countUsersRequest	A countUsersRequest message contains an element of CountUsersQuery.
countUsersResponse	A countUsersResponse message contains an element of CountUsersResponse.
customAttrMetaDataRequest	A customAttrMetaDataRequest message contains an element of EmptyRequest.
customAttrMetaDataResponse	A customAttrMetaDataResponse message contains an element of customAttrMetaDataResponse.
deleteUsersRequest	A deleteUsersRequest message contains an element of UserStatus.
deleteUsersResponse	A deleteUsersResponse message contains an element of StatusResponse.
findUsersRequest	A findUsersRequest message contains an element of FindUsersQuery.
findUsersResponse	A findUsersResponse message contains an element of FindUsersResponse.
resetPasswordRequest	A resetPasswordRequest message contains an element of UserReset.
resetPasswordResponse	A resetPasswordResponse message contains an element of StatusResponse.
retrieveAllGroupsRequest	A retrieveAllGroupsRequest message contains an element of EmptyRequest.
retrieveAllGroupsResponse	A retrieveAllGroupsResponse message contains an element of AllGroupsResponse.
retrieveAllUsersRequest	A retrieveAllUsersRequest message contains an element of EmptyRequest.
retrieveAllUsersResponse	A retrieveAllUsersResponse message contains an element of AllUsersResponse.
retrieveGroupRequest	A retrieveGroupRequest message contains an element of GroupQuery.
retrieveGroupResponse	A retrieveGroupResponse message contains an element of GroupResponse.
retrieveUserRequest	A retrieveUserRequest message contains an element of UserQuery.

Elements

Name	Description
retrieveUserResponse	A retrieveUserResponse message contains an element of UserResponse. Either user or domainUser will be returned, not both.
updateGroupsRequest	An updateGroupsRequest message contains an element of GroupList.
updateGroupsResponse	An updateGroupsResponse message contains an element of StatusResponseList. Each group in the updateGroupsRequest is updated as an atomic unit; updating each either succeeds or fails.
updateUsersRequest	An updateUsersRequest message contains an element of UserList. Specify users[] or domainUsers[] , not both, in a single request.
updateUsersResponse	An updateUsersResponse message contains an element of StatusResponseList. Each user in the updateUsersRequest is updated as an atomic unit; updating each either succeeds or fails.

Element: addGroupsRequest

Description

An **addGroupsRequest** message contains an element of type GroupList.

Derived By

Type [GroupList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
domainGroups	DomainGroup	1..*	Optional. See DomainGroup .

Referenced By

Name	Type
addGroups	Method

XML Example

The following XML fragment illustrates an **addGroupsRequest** message:

```
<addGroupsRequest>
  <domainGroups>
    <groupDN>CN=Accounts,CN=Users,dc=test,dc=com</groupDN>
```

XML Example

```
<domain>TestAD</domain>
<status>Inactive</status>
<roles>
  <name>Portal User Role</name>
</roles>
</domainGroups>
</addGroupsRequest>
```

Element: addGroupsResponse

Description

An **addGroupsResponse** message contains an element of **StatusResponseList**.

Each group in the **addGroupsRequest** is imported as an atomic unit; importing each either succeeds or fails

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
addGroups	Method

XML Example

The following XML fragment illustrates a successful **addGroupsResponse** message:

```
<addGroupsResponse>
  <status>
    <statusCorelation>GroupDN:"CN=Accounts,CN=Users,DC=test,DC=com"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully Added with "false" status
      INFO:Role "Portal User Role" added successfully
  </status>
</addGroupsResponse>
```

XML Example

```
</statusMessage>
</status>
</addGroupsResponse>
```

Element: addUsersRequest

Description

An **addUsersRequest** message contains an element of type `UserList`. . Specify **users[]** or **domainUsers[]**, not both, in a single request.

Derived By

Type [UserList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
domainUsers	DomainUser	1..*	Users in a directory service domain. The directory service domain must be configured in FlexNet Operations before domain users can be imported. See DomainUser .
users	User	1..*	Users in the FlexNet domain. See User .

Referenced By

Name	Type
addUsers	Method

XML Example

The following XML fragment illustrates an **addUsersRequest** message:

```
<addUsersRequest>
  <users>
    <userId>testuser</userId>
    <firstName>Test</firstName>
    <lastName>User</lastName>
    <email>test@example.com</email>
    <optIn>false</optIn>
    <phoneNumber>408-555-2222</phoneNumber>
    <faxNumber>408-555-0001</faxNumber>
    <locale>en_US</locale>
    <timeZone>-07:00</timeZone>
    <status>Active</status>
    <organization>ACME</organization>
    <shared>false</shared>
```

XML Example

```
<roles>
  <name>Portal User Role</name>
</roles>
</users>
</addUsersRequest>
```

Element: addUsersResponse

Description

An **addUsersResponse** message contains an element of StatusResponseList.

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: • statusCorrelation • statusCode • statusMessage

Referenced By

Name	Type
addUsers	Method

XML Example

The following XML fragment illustrates a successful **addUsersResponse** message:

```
<addUsersResponse>
  <status>
    <statusCorrelation>UserID:"testuser"</statusCorrelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully Added with "true" status
      INFO:Role "Portal User Role" added successfully
    </statusMessage>
  </status>
</addUsersResponse>
```

Element: changeGroupStatusRequest

Description

A **changeGroupStatusRequest** message contains an element of GroupStatus.

Derived By

Type [GroupStatus](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
groupDN	string	1..1	Required. Distinguished name of the group in the directory service domain.
domain	string	1..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).
status	StatusType	1..1	Optional. StatusType can be one of the following values: - Active - Inactive If not set, the status defaults to Active. Only need to specify if modifying value.

Referenced By

Name	Type
changeGroupStatus	Method

XML Example

The following XML fragment illustrates a **changeGroupStatusRequest** message:

```
<changeGroupStatusRequest>  
  <groupDN>CN=Engineering,CN=Users,DC=test,DC=com</groupDN>  
  <domain>TestAD</domain>  
  <status>Active</status>  
</changeGroupStatusRequest></changeGroupStatusRequest>
```

Element: changeGroupStatusResponse

Description

A **changeGroupStatusResponse** message contains an element of StatusResponse.

Derived By

Type StatusResponse

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusCorelation	string	0..1	
statusCode	string	0..1	
statusMessage	string	0..1	

Referenced By

Name	Type
changeGroupStatus	Method

XML Example

The following XML fragment illustrates a **changeGroupStatusResponse** message:

```
<changeGroupStatusResponse>  
  <statusCorelation>GroupDN:"CN=Engineering,CN=Users,DC=testlab,DC=com"  
    </statusCorelation>  
  <statusCode>200</statusCode>  
  <statusMessage>Status changed to "true"</statusMessage>  
</changeGroupStatusResponse>
```

Element: changeUserStatusRequest

Description

A **changeUserStatusRequest** message contains an element of UserStatus.

Derived By

Type [UserStatus](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.
domain	string	0..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).
status	StatusType	1..1	Optional. StatusType can be one of the following values: - Active - Inactive If not set, the status defaults to Active. Only need to specify if modifying value.

Referenced By

Name	Type
changeUserStatus	Method

Element: changeUserStatusResponse

Description

A **changeUserStatusResponse** message contains an element of StatusResponse.

Derived By

Type StatusResponse

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusCorelation	string	0..1	
statusCode	string	0..1	
statusMessage	string	0..1	

Referenced By

Name	Type
changeUserStatus	Method

Element: countUsersRequest

Description

A **countUsersRequest** message contains an element of CountUsersQuery.

Derived By

Type [CountUsersQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
CHOICE		1..1	
userSearchColumn	UserSearchColumnType	0..1	userSearchColumn can be one of the following: • UserName • DisplayName • OrganizationName Note: Use either the userSearchColumn or the UserSearchCustomAttribute elements, but not both.
userSearchCustomAttribute	string	0..1	You can search for a user with the specified value of a text-type attribute, where the attribute name is appended by the string <_customattribute> (for example, OTHER_PRODUCTS_USED_customattribute). Note: Use either the userSearchColumn or the userSearchCustomAttribute elements, but not both.
userSearchValue	string	0..1	Value of the attribute to match.

Referenced By

Name	Type
countUsers	Method

XML Example

The following XML fragment illustrates a **countUsersRequest** message using the **userSearchColumn** element:

```
<countUsersRequest>
  <userSearchColumn>OrganizationName</userSearchColumn>
  <userSearchValue>MYORG</userSearchValue>
</countUsersRequest>
```

The following XML fragment illustrates a **countUsersRequest** message using the **userSearchCustomAttribute** element:

```
<countUsersRequest>
  <userSearchCustomAttribute>OTHER_PRODUCTS_USED_customattribute</userSearchColumn>
  <userSearchValue>Acrobat</userSearchValue>
</countUsersRequest>
```

Element: countUsersResponse

Description

A **countUsersResponse** message contains an element of CountUsersResponse.

Derived By

Type [CountUsersResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
count	integer	1..1	Number of users who match the specified criterion.
error	StatusResponse	1..1	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
countUsers	Method

XML Example

The following XML fragment illustrates a **countUsersResponse** message:

XML Example

```
<countUsersResponse>  
  <count>4</count>  
</countUsersResponse>
```

Element: customAttrMetaDataReader

Description

A **customAttrMetaDataReader** message contains an element of EmptyRequest.

Derived By

Type [EmptyRequest](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
empty	string	0..1	Required. Leave value blank.

Referenced By

Name	Type
retrieveCustomAttrMetaDataReader	Method

XML Example

The following XML fragment illustrates a **customAttrMetaDataReader** message:

```
<<customAttrMetaDataReader>  
  <empty></empty>  
</customAttrMetaDataReader>
```

Element: customAttrMetaDataReaderResponse

Description

A **customAttrMetaDataReaderResponse** message contains an element of customAttrMetaDataReaderResponse.

Derived By

Type [CustomAttrMetaDataReaderResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 CHOICE		1..1	
attributes	CustomAttributeMetaDat a	1..*	Returned custom user attribute metadata. See customAttrMetaData .
error	StatusResponse	1..1	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Referenced By

Name	Type
retrieveCustomAttrMetaData	Method

XML Example

The following XML fragment illustrates a successful **customAttrMetaDataResponse** message :

```
<customAttrMetaDataResponse>
  <attributes>
    <name>OTHER_PRODUCTS_USED</name>
    <required>>false</required>
    <type>TEXT</type>
    <hasRangeValues>>false</hasRangeValues>
    <hasValidValues>>false</hasValidValues>
  </attributes>
  <attributes>
    <name>NO_OF_OTHER_PRODUCTS</name>
    <required>>false</required>
    <type>NUMBER</type>
    <hasRangeValues>>false</hasRangeValues>
    <hasValidValues>>false</hasValidValues>
  </attributes>
  <attributes>
    <name>REGION_BELONGS_TO</name>
    <required>>false</required>
    <type>TEXT</type>
    <hasRangeValues>>false</hasRangeValues>
    <hasValidValues>>true</hasValidValues>
    <validValues>USA</validValues>
    <validValues>EMEA</validValues>
    <validValues>ASIA</validValues>
  </attributes>
  <attributes>
    <name>CUSTOMER_SINCE_DATE</name>
    <required>>false</required>
    <type>DATE</type>
    <hasRangeValues>>false</hasRangeValues>
    <hasValidValues>>false</hasValidValues>
  </attributes>
</customAttrMetaDataResponse>
```

XML Example

```
<attributes>
  <name>SUBSCRIBE_NEWS</name>
  <required>false</required>
  <type>BOOLEAN</type>
  <hasRangeValues>false</hasRangeValues>
  <hasValidValues>false</hasValidValues>
</attributes>
<attributes>
  <name>RATING</name>
  <required>false</required>
  <type>NUMBER</type>
  <hasRangeValues>true</hasRangeValues>
  <minRange>1</minRange>
  <maxRange>10</maxRange>
  <hasValidValues>false</hasValidValues>
</attributes>
<attributes>
  <name>PREFERRED_COMMUNICATION</name>
  <required>false</required>
  <type>MULTI_VALUED_TEXT</type>
  <hasRangeValues>false</hasRangeValues>
  <hasValidValues>true</hasValidValues>
  <validValues>Email</validValues>
  <validValues>Phone</validValues>
  <validValues>Post</validValues>
  <validValues>Other</validValues>
</attributes>
</customAttrMetaDataResponse>
```

Element: deleteUsersRequest

Description

A **deleteUsersRequest** message contains an element of UserStatus.

Derived By

Type [DeleteUserList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..*	Required. The user name to log in to FlexNet Operations.
domain	string	0..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Referenced By

Name	Type
deleteUsers	Method

XML Example

The following XML fragment illustrates a **deleteUsersRequest** message:

```
<deleteUsersRequest>  
  <userId>samual</userId>  
  <userId>joel</userId>  
  <domain>FLEXnet</domain>  
</deleteUsersRequest>
```

Element: deleteUsersResponse

Description

A **deleteUsersResponse** message contains an element of StatusResponse.

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
deleteUsers	Method

XML Example

The following XML fragment illustrates a successful **deleteUsersResponse** message:

XML Example

```
<deleteUsersResponse">
  <status>
    <statusCorelation>UserID:"samual"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully deleted user</statusMessage>
  </status>
  <status>
    <statusCorelation>UserID:"joel"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully deleted user</statusMessage>
  </status>
</deleteUsersResponse>
```

Element: findUsersRequest

Description

A **findUsersRequest** message contains an element of FindUsersQuery.

Derived By

Type [FindUsersQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
CHOICE		1..1	
userSearchColumn	UserSearchColumnType	0..1	userSearchColumn can be one of the following: - UserName - DisplayName - OrganizationName Note: Use either the userSearchColumn or the UserSearchCustomAttribute elements, but not both.
userSearchCustomAttribute	string	0..1	You can search for a user with the specified value of a text-type attribute, where the attribute name is appended by the string <_customattribute> (for example, OTHER_PRODUCTS_USED_customattribute). Note: Use either the userSearchColumn or the userSearchCustomAttribute elements, but not both.
userSearchValue	string	0..1	Value of the attribute to match.

Content Model

Component	Type	Occurs	Description
pageNumber	integer	0..1	Optional. Starts at 1. Say the findUsers operation using the query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Optional. Maximum number of records to return in the response. If not provided, all results are returned.

Referenced By

Name	Type
findUsers	Method

XML Example

The following XML fragment illustrates a **findUsersRequest** message using the **UserSearchColumn** element:

```
<findUsersRequest>
  <userSearchColumn>UserName</userSearchColumn>
  <userSearchValue>admin</userSearchValue>
  <pageNumber>1</pageNumber>
  <batchSize>50</batchSize>
</findUsersRequest>
```

The following XML fragment illustrates a **findUsersRequest** message using the **UserSearchCustomAttribute** element, showing the proper query:

```
<findUsersRequest>
  <userSearchCustomAttribute>OTHER_PRODUCTS_USED_customattribute</userSearchCustomAttribute>
  <userSearchValue>Acrobat</userSearchValue>
  <pageNumber>1</pageNumber>
  <batchSize>10</batchSize>
</findUsersRequest>
```

Element: findUsersResponse

Description

A **findUsersResponse** message contains an element of FindUsersResponse.

Derived By

Type [FindUsersResponse](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
users	DisplayUser	1..*	See DisplayUser .

Referenced By

Name	Type
findUsers	Method

XML Example

The following XML fragment illustrates a successful **findUsersResponse** message:

```
<findUsersResponse>
  <users>
    <userId>admin</userId>
    <shared>false</shared>
    <displayName>System Administration</displayName>
    <domain>FLEXnet</domain>
    <dateCreated>2009-02-15 10:46:29.0</dateCreated>
    <dateLastLogin>Tue Feb 20 18:24:42 PST 2009</dateLastLogin>
    <status>Active</status>
    <organization>My Organization</organization>
  </users>
</findUsersResponse>
```

Element: resetPasswordRequest

Description

A **resetPasswordRequest** message contains an element of UserReset.

Derived By

Type [UserReset](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.

Referenced By

Name	Type
resetPassword	Method

Element: resetPasswordResponse

Description

A **resetPasswordResponse** message contains an element of StatusResponse.

Derived By

Type StatusResponse

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusCorelation	string	0..1	
statusCode	string	0..1	
statusMessage	string	0..1	

Referenced By

Name	Type
resetPassword	Method

Element: retrieveAllGroupsRequest

Description

A **retrieveAllGroupsRequest** message contains an element of EmptyRequest.

Derived By

Type [EmptyRequest](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
empty	string	0..1	Required. Leave value blank.

Referenced By

Name	Type
retrieveAllGroups	Method

XML Example

The following XML fragment illustrates a **retrieveAllGroupsRequest** message:

```
<retrieveAllGroupsRequest>  
</retrieveAllGroupsRequest>
```

Element: retrieveAllGroupsResponse

Description

A **retrieveAllGroupsResponse** message contains an element of AllGroupsResponse.

Derived By

Type [AllGroupsResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	

Content Model

Component	Type	Occurs	Description
error	StatusResponse	1..1	error contains the following string elements: • statusCorrelation • statusCode • statusMessage
groups	DisplayGroup	1..*	See DisplayGroup .

Referenced By

Name	Type
retrieveAllGroups	Method

XML Example

The following XML fragment illustrates a successful **retrieveAllGroupsResponse** message:

```
<retrieveAllGroupsResponse>
  <groups>
    <displayName>Engineering</displayName>
    <domain>TestAD</domain>
    <status>Inactive</status>
  </groups>
  <groups>
    <displayName>Accounts</displayName>
    <domain>TestAD</domain>
    <status>Active</status>
  </groups>
</retrieveAllGroupsResponse>
```

Element: retrieveAllUsersRequest

Description

A **retrieveAllUsersRequest** message contains an element of EmptyRequest.

Derived By

Type [EmptyRequest](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
empty	string	0..1	Required. Leave value blank.

Referenced By

Name	Type
retrieveAllUsers	Method

XML Example

The following XML fragment illustrates a **retrieveAllUsersRequest** message:

```
<retrieveAllUsersRequest>  
</retrieveAllUsersRequest>
```

Element: retrieveAllUsersResponse

Description

A **retrieveAllUsersResponse** message contains an element of AllUsersResponse.

Derived By

Type [AllUsersResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
users	DisplayUser	1..*	See DisplayUser .

Referenced By

Name	Type
retrieveAllUsers	Method

XML Example

The following XML fragment illustrates a successful **retrieveAllUsersResponse** message:

```
<retrieveAllUsersResponse>
  <user>
    <userId>admin</userId>
    <shared>true</shared>
    <displayName>System Administration</displayName>
    <domain>FLEXnet</domain>
    <dateCreated>2005-11-30 14:13:56.0</dateCreated>
    <status>Active</status>
    <organization>My Organization</organization>
  </user>
  ...
  <user>
    <userId>testuser</userId>
    <shared>false</shared>
    <displayName>Test User</displayName>
    <domain>FLEXnet</domain>
    <dateCreated>2005-11-30 16:40:30.668</dateCreated>
    <dateLastLogin>2005-11-30 17:01:24.988</dateLastLogin>
    <status>Active</status>
    <organization>Acme Software Corporation</organization>
  </user>
  <error xsi:nil="true"/>
</retrieveAllUsersResponse>
```

Element: retrieveGroupRequest

Description

A **retrieveGroupRequest** message contains an element of GroupQuery.

Derived By

Type [GroupQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
groupDN	string	1..1	Required. Distinguished name of the group in the directory service domain.

Content Model

Component	Type	Occurs	Description
domain	string	1..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Referenced By

Name	Type
retrieveGroup	Method

XML Example

The following XML fragment illustrates a **retrieveGroupRequest** message:

```
<retrieveGroupRequest>  
  <groupDN>CN=Accounts,CN=Users,DC=test,DC=com</groupDN>  
  <domain>TestAD</domain>  
</retrieveGroupRequest>
```

Element: retrieveGroupResponse

Description

A **retrieveGroupResponse** message contains an element of GroupResponse.

Derived By

Type [GroupResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
domainGroup	DomainGroup	1..1	See DomainGroup .
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
retrieveGroup	Method

XML Example

The following XML fragment illustrates a successful **retrieveGroupResponse** message:

```
<retrieveGroupResponse>
  <domainGroup>
    <groupDN>CN=Accounts,CN=Users,DC=test,DC=com</groupDN>
    <domain>TestAD</domain>
    <displayName>Accounts</displayName>
    <status>Active</status>
    <roles>
      <name>Executive<name>
    </roles>
  </domainGroup>
</retrieveGroupResponse>
```

Element: retrieveUserRequest

Description

A **retrieveUserRequest** message contains an element of UserQuery.

Derived By

Type [UserQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	Required. User name to log in to FlexNet Operations.
domain	string	0..1	Required, if not the FlexNet domain. Domain that contains user information (for example, the name of a directory service configured in FlexNet Operations).

Referenced By

Name	Type
retrieveUser	Method

XML Example

The following XML fragment illustrates a **retrieveUserRequest** message:

```
<retrieveUserRequest>
  <userId>testuser</userId>
  <domain>FLEXnet</domain>
</retrieveUserRequest>
```

Element: retrieveUserResponse

Description

A **retrieveUserResponse** message contains an element of UserResponse. Either **user** or **domainUser** will be returned, not both.

Derived By

Type [UserResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
domainUser	DomainUser	1..1	See DomainUser . The organization display name is returned, not the organization identifier.
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
user	User	1..1	See User . The organization display name is returned, not the organization identifier.

Referenced By

Name	Type
retrieveUser	Method

XML Example

The following XML fragment illustrates a successful **retrieveUserResponse** message:

```
<retrieveUserResponse>
  <user>
```

XML Example

```
<userId>testuser</userId>
<firstName>Test</firstName>
<lastName>User</lastName>
<email>test@example.com</email>
<optIn>false</optIn>
<phoneNumber>408-555-2222</phoneNumber>
<faxNumber>408-555-0001</faxNumber>
<locale>en_US</locale>
<timeZone>America/Dawson_Creek</timeZone>
<status>Active</status>
<organization>Acme Software Corporation</organization>
<shared>false</shared>
<roles>
  <name>Portal User Role</name>
</roles>
</user>
<domainUser xsi:nil="true"/>
<error xsi:nil="true"/>
</retrieveUserResponse>
```

Element: updateGroupsRequest

Description

An **updateGroupsRequest** message contains an element of [GroupList](#).

Derived By

Type [GroupList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
domainGroups	DomainGroup	1..*	Optional. See DomainGroup .

Referenced By

Name	Type
updateGroups	Method

XML Example

The following XML fragment illustrates an **updateGroupsRequest** message:

```
<updateGroupsRequest>
  <domainGroups>
    <groupDN>CN=Accounts,CN=Users,DC=test,DC=com</groupDN>
    <domain>TestAD</domain>
  </domainGroups>
</updateGroupsRequest>
```

XML Example

```
<status>Active</status>
<roles>
  <name>Executive</name>
</roles>
</domainGroups>
</updateGroupsRequest>
```

Element: updateGroupsResponse

Description

An **updateGroupsResponse** message contains an element of `StatusResponseList`.

Each group in the **updateGroupsRequest** is updated as an atomic unit; updating each either succeeds or fails.

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
updateGroups	Method

XML Example

The following XML fragment illustrates a successful **updateGroupsResponse** message:

```
<updateGroupsResponse>
  <status>
    <statusCorelation>GroupDN:"CN=Accounts,CN=Users,DC=test,DC=com"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully Updated with "true" status
      INFO:Role "Executive" added successfully</statusMessage>
  </status>
```

XML Example

```
</updateGroupsResponse>
```

Element: updateUsersRequest

Description

An **updateUsersRequest** message contains an element of `UserList`. Specify **users[]** or **domainUsers[]**, not both, in a single request.

Derived By

Type [UserList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
domainUsers	DomainUser	1..*	Users in a directory service domain. The directory service domain must be configured in FlexNet Operations before domain users can be imported. See DomainUser .
users	User	1..*	Users in the FlexNet domain. See User .

Referenced By

Name	Type
updateUsers	Method

Element: updateUsersResponse

Description

An **updateUsersResponse** message contains an element of `StatusResponseList`.

Each user in the `updateUsersRequest` is updated as an atomic unit; updating each either succeeds or fails.

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
updateUsers	Method

OrganizationAdministration Web Service

Description

Web service to manage organizations.

Introduction

The Organization Administration service manages organizations (by creating, updating, and querying operations).

Methods: OrganizationAdministration

Methods

Name	Description
addOrganizations	The addOrganizations operation adds one or more organizations and contacts.
countOrganizations	The countOrganizations operation returns the number of organizations who match a specified criterion.
deleteOrganizations	The deleteOrganizations operation deletes one or more organizations and contacts.
findOrganizations	The findOrganizations operation returns organizations whose organization identifier or display name contains the specified string. Organization contacts are also returned. Important: The <i>findOrganizations</i> operation replaces the deprecated <i>retrieveAllOrganizations</i> operation. <i>findOrganizations</i> supports filtering organizations and paging the response to better support large numbers of organizations.
retrieveAllOrganizations	The retrieveAllOrganizations operation returns a list of all organizations and their contacts. Important: This operation was deprecated. Instead, use the findOrganizations operation because it supports filtering organizations and paging the response to better support large numbers of organizations.
retrieveOrganization	The retrieveOrganization operation returns a single organization and its contacts.
updateOrganizations	The updateOrganizations operation updates organizations and contacts.

Method: addOrganizations

Description

The **addOrganizations** operation adds one or more organizations and contacts.

Parameters

Name	Type	Direction	Description
addOrganizationsRequest	OrganizationList	Input	See OrganizationList.

Returns

A [addOrganizationsResponse](#) element having the structure defined by the following table.

Returns

Name	Type	Description
status	StatusResponse	status contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: countOrganizations

Description

The **countOrganizations** operation returns the number of organizations who match a specified criterion.

Parameters

Name	Type	Direction	Description
countOrganizationsRequest	CountOrganizationsQuery	Input	See CountOrganizationsQuery.

Returns

A [countOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description
count	integer	Number of organizations who match the specified criterion.
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: deleteOrganizations

Description

The **deleteOrganizations** operation deletes one or more organizations and contacts.

Parameters

Name	Type	Direction	Description
deleteOrganizationsRequest	DeleteOrganizationList	Input	See DeleteOrganiza tionList.

Returns

A [deleteOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Method: findOrganizations

Description

The **findOrganizations** operation returns organizations whose organization identifier or display name contains the specified string. Organization contacts are also returned.

Important: The *findOrganizations* operation replaces the deprecated *retrieveAllOrganizations* operation. *findOrganizations* supports filtering organizations and paging the response to better support large numbers of organizations.

Parameters

Name	Type	Direction	Description
findOrganizationsRequest	FindOrganizationsQuery	Input	See FindOrganizatio nsQuery.

Returns

A [findOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description
organizations	DisplayOrganization	See DisplayOrganization.

Returns

Name	Type	Description
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: retrieveAllOrganizations

Description

The **retrieveAllOrganizations** operation returns a list of all organizations and their contacts.

Important: This operation was deprecated. Instead, use the **findOrganizations** operation because it supports filtering organizations and paging the response to better support large numbers of organizations.

Parameters

Name	Type	Direction	Description
retrieveAllOrganizationsRequest	EmptyRequest	Input	See EmptyRequest.

Returns

A [retrieveAllOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description
organizations	DisplayOrganization	See DisplayOrganization.
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: retrieveOrganization

Description

The **retrieveOrganization** operation returns a single organization and its contacts.

Parameters

Name	Type	Direction	Description
retrieveOrganizationRequest	OrganizationQuery	Input	See OrganizationQuery.

Returns

A [retrieveOrganizationResponse](#) element having the structure defined by the following table.

Name	Type	Description
organization	DisplayOrganization	See DisplayOrganization.
error	StatusResponse	error contains the following string elements: • statusCorrelation • statusCode • statusMessage

Method: updateOrganizations

Description

The **updateOrganizations** operation updates organizations and contacts.

Parameters

Name	Type	Direction	Description
updateOrganizationsRequest	UpdateOrganizationList	Input	See UpdateOrganizationList.

Returns

A [updateOrganizationsResponse](#) element having the structure defined by the following table.

Name	Type	Description
status	StatusResponse	status contains the following string elements: • statusCorrelation • statusCode • statusMessage

Complex Types: OrganizationAdministration

Complex Types

Name
AllOrganizationResponse
Contact
CountOrganizationsQuery
CountOrganizationsResponse
DeleteOrganizationList
DisplayOrganization
EmptyRequest
FindOrganizationsQuery
FindOrganizationsResponse
Organization
OrganizationList
OrganizationQuery
OrganizationResponse
StatusResponseList
UpdateOrganization
UpdateOrganizationList

Complex Type: AllOrganizationResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
organizations	DisplayOrganization	1..*	See DisplayOrganization.

Referenced By

Name	Type
retrieveAllOrganizationsResponse	Element

Complex Type: Contact

Description

Contacts are considered to be duplicates if **firstName**, **lastName**, **email**, and **phoneNumber** values are all identical.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
firstName	string	1..1	Required. Contact's first name.
lastName	string	1..1	Required. Contact's last name.
email	string	0..1	Optional. Email address of contact.
optIn	boolean	0..1	Optional. Whether a contact wants to receive email from the Home organization (publisher). If not specified, defaults to false.
phoneNumber	string	0..1	Optional. Phone number of contact.
faxNumber	string	0..1	Optional. Fax number of contact.
street	string	0..1	Optional. Street address of contact.
city	string	0..1	Optional. City in which contact is located.
state	string	0..1	Optional. State in which contact is located.
postalCode	string	0..1	Optional. Postal code in which contact is located.
country	string	0..1	Optional. Country in which contact is located. Provide country in the two-character ISO-3166 format.
locale	string	0..1	Optional. A string containing one of the locale settings supported by Java, for example, en_US.
statusType	ContactStatusType	0..1	Ignored by the addOrganization operation. Specified contacts are always added, even if a different statusType is specified.

Complex Type: CountOrganizationsQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	0..1	Required. name is a string to match against part of an organization identifier or organization display name.

Referenced By

Name	Type
countOrganizationsRequest	Element
countOrganizations	Method

Complex Type: CountOrganizationsResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
count	integer	1..1	Number of organizations who match the specified criterion.
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
countOrganizationsResponse	Element

Complex Type: DeleteOrganizationList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizationId	string	1..*	Required. Displayed as Organization Identifier (short organization name) in the web interface.
uniqueId	long	1..*	Database identifier of the organization to update. Either the uniqueId or organizationId are required to identify the organization to update.

Referenced By

Name	Type
deleteOrganizationsRequest	Element
deleteOrganizations	Method

Complex Type: DisplayOrganization

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
uniqueId	long	1..1	Database identifier of the organization to update. Either the uniqueId or organizationId are required to identify the organization to update.
organizationId	string	1..1	Organization identifier of organization to update. Displayed as Organization Identifier (short organization name) in the web interface. Either the uniqueId or organizationId are required to identify the organization to update.
organizationDisplayName	string	1..1	Optional (not required for a delete operation). Displayed as Display Name (full organization name) in the web interface.
parentOrganizationId	string	0..1	Not currently supported by FlexNet Operations.
parentOrganizationDisplayName	string	0..1	Not currently supported by FlexNet Operations.
contacts	Contact	0..*	Optional (not required for a delete operation). People in the organization. See Contact.

Complex Type: EmptyRequest

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
empty	string	0..1	Required. Leave value blank.

Referenced By

Name	Type
retrieveAllOrganizationsRequest	Element
retrieveAllOrganizations	Method

Complex Type: FindOrganizationsQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	0..1	Required. name is a string to match against part of an organization identifier or organization display name.
pageNumber	integer	0..1	Optional. Starts at 1. Say the findOrganizations operation using the query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Optional. Maximum number of records to return in the response. If not provided, all results are returned.

Referenced By

Name	Type
findOrganizationsRequest	Element
findOrganizations	Method

Complex Type: FindOrganizationsResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Content Model

Component	Type	Occurs	Description
organizations	DisplayOrganization	1..*	See DisplayOrganization.

Referenced By

Name	Type
findOrganizationsResponse	Element

Complex Type: Organization

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
organizationId	string	1..1	Organization identifier of organization to update. Displayed as Organization Identifier (short organization name) in the web interface. Either the uniqueId or organizationId are required to identify the organization to update.
organizationDisplayName	string	1..1	Optional (not required for a delete operation). Displayed as Display Name (full organization name) in the web interface.
parentOrganizationId	string	0..1	Not currently supported by FlexNet Operations.
parentOrganizationDisplayName	string	0..1	Not currently supported by FlexNet Operations.
contacts	Contact	0..*	Optional (not required for a delete operation). People in the organization. See Contact.

Complex Type: OrganizationList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizations	Organization	1..*	Required. An addOrganizationsRequest contains an array of organizations elements. See Organization .

Referenced By

Name	Type
addOrganizationsRequest	Element
addOrganizations	Method

Complex Type: OrganizationQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizationId	string	1..1	Organization identifier of organization to update. Displayed as Organization Identifier (short organization name) in the web interface. Either the uniqueId or organizationId are required to identify the organization to update.
uniqueId	long	1..1	Database identifier of the organization to update. Either the uniqueId or organizationId are required to identify the organization to update.

Referenced By

Name	Type
retrieveOrganizationRequest	Element
retrieveOrganization	Method

Complex Type: OrganizationResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
organization	DisplayOrganization	1..1	See DisplayOrganization.

Referenced By

Name	Type
retrieveOrganizationResponse	Element

Complex Type: StatusResponseList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
addOrganizationsResponse	Element
deleteOrganizationsResponse	Element
updateOrganizationsResponse	Element

Complex Type: UpdateOrganization

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
CHOICE		1..1	
organizationId	string	1..1	Organization identifier of organization to update. Displayed as Organization Identifier (short organization name) in the web interface. Either the uniqueId or organizationId are required to identify the organization to update.
uniqueId	long	1..1	Database identifier of the organization to update. Either the uniqueId or organizationId are required to identify the organization to update.
newOrganizationId	string	0..1	Specify only if changing the organization identifier. Displayed as Organization Identifier (short organization name) in the web interface.
newOrganizationDisplayName	string	0..1	Specify only if changing the organization display name. Displayed as Display Name (full organization name) in the web interface. OrganizationDisplayNameType is a string.
parentOrganizationId	string	0..1	Not currently supported by FlexNet Operations.
parentOrganizationDisplayName	string	0..1	Not currently supported by FlexNet Operations.
contacts	Contact	0..*	Optional (not required for a delete operation). People in the organization. See Contact.

Complex Type: UpdateOrganizationList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizations	UpdateOrganization	1..*	Required. An updateOrganizationsRequest contains an array of organizations elements. See UpdateOrganization .

Referenced By

Name	Type
updateOrganizationsRequest	Element
updateOrganizations	Method

Elements: OrganizationAdministration

Elements

Name	Description
addOrganizationsRequest	An addOrganizationsRequest message contains an element of OrganizationList.
addOrganizationsResponse	An addOrganizationsResponse message contains an element of StatusResponseList. Each organization in the addOrganizationsRequest is added as an atomic unit; adding each either succeeds or fails
countOrganizationsRequest	A countOrganizationsRequest message contains an element of CountOrganizationsQuery.
countOrganizationsResponse	A countOrganizationsResponse message contains an element of CountOrganizationsResponse.
deleteOrganizationsRequest	A deleteOrganizationsRequest message contains an element of OrganizationList.
deleteOrganizationsResponse	A deleteOrganizationsResponse message contains an element of StatusResponseList. Each organization in the deleteOrganizationsRequest is added as an atomic unit; adding either succeeds or fails.
findOrganizationsRequest	A findOrganizationsRequest message contains an element of FindOrganizationsQuery.
findOrganizationsResponse	A findOrganizationsResponse message contains an element of FindOrganizationsResponse.
retrieveAllOrganizationsRequest	A retrieveAllOrganizationsRequest message contains an element of EmptyRequest.
retrieveAllOrganizationsResponse	A retrieveAllOrganizationsResponse message contains an element of AllOrganizationsResponse.
retrieveOrganizationRequest	A retrieveOrganizationRequest message contains an element of OrganizationQuery. In the request, specify <i>either</i> uniqueId or organizationId to uniquely specify the organization, not both.
retrieveOrganizationResponse	A retrieveOrganizationResponse message contains an element of OrganizationResponse.
updateOrganizationsRequest	An updateOrganizationRequest message contains an element of UpdateOrganizationList.
updateOrganizationsResponse	An updateOrganizationsResponse message contains an element of StatusResponseList. Each organization in the updateOrganizationRequest is updated as an atomic unit; updating each either succeeds or fails.

Element: addOrganizationsRequest

Description

An **addOrganizationsRequest** message contains an element of OrganizationList.

Derived By

Type [OrganizationList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizations	Organization	1..*	Required. An addOrganizationsRequest contains an array of organizations elements. See Organization .

Referenced By

Name	Type
addOrganizations	Method

XML Example

The following XML fragment illustrates an **addOrganizationsRequest** message:

```
<addOrganizationsRequest>
  <organizations>
    <organizationId>TESTORG</organizationId>
    <organizationDisplayName>Test Org</organizationDisplayName>
    <contacts>
      <firstName>Test</firstName>
      <lastName>Contact</lastName>
      <email>test@example.com</email>
      <optIn>false</optIn>
      <phoneNumber>408-555-2222</phoneNumber>
      <faxNumber/>
      <street>123 Main St.</street>
      <city>San Jose</city>
      <state>CA</state>
      <postalCode>95025</postalCode>
      <country>US</country>
      <locale>en_US</locale>
    </contacts>
  </organizations>
</addOrganizationsRequest>
```

Element: addOrganizationsResponse

Description

An **addOrganizationsResponse** message contains an element of [StatusResponseList](#).

Each organization in the **addOrganizationsRequest** is added as an atomic unit; adding each either succeeds or fails

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
addOrganizations	Method

XML Example

The following XML fragment illustrates a successful **addOrganizationsResponse** message:

```
<addOrganizationsResponse>
  <status>
    <statusCorrelation>Organization ID:"TESTORG"
      DisplayName:"Test Org"</statusCorrelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully Added</statusMessage>
  </status>
</addOrganizationsResponse>
```

Element: countOrganizationsRequest

Description

A **countOrganizationsRequest** message contains an element of CountOrganizationsQuery.

Derived By

Type [CountOrganizationsQuery](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	0..1	Required. name is a string to match against part of an organization identifier or organization display name.

Referenced By

Name	Type
countOrganizations	Method

XML Example

The following XML fragment illustrates a **countOrganizationsRequest** message:

```
<countOrganizationsRequest>  
  <name>Echo</name>  
</countOrganizationsRequest>
```

Element: countOrganizationsResponse

Description

A **countOrganizationsResponse** message contains an element of CountOrganizationsResponse.

Derived By

Type [CountOrganizationsResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
count	integer	1..1	Number of organizations who match the specified criterion.
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
countOrganizations	Method

XML Example

The following XML fragment illustrates a successful **countOrganizationsResponse** message:

```
<countOrganizationsResponse>  
  <count>1</count>  
</countOrganizationsResponse>
```

Element: deleteOrganizationsRequest

Description

A **deleteOrganizationsRequest** message contains an element of OrganizationList.

Derived By

Type [DeleteOrganizationList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizationId	string	1..*	Required. Displayed as Organization Identifier (short organization name) in the web interface.
uniqueId	long	1..*	Database identifier of the organization to update. Either the uniqueId or organizationId are required to identify the organization to update.

Referenced By

Name	Type
deleteOrganizations	Method

XML Example

The following XML fragments illustrate a **deleteOrganizationRequest** message:

```
<deleteOrganizationsRequest>  
  <organizationId>Test-Org11</organizationId>  
  <organizationId>Test-Org12</organizationId>  
</deleteOrganizationsRequest>
```

Element: deleteOrganizationsResponse

Description

A **deleteOrganizationsResponse** message contains an element of StatusResponseList.

Each organization in the **deleteOrganizationsRequest** is added as an atomic unit; adding either succeeds or fails.

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
deleteOrganizations	Method

XML Example

The following XML fragments illustrate a successful **deleteOrganizationResponse** message:

```
<deleteOrganizationsResponse>
  <status>
    <statusCorelation>Name:"Test-Org11"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully deleted organization</statusMessage>
  </status>
  <status>
    <statusCorelation>Name:"Test-Org12"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully deleted organization</statusMessage>
  </status>
</deleteOrganizationsResponse>
```

Element: findOrganizationsRequest

Description

A **findOrganizationsRequest** message contains an element of FindOrganizationsQuery.

Derived By

Type [FindOrganizationsQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	0..1	Required. name is a string to match against part of an organization identifier or organization display name.
pageNumber	integer	0..1	Optional. Starts at 1. Say the findOrganizations operation using the query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Optional. Maximum number of records to return in the response. If not provided, all results are returned.

Referenced By

Name	Type
findOrganizations	Method

XML Example

The following XML fragment illustrates a **findOrganizationsRequest** message:

```
<findOrganizationsRequest>  
  <name>TESTORG</name>  
  <pageNumber>1</pageNumber>  
  <batchSize>50</batchSize>  
</findOrganizationsRequest>
```

Element: findOrganizationsResponse

Description

A **findOrganizationsResponse** message contains an element of FindOrganizationsResponse.

Derived By

Type [FindOrganizationsResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: • statusCorrelation • statusCode • statusMessage
organizations	DisplayOrganization	1..*	See DisplayOrganization.

Referenced By

Name	Type
findOrganizations	Method

XML Example

The following XML fragment illustrates a successful **findOrganizationsResponse** message:

```
<findOrganizationsResponse>
  <organizations>
    <uniqueId>20190</uniqueId>
    <organizationId>TESTORGANIZATION</organizationId>
    <organizationDisplayName>Test Organization</organizationDisplayName>
    <contacts>
      <firstName>Test</firstName>
      <lastName>Contact</lastName>
      <email>test@example.com</email>
      <phoneNumber>408-555-5555</phoneNumber>
      <faxNumber/>
      <street>123 Main St.</street>
      <city>San Jose</city>
      <state>CA</state>
      <postalCode>95025</postalCode>
      <country>US</country>
      <locale>en_US</locale>
    </contacts>
  </organizations>
  <organizations>
    <organizationId>TESTORG2</organizationId>
    <organizationDisplayName>Test Org2</organizationDisplayName>
  </organizations>
  <error xsi:nil="true"/>
</findOrganizationsResponse>
```

Element: retrieveAllOrganizationsRequest

Description

A **retrieveAllOrganizationsRequest** message contains an element of **EmptyRequest**.

Derived By

Type [EmptyRequest](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
empty	string	0..1	Required. Leave value blank.

Referenced By

Name	Type
retrieveAllOrganizations	Method

XML Example

The following XML fragment illustrates a **retrieveAllOrganizationsRequest** message:

```
<retrieveAllOrganizationsRequest>  
</retrieveAllOrganizationsRequest>
```

Element: retrieveAllOrganizationsResponse

Description

A **retrieveAllOrganizationsResponse** message contains an element of **AllOrganizationsResponse**.

Derived By

Type [AllOrganizationResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	

Content Model

Component	Type	Occurs	Description
error	StatusResponse	1..1	error contains the following string elements: • statusCorrelation • statusCode • statusMessage
organizations	DisplayOrganization	1..*	See DisplayOrganization.

Referenced By

Name	Type
retrieveAllOrganizations	Method

XML Example

The following XML fragment illustrates a successful **retrieveAllOrganizationsResponse** message:

```
<retrieveAllOrganizationsResponse>
  <organizations>
    <uniqueId>100059</uniqueId>
    <organizationId>MYORG</organizationId>
    <organizationDisplayName>My Organization</organizationDisplayName>
  </organizations>
  ...
  <organizations>
    <uniqueId>103049</uniqueId>
    <organizationId>TESTORGANIZATION</organizationId>
    <organizationDisplayName>Test Organization</organizationDisplayName>
    <contacts>
      <firstName>Test</firstName>
      <lastName>Contact</lastName>
      <email>test@example.com</email>
      <optIn>false</optIn>
      <phoneNumber>408-555-5555</phoneNumber>
      <statusType xsi:nil="true"/>
    </contacts>
  </organizations>
  <error xsi:nil="true"/>
</retrieveAllOrganizationsResponse>
```

Element: retrieveOrganizationRequest

Description

A **retrieveOrganizationRequest** message contains an element of OrganizationQuery. In the request, specify *either* **uniqueId** or **organizationId** to uniquely specify the organization, not both.

Derived By

Type [OrganizationQuery](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 CHOICE		1..1	
organizationId	string	1..1	Organization identifier of organization to update. Displayed as Organization Identifier (short organization name) in the web interface. Either the uniqueId or organizationId are required to identify the organization to update.
uniqueId	long	1..1	Database identifier of the organization to update. Either the uniqueId or organizationId are required to identify the organization to update.

Referenced By

Name	Type
retrieveOrganization	Method

XML Example

The following XML fragment illustrates a **retrieveOrganizationRequest** message:

```
<retrieveOrganizationRequest>  
  <organizationId>TESTORG</organizationId>  
</retrieveOrganizationRequest>
```

Element: retrieveOrganizationResponse

Description

A **retrieveOrganizationResponse** message contains an element of OrganizationResponse.

Derived By

Type [OrganizationResponse](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
CHOICE		1..1	
error	StatusResponse	1..1	error contains the following string elements: - statusCorrelation - statusCode - statusMessage
organization	DisplayOrganization	1..1	See DisplayOrganization.

Referenced By

Name	Type
retrieveOrganization	Method

XML Example

The following XML fragment illustrates a successful **retrieveOrganizationResponse** message:

```
<retrieveOrganizationResponse>
  <organization>
    <uniqueId>20190</uniqueId>
    <organizationId>TESTORGANIZATION</organizationId>
    <organizationDisplayName>Test Organization</organizationDisplayName>
    <contacts>
      <firstName>Test</firstName>
      <lastName>Contact</lastName>
      <email>test@example.com</email>
      <optIn>false</optIn>
      <phoneNumber>408-555-5555</phoneNumber>
      <statusType xsi:nil="true"/>
    </contacts>
  </organization>
  <error xsi:nil="true"/>
</retrieveOrganizationResponse>
```

Element: updateOrganizationsRequest

Description

An **updateOrganizationRequest** message contains an element of UpdateOrganizationList.

Derived By

Type [UpdateOrganizationList](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
CHOICE		1..1	
organizations	UpdateOrganization	1..*	Required. An updateOrganizationsRequest contains an array of organizations elements. See UpdateOrganization .

Referenced By

Name	Type
updateOrganizations	Method

XML Example

The following XML fragment illustrates an **updateOrganizationsRequest** message:

```
<updateOrganizationsRequest>
  <organizations>
    <organizationId>TESTORG</organizationId>
    <newOrganizationId>TESTORGANIZATION</newOrganizationId>
    <newOrganizationDisplayName>Test Organization</newOrganizationDisplayName>
    <contacts>
      <firstName>Test</firstName>
      <lastName>Contact</lastName>
      <email>test@example.com</email>
      <phoneNumber>408-555-5555</phoneNumber>
      <statusType>Update</statusType>
    </contacts>
  </organizations>
</updateOrganizationsRequest>
```

Element: updateOrganizationsResponse

Description

An **updateOrganizationsResponse** message contains an element of `StatusResponseList`.

Each organization in the **updateOrganizationRequest** is updated as an atomic unit; updating each either succeeds or fails.

Derived By

Type [StatusResponseList](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	StatusResponse	1..*	status contains the following string elements: - statusCorrelation - statusCode - statusMessage

Referenced By

Name	Type
updateOrganizations	Method

XML Example

The following XML fragment illustrates a successful **updateOrganizationsResponse** message:

```
<updateOrganizationsResponse>
  <status>
    <statusCorelation>Organization ID:"TESTORG" DisplayName:"Test Organization"</statusCorelation>
    <statusCode>200</statusCode>
    <statusMessage>Successfully Updated</statusMessage>
  </status>
</updateOrganizationsResponse>
```

FlexnetAuthentication Web Service

Description

Web service to manage Flexnet authentication.

Introduction

The Flexnet Authentication service manages the authentication of a FlexNet Operations user by processing a token passed from another application that performs user authentication, such as a company portal.

Methods: FlexnetAuthentication

Methods

Name	Description
getSecureToken	The getSecureToken operation receives a user identity from an external application to which an end-user has logged in successfully. A unique token is generated for the user identity in the request and passed back to the requesting application. The external application uses this token to support a single sign-on mechanism that allows the end-user to bypass the FlexNet Operations login page.
getUserToken	The getUserToken operation receives a string from an external application to which an end-user has logged in successfully. A token is generated and passed back to the requesting application. The external application uses this token to support a single sign-on mechanism that allows the end-user to bypass the FlexNet Operations login page. Caution: <i>The <code>getUserToken</code> operation was deprecated in FlexNet Operations 8.3.0.2 and its use is not recommended. It is supported for backwards compatibility only.</i>

Method: getSecureToken

Description

The **getSecureToken** operation receives a user identity from an external application to which an end-user has logged in successfully. A unique token is generated for the user identity in the request and passed back to the requesting application. The external application uses this token to support a single sign-on mechanism that allows the end-user to bypass the FlexNet Operations login page.

Parameters

Name	Type	Direction	Description
secureTokenRequest	IdentityType	Input	See IdentityType.

Returns

A [secureTokenResponse](#) element having the structure defined by the following table.

Name	Type	Description
token	string	Secure token passed back to the external application. This token supports the implementation of a single sign-on mechanism for the external application and FlexNet Operations. The token should be used for the same user identity that is passed in the request.

Method: getUserToken

Description

The **getUserToken** operation receives a string from an external application to which an end-user has logged in successfully. A token is generated and passed back to the requesting application. The external application uses this token to support a single sign-on mechanism that allows the end-user to bypass the FlexNet Operations login page.

Caution: *The `getUserToken` operation was deprecated in FlexNet Operations 8.3.0.2 and its use is not recommended. It is supported for backwards compatibility only.*

Parameters

Name	Type	Direction	Description
applicationName	string	Input	A token string.

Returns

A [UserTokenReturn](#) element having the structure defined by the following table.

Name	Type	Description
Token	string	Secure token passed back to the external application. This token supports the implementation of a single sign-on mechanism for the external application and FlexNet Operations.

Complex Types: FlexnetAuthentication

Complex Types

Name
IdentityType
TokenResponseType
UserTokenReturnTypes

Complex Type: IdentityType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	userId is the identity of the user for whom the token will be requested. FlexNet Operations will generate a token linked to this userId .

Referenced By

Name	Type
secureTokenRequest	Element
getSecureToken	Method

Complex Type: TokenResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
token	string	1..1	Secure token passed back to the external application. This token supports the implementation of a single sign-on mechanism for the external application and FlexNet Operations. The token should be used for the same user identity that is passed in the request.

Referenced By

Name	Type
secureTokenResponse	Element

Complex Type: UserTokenReturntype

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Token	string	1..1	Secure token passed back to the external application. This token supports the implementation of a single sign-on mechanism for the external application and FlexNet Operations.

Referenced By

Name	Type
UserTokenReturn	Element

Elements: FlexnetAuthentication

Elements

Name	Description
secureTokenRequest	A secureTokenRequest contains an element of IdentityType.
secureTokenResponse	A secureTokenResponse message contains an element of SecureTokenResponseType.
UserTokenInput	A UserTokenInput message contains a string.
UserTokenReturn	A UserTokenReturn message contains an element of UserTokenResponseType.

Element: secureTokenRequest

Description

A **secureTokenRequest** contains an element of IdentityType.

Derived By

Type [IdentityType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
userId	string	1..1	userId is the identity of the user for whom the token will be requested. FlexNet Operations will generate a token linked to this userId .

Referenced By

Name	Type
getSecureToken	Method

XML Example

The following XML fragment illustrates a **getSecureTokenRequest** message:

```
<secureTokenRequest>  
<userId>sjoe</userId>  
</secureTokenRequest>
```

Element: secureTokenResponse

Description

A **secureTokenResponse** message contains an element of SecureTokenResponseType.

Derived By

Type [TokenResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
token	string	1..1	Secure token passed back to the external application. This token supports the implementation of a single sign-on mechanism for the external application and FlexNet Operations. The token should be used for the same user identity that is passed in the request.

Referenced By

Name	Type
getSecureToken	Method

XML Example

The following XML fragment illustrates a **secureTokenResponse** message:

```
<secureTokenResponse>  
  <token>ras12hkflgthksgymjk</token>  
</secureTokenResponse>
```

Element: UserTokenInput

Description

A **UserTokenInput** message contains a string.

Derived By

Type string

Referenced By

Name	Type
getUserToken	Method

XML Example

The following XML fragment illustrates a **UserTokenInput** message:

```
<UserTokenInput>sjdgljkr</UserTokenInput>
```

Element: UserTokenReturn

Description

A **UserTokenReturn** message contains an element of UserTokenReturn type.

Derived By

Type [UserTokenReturn type](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Token	string	1..1	Secure token passed back to the external application. This token supports the implementation of a single sign-on mechanism for the external application and FlexNet Operations.

Referenced By

Name	Type
getUserToken	Method

XML Example

The following XML fragment illustrates a **UserTokenReturn** message:

```
<UserTokenReturn>  
  <Token>rohkflgthksgymjks</Token>  
</UserTokenReturn>
```

ManageDeviceService Web Service

Description

Web service to manage devices.

Introduction

The Device Management service enables management of hardware devices.

License Restrictions

Some license restrictions govern the use of the Device Management service:

- You must have a FLEXnetOps.FLEXnetEmbedded license to use the Device Management service
- You must have a FLEXnetOps.MultiTierSupport license to specify partner tiers other than the default (endcustomer and tier1) tiers.

In both cases, if you haven't installed a required license, FlexNet Operations returns an error:

ERROR Initialization Failed - Unable to set/verify permissions.

Methods: ManageDeviceService

Methods

Name	Description
createDevice	The createDevice operation takes information about one or more client or server devices and adds them to FlexNet Operations. Devices are created in the Active state.
decrementAddonLineItems	The decrementAddonLineItems operation takes one or many devices and decrements entitlement line items to the devices. To decrement a line item on a simple entitlement to a device, the entitlement must belong to the same soldTo and the product must use the same host type as the device. When a web register key is decremented, it will be redeemed and the soldTo of the device will be assigned to the simple entitlement line item that is created. If decrementing for a device fails, then the failed devices are displayed in the response data.
deleteAddonLineItems	The deleteAddonLineItems operation takes one or many devices and deletes entitlement line items from the devices. If deleting for a device fails, then the failed devices are displayed in the response data.
deleteDevice	The deleteDevice operation deletes one or more hardware devices.
generateCapabilityResponse	The generateCapabilityResponse operation generates capability responses for one or more devices, either from a submitted capability request or from input data that comprises a capability request. This operation optionally maps activation IDs and generates a buffer response for client devices; in the absence of optional input parameters, a capability response is generated. The generateCapabilityResponse operation returns an error for requests to: • generate a buffer response for a server device • generate a buffer response for a client device that previously received a capability response • generate a capability response for a client device that previously received a buffer response • remove or decrease copies of client device buffer licenses Generating from Capability Requests This mode allows a collection of base-64 encoded binary capability requests to be uploaded in one web service operation, licenses (capability and buffer responses) generated or re-generated, as appropriate, and returned to the caller. In this mode, the behavior is identical to the devices being directly connected and receiving responses (or as if requests were uploaded for offline activation), including the ability to register unknown devices if FlexNet Operations is configured to allow adding unknown devices. Confirmation of license removal is possible, and empty responses are returned if nothing changes on the client. In the case of a buffer response, a license cannot be returned (in other words, the count cannot be decreased). The binary responses are returned with base-64 encoding, and wrapped in XML elements that identify the device for which they are intended.

Methods

Name	Description
	Generating from Web Service Parameters This mode bypasses the need for the caller to get or create binary capability requests. The caller specifies the hostid of each device to be processed, and optionally supplies the force generation flag, the last update time, and vendor dictionary entries. Note: If the last update time information is not supplied, the time used is the logical beginning of time. In this case, it is not possible to confirm removal of licenses in the usual way. To support return operations without the last update time, either set the configuration parameter to skip confirmation (which applies to all devices) or define the <i>DeviceRequestHandler.handleResponse</i> call-out to skip confirmation for devices that require special treatment. For example, the <i>handleResponse</i> call-out could be used to skip confirmation only for node-locked licenses (requests coming from clients) but not for served licenses.
generateCloneDetectionReport	If the setting for "Clone Detection" is enabled in FNO UI under System > Configure > Embedded Devices > Host Options , then FNO is capable of detecting if multiple devices are sending in duplicate caprequests to the CLS server (i.e. a fraud). FNO and LFS starts tracking these as duplicate devices as "Clone Suspects". This web-service helps users to identify such clone-suspects. The inputs required are the enterpriseID (that identifies the organization) and the startDate and endDate in which the clone-suspects should be listed.
generatePrebuiltLicense	The generatePrebuiltLicense service takes one or many devices and generates pre-installed licenses for the devices. If the pre-installed license has already been generated, it is regenerated. There are no restrictions on how many times a pre-installed license can be regenerated.
getAutoProvisionedServer	The getAutoProvisionedServer operation returns the default Cloud License Server for the enterprise, if one exists.
getDeviceCount	The getDeviceCount operation takes one or more query parameters to return the number of matching devices. If no specific query parameters are provided in the <queryParams> element, the total number of devices is returned.
getDevicesQuery	The getDevicesQuery operation takes one or more query parameters to return the matching devices. If no specific query parameters are provided in the <queryParams> element, all devices are returned.
incrementAddonLineItems	The incrementAddonLineItems operation takes one or many devices and increments entitlement line items to the devices. To increment a line item on a simple entitlement to a device, the entitlement must belong to the same soldTo and the product must use the same host type as the device. When a web register key is incremented, it will be redeemed and the soldTo of the device will be assigned to the simple entitlement line item that is created. If incrementing for a device fails, then the failed devices are displayed in the response data.

Methods

Name	Description
linkAddonLineItems	The linkAddonLineItems operation takes one or many devices and links entitlement line items to the devices. To link a line item on a simple entitlement to a device, the entitlement must belong to the same soldTo and the product must use the same host type as the device. When a web register key is linked, it will be redeemed and the soldTo of the device will be assigned to the simple entitlement line item that is created. If linking for a device fails, then the failed devices are displayed in the response data.
moveDevice	The moveDevice operation moves a device from one organization to a related organization. A device that has not yet been assigned as sold-to a customer can be moved. For example, the parent organization can move the device from one of its child organizations (a regional division, for instance) to another child organization. When a device is moved, any entitlements that belong to that device are moved as well. The result of such a move is to either create new entitlements for the receiving organization or to increment the count of that organization's existing, matching entitlements by the count on the device that was moved.
obsoleteHost	The obsoleteHost operation returns all licenses and sets the status of host to "OBSOLETE". Host id is appended with the timestamp and word "OBSOLETE".
returnHost	The returnHost operation returns all licenses and sets the status of host to "RETURNED". If a target host is supplied, licenses are transferred to the target host.
updateDevice	The updateDevice operation updates one or more hardware devices.

Method: createDevice

Description

The **createDevice** operation operation takes information about one or more client or server devices and adds them to FlexNet Operations. Devices are created in the Active state.

Parameters

Name	Type	Direction	Description
msgparameters	createDevRequestType	Input	See createDevRequestType .

Returns

A [createDeviceResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .

Returns

Name	Type	Description
failedData	failedCreateDevDataListType	See failedCreateDevDataListType .
responseData	createdDeviceDataListType	See createdDeviceDataListType .

Method: decrementAddonLineItems

Description

The **decrementAddonLineItems** operation takes one or many devices and decrements entitlement line items to the devices.

To decrement a line item on a simple entitlement to a device, the entitlement must belong to the same soldTo and the product must use the same host type as the device. When a web register key is decremented, it will be redeemed and the soldTo of the device will be assigned to the simple entitlement line item that is created.

If decrementing for a device fails, then the failed devices are displayed in the response data.

Parameters

Name	Type	Direction	Description
msgparameters	linkAddonLineItemsRequestType	Input	See linkAddonLineItemsRequestType .

Returns

A [decrementAddonLineItemsResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	linkFailAddonDataListType	See linkFailAddonDataListType .
responseData	successAddonDataListType	See successAddonDataListType .

Method: deleteAddonLineItems

Description

The **deleteAddonLineItems** operation takes one or many devices and deletes entitlement line items from the devices.

If deleting for a device fails, then the failed devices are displayed in the response data.

Parameters

Name	Type	Direction	Description
msgparameters	deleteAddonLineItemsRequestType	Input	See deleteAddonLineItemsRequestType .

Returns

A [deleteAddonLineItemsResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	deleteFailAddonDataListType	See deleteFailAddonDataListType .
responseData	successAddonDataListType	See successAddonDataListType .

Method: deleteDevice

Description

The **deleteDevice** operation deletes one or more hardware devices.

Parameters

Name	Type	Direction	Description
msgparameters	deleteDeviceRequestType	Input	See deleteDeviceRequestType .

Returns

A [deleteDeviceResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedDeleteDevDataListType	See failedDeleteDevDataListType .

Method: generateCapabilityResponse

Description

The **generateCapabilityResponse** operation generates capability responses for one or more devices, either from a

Description

submitted capability request or from input data that comprises a capability request. This operation optionally maps activation IDs and generates a buffer response for client devices; in the absence of optional input parameters, a capability response is generated. The generateCapabilityResponse operation returns an error for requests to:

- generate a buffer response for a server device
- generate a buffer response for a client device that previously received a capability response
- generate a capability response for a client device that previously received a buffer response
- remove or decrease copies of client device buffer licenses

Generating from Capability Requests

This mode allows a collection of base-64 encoded binary capability requests to be uploaded in one web service operation, licenses (capability and buffer responses) generated or re-generated, as appropriate, and returned to the caller. In this mode, the behavior is identical to the devices being directly connected and receiving responses (or as if requests were uploaded for offline activation), including the ability to register unknown devices if FlexNet Operations is configured to allow adding unknown devices. Confirmation of license removal is possible, and empty responses are returned if nothing changes on the client. In the case of a buffer response, a license cannot be returned (in other words, the count cannot be decreased). The binary responses are returned with base-64 encoding, and wrapped in XML elements that identify the device for which they are intended.

Generating from Web Service Parameters

This mode bypasses the need for the caller to get or create binary capability requests. The caller specifies the hostid of each device to be processed, and optionally supplies the force generation flag, the last update time, and vendor dictionary entries.

Note: If the last update time information is not supplied, the time used is the logical beginning of time. In this case, it is not possible to confirm removal of licenses in the usual way. To support return operations without the last update time, either set the configuration parameter to skip confirmation (which applies to all devices) or define the `DeviceRequestHandler.handleResponse` call-out to skip confirmation for devices that require special treatment. For example, the `handleResponse` call-out could be used to skip confirmation only for node-locked licenses (requests coming from clients) but not for served licenses.

Parameters

Name	Type	Direction	Description
msgparameters	generateCapabilityResponseRequestType	Input	See generateCapabilityResponseRequestType.

Returns

A [generateCapabilityResponseResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .

Returns

Name	Type	Description
failedData	failedGenerateCapabilityResponseDataType	See failedGenerateCapabilityResponseDataType .
responseData	generateCapabilityResponseDataType	See generateCapabilityResponseDataType .

Method: generateCloneDetectionReport

Description

If the setting for "Clone Detection" is enabled in FNO UI under **System > Configure > Embedded Devices > Host Options**, then FNO is capable of detecting if multiple devices are sending in duplicate caprequests to the CLS server (i.e. a fraud). FNO and LFS starts tracking these as duplicate devices as "Clone Suspects". This web-service helps users to identify such clone-suspects. The inputs required are the enterpriseID (that identifies the organization) and the startDate and endDate in which the clone-suspects should be listed.

Parameters

Name	Type	Direction	Description
msgparameters	generateCloneDetectionReportRequest	Input	See generateCloneDetectionReportRequest .

Returns

A [generateCloneDetectionReportResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
cloneSuspects	anyType (restriction)	See cloneSuspect .

Method: generatePrebuiltLicense

Description

The **generatePrebuiltLicense** service takes one or many devices and generates pre-installed licenses for the devices. If the pre-installed license has already been generated, it is regenerated. There are no restrictions on how many times a pre-installed license can be regenerated.

Parameters

Name	Type	Direction	Description
msgparameters	generatePrebuiltLicenseRequestType	Input	See generatePrebuiltLicenseRequestType .

Returns

A [generatePrebuiltLicenseResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedGeneratePrebuiltLicenseDataListType	See failedGeneratePrebuiltLicenseDataListType .
responseData	generatePrebuiltLicenseDataListType	See generatePrebuiltLicenseListType .

Method: getAutoProvisionedServer

Description

The **getAutoProvisionedServer** operation returns the default Cloud License Server for the enterprise, if one exists.

Parameters

Name	Type	Direction	Description
msgparameters	getAutoProvisionedServerRequest	Input	

Returns

A [getAutoProvisionedServerResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
cloudLicenseServer	deviceIdIdentifier	See deviceIdIdentifier .

Method: getDeviceCount

Description

The **getDeviceCount** operation takes one or more query parameters to return the number of matching devices. If no specific query parameters are provided in the <queryParams> element, the total number of devices is returned.

Parameters

Name	Type	Direction	Description
msgparameters	getDevicesCountRequestType	Input	See getDevicesCountRequestType .

Returns

A [getDeviceCountResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedGetDevicesDataType	See failedGetDevicesDataType .
responseData	getDeviceCountResponseDataType	See getDeviceCountResponseDataType .

Method: getDevicesQuery

Description

The **getDevicesQuery** operation takes one or more query parameters to return the matching devices. If no specific query parameters are provided in the <queryParams> element, all devices are returned.

Parameters

Name	Type	Direction	Description
msgparameters	getDevicesRequestType	Input	See getDevicesRequestType .

Returns

A [getDevicesResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedGetDevicesDataType	See failedGetDevicesDataType .
responseData	getDevicesResponseDataType	See getDevicesResponseDataType .

Method: incrementAddonLineItems

Description

The **incrementAddonLineItems** operation takes one or many devices and increments entitlement line items to the devices.

To increment a line item on a simple entitlement to a device, the entitlement must belong to the same soldTo and the product must use the same host type as the device. When a web register key is incremented, it will be redeemed and the soldTo of the device will be assigned to the simple entitlement line item that is created.

If incrementing for a device fails, then the failed devices are displayed in the response data.

Parameters

Name	Type	Direction	Description
msgparameters	linkAddonLineItemsRequestType	Input	See linkAddonLineItemsRequestType .

Returns

A [incrementAddonLineItemsResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	linkFailAddonDataListType	See linkFailAddonDataListType .
responseData	successAddonDataListType	See successAddonDataListType .

Method: linkAddonLineItems

Description

The **linkAddonLineItems** operation takes one or many devices and links entitlement line items to the devices.

To link a line item on a simple entitlement to a device, the entitlement must belong to the same soldTo and the product must use the same host type as the device. When a web register key is linked, it will be redeemed and the soldTo of the device will be assigned to the simple entitlement line item that is created.

If linking for a device fails, then the failed devices are displayed in the response data.

Parameters

Name	Type	Direction	Description
msgparameters	linkAddonLineItemsRequestType	Input	See linkAddonLineItemsRequestType .

Returns

A [linkAddonLineItemsResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	linkFailAddonDataListType	See linkFailAddonDataListType .
responseData	successAddonDataListType	See successAddonDataListType .

Method: moveDevice

Description

The **moveDevice** operation moves a device from one organization to a related organization. A device that has not yet been assigned as sold-to a customer can be moved. For example, the parent organization can move the device from one of its child organizations (a regional division, for instance) to another child organization.

When a device is moved, any entitlements that belong to that device are moved as well. The result of such a move is to either create new entitlements for the receiving organization or to increment the count of that organization's existing, matching entitlements by the count on the device that was moved.

Parameters

Name	Type	Direction	Description
msgparameters	moveDeviceRequestType	Input	See moveDeviceRequestType .

Returns

A [moveDeviceResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedMoveDeviceListDataType	See failedMoveDeviceListDataType .

Method: obsoleteHost

Description

The **obsoleteHost** operation returns all licenses and sets the status of host to "OBSOLETE". Host id is appended with the timestamp and word "OBSOLETE".

Parameters

Name	Type	Direction	Description
msgparameters	obsoleteHostRequestListType	Input	See obsoleteHostRequestListType .

Returns

A [obsoleteHostResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedObsoleteHostListDataType	See failedObsoleteHostListDataType .

Method: returnHost

Description

The **returnHost** operation returns all licenses and sets the status of host to "RETURNED". If a target host is supplied, licenses are transferred to the target host.

Parameters

Name	Type	Direction	Description
msgparameters	returnHostRequestListType	Input	See returnHostRequestListType .

Returns

A [returnHostResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedReturnHostListDataType	See failedReturnHostListDataType .

Method: updateDevice

Description

The **updateDevice** operation updates one or more hardware devices.

Parameters

Name	Type	Direction	Description
msgparameters	updateDevRequestType	Input	See updateDevRequestType .

Returns

A [updateDeviceResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	OpsEmbeddedStatusInfoType	See OpsEmbeddedStatusInfoType .
failedData	failedUpdateDevDataListType	See failedUpdateDevDataListType .
responseData	updatedDeviceDataListType	See updatedDeviceDataListType .

Complex Types: ManageDeviceService

Complex Types

Name
addonLineItemDataDataType
attributeDescriptorDataType
attributeDescriptorType
capabilityRequestType
capabilityResponseDataType
channelPartnerDataListType
channelPartnerDataType
cloneSuspect
createdDeviceDataListType
createDeviceIdentifier
createDevRequestType
createDevResponseType
customAttributeDescriptorDataType
customAttributeDescriptorType
customAttributeQueryType
customAttributesQueryListType
DateQueryType
DateTimeQueryType
deleteAddonLineItemDataType
deleteAddonLineItemsRequestType
deleteAddonLineItemsResponseType
deleteDeviceRequestType
deleteDeviceResponseType
deleteFailAddonDataListType
deleteFailAddonDataType
deleteLineItemDataType
deleteLineItemIdentifier
deviceDataType
deviceIdentifier
DeviceMachineTypeQueryType
deviceQueryDataType
DeviceServedStateQueryType
DeviceStateQueryType
deviceTypeList

Complex Types

Name
dictionaryEntry
dictionaryType
DurationType
entitledProductDataListType
entitledProductDataType
failedCapabilityResponseDataType
failedCreateDevDataListType
failedCreateDeviceDataType
failedDeleteDevDataListType
failedDeleteDevDataType
failedGenerateCapabilityResponseDataType
failedGeneratePrebuiltLicenseDataListType
failedGeneratePrebuiltLicenseDataType
failedGetDevicesDataType
failedMoveDeviceDataType
failedMoveDeviceListDataType
failedObsoleteHostDataType
failedObsoleteHostListDataType
failedReturnHostDataType
failedReturnHostListDataType
failedUpdateDevDataListType
failedUpdateDeviceDataType
featureDataDataType
featureIds
generateCapabilityResponseDataType
generateCapabilityResponseDictionary
generateCapabilityResponseDictionaryEntry
generateCapabilityResponseRequestType
generateCapabilityResponseResponseType
generateCloneDetectionReportRequest
generateCloneDetectionReportResponse
generatePrebuiltLicenseDataListType
generatePrebuiltLicenseDataType
generatePrebuiltLicenseRequestType
generatePrebuiltLicenseResponseType

Complex Types

Name
getAutoProvisionedServerRequest
getAutoProvisionedServerResponse
getDeviceCountResponseDataType
getDeviceCountResponseType
getDevicesCountRequestType
getDevicesParametersType
getDevicesRequestType
getDevicesResponseDataType
getDevicesResponseType
hostTypeIdentifier
licenseModelIdentifierType
linkAddonLineItemDataType
linkAddonLineItemsRequestType
linkAddonLineItemsResponseType
linkFailAddonDataListType
linkFailAddonDataType
linkLineItemDataType
linkLineItemIdentifier
moveDeviceList
moveDeviceRequestType
moveDeviceResponseType
NumberQueryType
obsoleteHostRequestListType
obsoleteHostResponseType
obsoleteHostType
OpsEmbeddedStatusInfoType
organizationIdentifierType
organizationPKType
PartnerTierQueryType
productIdentifierType
productPKType
publisherIdentifier
returnHostRequestListType
returnHostResponseType
returnHostType

Complex Types

Name
ServerIdsType
soldToType
successAddonDataListType
updateChannelPartnerDataListType
updatedDeviceDataListType
updateDevDataType
updateDevRequestType
updateDevResponseType
userIdentifierType
userPKType

Complex Type: addonLineItemDataDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database ID of the line item.
activationId	string	0..1	Activation ID.
enabledCount	integer	0..1	The number enabled.
consumedCount	integer	0..1	The number consumed.

Content Model

Component	Type	Occurs	Description
licenseState	licenseStateType	0..1	State of the license, where the value is one of the following: • UNDEFINED • LICENSE_NOT_GENERATED • LICENSE_GENERATED • MARKED_FOR_REMOVAL • REMOVED_FROM_LICENSE • REMOVAL_PENDING_CONFIRMATION • COPIES_INCREASING • COPIES_DECREASING • WAITING_FOR_CONFIRMATION • EXPIRED • OBSOLETE • INACTIVE
entitledProducts	entitledProductDataListType	0..1	See entitledProductDataListType .

Complex Type: attributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attribute	attributeDescriptorType	0..*	attribute contains a required string attributeName and one attributeDescriptorType .

Complex Type: attributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
attributeName	string	1..1	Name of the attribute.
 CHOICE		1..1	
arrayValue	string	0..*	Array of string values of the attribute.
booleanValue	boolean	0..1	Boolean value of the attribute.
dateValue	date	0..1	Date value of the attribute.
integerValue	integer	0..1	Integer value of the attribute.
stringValue	string	0..1	String value of the attribute.

Complex Type: capabilityRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	1..1	See deviceIdIdentifier .
lastUpdateTime	long	0..1	Optional. The date the device was last updated in seconds since midnight, 1 January 1970 GMT. If this date is not specified, the time used will be the logical beginning of time and removal of licenses cannot be confirmed in the usual way. Note: This parameter not supported as of 2016 R1 .
force	boolean	0..1	Optional. If true, the generateCapabilityResponse generates a response even if the lastUpdateTime indicates that no response is needed. Default: false.
vendorDictionary	generateCapabilityResponseDictionary	0..1	Optional. See generateCapabilityResponseDictionary . Note: This parameter not supported as of 2016 R1.

Content Model

Component	Type	Occurs	Description
linelItem	linkLinelItemDataType	0..*	Optional. The activation IDs and their counts to map to the device. If activation ID is already linked to the device, its copies are set to the count value in this request. See linkLinelItemDataType .
bufferLicense	boolean	0..1	Optional. If true, generate a buffer response. Note: This parameter not supported as of 2016 R1.

Complex Type: capabilityResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	1..1	See deviceIdIdentifier .
addonLicense	base64Binary	1..1	The license as a base-64 encoded, binary capability response.
bufferLicense	boolean	0..1	True if the license is a buffer license, otherwise false.

Complex Type: channelPartnerDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
channelPartner	channelPartnerDataType	0..*	See channelPartnerDataType .

Complex Type: channelPartnerDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
tierName	string	1..1	Tier of the channel partner, specified in the OPS_PARTNER_TIER_NAME table. By default, this table includes the tier names for the End Customer and Distributor tiers. Custom tier names can be added to the table manually. In the web services, the tierName string must always be specified as the constant value, not the display value. So for example, End Customer has to be specified as bo.constants.partner-tier-names.endcustomer and Distributor as bo.constants.partner-tier-names.tier1.
organizationUnit	organizationIdentifierType	1..1	See organizationIdentifierType .
contact	userIdentifierType	0..1	See userIdentifierType .
currentOwner	boolean	0..1	True if the organization specified in organizationUnit is the current owner of the device.

Complex Type: cloneSuspect

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
timeStamp	dateTime	0..1	The datetime back office detect/log the clone suspect.
hostClass	WSDeviceType	0..1	Device type: - CLIENT - SERVER - SERVED_CLIENT

Content Model

Component	Type	Occurs	Description
hostAlias	string	0..1	Alias field of the host.
deviceId	string	0..1	Host identifier if the host is a CLIENT or SERVED_CLIENT.
serverId	string	0..1	Host identifier if the host is a server or the server host identifier if the host is a served client by that server.
lineItemActivationIds	anyType (restriction)	1..1	List of the activation details, including the activation ID and count request (for client and server).
lineItemActivationId	string	1..*	
featureIds	featureIds	1..*	List of features including feature ID and count for served client. Note: This attribute is currently disabled.
orgId	string	0..1	Account/Organization owner ID.
orgName	string	0..1	Account/Organization owner name.
enterprisId	string	0..1	System account ID.

Complex Type: createdDeviceDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..*	See deviceIdIdentifier .

Complex Type: createDeviceIdentifier

Description

Either a deviceId or serverId is specified, depending on the deviceType. Each ID must be unique across the set of all device and server IDs.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceType	WSDeviceType	1..1	CLIENT or SERVER.
deviceId	string	0..1	Client device identifier, if this is a client device.
serverIds	ServerIdsType	0..1	Server device identifier, if this is a server device. See ServerIdsType .
deviceIdType	deviceIdTypeType	0..1	Device ID type. The value for deviceIdType can be: - UNKNOWN - STRING - ETHERNET - FLEXID9 - FLEXID10 - EXTENDED - INTERNET - INTERNET6 - USER - TOLERANT - VM_UUID TOLERANT should only be used to create a device as the result of a capability request sent from the device itself. That is, FNO honors requests with ID type of TOLERANT, but because there is no FNO code to support it, it should never be used to create or update a device.
publisherName	string	0..1	The name of the publisher. Part of the unique ID of the device.

Complex Type: createDevRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
device	deviceDataType	1..*	Name of the device. See deviceDataType .

Referenced By

Name	Type
createDeviceRequest	Element
createDevice	Method

Complex Type: createDevResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedCreateDevDataListType	0..1	See failedCreateDevDataListType .
responseData	createdDeviceDataListType	0..1	See createdDeviceDataListType .

Referenced By

Name	Type
createDeviceResponse	Element

Complex Type: customAttributeDescriptorDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	customAttributeDescriptorType	0..*	See customAttributeDescriptorType .

Complex Type: customAttributeDescriptorType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	The attribute name.

Complex Type: customAttributeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attributeName	string	1..1	The name of the custom attribute.
CHOICE		1..1	
booleanValue	boolean	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue . Set to true or false if the custom attribute is of type boolean.

Content Model

Component	Type	Occurs	Description
dateValue	DateQueryType	0..1	Optional. A dateValue element contains: • value—a date value to compare to the version date value. • searchType—one of the following datedSearchType values: • BEFORE • AFTER • ON
numberValue	NumberQueryType	0..1	Optional. Depending on the attribute type, set either stringValue or numberValue or booleanValue. A numberValue element contains: • value—an integer number to match part or all of the custom attribute value. • searchType—one of the following simpleSearchType values: • GREATER_THAN • GREATER_THAN_EQUALS • LESS_THAN • LESS_THAN_EQUALS • EQUALS • NOT_EQUALS

Content Model

Component	Type	Occurs	Description
stringValue	SimpleQueryType	0..1	A stringValue element contains: • value—a string to match part or all of the custom attribute value. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: customAttributesQueryListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
attribute	customAttributeQueryType	0..*	See customAttributeQueryType .

Complex Type: DateQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	date	1..1	A date value to compare to the version date value.
searchType	datedSearchType	1..1	One of the following datedSearchType values: - BEFORE - AFTER - ON

Complex Type: DateTimeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	dateTime	1..1	A date and time value.
searchType	datedSearchType	1..1	One of the following dateSearchType values: - BEFORE - AFTER - ON

Complex Type: deleteAddonLineItemType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	1..1	See deviceIdentifier .
lineItem	deleteLineItemDataType	1..*	See deleteLineItemDataType .

Complex Type: deleteAddonLineItemsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestList	deleteAddonLineItemData aType	1..*	See deleteAddonLineItemData aType .

Referenced By

Name	Type
deleteAddonLineItemsRequest	Element
deleteAddonLineItems	Method

Complex Type: deleteAddonLineItemsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfo Type	1..1	See OpsEmbeddedStatusInfo Type .

Content Model

Component	Type	Occurs	Description
failedData	deleteFailAddonDataListType	0..1	See deleteFailAddonDataListType .
responseData	successAddonDataListType	0..1	See successAddonDataListType .

Referenced By

Name	Type
deleteAddonLineItemsResponse	Element

Complex Type: deleteDeviceRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	1..*	Name of the device. See deviceIdIdentifier .

Referenced By

Name	Type
deleteDeviceRequest	Element
deleteDevice	Method

Complex Type: deleteDeviceResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedDeleteDevDataListType	0..1	See failedDeleteDevDataListType .

Referenced By

Name	Type
deleteDeviceResponse	Element

Complex Type: deleteFailAddonDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failAddon	deleteFailAddonDataType	0..*	See deleteFailAddonDataType .

Complex Type: deleteFailAddonDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..1	See deviceIdIdentifier .
lineItem	deleteLineItemDataType	0..1	See deleteLineItemDataType .

Content Model

Component	Type	Occurs	Description
reason	string	0..1	Reason for failure.

Complex Type: deleteLineItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
lineItemIdentifier	deleteLineItemIdentifier	1..1	See deleteLineItemIdentifier .

Complex Type: deleteLineItemIdentifier

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
activationId	string	0..1	Activation ID.

Complex Type: deviceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	createDeviceIdentifier	1..1	See createDeviceIdentifier .
hostTypeName	hostTypeIdentifier	0..1	Optional. If hostTypeName is not specified, you must implement the com.flexnet.opsembedded.publicapi.DeviceHandler.decodeDeviceId() callout to set it. See hostTypeIdentifier .
publisherIdName	publisherIdentifier	0..1	Optional. If publisherIdName is not specified, you must either implement the DeviceHandler.decodeDeviceId() callout to set it, or the host type must have a default publisher identity defined. See publisherIdentifier .
description	string	0..1	Description of the device.
channelPartners	channelPartnerDataListType	0..1	See channelPartnerDataListType . Note: This parameter not supported as of 2016 R1. Only <i>end-customer</i> is processed in tierName .
customAttributes	attributeDescriptorDataT ype	0..1	See attributeDescriptorDataT ype . Note: This parameter not supported as of 2016 R1.
alias	string	0..1	Optional. The device alias of a client device or server device.
user	string	0..1	Device User associated with the device. Leave empty to remove the Device User associated with the device.
deployment	deployment	0..1	Deployment location: CLOUD or LOCAL.
siteName	string	0..1	Name of site.

Complex Type: deviceIdIdentifier

Description

Note: When used as an input element for update and other operations, either **uniqueId** or **deviceId/serverId**s should be specified—not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceType	WSDeviceType	1..1	CLIENT, SERVER or SERVED_CLIENT.

Content Model

Component	Type	Occurs	Description
uniqueId	string	0..1	Unique database identifier of the device.
deviceId	string	0..1	Client device identifier, if the device is a client device.
serverIds	ServerIdsType	0..1	Server device identifier, if the device is a server device. See ServerIdsType .
deviceIdType	deviceIdTypeType	0..1	Device ID type. The value for deviceIdType can be: - UNKNOWN - STRING - ETHERNET - FLEXID9 - FLEXID10 - EXTENDED - INTERNET - INTERNET6 - USER - TOLERANT - VM_UUID TOLERANT should only be used to create a device as the result of a capability request sent from the device itself. That is, FNO honors requests with ID type of TOLERANT, but because there is no FNO code to support it, it should never be used to create or update a device.
publisherName	string	0..1	The name of the publisher. Part of the unique ID of the device.

Complex Type: DeviceMachineTypeQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	machineTypeType	1..1	The value is a string to match part or all of the machineType: - UNKNOWN - PHYSICAL - VIRTUAL
searchType	enumSearchType	1..1	One of the following enumSearchType values: - EQUALS - NOT_EQUALS

Complex Type: deviceQueryDataType

Description

Note: Some elements apply only to served client devices while others apply only to server devices and client devices. Elements that start with feature are specific to served clients. Elements that start with addOn or preBuilt are specific to server devices and client devices.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..1	See deviceIdIdentifier .
alias	string	0..1	An alias for the device ID.
description	string	0..1	Device description.
hostTypeName	hostTypeIdIdentifier	0..1	See hostTypeIdIdentifier .
deviceStatus	deviceStatusType	0..1	ACTIVE or OBSOLETE.
deviceServedStatus	deviceServedStatusType	0..1	The status of a served client device. The deviceServedStatus can be NORMAL, RETURNED, EXPIRED, or DROPPED. See deviceServedStatusType .

Content Model

Component	Type	Occurs	Description
channelPartners	channelPartnerDataListType	0..1	See channelPartnerDataListType . Note: This parameter not supported as of 2016 R1. Only <i>end-customer</i> is processed in tierName .
soldTo	soldToType	0..1	See soldToType .
preBuiltProduct	productPKType	0..1	Database primary key of the product—strings containing the name and version of the product.
hasPrebuiltLicense	boolean	0..1	Does the device have a prebuilt license?
prebuiltLicense	base64Binary	0..1	Actual prebuilt license.
hasAddonLicense	boolean	0..1	Does the device have a license?
addonLicense	base64Binary	0..1	Actual license.
publisherIdName	publisherIdentifier	0..1	See publisherIdentifier .
addonLineItemData	addonLineItemDataDataType	0..*	See addonLineItemDataDataType .
featureData	featureDataDataType	0..*	See featureDataDataType .
customAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
parentIdentifier	deviceIdentifier	0..1	The parentIdentifier element corresponds to the Served By value for a served client in the admin console UI; it identifies the served client's parent FlexNet Embedded server device. See deviceIdentifier .
machineType	machineTypeType	0..1	The machineType can be UNKNOWN, PHYSICAL, or VIRTUAL.
vmName	string	0..1	The name of the virtual machine on which the device is hosted. If the machineType is not VIRTUAL, vmName is NULL.
vmInfo	dictionaryType	0..1	A BLOB of VM properties. See dictionaryType .
vendorDictionary	dictionaryType	0..1	A BLOB of vendor properties. See dictionaryType .

Content Model

Component	Type	Occurs	Description
deviceUser	string	0..1	This field is supported only for the tenants who have configured their Device User Option to On. The deviceUser string is returned only if the request's deviceResponseConfig contains deviceUser field, set to true. • If the Device User Option is set to Off, and the request's deviceResponseConfig has deviceUser field is true, the service will ignore it, and the response will state that the deviceUser response configuration is not supported. • If the Device User Option is set to On with no validation, the response will contain deviceUser field, set to the string value of the Device User. • If the Device User Option is set to On with validation and the deviceUser response configuration is set to true, the response will not populate the deviceUser for existing users, populating instead deviceUserIdentifier element with user's info. In cases when the user have been deleted, the deviceUser string will be set to <User System ID> (Removed).
deviceUserIdentifier	userIdentifierType	0..1	See userIdentifierType. This field is returned when a tenant's Device User Option is set to On with validation and the response configuration's deviceUser is set to true. The response will contain the following information: • first name • last name • email address • user name • phone number

Complex Type: DeviceServedStateQueryType

Description

Note: This parameter not supported as of 2016 R1.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	deviceServedStatusType	1..1	This element can be set to: - NORMAL - RETURNED - EXPIRED - DROPPED
searchType	simpleSearchType	1..1	One of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Complex Type: DeviceStateQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
value	deviceStatusType	1..1	This element can be set to: • ACTIVE • OBSOLETE • RETURNED
searchType	simpleSearchType	1..1	One of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Complex Type: deviceTypeList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceType	WSDeviceType	1..*	CLIENT, SERVER or SERVED_CLIENT.

Complex Type: dictionaryEntry

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	The name of the entry.
stringValue	string	0..1	The value for the named entry when the value is a string.
numberValue	integer	0..1	The value for the named entry when the value is a number.

Complex Type: dictionaryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entry	dictionaryEntry	1..*	An array of dictionaryEntry elements. See dictionaryEntry .

Complex Type: DurationType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
numDuration	integer	1..1	Required. Specify the number of units of time, for example, 10, for a duration of 10 durationUnit .

Content Model

Component	Type	Occurs	Description
durationUnit	DurationUnit	1..1	Required. Specify one of the following units of time: - DAYS - WEEKS - MONTHS - YEARS

Complex Type: entitledProductDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entitledProduct	entitledProductDataType	0..*	See entitledProductDataType .

Complex Type: entitledProductDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
product	productIdentifierType	0..1	See productIdentifierType .
quantity	integer	1..1	Quantity per copy of the line item. This is a multiplier to the number of copies. If one copy of the line item is fulfilled, this many copies of the entitled product will be fulfilled.

Complex Type: failedCapabilityResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	0..1	See deviceIdentifier .
reason	string	0..1	Reason for failure.

Complex Type: failedCreateDevDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
failedDevice	failedCreateDeviceDataT ype	0..*	See failedCreateDeviceDataType .

Complex Type: failedCreateDeviceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
device	deviceDataType	0..1	See deviceDataType .
reason	string	0..1	Reason for failure.

Complex Type: failedDeleteDevDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedDevice	failedDeleteDevDataTy e	0..*	See failedDeleteDevDataType .

Complex Type: failedDeleteDevDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	0..1	See deviceIdentifier .
reason	string	0..1	Reason for failure.

Complex Type: failedGenerateCapabilityResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
failedDevice	failedCapabilityResponseDataType	0..*	See failedCapabilityResponseDataType .

Complex Type: failedGeneratePrebuiltLicenseDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedDevice	failedGeneratePrebuiltLicenseDataType	0..*	See failedGeneratePrebuiltLicenseDataType .

Complex Type: failedGeneratePrebuiltLicenseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..1	See deviceIdIdentifier .
reason	string	0..1	Reason for failure.

Complex Type: failedGetDevicesDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
reason	string	0..1	Reason for failure.

Complex Type: failedMoveDeviceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	0..1	See deviceIdentifier .
reason	string	0..1	Reason for failure.

Complex Type: failedMoveDeviceListDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedDevice	failedMoveDeviceDataType	0..*	See failedMoveDeviceDataType .

Complex Type: failedObsoleteHostDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdentifier	deviceIdentifier	0..1	See deviceIdentifier .
reason	string	0..1	Reason for the failure.

Complex Type: failedObsoleteHostListDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedHost	failedObsoleteHostDataType	0..*	See failedObsoleteHostDataType .

Complex Type: failedReturnHostDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdentifier	deviceIdentifier	0..1	See deviceIdentifier .
reason	string	0..1	Reason for failure.

Complex Type: failedReturnHostListDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedHost	failedReturnHostDataType	0..*	See failedReturnHostDataType .

Complex Type: failedUpdateDevDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failedDevice	failedUpdateDeviceDataType	0..*	See failedUpdateDeviceDataType .

Complex Type: failedUpdateDeviceDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
device	updateDevDataType	0..1	See updateDevDataType .
reason	string	0..1	Reason for failure.

Complex Type: featureDataDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	0..1	Feature name.
version	string	0..1	Feature version.
count	integer	0..1	Feature count. This is the count that a served client last used when it checked out the feature, as of the last FNE server sync with FlexNet Operations.
overage	integer	0..1	Feature overage. Overage is the count of the feature on a served client device that the server considers as overage, as of the last sync. An overage occurs when the number of copies of a license allocated to an FNE server is reduced to the point that some client devices have a count of that feature that exceeds what the server is entitled to serve. This condition persists until the next time the client renews its checkout of the checkout expires.
expiration	dateTime	0..1	Feature expiration date.
lineItemUniqueid	string	0..1	Unique database ID of the feature line item.
lineItemActivationId	string	0..1	ActivationID of the feature line item.

Complex Type: featureIds

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
featureId	string	1..1	
featureName	string	1..1	
count	int	1..1	

Complex Type: generateCapabilityResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
device	capabilityResponseDataType	0..*	See capabilityResponseDataType .

Complex Type: generateCapabilityResponseDictionary

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
entry	generateCapabilityResponseDictionaryEntry	1..*	See generateCapabilityResponseDictionaryEntry

Complex Type: generateCapabilityResponseDictionaryEntry

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	A name for a vendor dictionary attribute.
stringValue	string	0..1	Optional. A string value for the key in name.
numberValue	integer	0..1	Optional. An integer value for the key in name.

Complex Type: generateCapabilityResponseRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
device	capabilityRequestType	0..*	See capabilityRequestType . Specify a device to generate a capability response based on web service parameters. If no device is specified, you must specify a capability request.
request	base64Binary	0..*	A base-64 encoded, binary capability request. Specify a request to generate a capability response based on a capability request. If no request is specified, the generateCapabilityResponse operation requires that you specify a device and provide sufficient data via capabilityRequestType elements to generate the response.

Referenced By

Name	Type
generateCapabilityResponseRequest	Element
generateCapabilityResponse	Method

Complex Type: generateCapabilityResponseResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .

Content Model

Component	Type	Occurs	Description
failedData	failedGenerateCapabilityResponseDataType	0..1	See failedGenerateCapabilityResponseDataType .
responseData	generateCapabilityResponseDataType	0..1	See generateCapabilityResponseDataType .

Referenced By

Name	Type
generateCapabilityResponseResponse	Element

Complex Type: generateCloneDetectionReportRequest

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
enterpriselds	anyType (restriction)	0..1	System account ID.
enterpriseld	string	1..*	
startDate	dateTime	1..1	The start date of the date range (Event time should >=startDate).
endDate	dateTime	1..1	The end date of the date range (Event time should <=endDate).
pageNumber	integer	0..1	Required. Starts at 1. Say the generateCloneDetectionReport operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
generateCloneDetectionReportRequest	Element
generateCloneDetectionReport	Method

Complex Type: generateCloneDetectionReportResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
cloneSuspects	anyType (restriction)	1..1	See cloneSuspect .
cloneSuspect	cloneSuspect	1..*	

Referenced By

Name	Type
generateCloneDetectionReportResponse	Element

Complex Type: generatePrebuiltLicenseDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..*	See deviceIdIdentifier .

Complex Type: generatePrebuiltLicenseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	1..1	See deviceIdentifier .
product	productIdentifierType	0..1	See productIdentifierType . Note: This parameter not supported as of 2016 R1.
licenseModel	licenseModelIdentifierType	0..1	See licenseModelIdentifierType . Note: This parameter not supported as of 2016 R1.
licenseModelAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType . Note: This parameter not supported as of 2016 R1.
startDate	date	0..1	Start date of the prebuilt license. Note: This parameter not supported as of 2016 R1.
isPermanent	boolean	0..1	Is license permanent? Note: This parameter not supported as of 2016 R1.
term	DurationType	0..1	See Duration of an expiring license. See DurationType .
expirationDate	date	0..1	License expiration date.

Complex Type: generatePrebuiltLicenseRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestDataList	generatePrebuiltLicenseDataType	1..*	See generatePrebuiltLicenseDataType .

Referenced By

Name	Type
generatePrebuiltLicenseRequest	Element
generatePrebuiltLicense	Method

Complex Type: generatePrebuiltLicenseResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGeneratePrebuiltLicenseDataListType	0..1	See failedGeneratePrebuiltLicenseDataListType .
responseData	generatePrebuiltLicenseDataListType	0..1	See generatePrebuiltLicenseListType .

Referenced By

Name	Type
generatePrebuiltLicenseResponse	Element

Complex Type: getAutoProvisionedServerRequest

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgName	string	1..1	The organization/enterprise for which we intend to retrieve the Cloud License Server (also referred to as autoprovisioned server).

Referenced By

Name	Type
getAutoProvisionedServerRequest	Element
getAutoProvisionedServer	Method

Complex Type: getAutoProvisionedServerResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
cloudLicenseServer	deviceIdentifier	0..1	See deviceIdentifier .

Referenced By

Name	Type
getAutoProvisionedServerResponse	Element

Complex Type: getDeviceCountResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
count	integer	0..1	Number of devices matching criteria.

Complex Type: getDeviceCountResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGetDevicesDataType	0..1	See failedGetDevicesDataType .
responseData	getDeviceCountResponseDataType	0..1	See getDeviceCountResponseDataType .

Referenced By

Name	Type
getDeviceCountResponse	Element

Complex Type: getDevicesCountRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	getDevicesParametersType	0..1	See getDevicesParametersType .

Referenced By

Name	Type
getDeviceCountRequest	Element
getDeviceCount	Method

Complex Type: getDevicesParametersType

Description

Note: Some elements apply only to served client devices while others apply only to server devices and client devices.

Description

Elements that start with *feature* are specific to served clients. Elements that start with *addOn* or *preBuilt* are specific to server devices and client devices.

Query results can be restricted to one or more device types listed in the **deviceTypes** element. If **deviceTypes** is not defined, the query results depend upon whether or not **isServer** is set and, if so, what that setting is. If **isServer** is set to true, the query results include only server devices. If **isServer** is set to false, the query results include only client devices. If neither **deviceTypes** nor **isServer** is set, query results include all three types of devices.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
alias	SimpleQueryType	0..1	Optional. An alias for the device ID. An alias element contains a value and a search type. A value is a string to match part or all of the alias , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
deviceld	SimpleQueryType	0..1	Optional. A deviceld element contains a value and search type. A value is a string to match part or all of the deviceld , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Content Model

Component	Type	Occurs	Description
deviceIdType	DeviceldTypeQueryType	0..1	Optional. A deviceIdType element contains a value and search type. The value is a string to match part or all of the deviceIdType: - UNKNOWN - STRING - ETHERNET - FLEXID9 - FLEXID10 - INTERNET - INTERNET6 - USER - TOLERANT - VM_UUID The searchType is one of the following enumSearchType values: - EQUALS - NOT_EQUALS
parentId	SimpleQueryType	0..1	Optional. A parentId corresponds to the Served By value for a served client in the admin console UI; it identifies the served client's parent FlexNet Embedded server device. A parentId element contains a value and a search type. A value is a string to match part or all of the parentId, and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Content Model

Component	Type	Occurs	Description
parentIdType	DeviceIdTypeQueryType	0..1	Optional. A parentIdType element contains a value and search type. The value is a string to match part or all of the parentIdType . The searchType is one of the following enumSearchType values: - EQUALS - NOT_EQUALS
hostTypeName	SimpleQueryType	0..1	Optional. A hostTypeName element contains a value and search type. A value is a string to match part or all of the hostTypeName , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
soldTo	SimpleQueryType	0..1	Optional. A hostTypeName element contains a value and search type. A value is a string to match part or all of the hostTypeName , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
currentOwnerName	SimpleQueryType	0..1	Optional. The End Customer or Distributor tier organization that currently owns the device. A device can belong to an organization without that organization being set as the current owner.
organizationUnitName	PartnerTierQueryType	0..1	Optional. See PartnerTierQueryType .

Content Model

Component	Type	Occurs	Description
description	SimpleQueryType	0..1	Optional. A description element contains a value and search type. A value is a string to match part or all of the description , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
status	DeviceStateQueryType	0..1	Optional. The status of the device. See DeviceStateQueryType .
servedStatus	DeviceServedStateQueryType	0..1	Optional. The status of a served client device. See DeviceServedStateQueryType . Note: This parameter not supported as of 2016 R1.
preBuiltProductName	SimpleQueryType	0..1	preBuiltProductName element contains a value and search type. A value is a string to match part or all of the preBuiltProductName , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS Note: This parameter not supported as of 2016 R1.
preBuiltProductVersion	SimpleQueryType	0..1	Optional. An preBuiltProductVersion element contains a value and search type. A value is a string to match part or all of the preBuiltProductVersion , and a searchType is one of the following simpleSearchType values - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS Note: This parameter not supported as of 2016 R1.

Content Model

Component	Type	Occurs	Description
addOnActivationId	SimpleQueryType	0..1	Optional. An addOnActivationID element contains a value and search type. A value is a string to match part or all of the addOnActivationID , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
addOnProductName	SimpleQueryType	0..1	Optional. An addOnProductName element contains a value and search type. A value is a string to match part or all of the addOnProductName , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
addOnProductVersion	SimpleQueryType	0..1	Optional. An addOnProductVersion element contains a value and search type. A value is a string to match part or all of the addOnProductVersion , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Content Model

Component	Type	Occurs	Description
featureName	SimpleQueryType	0..1	Optional. A featureName element contains a value and search type. A value is a string to match part or all of the featureName, and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS Note: This parameter not supported as of 2016 R1.
featureVersion	SimpleQueryType	0..1	Optional. A featureVersion element contains a value and search type. A value is a string to match part or all of the featureVersion, and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS Note: This parameter not supported as of 2016 R1.
featureCount	NumberQueryType	0..1	Optional. This is the count that a served client last used when it checked out the feature, as of the last FNE server sync with FlexNet Operations. See NumberQueryType. Note: This parameter not supported as of 2016 R1.
featureOverage	NumberQueryType	0..1	Optional. The featureOverage element is the count of the feature on a served client device that the server considers as overage, as of the last sync. An overage occurs when the number of copies of a license allocated to an FNE server is reduced to the point that some client devices have a count of that feature that exceeds what the server is entitled to serve. This condition persists until the next time the client renews its checkout of the checkout expires. See NumberQueryType.
isServer	boolean	0..1	Optional. True if the device is a FlexNet Embedded server device. (See note about isServer and deviceTypes.)
deviceTypes	deviceTypeList	0..1	Optional. The deviceTypes element contains one or more WSDeviceType elements. These can be CLIENT, SERVER, SERVED_CLIENT. (See note about isServer and deviceTypes.)
customAttributes	customAttributesQueryListType	0..1	Optional. See customAttributesQueryListType.

Content Model

Component	Type	Occurs	Description
machineType	DeviceMachineTypeQueryType	0..1	Optional. A machineType element contains a value and search type. See DeviceMachineTypeQueryType . Note: This parameter not supported as of 2016 R1.
vmName	SimpleQueryType	0..1	Optional. A vmName element contains a value and search type. A value is a string to match part or all of the vmName , and a searchType is one of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
userString	SimpleQueryType	0..1	Allows users to request devices with matching Device User. Results for this request depend on how the tenant has configured Device User Option . - If the Device User Option is set to Off, the userString field is ignored, and the response states that this criteria is not supported - If the Device User Option is set to On with no validation, the userString is matched with string value of the Device User. - If the Device User Option is set to On with validation, the userString is matched with the email of the Device User.

Complex Type: getDevicesRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
queryParams	getDevicesParametersType	0..1	See getDevicesParametersType .
deviceResponseConfig	deviceResponseConfigRequestType	0..1	Specifies the configuration settings to be included in the response. Includes the following boolean elements: • alias • description • status • servedStatus • hostTypeName • soldTo • channelPartners • preBuiltProduct • preBuiltLicense • addOnActivationId • addOnCounts • addOnProduct • addOnLicense • features • publisherIdentity • parent • machineType • vmDetails • vmInfo • vendorDictionary • deviceUser Optionally includes customAttributes. See customAttributesQueryListType.

Content Model

Component	Type	Occurs	Description
pageNumber	integer	1..1	Required. Starts at 1. Say the operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getDevicesRequest	Element
getDevicesQuery	Method

Complex Type: getDevicesResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
device	deviceQueryDataType	0..*	See deviceQueryDataType .

Complex Type: getDevicesResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGetDevicesDataTy e	0..1	See failedGetDevicesDataTy e .
responseData	getDevicesResponseDat aType	0..1	See getDevicesResponseDat aType .

Referenced By

Name	Type
getDevicesResponse	Element

Complex Type: hostTypeIdentifier

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Host type of the device.

Complex Type: licenseModelIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the license model, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the license model.
primaryKeys	licenseModelPKType	0..1	Database primary key of the license model—a string containing the name of the license model.

Complex Type: linkAddonLinItemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	1..1	See deviceIdIdentifier .
linItem	linkLinItemDataType	1..*	See linkLinItemDataType .

Complex Type: linkAddonLinItemsRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestList	linkAddonLinItemDataType	1..*	See linkAddonLinItemDataType .

Referenced By

Name	Type
decrementAddonLinItemsRequest	Element

Referenced By

Name	Type
incrementAddonLineItemsRequest	Element
linkAddonLineItemsRequest	Element
decrementAddonLineItems	Method
incrementAddonLineItems	Method
linkAddonLineItems	Method

Complex Type: linkAddonLineItemsResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	linkFailAddonDataListType	0..1	See linkFailAddonDataListType .
responseData	successAddonDataListType	0..1	See successAddonDataListType .

Referenced By

Name	Type
decrementAddonLineItemsResponse	Element
incrementAddonLineItemsResponse	Element
linkAddonLineItemsResponse	Element

Complex Type: linkFailAddonDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
failAddon	linkFailAddonDataType	0..*	See linkFailAddonDataType .

Complex Type: linkFailAddonDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..1	See deviceIdIdentifier .
lineltem	linkLineltemDataType	0..1	See linkLineltemDataType .
reason	string	0..1	Reason for failure.

Complex Type: linkLineltemDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
lineltemIdentifier	linkLineltemIdentifier	1..1	See linkLineltemIdentifier .

Complex Type: linkLineltemIdentifier

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
activationId	string	0..1	Activation ID.
count	integer	0..1	Number of copies from the line item linked.
expirationDateOverride	date	0..1	New, overriding expiration date. Affects link/increment/decrement and generateCapabilityResponse. For link/increment and generateCapabilityResponse, the expiration date is used and set at add-on line if there is no override date yet (after it is set, only the same date is accepted). After the date is set, it cannot be changed (same as on the UI). For decrement, this field is ignored and put in the warning queue. Known issue regarding expiration date: The ALM expiration date is GMT midnight, but the back office uses midnight of the FlexNet Operations server time zone. An issue will occur if the user tries to set the override date to be the same as the entitlement expiration (on ALM).

Complex Type: moveDeviceList

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	1..*	See deviceIdentifier .

Complex Type: moveDeviceRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
sourceDevices	moveDeviceList	1..1	Devices to move. See moveDeviceList .
soldToUniqueld	string	0..1	Unique database identifier of the organization to which the device currently belongs. Specify either soldToUniqueld or soldToName, not both.
soldToName	string	0..1	The name of the organization to which the device currently belongs. Specify either soldToUniqueld or soldToName, not both.
poolEntitlements	boolean	0..1	True, if existing, matching line items at the target organization are to be pooled. False, to always create new line items at the target organization. Note: This parameter not supported as of 2016 R1.

Referenced By

Name	Type
moveDeviceRequest	Element
moveDevice	Method

Complex Type: moveDeviceResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedMoveDeviceListDataaType	0..1	See failedMoveDeviceListDataaType .

Referenced By

Name	Type
moveDeviceResponse	Element

Complex Type: NumberQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
value	integer	1..1	An integer number to match part or all of the custom attribute value.
searchType	numberSearchType	1..1	One of the following simpleSearchType values: - GREATER_THAN - GREATER_THAN_EQUALS - LESS_THAN - LESS_THAN_EQUALS - EQUALS, NOT_EQUALS

Complex Type: obsoleteHostRequestListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
host	obsoleteHostType	1..*	See obsoleteHostType .

Referenced By

Name	Type
obsoleteHostRequest	Element
obsoleteHost	Method

Complex Type: obsoleteHostResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedObsoleteHostListDataType	0..1	See failedObsoleteHostListDataType .

Referenced By

Name	Type
obsoleteHostResponse	Element

Complex Type: obsoleteHostType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
hostIdentifier	deviceIdentifier	1..1	See deviceIdentifier .

Complex Type: OpsEmbeddedStatusInfoType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
status	OpsEmbeddedStatusType	1..1	One of the following values: - SUCCESS - FAILURE - PARTIAL_FAILURE
reason	string	0..1	Reason related to the status.

Complex Type: organizationIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the organization.
primaryKeys	organizationPKType	0..1	See organizationPKType .

Complex Type: organizationPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Name of the organization.

Complex Type: PartnerTierQueryType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	string	1..1	The name of the organization.
searchType	simpleSearchType	1..1	One of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS
partnerTier	string	0..1	Optional. The name of the tier in which the organization exists or ANY. If set to a named tier, the format partnerTier is bo.constants.partnertiernames.tier_name. If not specified, the partner tier searched is the End Customer tier.

Complex Type: productIdentifierType

Description

In the request, specify *either* **uniqueId** or **primaryKeys** to uniquely specify the product, not both.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the product.
primaryKeys	productPKType	0..1	Database primary key of the product—strings containing the name and version of the product.

Complex Type: productPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
name	string	1..1	Name of the product. of the product.
version	string	0..1	Version of the product.

Complex Type: publisherIdentifier

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
name	string	1..1	Publisher identifier of the device.

Complex Type: returnHostRequestListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
returnHosts	returnHostType	1..*	See returnHostType .

Referenced By

Name	Type
returnHostRequest	Element
returnHost	Method

Complex Type: returnHostResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedReturnHostListDataType	0..1	See failedReturnHostListDataType .

Referenced By

Name	Type
returnHostResponse	Element

Complex Type: returnHostType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
hostIdentifier	deviceIdentifier	1..1	See deviceIdentifier .
targetHostIdentifier	deviceIdentifier	0..1	See deviceIdentifier .

Complex Type: ServerIdsType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
serverId	string	1..2	One or two server identifiers. To be able to add two server identifiers, FlexNet Operations must be configured to allow redundant FlexNet Embedded servers. (Check the Allow Adding Redundant Server setting in System Configuration > Embedded Devices .)

Complex Type: soldToType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
displayName	string	1..1	Organization display name.
id	string	1..1	Unique database identifier of organization.
name	string	1..1	Organization name.

Complex Type: successAddonDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..*	See deviceIdIdentifier .

Complex Type: updateChannelPartnerDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
channelPartners	channelPartnerDataListType	0..1	See channelPartnerDataListType .

Content Model

Component	Type	Occurs	Description
opType	CollectionOperationType	1..1	Choose from one of the following: • ADD: A channel partner can be added to a tier only if that tier has not already been populated. • REPLACE: The specified updateChannelPartners set replaces the entire existing channel partner set. Individual tiers cannot be updated separately. If an organization with a specified contact is replaced by an organization without a specified contact, the contact is cleared. • DELETE: This basically clears the tiers that are specified in the request, regardless of the particular organization that is specified. The request will succeed as long as it specifies an existing organization, even if it is not the one specified in the target tier in the device. When the organization is removed, so is its contact, if specified.

Complex Type: updatedDeviceDataListType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	0..*	See deviceIdIdentifier .

Complex Type: updateDevDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
deviceIdentifier	deviceIdentifier	1..1	See deviceIdentifier .
deviceId	string	0..1	Device ID. Optional, if the identifier of a client device is to be changed.
serverIds	ServerIdsType	0..1	See ServerIdsType . Optional, if the identifier of a server device is to be changed.
deviceIdType	deviceIdTypeType	0..1	Device ID type. The value for deviceIdType can be : - UNKNOWN - STRING - ETHERNET - FLEXID9 - FLEXID10 - EXTENDED - INTERNET - INTERNET6 - USER - TOLERANT - VM_UUID While the deviceIdType in the deviceIdentifier can be used to identify the device being updated, the deviceIdType here in updateDevDataType can be used to change the device ID type of the device being updated. TOLERANT should only be used to create a device as the result of a capability request sent from the device itself. That is, FNO honors requests with ID type of TOLERANT, but because there is no FNO code to support it, it should never be used to create or update a device.
hostTypeName	hostTypeIdentifier	0..1	Optional. Only necessary if this value must be changed. See hostTypeIdentifier .
publisherIdName	publisherIdentifier	0..1	Optional. Only necessary if this value must be changed. See publisherIdentifier .
description	string	0..1	Device description. Optional, if to be changed.

Content Model

Component	Type	Occurs	Description
updateChannelPartners	updateChannelPartnerDataListType	0..1	See updateChannelPartnerDataListType .
customAttributes	attributeDescriptorDataType	0..1	See attributeDescriptorDataType .
alias	string	0..1	Optional. The device alias of a client device or server device.
user	string	0..1	Device User associated with the device. Leave empty to remove the Device User associated with the device.

Complex Type: updateDevRequestType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
device	updateDevDataType	1..*	See updateDevDataType .

Referenced By

Name	Type
updateDeviceRequest	Element
updateDevice	Method

Complex Type: updateDevResponseType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedUpdateDevDataListType	0..1	See failedUpdateDevDataListType .
responseData	updatedDeviceDataListType	0..1	See updatedDeviceDataListType .

Referenced By

Name	Type
updateDeviceResponse	Element

Complex Type: userIdentifierType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
uniqueId	string	0..1	Unique database identifier of the contact. Note that this is the contact unique identifier, not the user unique identifier.
userName	string	0..1	User's FlexNet Operations login name.
primaryKeys	userPKType	0..1	See userPKType .

Complex Type: userPKType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
 SEQUENCE		1..1	
firstName	string	1..1	User's first name.
lastName	string	1..1	User's last name.
emailAddress	string	1..1	User's email address.
phoneNumber	string	0..1	User's phone number. Optional.

Simple Types: ManageDeviceService

Simple Types

Name
deviceServedStatusType

Simple Type: deviceServedStatusType

Description

See [deviceServedStatusType](#).

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
NORMAL	
RETURNED	
EXPIRED	
DROPPED	

Elements: ManageDeviceService

Elements

Name	Description
createDeviceRequest	A createDeviceRequest message contains an element of createDevRequestType.
createDeviceResponse	A createDeviceResponse message contains an element of createDevResponseType.
decrementAddonLineItemsRequest	A decrementAddonLineItemsRequest message contains an element of linkAddonLineItemsRequestType. It decrements an existing count.
decrementAddonLineItemsResponse	A decrementAddonLineItemsResponse message contains an element of linkAddonLineItemsResponseType.
deleteAddonLineItemsRequest	A deleteAddonLineItemsRequest message contains an element of deleteAddonLineItemsRequestType.
deleteAddonLineItemsResponse	A deleteAddonLineItemsResponse message contains an element of deleteAddonLineItemsResponseType.
deleteDeviceRequest	A deleteDeviceRequest message contains an element of deleteDeviceRequestType.
deleteDeviceResponse	A deleteDeviceResponse message contains an element of deleteDeviceResponseType.
generateCapabilityResponseRequest	A generateCapabilityResponseRequest message contains an element of generateCapabilityResponseRequestType.
generateCapabilityResponseResponse	A generateCapabilityResponseResponse message contains an element of generateCapabilityResponseResponseType.
generateCloneDetectionReportRequest	A generateCloneDetectionReportRequest message contains an element of generateCloneDetectionReportRequest.
generateCloneDetectionReportResponse	A generateCloneDetectionReportResponse message contains an element of generateCloneDetectionReportResponse.
generatePrebuiltLicenseRequest	A generatePrebuiltLicenseRequest message contains an element of generatePrebuiltLicenseRequestType.
generatePrebuiltLicenseResponse	A generatePrebuiltLicenseResponse message contains an element of generatePrebuiltLicenseResponseType.
getAutoProvisionedServerRequest	A getAutoProvisionedServerRequest message contains an element of getAutoProvisionedServerRequest.
getAutoProvisionedServerResponse	A getAutoProvisionedServerResponse message contains an element of getAutoProvisionedServerResponse.
getDeviceCountRequest	A getDeviceCountRequest message contains an element of getDevicesCountRequestType.
getDeviceCountResponse	A getDeviceCountResponse message contains an element of getDeviceCountResponseType.
getDevicesRequest	A getDevicesRequest message contains an element of getDevicesRequestType.
getDevicesResponse	A getDevicesResponse message contains an element of getDevicesResponseType.
incrementAddonLineItemsRequest	A incrementAddonLineItemsRequest message contains an element of linkAddonLineItemsRequestType. It increments an existing count.

Elements

Name	Description
incrementAddonLineItemsResponse	A incrementAddonLineItemsResponse message contains an element of linkAddonLineItemsResponseType.
linkAddonLineItemsRequest	A linkAddonLineItemsRequest message contains an element of linkAddonLineItemsRequestType.
linkAddonLineItemsResponse	A linkAddonLineItemsResponse message contains an element of linkAddonLineItemsResponseType.
moveDeviceRequest	A moveDeviceRequest message contains an element of moveDeviceRequestType.
moveDeviceResponse	A moveDeviceResponse message contains an element of moveDeviceResponseType.
obsoleteHostRequest	An obsoleteHostRequest message contains an element of obsoleteHostRequestListType.
obsoleteHostResponse	An obsoleteHostResponse message contains an element of obsoleteHostResponseType.
returnHostRequest	A returnHostRequest message contains an element of returnHostRequestListType.
returnHostResponse	A returnHostResponse message contains an element of returnHostResponseType.
updateDeviceRequest	An updateDevRequest message contains an element of updateDevRequestType.
updateDeviceResponse	An updateDevResponse message contains an element of updateDevResponseType.

Element: createDeviceRequest

Description

A **createDeviceRequest** message contains an element of createDevRequestType.

Derived By

Type [createDevRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
device	deviceDataType	1..*	Name of the device. See deviceDataType .

Referenced By

Name	Type
createDevice	Method

XML Example

The following XML fragment illustrates a **createDeviceRequest** message:

```
<createDeviceRequest>
  <!--1 or more repetitions:-->
  <device>
    <deviceIdentifier>
      <deviceType>?</deviceType>
      <!--Optional:-->
      <deviceId>?</deviceId>
      <!--Optional:-->
      <serverIds>
        <!--1 or more repetitions:-->
        <serverId>?</serverId>
      </serverIds>
      <deviceIdType>ETHERNET</deviceIdType>
    </deviceIdentifier>
    <hostTypeName>
      <name>?</name>
    </hostTypeName>
    <publisherIdName>
      <name>?</name>
    </publisherIdName>
    <!--Optional:-->
    <description>?</description>
    <!--Optional:-->
    <channelPartners>
      <!--Zero or more repetitions:-->
      <channelPartner>
        <tierName>?</tierName>
        <organizationUnit>
          <!--Optional:-->
          <uniqueId>?</uniqueId>
          <!--Optional:-->
          <primaryKeys>
            <name>?</name>
          </primaryKeys>
        </organizationUnit>
        <!--Optional:-->
        <contact>
          <!--Optional:-->
          <uniqueId>?</uniqueId>
          <!--Optional:-->
          <userName>?</userName>
          <!--Optional:-->
          <primaryKeys>
            <firstName>?</firstName>
            <lastName>?</lastName>
            <emailAddress>?</emailAddress>
            <!--Optional:-->
            <phoneNumber>?</phoneNumber>
          </primaryKeys>
        </contact>
      </channelPartner>
    </channelPartners>
    <!--Optional:-->
    <alias>?</alias>
  </device>
</createDeviceRequest>
```

Element: createDeviceResponse

Description

A **createDeviceResponse** message contains an element of createDevResponseType.

Derived By

Type [createDevResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedCreateDevDataListType	0..1	See failedCreateDevDataListType .
responseData	createdDeviceDataListType	0..1	See createdDeviceDataListType .

Referenced By

Name	Type
createDevice	Method

XML Example

The following XML fragments illustrate **createDeviceResponse** messages:

Sample Successful Response Data:

```
<createDeviceResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <deviceIdentifier>
      <deviceType>CLIENT</deviceType>

      <deviceId>545454</deviceId>
    </deviceIdentifier>
  </responseData>
</createDeviceResponse>
```

Sample Failed Response Data:

```
<createDeviceResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
```

XML Example

```
<failedData>
  <failedDevice>
    <device>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>
        <deviceId>1111</deviceId>
        <deviceIdType>STRING</deviceIdType>
      </deviceIdentifier>
      <hostTypeName>
        <name>gizmo-1</name>
      </hostTypeName>
      <publisherIdName>
        <name>demo-trl-low</name>
      </publisherIdName>
      <description>a client device</description>
      <channelPartners>
        <channelPartner>
          <tierName>bo.constants.partner tiers.names.endcustomer</tierName>
          <organizationUnit>
            <primaryKeys>
              <name>ACME</name>
            </primaryKeys>
          </organizationUnit>
          <contact>
            <primaryKeys>
              <firstName>ACME</firstName>
              <lastName>Admin</lastName>
              <emailAddress>admin@acme.co</emailAddress>
            </primaryKeys>
          </contact>
        </channelPartner>
      </channelPartners>
    </device>
    <reason>20008:Cannot create Device: Device with host id "1111" already exists. [Incident# 8653-231]</reason>
  </failedDevice>
</failedData>
</createDeviceResponse>
```

Element: incrementAddonLineItemsRequest

Description

A **decrementAddonLineItemsRequest** message contains an element of linkAddonLineItemsRequestType. It decrements an existing count.

Derived By

Type [linkAddonLineItemsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
requestList	linkAddonLineItemDataType	1..*	See linkAddonLineItemDataType .

Referenced By

Name	Type
decrementAddonLineItems	Method

XML Example

The following XML fragment illustrates a **decrementAddonLineItemsRequest** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:ops="urn:com.macrovision.flexnet/opseembedded">
  <soapenv:Header/>
  <soapenv:Body>
    <ops:decrementAddonLineItemsRequest>
      <ops:requestList>
        <ops:deviceIdentifier>
          <ops:deviceType>CLIENT</ops:deviceType>
          <ops:deviceId>6565</ops:deviceId>
          <ops:deviceIdType>STRING</ops:deviceIdType>
          <ops:publisherName>demo</ops:publisherName>
        </ops:deviceIdentifier>
        <ops:lineItem>
          <ops:lineItemIdIdentifier>
            <ops:activationId>Online_Reg_ACT58_A</ops:activationId>
            <ops:count>10</ops:count>
          </ops:lineItemIdIdentifier>
        </ops:lineItem>
      </ops:requestList>
    </ops:decrementAddonLineItemsRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: decrementAddonLineItemsResponse

Description

A **decrementAddonLineItemsResponse** message contains an element of linkAddonLineItemsResponseType.

Derived By

Type [linkAddonLineItemsResponseType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	linkFailAddonDataListType	0..1	See linkFailAddonDataListType .
responseData	successAddonDataListType	0..1	See successAddonDataListType .

Referenced By

Name	Type
decrementAddonLineItems	Method

XML Example

The following XML fragment illustrates a **decrementAddonLineItemsResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">  
  <soapenv:Body>  
    <decrementAddonLineItemsResponse xmlns="urn:com.macrovision.flexnet/opsembedded">  
      <statusInfo>  
        <status>SUCCESS</status>  
      </statusInfo>  
      <responseData>  
        <deviceIdentifier>  
          <deviceType>CLIENT</deviceType>  
          <deviceId>6565</deviceId>  
          <deviceIdType>STRING</deviceIdType>  
          <publisherName>demo</publisherName>  
        </deviceIdentifier>  
      </responseData>  
    </decrementAddonLineItemsResponse>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: deleteAddonLineItemsRequest

Description

A **deleteAddonLineItemsRequest** message contains an element of deleteAddonLineItemsRequestType.

Derived By

Type [deleteAddonLineItemsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestList	deleteAddonLineItemData Type	1..*	See deleteAddonLineItemDataType .

Referenced By

Name	Type
deleteAddonLineItems	Method

XML Example

The following XML fragment illustrates a **deleteAddonLineItemsRequest** message:

```
<deleteAddonLineItemsRequest>
  <!-- 1 or more repetitions:-->
  <requestList>
    <deviceIdentifier>
      <deviceType?></deviceType>
      <!--Optional:-->
      <uniqueId?></uniqueId>
      <!--Optional:-->
      <deviceId?></deviceId>
      <!--Optional:-->
      <serverIds>
        <!-- 1 or more repetitions:-->
        <serverId?></serverId>
      </serverIds>
    </deviceIdentifier>
    <!-- 1 or more repetitions:-->
    <lineItem>
      <lineItemIdIdentifier>
        <!--Optional:-->
        <activationId?></activationId>
      </lineItemIdIdentifier>
    </lineItem>
  </requestList>
</deleteAddonLineItemsRequest>
```

Element: deleteAddonLineItemsResponse

Description

A **deleteAddonLineItemsResponse** message contains an element of deleteAddonLineItemsResponseType.

Derived By

Type [deleteAddonLineItemsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	deleteFailAddonDataListType	0..1	See deleteFailAddonDataListType .
responseData	successAddonDataListType	0..1	See successAddonDataListType .

Referenced By

Name	Type
deleteAddonLinItems	Method

XML Example

The following XML fragments illustrate **deleteAddonLinItemsResponse** messages:

Sample Successful Response Data:

```
<deleteAddonLinItemsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <deviceIdentifier>
      <deviceType>CLIENT</deviceType>

      <deviceId>1111</deviceId>
    </deviceIdentifier>
  </responseData>
</deleteAddonLinItemsResponse>
```

Sample Failed Response Data:

```
<deleteAddonLinItemsResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failAddon>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>

        <deviceId>
          <linItem>
            <linItemId>
              <activationId>se-cp-1</activationId>
            </linItemId>
          </linItem>
          <reason>9999:Add-on to remove "se-cp-1" is not currently linked.</reason>
        </failAddon>
      </failedData>
    </deleteAddonLinItemsResponse>
```

Element: deleteDeviceRequest

Description

A **deleteDeviceRequest** message contains an element of deleteDeviceRequestType.

Derived By

Type [deleteDeviceRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
deviceIdIdentifier	deviceIdIdentifier	1..*	Name of the device. See deviceIdIdentifier .

Referenced By

Name	Type
deleteDevice	Method

XML Example

The following XML fragment illustrates a **deleteDeviceRequest** message:

```
<deleteDeviceRequest>
  <!-- 1 or more repetitions:-->
  <deviceIdIdentifier>
    <deviceType>?</deviceType>
    <!--Optional:-->
    <uniqueId>?</uniqueId>
    <!--Optional:-->
    <deviceId>?</deviceId>
    <!--Optional:-->
    <serverIds>
      <!-- 1 or more repetitions:-->
      <serverId>?</serverId>
    </serverIds>
  </deviceIdIdentifier>
</deleteDeviceRequest>
```

Element: deleteDeviceResponse

Description

A **deleteDeviceResponse** message contains an element of deleteDeviceResponseType.

Derived By

Type [deleteDeviceResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedDeleteDevDataListType	0..1	See failedDeleteDevDataListType .

Referenced By

Name	Type
deleteDevice	Method

XML Example

The following XML fragments illustrate **deleteDeviceResponse** messages:

Sample Successful Response Data:

```
<deleteDeviceResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</deleteDeviceResponse>
```

Sample Failed Response Data:

```
<deleteDeviceResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failedDevice>
      <deviceIdentifier>
        <deviceType>SERVER</deviceType>
        <serverIds>
          <serverId>xxxx</serverId>
          <serverId>yyyy</serverId>
        </serverIds>
      </deviceIdentifier>
      <reason>20064:An active device cannot be deleted.</reason>
    </failedDevice>
  </failedData>
</deleteDeviceResponse>
```

Element: generateCapabilityResponseRequest

Description

A **generateCapabilityResponseRequest** message contains an element of generateCapabilityResponseType.

Derived By

Type [generateCapabilityResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
device	capabilityRequestType	0..*	See capabilityRequestType . Specify a device to generate a capability response based on web service parameters. If no device is specified, you must specify a capability request.
request	base64Binary	0..*	A base-64 encoded, binary capability request. Specify a request to generate a capability response based on a capability request. If no request is specified, the generateCapabilityResponse operation requires that you specify a device and provide sufficient data via capabilityRequestType elements to generate the response.

Referenced By

Name	Type
generateCapabilityResponse	Method

The following XML fragment illustrates a **generateCapabilityResponseRequest** message.

```
<ops:generateCapabilityResponseRequest>
  <!--Zero or more repetitions:-->
  <ops:device>
    <ops:deviceIdentifier>
      <ops:deviceType?></ops:deviceType>
      <!--Optional:-->
      <ops:uniqueId?></ops:uniqueId>
      <!--Optional:-->
      <ops:deviceId?></ops:deviceId>
      <!--Optional:-->
      <ops:serverIds>
        <!--1 or more repetitions:-->
        <ops:serverId?></ops:serverId>
      </ops:serverIds>
      <!--Optional:-->
      <ops:deviceIdType?></ops:deviceIdType>
    </ops:deviceIdentifier>
    <!--Optional:-->
    <ops:lastUpdateTime?></ops:lastUpdateTime>
    <!--Optional:-->
    <ops:force?></ops:force>
    <!--Optional:-->
    <ops:vendorDictionary>
      <!--1 or more repetitions:-->
```

```
<ops:entry>
  <ops:name>?</ops:name>
  <!--Optional:-->
  <ops:stringValue>?</ops:stringValue>
  <!--Optional:-->
  <ops:numberValue>?</ops:numberValue>
</ops:entry>
</ops:vendorDictionary>
<!--Zero or more repetitions:-->
<ops:lineltem>
  <ops:lineltemIdentifier>
    <!--Optional:-->
    <ops:activationId>?</ops:activationId>
    <!--Optional:-->
    <ops:count>?</ops:count>
  </ops:lineltemIdentifier>
</ops:lineltem>
<!--Optional:-->
<ops:bufferLicense>?</ops:bufferLicense>
</ops:device>
</ops:generateCapabilityResponseRequest>
```

Element: generateCapabilityResponseResponse

Description

A **generateCapabilityResponseResponse** message contains an element of generateCapabilityResponseResponseType.

Derived By

Type [generateCapabilityResponseResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGenerateCapabilityResponseDataType	0..1	See failedGenerateCapabilityResponseDataType .
responseData	generateCapabilityResponseDataType	0..1	See generateCapabilityResponseDataType .

Referenced By

Name	Type
generateCapabilityResponse	Method

XML Example

The following XML fragments illustrate **generateCapabilityResponseResponse** messages:

Sample Successful Capability Response Data:

```
<generateCapabilityResponseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <device>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>

        <deviceId>555555</deviceId>
      </deviceIdentifier>
      <addonLicense>?</addonLicense>
    </device>
  </responseData>
</generateCapabilityResponseResponse>
```

Sample Successful Buffer Response Data:

```
<generateCapabilityResponseResponse xmlns="urn:com.macrovision:flexnet/opseembedded">
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <device>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>

        <deviceId>bufDev</deviceId>
        <deviceIdType>STRING</deviceIdType>
      </deviceIdentifier>
      <addonLicense>?</addonLicense>
      <bufferLicense>true</bufferLicense>
    </device>
  </responseData>
</generateCapabilityResponseResponse>
```

Sample Failed Response Data:

```
<generateCapabilityResponseResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failedDevice>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>
        <deviceId>555555</deviceId>
      </deviceIdentifier>
      <reason>20022:Device Identifier is invalid.</reason>
    </failedDevice>
  </failedData>
</generateCapabilityResponseResponse>
```

Element: generateCloneDetectionReportRequest

Description

A **generateCloneDetectionReportRequest** message contains an element of generateCloneDetectionReportRequest.

Derived By

Type [generateCloneDetectionReportRequest](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
enterpriselds	anyType (restriction)	0..1	System account ID.
enterpriseld	string	1..*	
startDate	dateTime	1..1	The start date of the date range (Event time should >=startDate).
endDate	dateTime	1..1	The end date of the date range (Event time should <=endDate).
pageNumber	integer	0..1	Required. Starts at 1. Say the generateCloneDetectionReport operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	0..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
generateCloneDetectionReport	Method

XML Example

The following XML fragment illustrates a **generateCloneDetectionReportRequest** message:

```
<soapenv:Envelope xmlns:soapenv=http://schemas.xmlsoap.org/soap/envelope/  
  xmlns:urn="urn:v1.fne.webservices.operations.flexnet.com">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <urn:generateCloneDetectionReportRequest>  
      <urn:enterpriselds>  
        <urn:enterpriseld>4</urn:enterpriseld>  
      </urn:enterpriselds>  
      <urn:startDate>2016-11-01T20:14:07</urn:startDate>  
      <urn:endDate>2016-11-06T20:45:04+05:30</urn:endDate>  
      <urn:pageNumber>1</urn:pageNumber>  
      <urn:batchSize>100</urn:batchSize>  
    </urn:generateCloneDetectionReportRequest>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: generateCloneDetectionReportResponse

Description

A **generateCloneDetectionReportResponse** message contains an element of generateCloneDetectionReportResponse.

Derived By

Type [generateCloneDetectionReportResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
cloneSuspects	anyType (restriction)	1..1	See cloneSuspect .
cloneSuspect	cloneSuspect	1..*	

Referenced By

Name	Type
generateCloneDetectionReport	Method

XML Example

The following XML fragment illustrates a **generateCloneDetectionReportResponse** message:

```
<soapenv:Envelope xmlns:soapenv=http://schemas.xmlsoap.org/soap/envelope/  
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">  
  <soapenv:Body>  
    <generateCloneDetectionReportResponse xmlns="urn:v1.fne.webservices.operations.flexnet.com">  
      <statusInfo>  
        <status>SUCCESS</status>  
      </statusInfo>  
      <cloneSuspects>  
        <cloneSuspect>  
          <timeStamp>2016-11-07T10:23:24.190Z</timeStamp>  
          <hostClass>SERVED_CLIENT</hostClass>  
          <deviceId>served_clone_dev1</deviceId>  
          <serverId>9U3D3HZHFE7B</serverId>  
          <lineItemActivationIds/>  
          <orgId>pritam inc</orgId>  
          <orgName>pritam inc</orgName>  
          <enterprisId>4</enterprisId>  
        </cloneSuspect>  
        <cloneSuspect>  
          <timeStamp>2016-11-07T10:21:24.293Z</timeStamp>  
          <hostClass>SERVED_CLIENT</hostClass>  
          <deviceId>served_clone_dev1</deviceId>  
          <serverId>9U3D3HZHFE7B</serverId>  
          <lineItemActivationIds/>  
          <orgId>pritam inc</orgId>  
          <orgName>pritam inc</orgName>  
          <enterprisId>4</enterprisId>  
        </cloneSuspect>  
      </cloneSuspects>  
    </generateCloneDetectionReportResponse>  
  </soapenv:Body>  
</soapenv:Envelope>
```

XML Example

```
</cloneSuspect>
</cloneSuspects>
</generateCloneDetectionReportResponse>
</soapenv:Body>
</soapenv:Envelope>
```

Element: generatePrebuiltLicenseRequest

Description

A **generatePrebuiltLicenseRequest** message contains an element of generatePrebuiltLicenseRequestType.

Derived By

Type [generatePrebuiltLicenseRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestDataList	generatePrebuiltLicenseDataType	1..*	See generatePrebuiltLicenseDataType .

Referenced By

Name	Type
generatePrebuiltLicense	Method

XML Example

The following XML fragment illustrates a **generatePrebuiltLicenseRequest** message:

```
<generatePrebuiltLicenseRequest>
  <!-- 1 or more repetitions:-->
  <requestDataList>
    <deviceIdentifier>
      <deviceType>?</deviceType>
      <!--Optional:-->
      <uniqueId>?</uniqueId>
      <!--Optional:-->
      <deviceId>?</deviceId>
      <!--Optional:-->
      <serverIds>
        <!-- 1 or more repetitions:-->
        <serverId>?</serverId>
      </serverIds>
    </deviceIdentifier>
    <!--Optional:-->
    <product>
```

XML Example

```

<!--Optional:-->
<uniqueId>?</uniqueId>
<!--Optional:-->
<primaryKeys>
  <name>?</name>
  <!--Optional:-->
  <version>?</version>
</primaryKeys>
</product>
<!--Optional:-->
<licenseModel>
  <!--Optional:-->
  <uniqueId>?</uniqueId>
  <!--Optional:-->
  <primaryKeys>
    <name>?</name>
  </primaryKeys>
</licenseModel>
<!--Optional:-->
<licenseModelAttributes>
  <!--Zero or more repetitions:-->
  <attribute>
    <attributeName>?</attributeName>
    <!--You have a CHOICE of the next 5 items at this level-->
    <!--Optional:-->
    <stringValue>?</stringValue>
    <!--Optional:-->
    <dateValue>?</dateValue>
    <!--Optional:-->
    <booleanValue>?</booleanValue>
    <!--Optional:-->
    <integerValue>?</integerValue>
    <!--Zero or more repetitions:-->
    <arrayValue>?</arrayValue>
  </attribute>
</licenseModelAttributes>
<!--Optional:-->
<startDate>?</startDate>
<!--Optional:-->
<isPermanent>?</isPermanent>
<!--Optional:-->
<term>
  <numDuration>?</numDuration>
  <durationUnit>?</durationUnit>
</term>
<!--Optional:-->
<expirationDate>?</expirationDate>
</requestDataList>
</generatePrebuiltLicenseRequest>

```

Element: generatePrebuiltLicenseResponse

Description

A **generatePrebuiltLicenseResponse** message contains an element of generatePrebuiltLicenseResponseType.

Derived By

Type [generatePrebuiltLicenseResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGeneratePrebuiltLicenseDataListType	0..1	See failedGeneratePrebuiltLicenseDataListType .
responseData	generatePrebuiltLicenseDataListType	0..1	See generatePrebuiltLicenseListType .

Referenced By

Name	Type
generatePrebuiltLicense	Method

XML Example

The following XML fragments illustrate **generatePrebuiltLicenseResponse** messages:

Sample Successful Response Data:

```
<generatePrebuiltLicenseResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <deviceIdentifier>
      <deviceType>CLIENT</deviceType>

      <deviceId>555555</deviceId>
    </deviceIdentifier>
  </responseData>
</generatePrebuiltLicenseResponse>
```

Sample Failed Response Data:

```
<generatePrebuiltLicenseResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failedDevice>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>
        <deviceId>555555</deviceId>
      </deviceIdentifier>
      <reason>20026:Cannot generate license for obsolete device.</reason>
    </failedDevice>
  </failedData>
</generatePrebuiltLicenseResponse>
```

Element: getAutoProvisionedServerRequest

Description

A **getAutoProvisionedServerRequest** message contains an element of getAutoProvisionedServerRequest.

Derived By

Type [getAutoProvisionedServerRequest](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
orgName	string	1..1	The organization/enterprise for which we intend to retrieve the Cloud License Server (also referred to as autoprovisioned server).

Referenced By

Name	Type
getAutoProvisionedServer	Method

XML Example

The following XML fragment illustrates a **getAutoProvisionedServerRequest** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:ops="urn:com.macrovision:flexnet/opseembedded">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <ops:getAutoProvisionedServerRequest>  
      <ops:orgName>MyOrg INC</ops:orgName>  
    </ops:getAutoProvisionedServerRequest>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: getAutoProvisionedServerResponse

Description

A **getAutoProvisionedServerResponse** message contains an element of getAutoProvisionedServerResponse.

Derived By

Type [getAutoProvisionedServerResponse](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfo Type	1..1	See OpsEmbeddedStatusInfoType .
cloudLicenseServer	deviceIdentifier	0..1	See deviceIdentifier .

Referenced By

Name	Type
getAutoProvisionedServer	Method

XML Example

The following XML fragment illustrates a **getAutoProvisionedServerResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">  
  <soapenv:Body>  
    <getAutoProvisionedServerResponse xmlns="urn:com.macrovision:flexnet/opseembedded">  
      <statusInfo>  
        <status>SUCCESS</status>  
      </statusInfo>  
      <cloudLicenseServer>  
        <deviceType>SERVER</deviceType>  
        <uniqueId>LYZYM7S7E8C</uniqueId>  
        <deviceId>LYZYM7S7E8C</deviceId>  
        <serverIds>  
          <serverId>LYZYM7S7E8C</serverId>  
        </serverIds>  
        <deviceIdType>STRING</deviceIdType>  
        <publisherName>fndemo</publisherName>  
      </cloudLicenseServer>  
    </getAutoProvisionedServerResponse>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: getDeviceCountRequest

Description

A **getDeviceCountRequest** message contains an element of **getDevicesCountRequestType**.

Derived By

Type [getDevicesCountRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	getDevicesParametersType	0..1	See getDevicesParametersType .

Referenced By

Name	Type
getDeviceCount	Method

XML Example

The following XML fragment illustrates a **getDeviceCountRequest** message:

```
<getDevicesRequest>
  <!--Optional:-->
  <queryParams>
    <!--Optional:-->
    <deviceId>
      <value>?</value>
      <searchType>?</searchType>
    </deviceId>
    <!--Optional:-->
    <deviceIdType>
      <value>ETHERNET</value>
      <searchType>EQUALS</searchType>
    </deviceIdType>
    <!--Optional:-->
    <hostTypeName>
      <value>?</value>
      <searchType>?</searchType>
    </hostTypeName>
    <!--Optional:-->
    <soldTo>
      <value>?</value>
      <searchType>?</searchType>
    </soldTo>
    <!--Optional:-->
    <machineType>
      <value>PHYSICAL</value>
      <searchType>EQUALS</searchType>
    </machineType>
  </queryParams>
</getDevicesRequest>
```

Element: getDeviceCountResponse

Description

A **getDeviceCountResponse** message contains an element of **getDeviceCountResponseType**.

Derived By

Type [getDeviceCountResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGetDevicesDataTypes	0..1	See failedGetDevicesDataType .
responseData	getDeviceCountResponseDataType	0..1	See getDeviceCountResponseDataType .

Referenced By

Name	Type
getDeviceCount	Method

XML Example

The following XML fragments illustrate **getDeviceCountResponse** messages:

Sample Successful Response Data:

```
<getDeviceCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>2</count>
  </responseData>
</getDeviceCountResponse>
```

Sample Failed Response Data, if no devices match:

```
<getDeviceCountResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <count>0</count>
  </responseData>
</getDeviceCountResponse>
```

Element: getDevicesRequest

Description

A **getDevicesRequest** message contains an element of **getDevicesRequestType**.

Derived By

Type [getDevicesRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
queryParams	getDevicesParametersType	0..1	See getDevicesParametersType .

Content Model

Component	Type	Occurs	Description
deviceResponseConfig	deviceResponseConfigRequestType	0..1	Specifies the configuration settings to be included in the response. Includes the following boolean elements: • alias • description • status • servedStatus • hostTypeName • soldTo • channelPartners • preBuiltProduct • preBuiltLicense • addOnActivationId • addOnCounts • addOnProduct • addOnLicense • features • publisherIdentity • parent • machineType • vmDetails • vmInfo • vendorDictionary • deviceUser Optionally includes customAttributes. See customAttributesQueryListType.

Content Model

Component	Type	Occurs	Description
pageNumber	integer	1..1	Required. Starts at 1. Say the operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
batchSize	integer	1..1	Required. Maximum number of records to return in the response.

Referenced By

Name	Type
getDevicesQuery	Method

XML Example

The following XML fragment illustrates a **getDevicesRequest** message:

```
<getDevicesRequest>
  <!--Optional:-->
  <queryParams>
    <!--Optional:-->
    <deviceId>
      <value>?</value>
      <searchType>?</searchType>
    </deviceId>
  </queryParams>
  <!--Optional:-->
  <deviceResponseConfig>
    <!--Optional:-->
    <alias>1</alias>
    <!--Optional:-->
    <description>1</description>
    <!--Optional:-->
    <status>1</status>
    <!--Optional:-->
    <servedStatus>1</servedStatus>
    <!--Optional:-->
    <hostTypeName>1</hostTypeName>
    <!--Optional:-->
    <soldTo>1</soldTo>
    <!--Optional:-->
    <channelPartners>1</channelPartners>
    <!--Optional:-->
    <preBuiltProduct>1</preBuiltProduct>
    <!--Optional:-->
    <preBuiltLicense>1</preBuiltLicense>
    <!--Optional:-->
    <addOnActivationId>1</addOnActivationId>
    <!--Optional:-->
    <addOnCounts>1</addOnCounts>
    <!--Optional:-->
    <addOnProduct>1</addOnProduct>
    <!--Optional:-->
    <addOnLicense>1</addOnLicense>
    <!--Optional:-->
    <features>1</features>
    <!--Optional:-->
    <customAttributes>
```

XML Example

```
<!--Zero or more repetitions:-->
<attribute>
  <attributeName>LATITUDE</attributeName>
</attribute>
</customAttributes>
<!--Optional:-->
<publisherIdentity>1</publisherIdentity>
<!--Optional:-->
<parent>1</parent>
<machineType>1</machineType>
<vmDetails>1</vmDetails>
<vmInfo>1</vmInfo>
<vendorDictionary>1</vendorDictionary>
</deviceResponseConfig>
<pageNumber>?</pageNumber>
<batchSize>?</batchSize>
</getDevicesRequest>
```

Element: getDevicesResponse

Description

A **getDevicesResponse** message contains an element of `getDevicesResponseType`.

Derived By

Type [getDevicesResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedGetDevicesDataTyped	0..1	See failedGetDevicesDataTyped .
responseData	getDevicesResponseDataTyped	0..1	See getDevicesResponseDataTyped .

Referenced By

Name	Type
getDevicesQuery	Method

XML Example

The following XML fragments illustrate **getDevicesResponse** messages:

XML Example

Sample Successful Response Data:

```
<getDevicesResponse xmlns="urn:com.macrovision.flexnet/opsembedded">
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <device>
      <deviceIdIdentifier>
        <deviceType>CLIENT</deviceType>

        <deviceId>client1</deviceId>
      </deviceIdIdentifier>
      <hostTypeName>
        <name>client</name>
      </hostTypeName>
      <deviceStatus>ACTIVE</deviceStatus>
      <channelPartners>
        <channelPartner>
          <tierName>bo.constants.partneriertnames.endcustomer</tierName>
          <organizationUnit>

            <primaryKeys>
              <name>s1</name>
            </primaryKeys>
          </organizationUnit>
          <contact/>
          <currentOwner>>false</currentOwner>
        </channelPartner>
      </channelPartners>
      <soldTo>
        <displayName>Organization 1</displayName>

        <name>s1</name>
      </soldTo>
      <preBuiltProduct>
        <name>builtIn</name>
        <version>1.0</version>
      </preBuiltProduct>
      <hasPrebuiltLicense>true</hasPrebuiltLicense>
      <prebuiltLicense>xxxx</prebuiltLicense>
      <hasAddonLicense>true</hasAddonLicense>
      <addonLicense>xxxx</addonLicense>
      <publisherIdName>
        <name>id1</name>
      </publisherIdName>
      <addonLineItemData>

        <activationId>e1_addOn1</activationId>
        <enabledCount>1</enabledCount>
        <consumedCount>1</consumedCount>
        <licenseState>LICENSE_GENERATED</licenseState>
        <entitledProducts>
          <entitledProduct>
            <product>

              <primaryKeys>
                <name>addOn1</name>
                <version>1.0</version>
              </primaryKeys>
            </product>
            <quantity>1</quantity>
          </entitledProduct>
        </entitledProducts>
      </addonLineItemData>
      <customAttributes>
        <attribute>
```

XML Example

```
<attributeName>LATITUDE</attributeName>
<stringValue>38</stringValue>
</attribute>
</customAttributes>
</device>
</responseData>
</getDevicesResponse>
```

Sample Failed Response Data:

If no devices match:

```
<getDevicesResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</getDevicesResponse>
```

Element: decrementAddonLineItemsResponse

Description

A **incrementAddonLineItemsRequest** message contains an element of `linkAddonLineItemsRequestType`. It increments an existing count.

Derived By

Type [linkAddonLineItemsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestList	linkAddonLineItemDataType	1..*	See linkAddonLineItemDataType .

Referenced By

Name	Type
incrementAddonLineItems	Method

XML Example

The following XML fragment illustrates an **incrementAddonLineItemsRequest** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:ops="urn:com.macrovision:flexnet/opseembedded">
  <soapenv:Header/>
  <soapenv:Body>
```


XML Example

```
<ops:incrementAddonLineItemsRequest>
  <ops:requestList>
    <ops:deviceIdentifier>
      <ops:deviceType>CLIENT</ops:deviceType>
      <ops:deviceId>6565</ops:deviceId>
      <ops:deviceIdType>STRING</ops:deviceIdType>
      <ops:publisherName>demo</ops:publisherName>
    </ops:deviceIdentifier>
    <ops:lineItem>
      <ops:lineItemIdIdentifier>
        <ops:activationId>Online_Reg_ACT58_A</ops:activationId>
        <ops:count>10</ops:count>
      </ops:lineItemIdIdentifier>
    </ops:lineItem>
  </ops:requestList>
</ops:incrementAddonLineItemsRequest>
</soapenv:Body>
</soapenv:Envelope>
```

Element: incrementAddonLineItemsResponse

Description

A **incrementAddonLineItemsResponse** message contains an element of [linkAddonLineItemsResponseType](#).

Derived By

Type [linkAddonLineItemsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	linkFailAddonDataListType	0..1	See linkFailAddonDataListType .
responseData	successAddonDataListType	0..1	See successAddonDataListType .

Referenced By

Name	Type
incrementAddonLineItems	Method

XML Example

The following XML fragment illustrates an **incrementAddonLineItemsResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Body>
    <incrementAddonLineItemsResponse xmlns="urn:com.macrovision:flexnet/opseembedded">
      <statusInfo>
        <status>SUCCESS</status>
      </statusInfo>
      <responseData>
        <deviceIdentifier>
          <deviceType>CLIENT</deviceType>
          <deviceId>6565</deviceId>
          <deviceIdType>STRING</deviceIdType>
          <publisherName>demo</publisherName>
        </deviceIdentifier>
      </responseData>
    </incrementAddonLineItemsResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: linkAddonLineItemsRequest

Description

A **linkAddonLineItemsRequest** message contains an element of linkAddonLineItemsRequestType.

Derived By

Type [linkAddonLineItemsRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
requestList	linkAddonLineItemDataType	1..*	See linkAddonLineItemDataType .

Referenced By

Name	Type
linkAddonLineItems	Method

XML Example

The following XML fragment illustrates a **linkAddonLineItemsRequest** message:

XML Example

```
<linkAddonLineItemsRequest>
  <!--1 or more repetitions:-->
  <requestList>
    <deviceIdentifier>
      <deviceType?></deviceType>
      <!--Optional:-->
      <uniqueId?></uniqueId>
      <!--Optional:-->
      <deviceId?></deviceId>
      <!--Optional:-->
      <serverIds>
        <!--1 or more repetitions:-->
        <serverId?></serverId>
      </serverIds>
      <!--Optional:-->
      <deviceIdType?></deviceIdType>
      <!--Mandatory if you have more than one publisher or else optional: -->
      <!--type: string-->
      <publisherName?></publisherName>
    </deviceIdentifier>
    <!--1 or more repetitions:-->
    <lineItem>
      <lineItemIdIdentifier>
        <!--Optional:-->
        <activationId?></activationId>
        <!--Optional:-->
        <count?></count>
      </lineItemIdIdentifier>
    </lineItem>
  </requestList>
</linkAddonLineItemsRequest>
```

NOTE: If you have more than one publisher in your FlexNet Operations environment, you must pass the publisherName tag. When there is more than one publisher, if the publisherName tag is not passed, FlexNet Operations will not know which publisher this request is being made for.

Element: linkAddonLineItemsResponse

Description

A **linkAddonLineItemsResponse** message contains an element of linkAddonLineItemsResponseType.

Derived By

Type [linkAddonLineItemsResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .

Content Model

Component	Type	Occurs	Description
failedData	linkFailAddonDataListType	0..1	See linkFailAddonDataListType .
responseData	successAddonDataListType	0..1	See successAddonDataListType .

Referenced By

Name	Type
linkAddonLineItems	Method

XML Example

The following XML fragments illustrate **linkAddonLineItemsResponse** messages:

Sample Successful Response Data:

```
<linkAddonLineItemsResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <deviceIdentifier>
      <deviceType>CLIENT</deviceType>

      <deviceId>555555</deviceId>
    </deviceIdentifier>
  </responseData>
</linkAddonLineItemsResponse>
```

Sample Failed Response Data:

```
<linkAddonLineItemsResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failAddon>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>
        <deviceId>555555</deviceId>
      </deviceIdentifier>
      <lineItem>
        <lineItemId>
          <activationId>se-admin-1</activationId>
          <count>4</count>
        </lineItemId>
      </lineItem>
      <reason>20030:Add-on has mismatched sold-to.</reason>
    </failAddon>
  </failedData>
</linkAddonLineItemsResponse>
```

Element: moveDeviceRequest

Description

A **moveDeviceRequest** message contains an element of `moveDeviceRequestType`.

Derived By

Type [moveDeviceRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
sourceDevices	moveDeviceList	1..1	Devices to move. See moveDeviceList .
soldToUniqueld	string	0..1	Unique database identifier of the organization to which the device currently belongs. Specify either soldToUniqueld or soldToName, not both.
soldToName	string	0..1	The name of the organization to which the device currently belongs. Specify either soldToUniqueld or soldToName, not both.
poolEntitlements	boolean	0..1	True, if existing, matching line items at the target organization are to be pooled. False, to always create new line items at the target organization. Note: This parameter not supported as of 2016 R1.

Referenced By

Name	Type
moveDevice	Method

XML Example

The following XML fragment illustrates a **moveDeviceRequest** message:

```
<moveDeviceRequest>
  <sourceDevices>
    <deviceIdentifier>
      <deviceType>CLIENT</deviceType>
      <deviceId>client3</deviceId>
    </deviceIdentifier>
  </sourceDevices>
  <soldToName>s4</soldToName>
  <poolEntitlements>>false</poolEntitlements>
</moveDeviceRequest>
```

Element: moveDeviceResponse

Description

A **moveDeviceResponse** message contains an element of `moveDeviceResponseType`.

Derived By

Type [moveDeviceResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedMoveDeviceListDataaType	0..1	See failedMoveDeviceListDataaType .

Referenced By

Name	Type
moveDevice	Method

XML Example

The following XML fragments illustrate **moveDeviceResponse** messages:

Sample Successful Response Data:

```
<moveDeviceResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
</moveDeviceResponse>
```

Sample Failed Response Data:

```
<moveDeviceResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failedDevice>
      <deviceIdentifier>
        <deviceType>CLIENT</deviceType>
        <deviceId>client5</deviceId>
      </deviceIdentifier>
      <reason>20022:Device Identifier is invalid.</reason>
    </failedDevice>
  </failedData>
</moveDeviceResponse>
```

Element: **obsoleteHostRequest**

Description

An **obsoleteHostRequest** message contains an element of **obsoleteHostRequestListType**.

Derived By

Type [obsoleteHostRequestListType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
host	obsoleteHostType	1..*	See obsoleteHostType .

Referenced By

Name	Type
obsoleteHost	Method

XML Example

The following XML fragment illustrates an **obsoleteHostRequest** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:urn="urn:v1.fne.webservices.operations.flexnet.com">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <urn:obsoleteHostRequest>  
      <urn:host>  
        <urn:hostIdentifier>  
          <urn:deviceType>CLIENT</urn:deviceType>  
          <urn:deviceId>r_dev</urn:deviceId>  
          <urn:deviceIdType>STRING</urn:deviceIdType>  
          <urn:publisherName>fnedemo</urn:publisherName>  
        </urn:hostIdentifier>  
      </urn:host>  
    </urn:obsoleteHostRequest>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: **obsoleteHostResponse**

Description

An **obsoleteHostResponse** message contains an element of **obsoleteHostResponseType**.

Derived By

Type [obsoleteHostResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedObsoleteHostListDataType	0..1	See failedObsoleteHostListDataType .

Referenced By

Name	Type
obsoleteHost	Method

XML Example

The following XML fragment illustrates an **obsoleteHostResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">  
  <soapenv:Body>  
    <obsoleteHostResponse xmlns="urn:v1.fne.webservices.operations.flexnet.com">  
      <statusInfo>  
        <status>SUCCESS</status>  
      </statusInfo>  
    </obsoleteHostResponse>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: returnHostRequest

Description

A **returnHostRequest** message contains an element of returnHostRequestListType.

Derived By

Type [returnHostRequestListType](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
returnHosts	returnHostType	1..*	See returnHostType .

Referenced By

Name	Type
returnHost	Method

XML Example

The following XML fragment illustrates a **returnHostRequest** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:urn="urn:v1.fne.webservices.operations.flexnet.com">
  <soapenv:Header/>
  <soapenv:Body>
    <urn:returnHostRequest>
      <urn:returnHosts>
        <urn:hostIdentifier>
          <urn:deviceType>CLIENT</urn:deviceType>
          <urn:deviceId>r_dev1</urn:deviceId>
          <urn:deviceIdType>STRING</urn:deviceIdType>
          <urn:publisherName>fndemo</urn:publisherName>
        </urn:hostIdentifier>
      </urn:returnHosts>
    </urn:returnHostRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: returnHostResponse

Description

A **returnHostResponse** message contains an element of returnHostResponseType.

Derived By

Type [returnHostResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .

Content Model

Component	Type	Occurs	Description
failedData	failedReturnHostListDataType	0..1	See failedReturnHostListDataType .

Referenced By

Name	Type
returnHost	Method

XML Example

The following XML fragment illustrates a **returnHostResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Body>
    <returnHostResponse xmlns="urn:v1.fne.webservices.operations.flexnet.com">
      <statusInfo>
        <status>SUCCESS</status>
      </statusInfo>
    </returnHostResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: updateDeviceRequest

Description

An **updateDevRequest** message contains an element of updateDevRequestType.

Derived By

Type [updateDevRequestType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
device	updateDevDataType	1..*	See updateDevDataType .

Referenced By

Name	Type
updateDevice	Method

XML Example

The following XML fragment illustrates an **updateDevRequest** message:

```
<updateDevRequest>
  <!--1 or more repetitions:-->
  <device>
    <deviceIdentifier>
      <deviceType>?</deviceType>
      <!--Optional:-->
      <uniqueId>?</uniqueId>
      <!--Optional:-->
      <deviceId>?</deviceId>
      <!--Optional:-->
      <serverIds>
        <!--1 or more repetitions:-->
        <serverId>?</serverId>
      </serverIds>
      <deviceIdType>STRING</deviceIdType>
    </deviceIdentifier>
    <!--Optional:-->
    <deviceId>?</deviceId>
    <!--Optional:-->
    <serverIds>
      <!--1 or more repetitions:-->
      <serverId>?</serverId>
    </serverIds>
    <!--Optional:-->
    <hostTypeName>
      <name>?</name>
    </hostTypeName>
    <!--Optional:-->
    <publisherIdName>
      <name>?</name>
    </publisherIdName>
    <!--Optional:-->
    <description>?</description>
    <!--Optional:-->
    <updateChannelPartners>
      <!--Optional:-->
      <channelPartners>
        <!--Zero or more repetitions:-->
        <channelPartner>
          <tierName>?</tierName>
          <organizationUnit>
            <!--Optional:-->
            <uniqueId>?</uniqueId>
            <!--Optional:-->
            <primaryKeys>
              <name>?</name>
            </primaryKeys>
          </organizationUnit>
          <!--Optional:-->
          <contact>
            <!--Optional:-->
            <uniqueId>?</uniqueId>
            <!--Optional:-->
            <userName>?</userName>
            <!--Optional:-->
            <primaryKeys>
```

XML Example

```
<firstName>?</firstName>
<lastName>?</lastName>
<emailAddress>?</emailAddress>
<!--Optional-->
<phoneNumber>?</phoneNumber>
</primaryKeys>
</contact>
</channelPartner>
</channelPartners>
<opType>?</opType>
</updateChannelPartners>
<!--Optional-->
<alias>?</alias>
</device>
</updateDevRequest>
```

Element: updateDeviceResponse

Description

An **updateDevResponse** message contains an element of updateDevResponseType.

Derived By

Type [updateDevResponseType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	OpsEmbeddedStatusInfoType	1..1	See OpsEmbeddedStatusInfoType .
failedData	failedUpdateDevDataListType	0..1	See failedUpdateDevDataListType .
responseData	updatedDeviceDataListType	0..1	See updatedDeviceDataListType .

Referenced By

Name	Type
updateDevice	Method

XML Example

The following XML fragments illustrate **updateDevResponse** messages:

Sample Successful Response Data:

XML Example

```
<updateDevResponse>
  <statusInfo>
    <status>SUCCESS</status>
  </statusInfo>
  <responseData>
    <deviceIdentifier>
      <deviceType>CLIENT</deviceType>
      <deviceId>555555</deviceId>
    </deviceIdentifier>
  </responseData>
</updateDevResponse>
```

Sample Failed Response Data:

```
<updateDevResponse>
  <statusInfo>
    <status>FAILURE</status>
  </statusInfo>
  <failedData>
    <failedDevice>
      <device>
        <deviceIdentifier>
          <deviceType>CLIENT</deviceType>
          <deviceId>545454</deviceId>
          <deviceIdType>STRING</deviceIdType>
        </deviceIdentifier>
        <deviceId>555555</deviceId>
        <hostTypeName>
          <name>gizmo-2</name>
        </hostTypeName>
        <publisherIdName>
          <name>demo-trl-medium</name>
        </publisherIdName>
        <description>updated desc</description>
        <updateChannelPartners>
          <channelPartners>
            <channelPartner>
              <tierName>bo.constants.partnertiernames.endcustomer</tierName>
              <organizationUnit>
                <primaryKeys>
                  <name>WILY</name>
                </primaryKeys>
              </organizationUnit>
              <contact>
                <primaryKeys>
                  <firstName>WILY</firstName>
                  <lastName>Admin</lastName>
                  <emailAddress>admin@wilycoyote.co</emailAddress>
                </primaryKeys>
              </contact>
            </channelPartner>
          </channelPartners>
          <opType>REPLACE</opType>
        </updateChannelPartners>
      </device>
      <reason>Device Identifier is invalid.</reason>
    </failedDevice>
  </failedData>
</updateDevResponse>
```

DownloadPackagingService Web Service

Description

The Download Packaging Web Service is an add-on to the FlexNet Operations entitlement management system.

Introduction

The Download Packaging Service's primary components are Files and Download Packages (a collection of Files). Download Packages refer to additional optional attributes of End User License Agreements and Manufacturers which are also defined in this service. Products and Product Lines, which are defined in the Product Service, are also used by the Download Packaging Service. This service takes the place of ESD Web Service.

Methods: DownloadPackagingService

Methods

Name	Description
assignDownloadPackageToProduct	The assignDownloadPackageToProduct operation associates a download package to the Product.
assignFileToDownloadPackage	The assignFileToDownloadPackage operation associates a file to the Download Package.
createAgreement	The createAgreement operation creates the agreement with the provided Description and content.
createDownloadPackage	The createDownloadPackage operation creates the Download Package with the provide details.
createFile	The createFile operation creates the file with the provided file details.
createManufacturer	The createManufacturer operation creates the Manufacturer with the provided Manufacturer ID and Name.
deleteFile	The deleteFile operation deletes the file image associated with the file.
getAgreementCount	The getAgreementCount operation gets the agreement count with the provided search type.
getAgreementQuery	The getAgreementQuery operation gets the list of agreement descriptions with the provided search type.
getDownloadPackageCount	The getDownloadPackageCount operation gets the Download Package count with the provided search type.
getDownloadPackageInProductCount	The getDownloadPackageInProductCount operation gets the DownloadPackage In a Product count with the provided search type.
getDownloadPackageInProductQuery	The getDownloadPackageInProductQuery operation gets the list of DownloadPackage In a Product with the provided search type.
getDownloadPackageQuery	The getDownloadPackageQuery operation gets the list of DownloadPackageIDs with the provided search type.
getFileCount	The getFileCount operation gets the file count with the provided search type.
getFileQuery	The getFileQuery operation gets the list of file IDs with the provided search type.
getManufacturerCount	The getManufacturerCount operation gets the Manufacturer count with the provided search type.
getManufacturerQuery	The getManufacturerQuery operation gets the list of manufacturer descriptions with the provided search type.
getMultipleDownloadPackagesCount	
getMultipleDownloadPackagesQuery	
removeDownloadPackageFromProduct	The removeDownloadPackageFromProduct operation disassociates a Download Package from the Product.
removeFileFromDownloadPackage	The removeFileFromDownloadPackage operation disassociates a File from the Download Package.
updateAgreement	The updateAgreement operation updates the existing agreement with new content.
updateDownloadPackage	The updateDownloadPackage operation updates the existing Download Package with new description.

Methods

Name	Description
updateFile	The updateFile operation updates the existing File with new a description and content.
updateManufacturer	The updateManufacturer operation updates the existing manufacturer with new manufacturer name.
uploadFile	The uploadFile operation uploads the file image to the existing file ID.

Method: assignDownloadPackageToProduct

Description

The **assignDownloadPackageToProduct** operation associates a download package to the Product.

Parameters

Name	Type	Direction	Description
Product	ProductIDType	Input	See ProductIDType .
DownloadPackage	DownloadPackageIDType	Input	See DownloadPackageIDType .

Returns

A [ProductAssociationResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
Product	ProductIDType	See ProductIDType .
DownloadPackage	DownloadPackageIDType	See DownloadPackageIDType .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: assignFileToDownloadPackage

Description

The **assignFileToDownloadPackage** operation associates a file to the Download Package.

Parameters

Name	Type	Direction	Description
DownloadPackage	DownloadPackageIDType	Input	See DownloadPackageIDType .
File	FileInDownloadPackageType	Input	See FileInDownloadPackageType .

Returns

A [DownloadPackageAssociationResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
DownloadPackage	DownloadPackageIDType	See DownloadPackageIDType .
File	FileInDownloadPackageType	See FileInDownloadPackageType .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: createAgreement

Description

The **createAgreement** operation creates the agreement with the provided Description and content.

Parameters

Name	Type	Direction	Description
Agreement	Agreement	Input	See Agreement .

Returns

An [AgreementTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
Agreement	Agreement	See Agreement .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: createDownloadPackage

Description

The **createDownloadPackage** operation creates the Download Package with the provide details.

Parameters

Name	Type	Direction	Description
DownloadPackage	DownloadPackage	Input	See DownloadPackage .
OpType	OpTypeType	Input	See OpTypeType .

Returns

A [DownloadPackageTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
DownloadPackage	DownloadPackage	See DownloadPackage .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: createFile

Description

The **createFile** operation creates the file with the provided file details.

Parameters

Name	Type	Direction	Description
File	File	Input	See File .
OpType	OpTypeType	Input	See OpTypeType .

Returns

A [FileTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
File	File	See File .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: createManufacturer

Description

The **createManufacturer** operation creates the Manufacturer with the provided Manufacturer ID and Name.

Parameters

Name	Type	Direction	Description
Manufacturer	Manufacturer	Input	See Manufacturer .
OpType	OpTypeType	Input	See OpTypeType .

Returns

A [ManufacturerTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
Manufacturer	Manufacturer	See Manufacturer .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: deleteFile

Description

The **deleteFile** operation deletes the file image associated with the file.

Parameters

Name	Type	Direction	Description
File	FileIDType	Input	See FileIDType .

Returns

A [FileDeleteResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
File	FileIDType	See FileIDType .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: getAgreementCount

Description

The **getAgreementCount** operation gets the agreement count with the provided search type.

Parameters

Name	Type	Direction	Description
AgreementQueryParameters	AgreementQueryParameters	Input	See AgreementQueryParameters .

Returns

An [AgreementCountResult](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	CountResponseDataType	See CountResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getAgreementQuery

Description

The **getAgreementQuery** operation gets the list of agreement descriptions with the provided search type.

Parameters

Name	Type	Direction	Description
AgreementQueryParameters	AgreementQueryParameters	Input	See AgreementQueryParameters .

Returns

An [AgreementQueryResults](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	AgreementQueryResponseDataType	See AgreementQueryResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getDownloadPackageCount

Description

The **getDownloadPackageCount** operation gets the Download Package count with the provided search type.

Parameters

Name	Type	Direction	Description
DownloadPackageQueryParameters	DownloadPackageQueryParameters	Input	See DownloadPackageQueryParameters .

Returns

A [DownloadPackageCountResult](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	CountResponseDataType	See CountResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getDownloadPackageInProductCount

Description

The **getDownloadPackageInProductCount** operation gets the DownloadPackage In a Product count with the provided search type.

Parameters

Name	Type	Direction	Description
DownloadPackageInProductQueryParameters	DownloadPackageInProductQueryParameters	Input	

Returns

A [DownloadPackageInProductCountResult](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	CountResponseDataType	See CountResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getDownloadPackageInProductQuery

Description

The **getDownloadPackageInProductQuery** operation gets the list of DownloadPackage In a Product with the provided search type.

Parameters

Name	Type	Direction	Description
DownloadPackageInProductQueryParameters	DownloadPackageInProductQueryParameters	Input	
PageNumber	integer	Input	
BatchSize	integer	Input	
ReturnContainedObjects	boolean	Input	

Returns

A [DownloadPackageInProductQueryResults](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .

Returns

Name	Type	Description
ResponseData	DownloadPackageInProductQueryResponseDataType	See DownloadPackageInProductQueryResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getDownloadPackageQuery

Description

The **getDownloadPackageQuery** operation gets the list of DownloadPackageIDs with the provided search type.

Parameters

Name	Type	Direction	Description
DownloadPackageQueryParameters	DownloadPackageQueryParameters	Input	See DownloadPackageQueryParameters .
PageNumber	integer	Input	Required. Starts at 1. Say the getDownloadPackageQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
BatchSize	integer	Input	Required. Maximum number of records to return in the response.
ReturnContainedObjects	boolean	Input	TRUE or FALSE.

Returns

A [DownloadPackageQueryResults](#) element having the structure defined by the following table.

Returns

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	DownloadPackageQueryResponseDataType	See DownloadPackageQueryResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getFileCount

Description

The **getFileCount** operation gets the file count with the provided search type.

Parameters

Name	Type	Direction	Description
FileQueryParameters	FileQueryParameters	Input	See FileQueryParameters .

Returns

A [FileCountResult](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	CountResponseDataType	See CountResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getFileQuery

Description

The **getFileQuery** operation gets the list of file IDs with the provided search type.

Parameters

Name	Type	Direction	Description
FileQueryParameters	FileQueryParameters	Input	See FileQueryParameters .
PageNumber	integer	Input	Required. Starts at 1. Say the getFileQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
BatchSize	integer	Input	Required. Maximum number of records to return in the response.
ReturnContainedObjects	boolean	Input	Number of matching files.

Returns

A [FileQueryResults](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	FileQueryResponseDataType	See FileQueryResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getManufacturerCount

Description

The **getManufacturerCount** operation gets the Manufacturer count with the provided search type.

Parameters

Name	Type	Direction	Description
ManufacturerQueryParameters	ManufacturerQueryParameters	Input	See ManufacturerQueryParameters .

Returns

A [ManufacturerCountResult](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	CountResponseDataType	See CountResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getManufacturerQuery

Description

The **getManufacturerQuery** operation gets the list of manufacturer descriptions with the provided search type.

Parameters

Name	Type	Direction	Description
ManufacturerQueryParameters	ManufacturerQueryParameters	Input	See ManufacturerQueryParameters .

Returns

A [ManufacturerQueryResults](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	ManufacturerQueryResponseDataType	See ManufacturerQueryResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getMultipleDownloadPackagesCount

Parameters

Name	Type	Direction	Description
MultipleDownloadPackagesQuery Parameters	MultipleDownloadPackagesQuery Parameters	Input	

Returns

A [DownloadPackageCountResult](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	See QueryResult .
ResponseData	CountResponseDataType	See CountResponseDataType .

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: getMultipleDownloadPackagesQuery

Parameters

Name	Type	Direction	Description
MultipleDownloadPackagesQuery Parameters	MultipleDownloadPackagesQuery Parameters	Input	
SortBys	DownloadPackageSortBys	Input	
PageNumber	integer	Input	
BatchSize	integer	Input	
ReturnContainedObjects	boolean	Input	

Returns

A [MultipleDownloadPackagesQueryResults](#) element having the structure defined by the following table.

Name	Type	Description
QueryResult	QueryResult	
ResponseData	MultipleDownloadPackagesQueryResponseDataType	

Faults

Name	Content
QueryError	QueryError
UnexpectedError	UnexpectedError

Method: removeDownloadPackageFromProduct

Description

The **removeDownloadPackageFromProduct** operation disassociates a Download Package from the Product.

Parameters

Name	Type	Direction	Description
Product	ProductIDType	Input	See ProductIDType .
DownloadPackage	DownloadPackageIDType	Input	See DownloadPackageIDType .

Returns

A [ProductDisassociationResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
Product	ProductIDType	See ProductIDType .
DownloadPackage	DownloadPackageIDType	See DownloadPackageIDType .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: removeFileFromDownloadPackage

Description

The **removeFileFromDownloadPackage** operation disassociates a File from the Download Package.

Parameters

Name	Type	Direction	Description
DownloadPackage	DownloadPackageIDType	Input	See DownloadPackageIDType .
File	FileIDType	Input	See FileIDType .

Returns

A [DownloadPackageDisassociationResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
DownloadPackage	DownloadPackageIDType	See DownloadPackageIDType .
File	FileIDType	See FileIDType .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: updateAgreement

Description

The **updateAgreement** operation updates the existing agreement with new content.

Parameters

Name	Type	Direction	Description
Agreement	Agreement	Input	See Agreement .
OriginalDescription	string	Input	Used to "Reidentify" and agreement from "OriginalDescription" value to new "Description" value.

Returns

An [AgreementTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
Agreement	Agreement	See Agreement .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: updateDownloadPackage

Description

The **updateDownloadPackage** operation updates the existing Download Package with new description.

Parameters

Name	Type	Direction	Description
DownloadPackage	DownloadPackage	Input	See DownloadPackage .

Returns

A [DownloadPackageTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
DownloadPackage	DownloadPackage	See DownloadPackage .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: updateFile

Description

The **updateFile** operation updates the existing File with new a description and content.

Parameters

Name	Type	Direction	Description
File	File	Input	See File .

Returns

A [FileTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
File	File	See File .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: updateManufacturer

Description

The **updateManufacturer** operation updates the existing manufacturer with new manufacturer name.

Parameters

Name	Type	Direction	Description
Manufacturer	Manufacturer	Input	See Manufacturer .

Returns

A [ManufacturerTransactionResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
Manufacturer	Manufacturer	See Manufacturer .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Method: uploadFile

Description

The **uploadFile** operation uploads the file image to the existing file ID.

Parameters

Name	Type	Direction	Description
File	FileIDType	Input	See FileIDType .
RetrieveFromLocation	LocationType	Input	Used for retrieving file staged to Flexera upload server from server remote from Flexera.
ExpectedChecksum	Checksum	Input	The expected MD5 checksum of the file being uploaded to the service.
EmailAddresses	string	Input	Send email to this address or addresses upon file upload completion.

Returns

A [FileUploadResult](#) element having the structure defined by the following table.

Name	Type	Description
TransactionResult	TransactionResult	See TransactionResult .
File	FileIDType	See FileIDType .

Faults

Name	Content
TransactionError	TransactionError
UnexpectedError	UnexpectedError

Complex Types: DownloadPackagingService

Complex Types

Name
Agreement
AgreementCountResult
AgreementQueryParameters
AgreementQueryResponseDataType
AgreementQueryResults
AgreementTransactionResult
AttributeDescriptor
CountResponseDataType
DownloadPackage
DownloadPackageAlternateLanguage
DownloadPackageAssociationResult
DownloadPackageCountResult
DownloadPackageDisassociationResult
DownloadPackageIDType
DownloadPackageInProductCountResult
DownloadPackageInProductQueryParameters
DownloadPackageInProductQueryResponseDataType
DownloadPackageInProductQueryResults
DownloadPackageQueryParameters
DownloadPackageQueryResponseDataType
DownloadPackageQueryResults
DownloadPackageResult
DownloadPackageSortBy
DownloadPackageSortBys
DownloadPackageSortOrderType
DownloadPackageTransactionResult
ExportComplianceClassification
File
FileAlternateLanguage
FileCountResult
FileDeleteResult
FileIDType
FileInDownloadPackageType
FileQueryParameters

Complex Types

Name
FileQueryResponseDataType
FileQueryResults
FileResult
FileTransactionResult
FileUploadResult
Manufacturer
ManufacturerCountResult
ManufacturerQueryParameters
ManufacturerQueryResponseDataType
ManufacturerQueryResults
ManufacturerTransactionResult
MultipleDownloadPackagesQueryParameters
MultipleDownloadPackagesQueryResponseDataType
MultipleDownloadPackagesQueryResults
ProductAssociationResult
ProductDisassociationResult
ProductIDType
ProductLine
ProductLineAlternateLanguage
QueryError
QueryResult
TransactionError
TransactionResult
UnexpectedError

Complex Type: Agreement

Description

End User License Agreements can be assigned to Download Packages. If set, users must agree to the terms in this document before being allowed to download the Files contained in the Download Package.

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Description	string	1..1	Required. The name of the End User License Agreement for internal reference. Maximum of 100 characters.
Content	string	0..1	Required for create. Field for text or HTML content of the End User License Agreement, as you intend to display to the end user on the download site. Supports an unlimited number of characters.

Complex Type: AgreementCountResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataType	0..1	See CountResponseDataType .

Complex Type: AgreementQueryParameters

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
Description	SimpleQueryType	0..1	A description element contains: • value—string to match all or part of the description. • searchType—one of the following search values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
Status	StatusType	0..1	Returns one of the following: • ACTIVE • INACTIVE

Complex Type: AgreementQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Agreement	Agreement	0..*	See Agreement .

Complex Type: AgreementQueryResults

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	AgreementQueryResponseDataType	0..1	See AgreementQueryResponseDataType .

Complex Type: AgreementTransactionResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
Agreement	Agreement	1..1	See Agreement .

Complex Type: AttributeDescriptor

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
AttributeName	string	1..1	Custom attribute name.
StringValue	string	0..1	Custom attribute value.

Complex Type: CountResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Count	integer	1..1	The number of results.

Referenced By

Name	Type
ResponseData [type DownloadPackageInProductCountResult]	Element

Complex Type: DownloadPackage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageID	string	1..1	Required. Your company's unique identifier for this Product. We recommend that you use this field to facilitate product management between versions, bug fixes, or patches. Maximum of 100 characters.
Description	string	1..1	Required. The full name relating to the Product ID. The description may include manufacturer name, version, operating system, encryption level, or language. Maximum of 255 characters.
Version	string	0..1	This is the version of the Download Package or software release. Maximum of 20 characters.

Content Model

Component	Type	Occurs	Description
EffectiveDate	date	0..1	Required for create. The date the Download Package is available for download. The date description appears on the "Download Package Information" page from the download site. Organizations have access to the Download Package if the Product's Effective Date occurs within an Entitlement's Effective and Expiration dates on the Line Item for that Download Package.
ExpirationDate	date	0..1	Required for create. If the Expiration Date is in the future the Download Package appears on the new versions section of the download site. If the Expiration Date is in the past, the Download Package moves to the release archives section. Organizations have access to the Download Package from the release archives section even if the Download Package is expired, provided there is an overlap between the Download Package's Effective and Expiration dates and the Entitlement's Effective and Expiration dates.
ArchiveDate	date	0..1	Once this date has passed the download package will be moved to the "Archive" tab on the FlexNet Operations End User Portal. Users will still be able to download it if they have access through an overlap with their entitlement dates, but will not see it unless they click on the Archive tab on the End User Portal. (New entitlements with beginning dates after the Expiration date will not have access to this product at all).
SortGroup	string	0..1	The Release Group or Sort Group of the Download Package controls the sorting of Product in FlexNet Operations on the "Download Package Information" page. The value of this field should include padding to force the desired sorting. If your product follows a release number schema of x.y.z, the release group should be of the form xxx.yyy.zzz. For example version 9.1 would map to a Release Group of 009.001.000. Version 10.2.3 would map to 010.002.003. The Release Group could also just apply to the top level release number if desired. Version 10.1.2 could have a release group of 010 as would version 10 SP2. The second level sort of the product list is the effective date of the product. Maximum of 20 characters.
ExtendedDescription	string	0..1	The Extended Description. Maximum of 1000 characters.
ExportComplianceClassification	ExportComplianceClassification	0..1	Required for create. See ExportComplianceClassification .
Manufacturer	Manufacturer	0..1	Required for create. See Manufacturer .
ProductLine	ProductLine	0..1	Required for create. See ProductLine .
EndUserLicenseAgreement	Agreement	0..1	See Agreement .

Content Model

Component	Type	Occurs	Description
EvaluationEndUserLicenseAgreement	Agreement	0..1	See Agreement .
DownloadPackageNote	string	0..1	Instructions to End User on the download page for this package.
PhysicalDistributionAvailable	boolean	0..1	Indicates whether or not physical media may be order for this download package.
RestrictCode	string	0..1	Restrict download package functionality. Values are A=Allow, D=Deny, N=empty string (not currently restricted).
AttributeDescriptor	AttributeDescriptor	0..*	See AttributeDescriptor .
AlternateLanguage	DownloadPackageAlternateLanguage	0..*	See DownloadPackageAlternateLanguage .

Referenced By

Name	Type
DownloadPackage [type DownloadPackageResult]	Element

Complex Type: DownloadPackageAlternateLanguage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Language	string	0..1	Language used by partner.
Description	string	0..1	This is the full name relating to the Product ID. The description may include manufacturer name, version, operating system, encryption level, or language. This description appears on the " Product Information" page from the download site in locale.
ExtendedDescription	string	0..1	This is the Extended Description. Maximum of 1000 characters.
DownloadPackageNote	string	0..1	Instructions to End User on the download page for this package.

Complex Type: DownloadPackageAssociationResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
DownloadPackage	DownloadPackageIDType	1..1	See DownloadPackageIDType .
File	FileInDownloadPackageType	1..1	See FileInDownloadPackageType .

Complex Type: DownloadPackageCountResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataType	0..1	See CountResponseDataType .

Referenced By

Name	Type
DownloadPackageCountResult [element getMultipleDownloadPackagesCountResponse]	Element

Complex Type: DownloadPackageDisassociationResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
DownloadPackage	DownloadPackageIDType	1..1	See DownloadPackageIDType .
File	FileIDType	1..1	See FileIDType .

Complex Type: DownloadPackageIDType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageID	string	1..1	Required. Your company's unique identifier for this Product. We recommend that you use this field to facilitate product management between versions, bug fixes, or patches. Maximum of 100 characters.

Complex Type: DownloadPackageInProductCountResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataType	0..1	See CountResponseDataType .

Referenced By

Name	Type
DownloadPackageInProductCountResult [element getDownloadPackageInProductCountResponse]	Element

Complex Type: DownloadPackageInProductQueryParameters

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
ProductName	string	1..1	Product name.
ProductVersion	string	1..1	Product version.

Referenced By

Name	Type
DownloadPackageInProductQueryParameters [element getDownloadPackageInProductCount]	Element
DownloadPackageInProductQueryParameters [element getDownloadPackageInProductQuery]	Element

Complex Type: DownloadPackageInProductQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageResult	DownloadPackageResult	0..*	Download package.

Referenced By

Name	Type
ResponseData [type DownloadPackageInProductQueryResults]	Element

Complex Type: DownloadPackageInProductQueryResults

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	DownloadPackageInProductQueryResponseDataType	0..1	See DownloadPackageInProductQueryResponseDataType .

Referenced By

Name	Type
DownloadPackageInProductQueryResults [element getDownloadPackageInProductQueryResponse]	Element

Complex Type: DownloadPackageQueryParameters

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
DownloadPackageID	SimpleQueryType	0..1	A DownloadPackageID element contains: • value—a string to match part or all of the download package ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
DownloadPackageDescription	SimpleQueryType	0..1	A Description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
DownloadPackageVersion	string	0..1	Version of the download package.
CreationDateStart	date	0..1	The start date of the download package creation.
CreationDateEnd	date	0..1	The end date of the download package creation.
Availability	AvailabilityType	0..1	One of the following: • ARCHIVE • CURRENT • FUTURE

Complex Type: DownloadPackageQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageResult	DownloadPackageResult	0..*	See DownloadPackageResult

Complex Type: DownloadPackageQueryResults

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	DownloadPackageQueryResponseDataType	0..1	See DownloadPackageQueryResponseDataType .

Complex Type: DownloadPackageResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageSystemID	string	0..1	System ID of the download package.
DownloadPackage	DownloadPackage	0..1	See DownloadPackage .

Content Model

Component	Type	Occurs	Description
Product	ProductIDType	0..*	See ProductIDType .

Referenced By

Name	Type
DownloadPackageResult [type DownloadPackageInProductQueryResponseDataType]	Element
DownloadPackageResult [type DownloadPackageQueryResponseDataType]	Element
DownloadPackageResult [type MultipleDownloadPackagesQueryResponseDataType]	Element

Complex Type: DownloadPackageSortBy

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
SortKey	DownloadPackageSortKey	1..1	
Ascending	boolean	1..1	

Referenced By

Name	Type
SortBy [type DownloadPackageSortBys]	Element

Complex Type: DownloadPackageSortBys

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
SortBy	DownloadPackageSortBy	1..1	

Referenced By

Name	Type
SortBys [element getMultipleDownloadPackagesQuery]	Element

Complex Type: DownloadPackageSortOrderType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageID	string	1..1	Download package ID.
SortOrder	string	0..1	Download package file sort order.

Referenced By

Name	Type
DownloadPackageSortOrder [type FileResult]	Element

Complex Type: DownloadPackageTransactionResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
DownloadPackage	DownloadPackage	1..1	See DownloadPackage .

Complex Type: ExportComplianceClassification

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
NLR	string	0..1	NLR is the designator of a transaction that stands for the "No License Required" authorization. NLR may be used for either EAR99 items, or items on the CCL that do not require a license for the destination in question, provided no General Prohibitions apply.
ECCNCode	string	0..1	The Export Control Classification Number, or ECCN, is the U.S. term for an export classification code. An ECCN identifies the relevant category and paragraph of a classification, as they are maintained under the EAR's Commerce Control List.
ENCCCode	string	0..1	Encryption Licensing Arrangement: Refers to a specific type of export license that allows the export or re-export of specified encryption hardware or software to specified destinations in unlimited quantities.
CCATSCode	string	0..*	Refers to the Commodity Classification Automated Tracking System, or CCATS, number that the BIS assigns to a commodity classification request.

Complex Type: File

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
FileID	string	1..1	Required. Your company's unique identifier for this File. We recommend you use this field to facilitate file management between versions, bug fixes, or patches. Maximum of 100 characters.
Description	string	1..1	Required. The full name of the File. The description may include manufacturer name, version, operating system, encryption level, or language. This description appears on the download site. Maximum of 500 characters.
ExtendedDescription	string	0..1	The Extended Description. Maximum of 1000 characters.
FileName	string	0..1	The name of the File binary (for example: filename.zip). This field is overwritten with the name of the File when using the File Upload function. Alternately, this field may be edited to enter different content to present to the end user. File name is a mandatory field when a file is in LOADED state. Non-ascii characters are not allowed in the file name. Maximum of 255 characters
Status	string	0..1	Not directly settable. One of the following: • LOADED - The file has been loaded into the ESD system. • NOT_LOADED - The file is not yet loaded into the ESD system. • DELETED - The file that was previously load is now deleted.
AkamaiSyncIndicator	boolean	0..1	Not directly settable. Indicates whether or not file has been propagated to the Akamai network. This only applies customers who have purchased the Akamai option.
RestrictedIndicator	boolean	0..1	Not directly settable. Indicates whether or not File has granted or revoked access to specific Organizations.
RetrieveFromLocation	string	0..1	Used for retrieving file staged to Flexera upload server from server remote from Flexera.
FileSize	integer	0..1	Not directly settable.
ExpectedChecksum	Checksum	0..1	MD5 check sum.
ActualSHA256	string	0..1	

Content Model

Component	Type	Occurs	Description
ContentDetail	string	0..1	If the File is a zip or a jar file, the zipinfo will be set in this field during the File Upload process. Alternately, this field may be edited to enter different product content.
AttributeDescriptor	AttributeDescriptor	0..*	See AttributeDescriptor .
AlternateLanguage	FileAlternateLanguage	0..*	See FileAlternateLanguage .

Referenced By

Name	Type
File [type FileResult]	Element

Complex Type: FileAlternateLanguage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Language	string	0..1	Language used by partner.
Description	string	0..1	The full name of the File. The description may include manufacturer name, version, operating system, encryption level, or language. This description appears on the download site in locale.
ExtendedDescription	string	0..1	The Extended Description in locale. Maximum of 1000 characters.
ContentDetail	string	0..1	This content appears in the pop up windows for "Estimated Times and Details" located on the file download page from the download site. If the File is a zip or a jar file, the zipinfo will be set in this field during the File Upload process. Alternately, this field may be edited to enter different Product content to present to the end user.

Complex Type: FileCountResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataTy e	0..1	See CountResponseDataType .

Complex Type: FileDeleteResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
File	FileIDType	1..1	See FileIDType .

Complex Type: FileIDType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
FileID	string	1..1	Reference to existing File.

Complex Type: FileInDownloadPackageType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
FileID	string	1..1	Rquired. Reference to existing File.
SortOrder	string	0..1	Used to control sorting of files within the Download Package.

Complex Type: FileQueryParameters

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
FileID	SimpleQueryType	0..1	A FileID element contains: • value—a string to match part or all of the file ID. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Content Model

Component	Type	Occurs	Description
Description	SimpleQueryType	0..1	A Description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
FileName	SimpleQueryType	0..1	A FileName element contains: • value—a string to match part or all of the file name. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
FileStatus	FileStatusType	0..1	See FileStatusType .
CreationDateStart	date	0..1	Date the file creation started.
CreationDateEnd	date	0..1	Date the file creation ended.
LastUploadedDateStart	date	0..1	Date the last upload started.
LastUploadedDateEnd	date	0..1	Date the last upload ended.

Complex Type: FileQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
FileResult	FileResult	0..*	See FileResult

Complex Type: FileQueryResults

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	FileQueryResponseDataType	0..1	See FileQueryResponseDataType .

Complex Type: FileResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
File	File	0..1	See File .
DownloadPackageSortOrder	DownloadPackageSortOrderType	0..*	See DownloadPackageSortOrderType .

Referenced By

Name	Type
FileResult [type FileQueryResponseDataType]	Element

Complex Type: FileTransactionResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
File	File	1..1	See File .

Complex Type: FileUploadResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
File	FileIDType	1..1	See FileIDType .

Complex Type: Manufacturer

Description

Note: in the Producer Portal, this entity is referred to as "Producer".

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ManufacturerID	string	1..1	Required. This is your company's unique identifier for the Manufacturer. Alphanumeric format and must match the regular expression [A-Za-z0-9]. For example, "BS92" is acceptable, but BS_92 is not. Maximum of 100 characters.
Name	string	1..1	Required. The display name of the Manufacturer. This name is displayed when the end user navigates to his downloadable files. For example, in the sequence of Flexera Software, FlexNet Publisher, FlexNet Publisher 2015, "Flexera Software" is the Manufacturer. Maximum of 100 characters.
Status	string	0..1	One of the following: - ACTIVE (default) - INACTIVE Inactive Manufacturers will not be displayed in the dropdowns when editing DownloadPackages.

Complex Type: ManufacturerCountResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataType	0..1	See CountResponseDataType .

Complex Type: ManufacturerQueryParameters

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ManufacturerID	SimpleQueryType	0..1	A ManufacturerID element contains: • value—a string to match part or all of the manufacturer ID. • searchType—one of the following SimpleQueryType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
Name	SimpleQueryType	0..1	A name element contains: • value—a string to match part or all of the manufacturer name. • searchType—one of the following SimpleQueryType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS
Status	StatusType	0..1	Returns one of the following: • ACTIVE • INACTIVE

Complex Type: ManufacturerQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Manufacturer	Manufacturer	0..*	See Manufacturer .

Complex Type: ManufacturerQueryResults

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	ManufacturerQueryResponseDataType	0..1	See ManufacturerQueryResponseDataType .

Complex Type: ManufacturerTransactionResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
Manufacturer	Manufacturer	1..1	See Manufacturer .

Complex Type: MultipleDownloadPackagesQueryParameters

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageID	string	0..*	
DownloadPackageDescription	SimpleQueryType	0..1	
DownloadPackageVersion	string	0..1	
CreationDateStart	date	0..1	
CreationDateEnd	date	0..1	
Availability	AvailabilityType	0..1	

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesCount]	Element
MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesQuery]	Element

Complex Type: MultipleDownloadPackagesQueryResponseDataType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageResult	DownloadPackageResult	0..*	

Referenced By

Name	Type
ResponseData [type MultipleDownloadPackagesQueryResults]	Element

Complex Type: MultipleDownloadPackagesQueryResults

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	
ResponseData	MultipleDownloadPackag esQueryResponseDataT ype	0..1	

Referenced By

Name	Type
MultipleDownloadPackagesQueryResults [element getMultipleDownloadPackagesQueryResponse]	Element

Complex Type: ProductAssociationResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
Product	ProductIDType	1..1	See ProductIDType .

Content Model

Component	Type	Occurs	Description
DownloadPackage	DownloadPackageIDType e	1..1	See DownloadPackageIDType .

Complex Type: ProductDisassociationResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
TransactionResult	TransactionResult	1..1	See TransactionResult .
Product	ProductIDType	1..1	See ProductIDType .
DownloadPackage	DownloadPackageIDType e	1..1	See DownloadPackageIDType .

Complex Type: ProductIDType

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
ProductName	string	1..1	Name of the product.
ProductVersion	string	1..1	Version of the product.

Referenced By

Name	Type
Product [type DownloadPackageResult]	Element

Complex Type: ProductLine

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
ProductLineID	string	0..1	Your company's unique identifier for this Product Line. The Product Line is an attribute of both Catalog Items and Products.
Name	string	0..1	Required for create. The full name of the Product Line. This name appears as a navigational hyperlink option on the download site.
Description	string	0..1	Optional field for text or HTML content where you may include information about this Product Line. This content is typically only for internal reference and will not be displayed on the FlexNet Operations site.
Features	string	0..1	Optional field for text or HTML content where you may include marketing features of this Product Line. This content appears towards the top of the Product List page from the download site. Supports an unlimited number of characters.
SortOrder	string	0..1	The sort order of the product line. The sort order will determine the order in which the product line is displayed.
LicenseInformation	string	0..1	Optional field for text or HTML content where you may include information about licensing for all Products belonging to this Product Line. This content displays on the License Keys section.
AttributeDescriptor	AttributeDescriptor	0..*	See AttributeDescriptor .
AlternateLanguage	ProductLineAlternateLanguage	0..*	See ProductLineAlternateLanguage .
Status	string	0..1	The status of the product line. Active Products are in use on the download site.

Complex Type: ProductLineAlternateLanguage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Language	string	0..1	Language used by partner.
Name	string	0..1	The full name of the Product Line. This name appears as a navigational hyperlink option on the download site in a particular locale.
Description	string	0..1	Optional field for text or HTML content where you may include information about this Product Line. This content is typically only for internal reference and will not be displayed on the FlexNet Operations site in locale.
Features	string	0..1	Optional field for text or HTML content where you may include marketing features of this Product Line. This content appears towards the top of the Product List page from the download site. Supports an unlimited number of characters in locale.
LicenseInformation	string	0..1	Optional field for text or HTML content where you may include information about licensing for all Products belonging to this Product Line. This content displays on the License Keys section in locale.
Status	string	0..1	Status.

Complex Type: QueryError

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
errorCode	string	1..1	Query Code returned after executes a query.
errorMessage	string	1..1	Error message returned after executes a query.
errorDetails	string	1..1	Details of the error.

Complex Type: QueryResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Successful	boolean	1..1	TRUE or FALSE
ProcessedTime	dateTime	1..1	Date and time query processed.
QueryError	QueryError	0..*	See QueryError .

Referenced By

Name	Type
QueryResult [type DownloadPackageInProductCountResult]	Element
QueryResult [type DownloadPackageInProductQueryResults]	Element
QueryResult [type MultipleDownloadPackagesQueryResults]	Element

Complex Type: TransactionError

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
errorCode	string	1..1	Transaction Code returned after executes a transaction.
errorMessage	string	1..1	Error message returned after executes a transaction.
errorDetails	string	1..1	Details of the error.

Complex Type: TransactionResult

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
TransactionID	string	0..1	System generated ID returned as a reference for this submission.
TransactionStatus	TransactionStatusType	1..1	SUCCESS or FAILURE
ProcessedTime	dateTime	1..1	Timestamp of the transaction.
TransactionError	TransactionError	0..*	See TransactionError .

Complex Type: UnexpectedError

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Code	string	1..1	Other errors not included in ESD error list.
IncidentID	string	0..1	Error code.

Simple Types: DownloadPackagingService

Simple Types

Name
DownloadPackageSortKey
FileStatusType
OpTypeType

Simple Type: DownloadPackageSortKey

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
DOWNLOADPACKAGE_ID	
DESCRIPTION	

Referenced By

Name	Type
SortKey [type DownloadPackageSortBy]	Element

Simple Type: FileStatusType

Description

See [FileStatusType](#).

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
LOADED	The file has been loaded into the Dowload Package system.
NOT_LOADED	The file is not yet loaded into the Dowload Package system.
DELETED	The file that was previously load is now deleted.

Simple Type: OpTypeType

Description

See [OpTypeType](#).

Derived By

Restricting NMTOKEN

Enumeration

Value	Description
CREATE_OR_UPDATE	
CREATE_OR_IGNORE	

Elements: DownloadPackagingService

Elements

Name	Description
ActualSHA256 [type File]	
Ascending [type DownloadPackageSortBy]	
assignDownloadPackageToProduct	
assignDownloadPackageToProductResponse	
Availability [type MultipleDownloadPackagesQueryParameters]	
BatchSize [element getDownloadPackageInProductQuery]	
BatchSize [element getMultipleDownloadPackagesQuery]	
createAgreement	
createAgreementResponse	
createDownloadPackage	
createDownloadPackageResponse	
createManufacturer	
createManufacturerResponse	
CreationDateEnd [type MultipleDownloadPackagesQueryParameters]	
CreationDateStart [type MultipleDownloadPackagesQueryParameters]	
DownloadPackage [type DownloadPackageResult]	See DownloadPackage .
DownloadPackageCountResult [element getMultipleDownloadPackagesCountResponse]	
DownloadPackageDescription [type DownloadPackageQueryParameters]	A Description element contains: • value—a string to match part or all of the description. • searchType—one of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Elements

Name	Description
DownloadPackageDescription [type MultipleDownloadPackagesQueryParameters]	
DownloadPackageID [type DownloadPackageSortOrderType]	Download package ID.
DownloadPackageID [type MultipleDownloadPackagesQueryParameters]	
DownloadPackageInProductCountResult [element getDownloadPackageInProductCountResponse]	
DownloadPackageInProductQueryParameters [element getDownloadPackageInProductCount]	
DownloadPackageInProductQueryParameters [element getDownloadPackageInProductQuery]	
DownloadPackageInProductQueryResults [element getDownloadPackageInProductQueryResponse]	
DownloadPackageResult [type DownloadPackageInProductQueryResponseDataType]	Download package.
DownloadPackageResult [type DownloadPackageQueryResponseDataType]	See DownloadPackageResult
DownloadPackageResult [type MultipleDownloadPackagesQueryResponseDataType]	
DownloadPackageSortOrder [type FileResult]	See DownloadPackageSortOrderType .
DownloadPackageSystemID [type DownloadPackageResult]	System ID of the download package.
DownloadPackageVersion [type DownloadPackageQueryParameters]	Version of the download package.
DownloadPackageVersion [type MultipleDownloadPackagesQueryParameters]	
ExpectedChecksum [type File]	MD5 check sum.
File [type FileResult]	See File .
FileResult [type FileQueryResponseDataType]	See FileResult
getAgreementCount	
getAgreementCountResponse	
getAgreementQuery	
getAgreementQueryResponse	
getDownloadPackageCount	

Elements

Name	Description
getDownloadPackageCountResponse	
getDownloadPackageInProductCount	
getDownloadPackageInProductCountResponse	
getDownloadPackageInProductQuery	
getDownloadPackageInProductQueryResponse	
getDownloadPackageQuery	
getDownloadPackageQueryResponse	
getManufacturerCount	
getManufacturerCountResponse	
getManufacturerQuery	
getManufacturerQueryResponse	
getMultipleDownloadPackagesCount	
getMultipleDownloadPackagesCountResponse	
getMultipleDownloadPackagesQuery	
getMultipleDownloadPackagesQueryResponse	
MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesCount]	
MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesQuery]	
MultipleDownloadPackagesQueryResults [element getMultipleDownloadPackagesQueryResponse]	
PageNumber [element getDownloadPackageInProductQuery]	
PageNumber [element getMultipleDownloadPackagesQuery]	
Product [type DownloadPackageResult]	See ProductIDType .
ProductName [type DownloadPackageInProductQueryParameters]	Product name.
ProductVersion [type DownloadPackageInProductQueryParameters]	Product version.
QueryResult [type DownloadPackageInProductCountResult]	See QueryResult .
QueryResult [type DownloadPackageInProductQueryResults]	See QueryResult .

Elements

Name	Description
QueryResult [type MultipleDownloadPackagesQueryResults]	
removeDownloadPackageFromProduct	
removeDownloadPackageFromProductResponse	
ResponseData [type DownloadPackageInProductCountResult]	See CountResponseDataType .
ResponseData [type DownloadPackageInProductQueryResults]	See DownloadPackageInProductQueryResponseDataType .
ResponseData [type MultipleDownloadPackagesQueryResults]	
RestrictCode [type DownloadPackage]	Restrict download package functionality. Values are A=Allow, D=Deny, N=empty string (not currently restricted).
ReturnContainedObjects [element getDownloadPackageInProductQuery]	Whether or not to include the contained objects in the response. TRUE or FALSE.
ReturnContainedObjects [element getMultipleDownloadPackagesQuery]	
SortBy [type DownloadPackageSortBys]	
SortBys [element getMultipleDownloadPackagesQuery]	
SortKey [type DownloadPackageSortBy]	
SortOrder [type DownloadPackageSortOrderType]	Download package file sort order.
updateAgreement	
updateAgreementResponse	
updateDownloadPackage	
updateDownloadPackageResponse	
updateManufacturer	
updateManufacturerResponse	

Element: ActualSHA256 [type File]

Derived By

Type string

Referenced By

Name	Type
File	Complex Type

Definition

[See File](#)

Element: Ascending [type DownloadPackageSortBy]

Derived By

Type boolean

Referenced By

Name	Type
DownloadPackageSortBy	Complex Type

Definition

[See DownloadPackageSortBy](#)

Element: assignDownloadPackageToProduct

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Product	ProductIDType	1..1	See ProductIDType .
DownloadPackage	DownloadPackageIDType	1..1	See DownloadPackageIDType .

XML Example

The following XML fragment illustrates an **assignDownloadPackageToProduct** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header>
  </soapenv:Header>
  <soapenv:Body>
    <dow:assignDownloadPackageToProduct>
      <Product>
        <ProductName>AS-ESDProduct-011401</ProductName>
      </Product>
    </dow:assignDownloadPackageToProduct>
  </soapenv:Body>
</soapenv:Envelope>
```

XML Example

```
<ProductVersion>1.0</ProductVersion>
</Product>
<DownloadPackage>
  <DownloadPackageID>AS-DP1</DownloadPackageID>
</DownloadPackage>
</dow:assignDownloadPackageToProduct>
</soapenv:Body>
</soapenv:Envelope>
```

Element: assignDownloadPackageToProductResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ProductAssociationResult	ProductAssociationResult	1..1	See ProductAssociationResult .

XML Example

The following XML fragment illustrates a successful **assignDownloadPackageToProductResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p293566130:assignDownloadPackageToProductResponse
      xmlns:p293566130="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <ProductAssociationResult>
        <TransactionResult>
          <TransactionID>2171679973</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-04-15T16:45:11.350Z</ProcessedTime>
        </TransactionResult>
        <Product>
          <ProductName>AS-ESDProduct-011401</ProductName>
          <ProductVersion>1.0</ProductVersion>
        </Product>
        <DownloadPackage>
          <DownloadPackageID>AS-DP1</DownloadPackageID>
        </DownloadPackage>
      </ProductAssociationResult>
    </p293566130:assignDownloadPackageToProductResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: Availability [type MultipleDownloadPackagesQueryParameters]

Derived By

Type AvailabilityType

Enumeration

Value	Description
ARCHIVE	
CURRENT	
FUTURE	

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters	Complex Type

Definition

[See MultipleDownloadPackagesQueryParameters](#)

Element: BatchSize [element getDownloadPackageInProductQuery]

Derived By

Type integer

Referenced By

Name	Type
getDownloadPackageInProductQuery	Element
getDownloadPackageInProductQuery	Method

Definition

[See getDownloadPackageInProductQuery](#)

Element: BatchSize [element getMultipleDownloadPackagesQuery]

Derived By

Type integer

Referenced By

Name	Type
getMultipleDownloadPackagesQuery	Element
getMultipleDownloadPackagesQuery	Method

Definition

See [getMultipleDownloadPackagesQuery](#)

Element: createAgreement

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Agreement	Agreement	1..1	See Agreement .

XML Example

The following XML fragment illustrates a **createAgreement** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:createAgreement>
      <Agreement>
        <Description>AS-TESTAGREEMENT-01</Description>
        <!--Optional:-->
        <Content>TEST CONTENT</Content>
      </Agreement>
    </dow:createAgreement>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: createAgreementResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
AgreementTransaction Result	AgreementTransactionResult	1..1	See AgreementTransactionResult .

XML Example

The following XML fragment illustrates a successful **createAgreementResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:createAgreementResponse xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <AgreementTransactionResult>
        <TransactionResult>
          <TransactionID>2291380167</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-02-22T16:40:35.643Z</ProcessedTime>
        </TransactionResult>
        <Agreement>
          <Description>AS-TESTAGREEMENT-01</Description>
          <Content>TEST CONTENT</Content>
        </Agreement>
      </AgreementTransactionResult>
    </p707:createAgreementResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: createDownloadPackage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackage	DownloadPackage	1..1	See DownloadPackage .
OpType	OpTypeType	0..1	See OpTypeType .

XML Example

The following XML fragment illustrates a **createDownloadPackage** message:

XML Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
  xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:createDownloadPackage>
      <DownloadPackage>
        <DownloadPackageID>AS-DOWNLOADPACKAGE-02</DownloadPackageID>
        <Description>AS DOWNLOAD PACKAGE 02</Description>
        <!--Optional:-->
        <Version>2016R1</Version>
        <!--Optional:-->
        <EffectiveDate>2016-02-01</EffectiveDate>
        <!--Optional:-->
        <ExpirationDate>2016-07-31</ExpirationDate>
        <!--Optional:-->
        <ArchiveDate>2016-08-01</ArchiveDate>
        <!--Optional:-->
        <SortGroup>2016</SortGroup>
        <!--Optional:-->
        <ExtendedDescription>DOWNLOAD PACKAGE VERSION 2016R1</ExtendedDescription>
        <!--Optional:-->
        <ExportComplianceClassification>
          <!--Optional:-->
          <NLR>F</NLR>
          <!--Optional:-->
          <ECCNCode>5D002</ECCNCode>
          <!--Optional:-->
          <ENCCCode>NON_RETAIL</ENCCCode>
          <!--Zero or more repetitions:-->
          <CCATSCode>Z123456</CCATSCode>
        </ExportComplianceClassification>
        <!--Optional:-->
        <Manufacturer>
          <ManufacturerID>AS-FLEXERAQA</ManufacturerID>
          <Name>AS-FLEXERAQA</Name>
          <!--Optional:-->
          <Status>ACTIVE</Status>
        </Manufacturer>
        <!--Optional:-->
        <ProductLine>
          <!--Optional:-->
          <ProductLineID>ESD</ProductLineID>
          <!--Optional:-->
          <Name>ESD</Name>
          <!--Optional:-->
          <Description>CREATED VIA WEB SERVICES</Description>
          <!--Optional:-->
          <Features>THIS PRODUCTLINE IS USED FOR ESD</Features>
          <!--Optional:-->
          <SortOrder>1</SortOrder>
          <!--Optional:-->
          <LicenseInformation>ESD LICENSE. CANNOT BE DISTRIBUTED.</LicenseInformation>
          <!--Zero or more repetitions:-->
          <AttributeDescriptor>
            <AttributeName>PRODUCTLINE-ATTR1</AttributeName>
            <!--Optional:-->
            <StringValue>ESD</StringValue>
          </AttributeDescriptor>
          <!--Zero or more repetitions:-->
          <AlternateLanguage>
            <!--Optional:-->
            <Language>zh</Language>
            <!--Optional:-->
            <Name>PRODUCT LINE IN MANDARIN</Name>
            <!--Optional:-->
            <Description>DESCRIPTION IN MANDARIN</Description>
          </AlternateLanguage>
        </ProductLine>
      </DownloadPackage>
    </dow:createDownloadPackage>
  </soapenv:Body>
</soapenv:Envelope>
```

XML Example

```

    <!--Optional:-->
    <Features>THIS PRODUCT LINE IS USED FOR ESD (IN MANDARIN)</Features>
    <!--Optional:-->
    <LicenseInformation>CANNOT REUSE, REDISTRIBUTE (IN MANDARIN)</LicenseInformation>
    <!--Optional:-->
    <Status>ACTIVE</Status>
  </AlternateLanguage>
  <!--Optional:-->
  <Status>ACTIVE</Status>
</ProductLine>
<!--Optional:-->
<EndUserLicenseAgreement>
  <Description>FLEXERAQAAgreement</Description>
  <!--Optional:-->
  <Content>Created during September Prod release</Content>
</EndUserLicenseAgreement>
<!--Optional:-->
<EvaluationEndUserLicenseAgreement>
  <Description>AS-TESTAGREEMENT-02</Description>
  <!--Optional:-->
  <Content>IS THIS VALID?</Content>
</EvaluationEndUserLicenseAgreement>
<!--Optional:-->
<DownloadPackageNote>IN ORDER TO DOWNLOAD FILES FROM THE DOWNLOAD PACKAGE, CLICK THE DOWNLOAD PACKAGE
NAME</DownloadPackageNote>
<!--Optional:-->
<PhysicalDistributionAvailable>0</PhysicalDistributionAvailable>
<!--Zero or more repetitions:-->
<AttributeDescriptor>
  <AttributeName>PACKAGE_TYPE</AttributeName>
  <!--Optional:-->
  <StringValue>INSTALLATION</StringValue>
</AttributeDescriptor>
<!--Zero or more repetitions:-->
<AlternateLanguage>
  <!--Optional:-->
  <Language>zh</Language>
  <!--Optional:-->
  <Description>DESCRIPTION IN MANDARIN</Description>
  <!--Optional:-->
  <ExtendedDescription>EXTENDED DESCRIPTION IN MANDARIN</ExtendedDescription>
  <!--Optional:-->
  <DownloadPackageNote>NOTES IN MANDARIN</DownloadPackageNote>
</AlternateLanguage>
</DownloadPackage>
</dow:createDownloadPackage>
</soapenv:Body>
</soapenv:Envelope>

```

Element: createDownloadPackageResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageTransactionResult	DownloadPackageTransactionResult	1..1	See DownloadPackageTransactionResult .

XML Example

The following XML fragment illustrates a successful **createDownloadPackageResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:createDownloadPackageResponse
      xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <DownloadPackageTransactionResult>
        <TransactionResult>
          <TransactionID>2291779157</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-02-22T21:55:22.528Z</ProcessedTime>
        </TransactionResult>
        <DownloadPackage>
          <DownloadPackageID>AS-DOWNLOADPACKAGE-02</DownloadPackageID>
          <Description>AS DOWNLOAD PACKAGE 02</Description>
          <Version>2016R1</Version>
          <EffectiveDate>2016-02-01</EffectiveDate>
          <ExpirationDate>2016-07-31</ExpirationDate>
          <ArchiveDate>2016-08-01</ArchiveDate>
          <SortGroup>2016</SortGroup>
          <ExtendedDescription>DOWNLOAD PACKAGE VERSION 2016R1</ExtendedDescription>
          <ExportComplianceClassification>
            <NLR>No</NLR>
            <ECCNCode>5D002</ECCNCode>
            <ENCCCode>NON_RETAIL</ENCCCode>
            <CCATSCCode>Z123456</CCATSCCode>
          </ExportComplianceClassification>
          <ProductLine/>
          <EndUserLicenseAgreement>
            <Description xsi:nil="true"/>
          </EndUserLicenseAgreement>
          <EvaluationEndUserLicenseAgreement>
            <Description xsi:nil="true"/>
          </EvaluationEndUserLicenseAgreement>
          <DownloadPackageNote>IN ORDER TO DOWNLOAD FILES FROM THE DOWNLOAD PACKAGE, CLICK THE DOWNLOAD PACKAGE
            NAME</DownloadPackageNote>
          <PhysicalDistributionAvailable>0</PhysicalDistributionAvailable>
          <AttributeDescriptor>
            <AttributeName>PACKAGE_TYPE</AttributeName>
            <StringValue>INSTALLATION</StringValue>
          </AttributeDescriptor>
          <AlternateLanguage>
            <Language>zh</Language>
            <Description>DESCRIPTION IN MANDARIN</Description>
            <ExtendedDescription>EXTENDED DESCRIPTION IN MANDARIN</ExtendedDescription>
            <DownloadPackageNote>NOTES IN MANDARIN</DownloadPackageNote>
          </AlternateLanguage>
        </DownloadPackage>
      </DownloadPackageTransactionResult>
    </p707:createDownloadPackageResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: createManufacturer

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Manufacturer	Manufacturer	1..1	See Manufacturer .
OpType	OpTypeType	0..1	See OpTypeType .

XML Example

The following XML fragment illustrates a **createManufacturer** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:createManufacturer>
      <Manufacturer>
        <ManufacturerID>AS-FLEXERAQA</ManufacturerID>
        <Name>AS-FLEXERAQA</Name>
        <!--Optional:-->
        <Status>ACTIVE</Status>
      </Manufacturer>
    </dow:createManufacturer>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: createManufacturerResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ManufacturerTransactionResult	ManufacturerTransactionResult	1..1	See ManufacturerTransactionResult .

XML Example

The following XML fragment illustrates a successful **createManufacturerResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:createManufacturerResponse xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <ManufacturerTransactionResult>
        <TransactionResult>
          <TransactionID>2200543373</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-02-18T01:26:25.847Z</ProcessedTime>
        </TransactionResult>
        <Manufacturer>
          <ManufacturerID>AS-FLEXERAQA</ManufacturerID>
          <Name>AS-FLEXERAQA</Name>
          <Status>ACTIVE</Status>
        </Manufacturer>
      </ManufacturerTransactionResult>
    </p707:createManufacturerResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: CreationDateEnd [type MultipleDownloadPackagesQueryParameters]

Derived By

Type date

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters	Complex Type

Definition

[See MultipleDownloadPackagesQueryParameters](#)

Element: CreationDateStart [type MultipleDownloadPackagesQueryParameters]

Derived By

Type date

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters	Complex Type

Definition

See [MultipleDownloadPackagesQueryParameters](#)

Element: DownloadPackage [type DownloadPackageResult]

Description

See [DownloadPackage](#).

Derived By

Type [DownloadPackage](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageID	string	1..1	Required. Your company's unique identifier for this Product. We recommend that you use this field to facilitate product management between versions, bug fixes, or patches. Maximum of 100 characters.
Description	string	1..1	Required. The full name relating to the Product ID. The description may include manufacturer name, version, operating system, encryption level, or language. Maximum of 255 characters.
Version	string	0..1	This is the version of the Download Package or software release. Maximum of 20 characters.
EffectiveDate	date	0..1	Required for create. The date the Download Package is available for download. The date description appears on the "Download Package Information" page from the download site. Organizations have access to the Download Package if the Product's Effective Date occurs within an Entitlement's Effective and Expiration dates on the Line Item for that Download Package.

Content Model

Component	Type	Occurs	Description
ExpirationDate	date	0..1	Required for create. If the Expiration Date is in the future the Download Package appears on the new versions section of the download site. If the Expiration Date is in the past, the Download Package moves to the release archives section. Organizations have access to the Download Package from the release archives section even if the Download Package is expired, provided there is an overlap between the Download Package's Effective and Expiration dates and the Entitlement's Effective and Expiration dates.
ArchiveDate	date	0..1	Once this date has passed the download package will be moved to the "Archive" tab on the FlexNet Operations End User Portal. Users will still be able to download it if they have access through an overlap with their entitlement dates, but will not see it unless they click on the Archive tab on the End User Portal. (New entitlements with beginning dates after the Expiration date will not have access to this product at all).
SortGroup	string	0..1	The Release Group or Sort Group of the Download Package controls the sorting of Product in FlexNet Operations on the "Download Package Information" page. The value of this field should include padding to force the desired sorting. If your product follows a release number schema of x.y.z, the release group should be of the form xxx.yyy.zzz. For example version 9.1 would map to a Release Group of 009.001.000. Version 10.2.3 would map to 010.002.003. The Release Group could also just apply to the top level release number if desired. Version 10.1.2 could have a release group of 010 as would version 10 SP2. The second level sort of the product list is the effective date of the product. Maximum of 20 characters.
ExtendedDescription	string	0..1	The Extended Description. Maximum of 1000 characters.
ExportComplianceClassification	ExportComplianceClassification	0..1	Required for create. See ExportComplianceClassification .
Manufacturer	Manufacturer	0..1	Required for create. See Manufacturer .
ProductLine	ProductLine	0..1	Required for create. See ProductLine .
EndUserLicenseAgreement	Agreement	0..1	See Agreement .
EvaluationEndUserLicenseAgreement	Agreement	0..1	See Agreement .
DownloadPackageNote	string	0..1	Instructions to End User on the download page for this package.
PhysicalDistributionAvailable	boolean	0..1	Indicates whether or not physical media may be order for this download package.

Content Model

Component	Type	Occurs	Description
RestrictCode	string	0..1	Restrict download package functionality. Values are A=Allow, D=Deny, N=empty string (not currently restricted).
AttributeDescriptor	AttributeDescriptor	0..*	See AttributeDescriptor .
AlternateLanguage	DownloadPackageAlternateLanguage	0..*	See DownloadPackageAlternateLanguage .

Referenced By

Name	Type
DownloadPackageResult	Complex Type

Definition

See [DownloadPackageResult](#)

Element: DownloadPackageCountResult [element getMultipleDownloadPackagesCountResponse]

Derived By

Type [DownloadPackageCountResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataType	0..1	See CountResponseDataType .

Referenced By

Name	Type
getMultipleDownloadPackagesCountResponse	Element
getMultipleDownloadPackagesCount	Method

Definition

See [getMultipleDownloadPackagesCountResponse](#)

Element: DownloadPackageDescription [type DownloadPackageQueryParameters]

Description

A **Description** element contains:

- **value**—a string to match part or all of the description.
- **searchType**—one of the following simpleSearchType values:
 - STARTS_WITH
 - CONTAINS
 - ENDS_WITH
 - EQUALS

Derived By

Type SimpleQueryType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	string	1..1	A string to match part or all of the download package description.
searchType	SimpleSearchType	1..1	One of the following simpleSearchType values: • STARTS_WITH • CONTAINS • ENDS_WITH • EQUALS

Referenced By

Name	Type
DownloadPackageQueryParameters	Complex Type

Definition

[See DownloadPackageQueryParameters](#)

Element: DownloadPackageDescription [type MultipleDownloadPackagesQueryParameters]

Derived By

Type SimpleQueryType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
value	string	1..1	A string to match part or all of the download package description.
searchType	SimpleSearchType	1..1	One of the following simpleSearchType values: - STARTS_WITH - CONTAINS - ENDS_WITH - EQUALS

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters	Complex Type

Definition

[See MultipleDownloadPackagesQueryParameters](#)

Element: DownloadPackageID [type DownloadPackageSortOrderType]

Description

Download package ID.

Derived By

Type string

Referenced By

Name	Type
DownloadPackageSortOrderType	Complex Type

Definition

[See DownloadPackageSortOrderType](#)

Element: DownloadPackageID [type MultipleDownloadPackagesQueryParameters]

Derived By

Type string

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters	Complex Type

Definition

[See MultipleDownloadPackagesQueryParameters](#)

Element: DownloadPackageInProductCountResult [element getDownloadPackageInProductCountResponse]

Derived By

Type [DownloadPackageInProductCountResult](#)

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	CountResponseDataType	0..1	See CountResponseDataType .

Referenced By

Name	Type
getDownloadPackageInProductCountResponse	Element
getDownloadPackageInProductCount	Method

Definition

See [getDownloadPackageInProductCountResponse](#)

Element: DownloadPackageInProductQueryParameters [element getDownloadPackageInProductCount]

Derived By

Type [DownloadPackageInProductQueryParameters](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ProductName	string	1..1	Product name.
ProductVersion	string	1..1	Product version.

Referenced By

Name	Type
getDownloadPackageInProductCount	Element
getDownloadPackageInProductCount	Method

Definition

See [getDownloadPackageInProductCount](#)

Element: DownloadPackageInProductQueryParameters [element getDownloadPackageInProductQuery]

Derived By

Type [DownloadPackageInProductQueryParameters](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ProductName	string	1..1	Product name.
ProductVersion	string	1..1	Product version.

Referenced By

Name	Type
getDownloadPackageInProductQuery	Element
getDownloadPackageInProductQuery	Method

Definition

See [getDownloadPackageInProductQuery](#)

Element: DownloadPackageInProductQueryResults [element getDownloadPackageInProductQueryResponse]

Derived By

Type [DownloadPackageInProductQueryResults](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
QueryResult	QueryResult	1..1	See QueryResult .
ResponseData	DownloadPackageInProductQueryResponseDataType	0..1	See DownloadPackageInProductQueryResponseDataType .

Referenced By

Name	Type
getDownloadPackageInProductQueryResponse	Element
getDownloadPackageInProductQuery	Method

Definition

See [getDownloadPackageInProductQueryResponse](#)

Element: DownloadPackageResult [type DownloadPackageInProductQueryResponseDataType]

Description

Download package.

Derived By

Type [DownloadPackageResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageSystemID	string	0..1	System ID of the download package.
DownloadPackage	DownloadPackage	0..1	See DownloadPackage .
Product	ProductIDType	0..*	See ProductIDType .

Referenced By

Name	Type
DownloadPackageInProductQueryResponseDataType	Complex Type

Definition

See [DownloadPackageInProductQueryResponseDataType](#)

Element: DownloadPackageResult [type DownloadPackageQueryResponseDataType]

Description

See [DownloadPackageResult](#)

Derived By

Type [DownloadPackageResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageSystemID	string	0..1	System ID of the download package.
DownloadPackage	DownloadPackage	0..1	See DownloadPackage .
Product	ProductIDType	0..*	See ProductIDType .

Referenced By

Name	Type
DownloadPackageQueryResponseDataType	Complex Type

Definition

See [DownloadPackageQueryResponseDataType](#)

Element: DownloadPackageResult [type MultipleDownloadPackagesQueryResponseDataType]

Derived By

Type [DownloadPackageResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageSystemID	string	0..1	System ID of the download package.
DownloadPackage	DownloadPackage	0..1	See DownloadPackage .
Product	ProductIDType	0..*	See ProductIDType .

Referenced By

Name	Type
MultipleDownloadPackagesQueryResponseDataType	Complex Type

Definition

See [MultipleDownloadPackagesQueryResponseDataType](#)

Element: DownloadPackageSortOrder [type FileResult]

Description

See [DownloadPackageSortOrderType](#).

Derived By

Type [DownloadPackageSortOrderType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageID	string	1..1	Download package ID.
SortOrder	string	0..1	Download package file sort order.

Referenced By

Name	Type
FileResult	Complex Type

Definition

[See FileResult](#)

Element: DownloadPackageSystemID [type DownloadPackageResult]

Description

System ID of the download package.

Derived By

Type string

Referenced By

Name	Type
DownloadPackageResult	Complex Type

Definition

[See DownloadPackageResult](#)

Element: DownloadPackageVersion [type DownloadPackageQueryParameters]

Description

Version of the download package.

Derived By

Type string

Referenced By

Name	Type
DownloadPackageQueryParameters	Complex Type

Definition

[See DownloadPackageQueryParameters](#)

Element: DownloadPackageVersion [type MultipleDownloadPackagesQueryParameters]

Derived By

Type string

Referenced By

Name	Type
MultipleDownloadPackagesQueryParameters	Complex Type

Definition

[See MultipleDownloadPackagesQueryParameters](#)

Element: ExpectedChecksum [type File]

Description

MD5 check sum.

Derived By

Type CheckSum

Restrictions

- Length of value must be less than or equal to 32.

Referenced By

Name	Type
File	Complex Type

Definition

[See File](#)

Element: File [type FileResult]

Description

See [File](#).

Derived By

Type [File](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
FileID	string	1..1	Required. Your company's unique identifier for this File. We recommend you use this field to facilitate file management between versions, bug fixes, or patches. Maximum of 100 characters.
Description	string	1..1	Required. The full name of the File. The description may include manufacturer name, version, operating system, encryption level, or language. This description appears on the download site. Maximum of 500 characters.
ExtendedDescription	string	0..1	The Extended Description. Maximum of 1000 characters.
FileName	string	0..1	The name of the File binary (for example: filename.zip). This field is overwritten with the name of the File when using the File Upload function. Alternately, this field may be edited to enter different content to present to the end user. File name is a mandatory field when a file is in LOADED state. Non-ascii characters are not allowed in the file name. Maximum of 255 characters
Status	string	0..1	Not directly settable. One of the following: • LOADED - The file has been loaded into the ESD system. • NOT_LOADED - The file is not yet loaded into the ESD system. • DELETED - The file that was previously load is now deleted.
AkamaiSyncIndicator	boolean	0..1	Not directly settable. Indicates whether or not file has been propagated to the Akamai network. This only applies customers who have purchased the Akamai option.
RestrictedIndicator	boolean	0..1	Not directly settable. Indicates whether or not File has granted or revoked access to specific Organizations.

Content Model

Component	Type	Occurs	Description
RetrieveFromLocation	string	0..1	Used for retrieving file staged to Flexera upload server from server remote from Flexera.
FileSize	integer	0..1	Not directly settable.
ExpectedChecksum	Checksum	0..1	MD5 check sum.
ActualSHA256	string	0..1	
ContentDetail	string	0..1	If the File is a zip or a jar file, the zipinfo will be set in this field during the File Upload process. Alternately, this field may be edited to enter different product content.
AttributeDescriptor	AttributeDescriptor	0..*	See AttributeDescriptor .
AlternateLanguage	FileAlternateLanguage	0..*	See FileAlternateLanguage .

Referenced By

Name	Type
FileResult	Complex Type

Definition

See [FileResult](#)

Element: FileResult [type FileQueryResponseDataType]

Description

See [FileResult](#)

Derived By

Type [FileResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
File	File	0..1	See File .
DownloadPackageSortOrder	DownloadPackageSortOrderType	0..*	See DownloadPackageSortOrderType .

Referenced By

Name	Type
FileQueryResponseDataType	Complex Type

Definition

See [FileQueryResponseDataType](#)

Element: getAgreementCount

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
AgreementQueryParameters	AgreementQueryParameters	0..1	See AgreementQueryParameters .

XML Example

The following XML fragment illustrates a **getAgreementCount** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
  xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:getAgreementCount>
      <!--Optional:-->
      <AgreementQueryParameters>
        <!--Optional:-->
        <Description>
          <value>Agreement</value>
          <searchType>CONTAINS</searchType>
        </Description>
        <!--Optional:-->
        <!--Status?</Status-->
      </AgreementQueryParameters>
    </dow:getAgreementCount>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: getAgreementCountResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
AgreementCountResult	AgreementCountResult	0..1	See AgreementCountResult .

XML Example

The following XML fragment illustrates a successful **getAgreementCountResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:getAgreementCountResponse xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <AgreementCountResult>
        <QueryResult xsi:nil="true"/>
        <ResponseData>
          <Count>26</Count>
        </ResponseData>
      </AgreementCountResult>
    </p707:getAgreementCountResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: getAgreementQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
AgreementQueryParameters	AgreementQueryParameters	0..1	See AgreementQueryParameters .

XML Example

The following XML fragment illustrates a **getAgreementQuery** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
```

XML Example

```
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:getAgreementQuery>
      <!--Optional:-->
      <AgreementQueryParameters>
        <!--Optional:-->
        <Description>
          <value>AS-TEST</value>
          <searchType>STARTS_WITH</searchType>
        </Description>
        <!--Optional:-->
        <!--Status--></Status-->
      </AgreementQueryParameters>
    </dow:getAgreementQuery>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: getAgreementQueryResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
AgreementQueryResults	AgreementQueryResults	0..1	See AgreementQueryResults .

XML Example

The following XML fragment illustrates a successful **getAgreementQueryResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:getAgreementQueryResponse xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <AgreementQueryResults>
        <QueryResult xsi:nil="true"/>
        <ResponseData>
          <Agreement>
            <Description>AS-TESTAGREEMENT-02</Description>
            <Content>TEXT CONTENT</Content>
          </Agreement>
          <Agreement>
            <Description>AS-TESTAGREEMENT-01</Description>
            <Content>TEST CONTENT</Content>
          </Agreement>
        </Agreement>
      </AgreementQueryResults>
    </p707:getAgreementQueryResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

XML Example

```

        <Description>AS-TESTAGREEMENT</Description>
        <Content>TEST CONTENT</Content>
      </Agreement>
    </ResponseData>
  </AgreementQueryResults>
</p707:getAgreementQueryResponse>
</soapenv:Body>
</soapenv:Envelope>

```

Element: getDownloadPackageCount

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageQueryParameters	DownloadPackageQueryParameters	0..1	See DownloadPackageQueryParameters .

XML Example

The following XML fragment illustrates a **getDownloadPackageCount** message:

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
  xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header>
    <!--nsAuthn:authnHeader>
      <nsAuthn:id>aarthishyam20@gmail.com</nsAuthn:id>
      <nsAuthn:token>6mcNlaN7M2ecdMw4qsBTYsYzBgXqwdlGwFoPEKAf6CJDvMbTje_NIWGHxU6TD09PTzKZzsSx1zNzNQIE55KbQMhdA_MYA6MYygMrzIV1pJGzZScwBSC9Dr6TBoUF5P3EJg</nsAuthn:token>
    </nsAuthn:authnHeader-->
  </soapenv:Header>
  <soapenv:Body>
    <dow:getDownloadPackageCount>
      <DownloadPackageQueryParameters>
        <DownloadPackageID>
          <value>AS_DP_09</value>
          <searchType>EQUALS</searchType>
        </DownloadPackageID>
        <!--Description>
          <value>?</value>
          <searchType>?</searchType>
        </Description>
        <Version>?</Version>
        <CreationDateStart>?</CreationDateStart>
        <CreationDateEnd>?</CreationDateEnd>
        <Availability>CURRENT</Availability-->
      </DownloadPackageQueryParameters>
    </dow:getDownloadPackageCount>
  </soapenv:Body>

```

XML Example

```
</soapenv:Envelope>
```

Element: getDownloadPackageCountResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageCountResult	DownloadPackageCountResult	0..1	See DownloadPackageCountResult .

XML Example

The following XML fragment illustrates a successful **getDownloadPackageCountResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p293566130:getDownloadPackageCountResponse
      xmlns:p293566130="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <DownloadPackageCountResult>
        <QueryResult xsi:nil="true"/>
        <ResponseData>
          <Count>1</Count>
        </ResponseData>
      </DownloadPackageCountResult>
    </p293566130:getDownloadPackageCountResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: getDownloadPackageInProductCount

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageInProductQueryParameters	DownloadPackageInProductQueryParameters	0..1	

Element: getDownloadPackageInProductCountResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageInProductCountResult	DownloadPackageInProductCountResult	0..1	

Element: getDownloadPackageInProductQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageInProductQueryParameters	DownloadPackageInProductQueryParameters	1..1	
PageNumber	integer	1..1	
BatchSize	integer	1..1	
ReturnContainedObjects	boolean	1..1	Whether or not to include the contained objects in the response. TRUE or FALSE.

Element: getDownloadPackageInProductQueryResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageInProductQueryResults	DownloadPackageInProductQueryResults	0..1	

Element: getDownloadPackageQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageQueryParameters	DownloadPackageQueryParameters	1..1	See DownloadPackageQueryParameters .
PageNumber	integer	1..1	Required. Starts at 1. Say the getDownloadPackageQuery operation using the same query parameters returns 100 records. If the batch size is 50 records and you want the second batch of 50, set pageNumber to 2.
BatchSize	integer	1..1	Required. Maximum number of records to return in the response.
ReturnContainedObjects	boolean	1..1	Whether or not to include the contained objects in the response. TRUE or FALSE.

XML Example

The following XML fragment illustrates a **getDownloadPackageQuery** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:getDownloadPackageQuery>
      <DownloadPackageQueryParameters>
        <DownloadPackageID>
          <value>AS_DP</value>
          <searchType>CONTAINS</searchType>
        </DownloadPackageID>
      </DownloadPackageQueryParameters>
    </dow:getDownloadPackageQuery>
  </soapenv:Body>
</soapenv:Envelope>
```

XML Example

```
</DownloadPackageID>
<Description>
  <value>AS_DP_09</value>
  <searchType>EQUALS</searchType>
</Description>
<!--Version?--></Version>
<CreationDateStart?--></CreationDateStart>
<CreationDateEnd?--></CreationDateEnd>
<Availability?--></Availability-->
</DownloadPackageQueryParameters>
<PageNumber>1</PageNumber>
<BatchSize>10</BatchSize>
<ReturnContainedObjects>1</ReturnContainedObjects>
</dow:getDownloadPackageQuery>
</soapenv:Body>
</soapenv:Envelope>
```

Element: getDownloadPackageQueryResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageQueryResults	DownloadPackageQueryResults	0..1	See DownloadPackageQueryResults .

XML Example

The following XML fragment illustrates a successful **getDownloadPackageQueryResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p293566130:getDownloadPackageCountResponse
      xmlns:p293566130="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <DownloadPackageCountResult>
        <QueryResult xsi:nil="true"/>
        <ResponseData>
          <Count>1</Count>
        </ResponseData>
      </DownloadPackageCountResult>
    </p293566130:getDownloadPackageCountResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: getManufacturerCount

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ManufacturerQueryParameters	ManufacturerQueryParameters	0..1	See ManufacturerQueryParameters .

XML Example

The following XML fragment illustrates a **getManufacturerCount** message.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"  
  xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">  
  <soapenv:Header/>  
  <soapenv:Body>  
    <dow:getManufacturerCount>  
      <!--Optional:-->  
      <ManufacturerQueryParameters>  
        <!--Optional:-->  
        <ManufacturerID>  
          <value>AS-FLE</value>  
          <searchType>CONTAINS</searchType>  
        </ManufacturerID>  
        <!--Optional:-->  
        <Name>  
          <value>AS-FLE</value>  
          <searchType>CONTAINS</searchType>  
        </Name>  
        <!--Optional:-->  
        <Status>INACTIVE</Status>  
      </ManufacturerQueryParameters>  
    </dow:getManufacturerCount>  
  </soapenv:Body>  
</soapenv:Envelope>
```

Element: getManufacturerCountResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	

Content Model

Component	Type	Occurs	Description
ManufacturerCountResult	ManufacturerCountResult	0..1	See ManufacturerCountResult .

XML Example

The following XML fragment illustrates a successful **getManufacturerCountResponse** message.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:getManufacturerCountResponse
xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <ManufacturerCountResult>
        <QueryResult xsi:nil="true"/>
        <ResponseData>
          <Count>1</Count>
        </ResponseData>
      </ManufacturerCountResult>
    </p707:getManufacturerCountResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: getManufacturerQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ManufacturerQueryParameters	ManufacturerQueryParameters	0..1	See ManufacturerQueryParameters .

XML Example

The following XML fragment illustrates a **getManufacturerQuery** message.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:getManufacturerQuery>
      <!--Optional:-->
```

XML Example

```
<ManufacturerQueryParameters>
  <!--Optional:-->
  <ManufacturerID>
    <value>BOC_ManufacturerID_201504</value>
    <searchType>STARTS_WITH</searchType>
  </ManufacturerID>
  <!--Optional:-->
  <Name>
    <value>BOC Manufacturer201504</value>
    <searchType>CONTAINS</searchType>
  </Name>
  <!--Optional:-->
  <Status>ACTIVE</Status>
</ManufacturerQueryParameters>
</dow:getManufacturerQuery>
</soapenv:Body>
</soapenv:Envelope>
```

Element: getManufacturerQueryResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
ManufacturerQueryResults	ManufacturerQueryResults	0..1	See ManufacturerQueryResults .

XML Example

The following XML fragment illustrates a successful **getManufacturerQueryResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:getManufacturerQueryResponse xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <ManufacturerQueryResults>
        <QueryResult xsi:nil="true"/>
        <ResponseData>
          <Manufacturer>
            <ManufacturerID>BOC_ManufacturerID_20150402T103835039</ManufacturerID>
            <Name>BOC Manufacturer20150402T103835040</Name>
            <Status>ACTIVE</Status>
          </Manufacturer>
          <Manufacturer>
            <ManufacturerID>BOC_ManufacturerID_20150402T104441302</ManufacturerID>
            <Name>BOC Manufacturer20150402T104441302</Name>
            <Status>ACTIVE</Status>
          </Manufacturer>
        </ResponseData>
      </ManufacturerQueryResults>
    </p707:getManufacturerQueryResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

XML Example

```
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150403T093144402</ManufacturerID>
  <Name>BOC Manufacturer20150403T093144402</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150403T094545356</ManufacturerID>
  <Name>BOC Manufacturer20150403T094545356</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150404T093147624</ManufacturerID>
  <Name>BOC Manufacturer20150404T093147624</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150404T094546150</ManufacturerID>
  <Name>BOC Manufacturer20150404T094546150</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150405T093200466</ManufacturerID>
  <Name>BOC Manufacturer20150405T093200466</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150405T094559321</ManufacturerID>
  <Name>BOC Manufacturer20150405T094559321</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150406T093203294</ManufacturerID>
  <Name>BOC Manufacturer20150406T093203295</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150406T094601734</ManufacturerID>
  <Name>BOC Manufacturer20150406T094601734</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
<Manufacturer>
  <ManufacturerID>BOC_ManufacturerID_20150406T103128722</ManufacturerID>
  <Name>BOC Manufacturer20150406T103128722</Name>
  <Status>ACTIVE</Status>
</Manufacturer>
</ResponseData>
</ManufacturerQueryResults>
</p707:getManufacturerQueryResponse>
</soapenv:Body>
</soapenv:Envelope>
```

Element: getMultipleDownloadPackagesCount

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Content Model

Component	Type	Occurs	Description
SEQUENCE		1..1	
MultipleDownloadPackagesQueryParameters	MultipleDownloadPackagesQueryParameters	0..1	

Element: getMultipleDownloadPackagesCountResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageCountResult	DownloadPackageCountResult	0..1	

Element: getMultipleDownloadPackagesQuery

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
MultipleDownloadPackagesQueryParameters	MultipleDownloadPackagesQueryParameters	1..1	
SortBy	DownloadPackageSortBy	1..1	
PageNumber	integer	1..1	
BatchSize	integer	1..1	
ReturnContainedObjects	boolean	1..1	

Element: getMultipleDownloadPackagesQueryResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
MultipleDownloadPackagesQueryResults	MultipleDownloadPackagesQueryResults	0..1	

Element: MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesCount]

Derived By

Type [MultipleDownloadPackagesQueryParameters](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageID	string	0..*	
DownloadPackageDescription	SimpleQueryType	0..1	
DownloadPackageVersion	string	0..1	
CreationDateStart	date	0..1	
CreationDateEnd	date	0..1	
Availability	AvailabilityType	0..1	

Referenced By

Name	Type
getMultipleDownloadPackagesCount	Element
getMultipleDownloadPackagesCount	Method

Definition

See [getMultipleDownloadPackagesCount](#)

Element: MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesQuery]

Derived By

Type [MultipleDownloadPackagesQueryParameters](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageID	string	0..*	
DownloadPackageDescription	SimpleQueryType	0..1	
DownloadPackageVersion	string	0..1	
CreationDateStart	date	0..1	
CreationDateEnd	date	0..1	
Availability	AvailabilityType	0..1	

Referenced By

Name	Type
getMultipleDownloadPackagesQuery	Element
getMultipleDownloadPackagesQuery	Method

Definition

See [getMultipleDownloadPackagesQuery](#)

Element: MultipleDownloadPackagesQueryResults [element getMultipleDownloadPackagesQueryResponse]

Derived By

Type [MultipleDownloadPackagesQueryResults](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
QueryResult	QueryResult	1..1	
ResponseData	MultipleDownloadPackagesQueryResponseDataType	0..1	

Referenced By

Name	Type
getMultipleDownloadPackagesQueryResponse	Element
getMultipleDownloadPackagesQuery	Method

Definition

[See getMultipleDownloadPackagesQueryResponse](#)

Element: PageNumber [element getDownloadPackageInProductQuery]

Derived By

Type integer

Referenced By

Name	Type
getDownloadPackageInProductQuery	Element
getDownloadPackageInProductQuery	Method

Definition

[See getDownloadPackageInProductQuery](#)

Element: PageNumber [element getMultipleDownloadPackagesQuery]

Derived By

Type integer

Referenced By

Name	Type
getMultipleDownloadPackagesQuery	Element
getMultipleDownloadPackagesQuery	Method

Definition

See [getMultipleDownloadPackagesQuery](#)

Element: Product [type DownloadPackageResult]

Description

See [ProductIDType](#).

Derived By

Type [ProductIDType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
ProductName	string	1..1	Name of the product.
ProductVersion	string	1..1	Version of the product.

Referenced By

Name	Type
DownloadPackageResult	Complex Type

Definition

See [DownloadPackageResult](#)

Element: ProductName [type DownloadPackageInProductQueryParameters]

Description

Product name.

Derived By

Type string

Referenced By

Name	Type
DownloadPackageInProductQueryParameters	Complex Type

Definition

See [DownloadPackageInProductQueryParameters](#)

Element: ProductVersion [type DownloadPackageInProductQueryParameters]

Description

Product version.

Derived By

Type string

Referenced By

Name	Type
DownloadPackageInProductQueryParameters	Complex Type

Definition

See [DownloadPackageInProductQueryParameters](#)

Element: QueryResult [type DownloadPackageInProductCountResult]

Description

See [QueryResult](#).

Derived By

Type [QueryResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Successful	boolean	1..1	TRUE or FALSE
ProcessedTime	dateTime	1..1	Date and time query processed.
QueryError	QueryError	0..*	See QueryError .

Referenced By

Name	Type
DownloadPackageInProductCountResult	Complex Type

Definition

See [DownloadPackageInProductCountResult](#)

Element: QueryResult [type DownloadPackageInProductQueryResults]

Description

See [QueryResult](#).

Derived By

Type [QueryResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Successful	boolean	1..1	TRUE or FALSE
ProcessedTime	dateTime	1..1	Date and time query processed.
QueryError	QueryError	0..*	See QueryError .

Referenced By

Name	Type
DownloadPackageInProductQueryResults	Complex Type

Definition

See [DownloadPackageInProductQueryResults](#)

Element: QueryResult [type MultipleDownloadPackagesQueryResults]

Derived By

Type [QueryResult](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Successful	boolean	1..1	TRUE or FALSE
ProcessedTime	dateTime	1..1	Date and time query processed.
QueryError	QueryError	0..*	See QueryError .

Referenced By

Name	Type
MultipleDownloadPackagesQueryResults	Complex Type

Definition

See [MultipleDownloadPackagesQueryResults](#)

Element: removeDownloadPackageFromProduct

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Product	ProductIDType	1..1	See ProductIDType .

Content Model

Component	Type	Occurs	Description
DownloadPackage	DownloadPackageIDType	1..1	See DownloadPackageIDType .

XML Example

The following XML fragment illustrates a **removeDownloadPackageFromProduct** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:removeDownloadPackageFromProduct>
      <Product>
        <ProductName>AS-ESDProduct-011401</ProductName>
        <ProductVersion>1.0</ProductVersion>
      </Product>
      <DownloadPackage>
        <DownloadPackageID>AS_DP_09</DownloadPackageID>
      </DownloadPackage>
    </dow:removeDownloadPackageFromProduct>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: removeDownloadPackageFromProductResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
ProductDisassociation Result	ProductDisassociationResult	1..1	See ProductDisassociationResult .

XML Example

The following XML fragment illustrates a successful **removeDownloadPackageFromProductResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p293566130:removeDownloadPackageFromProductResponse
xmlns:p293566130="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <ProductDisassociationResult>
        <TransactionResult>
```

XML Example

```
<TransactionID>2171681993</TransactionID>
<TransactionStatus>SUCCESS</TransactionStatus>
<ProcessedTime>2016-04-15T18:39:08.624Z</ProcessedTime>
</TransactionResult>
<Product>
  <ProductName>AS-ESDProduct-011401</ProductName>
  <ProductVersion>1.0</ProductVersion>
</Product>
<DownloadPackage>
  <DownloadPackageID>AS_DP_09</DownloadPackageID>
</DownloadPackage>
</ProductDisassociationResult>
</p293566130:removeDownloadPackageFromProductResponse>
</soapenv:Body>
</soapenv:Envelope>
```

Element: ResponseData [type DownloadPackageInProductCountResult]

Description

See [CountResponseDataType](#).

Derived By

Type [CountResponseDataType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Count	integer	1..1	The number of results.

Referenced By

Name	Type
DownloadPackageInProductCountResult	Complex Type

Definition

See [DownloadPackageInProductCountResult](#)

Element: ResponseData [type DownloadPackageInProductQueryResults]

Description

See [DownloadPackageInProductQueryResponseDataType](#).

Derived By

Type [DownloadPackageInProductQueryResponseDataType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageResult	DownloadPackageResult	0..*	Download package.

Referenced By

Name	Type
DownloadPackageInProductQueryResults	Complex Type

Definition

See [DownloadPackageInProductQueryResults](#)

Element: ResponseData [type MultipleDownloadPackagesQueryResults]

Derived By

Type [MultipleDownloadPackagesQueryResponseDataType](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackageResult	DownloadPackageResult	0..*	

Referenced By

Name	Type
MultipleDownloadPackagesQueryResults	Complex Type

Definition

[See MultipleDownloadPackagesQueryResults](#)

Element: RestrictCode [type DownloadPackage]

Description

Restrict download package functionality. Values are A=Allow, D=Deny, N=empty string (not currently restricted).

Derived By

Type string

Referenced By

Name	Type
DownloadPackage	Complex Type

Definition

[See DownloadPackage](#)

Element: ReturnContainedObjects [element getDownloadPackageInProductQuery]

Description

Whether or not to include the contained objects in the response. TRUE or FALSE.

Derived By

Type boolean

Referenced By

Name	Type
getDownloadPackageInProductQuery	Element
getDownloadPackageInProductQuery	Method

Definition

[See getDownloadPackageInProductQuery](#)

Element: ReturnContainedObjects [element getMultipleDownloadPackagesQuery]

Derived By

Type boolean

Referenced By

Name	Type
getMultipleDownloadPackagesQuery	Element
getMultipleDownloadPackagesQuery	Method

Definition

[See getMultipleDownloadPackagesQuery](#)

Element: SortBy [type DownloadPackageSortBys]

Derived By

Type [DownloadPackageSortBy](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
SortKey	DownloadPackageSortKey	1..1	
Ascending	boolean	1..1	

Referenced By

Name	Type
DownloadPackageSortBys	Complex Type

Definition

See [DownloadPackageSortBys](#)

Element: SortBys [element getMultipleDownloadPackagesQuery]

Derived By

Type [DownloadPackageSortBys](#)

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
SortBy	DownloadPackageSortBy	1..1	

Referenced By

Name	Type
getMultipleDownloadPackagesQuery	Element
getMultipleDownloadPackagesQuery	Method

Definition

See [getMultipleDownloadPackagesQuery](#)

Element: SortKey [type DownloadPackageSortBy]

Derived By

Type [DownloadPackageSortKey](#)

Enumeration

Value	Description
DOWNLOADPACKAGE_ID	
DESCRIPTION	

Referenced By

Name	Type
DownloadPackageSortBy	Complex Type

Definition

[See DownloadPackageSortBy](#)

Element: SortOrder [type DownloadPackageSortOrderType]

Description

Download package file sort order.

Derived By

Type string

Referenced By

Name	Type
DownloadPackageSortOrderType	Complex Type

Definition

[See DownloadPackageSortOrderType](#)

Element: updateAgreement

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
Agreement	Agreement	1..1	See Agreement .
OriginalDescription	string	1..1	Used to "Reidentify" an agreement from "OriginalDescription" value to new "Description" value.

XML Example

The following XML fragment illustrates an **updateAgreement** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:updateAgreement>
      <Agreement>
        <Description>AS-TESTAGREEMENT-02</Description>
        <!--Optional:-->
        <Content>TEXT CONTENT</Content>
      </Agreement>
      <OriginalDescription>AS-TESTAGREEMENT-01</OriginalDescription>
    </dow:updateAgreement>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: updateAgreementResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
AgreementTransaction Result	AgreementTransactionResult	1..1	See AgreementTransactionResult .

XML Example

The following XML fragment illustrates a successful **updateAgreementResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:updateAgreementResponse xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <AgreementTransactionResult>
        <TransactionResult>
          <TransactionID>2291487167</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-02-22T17:56:21.399Z</ProcessedTime>
        </TransactionResult>
        <Agreement>
          <Description>AS-TESTAGREEMENT-02</Description>
          <Content>TEXT CONTENT</Content>
        </Agreement>
      </AgreementTransactionResult>
    </p707:updateAgreementResponse>
  </soapenv:Body>
```

XML Example

```
</soapenv:Envelope>
```

Element: updateDownloadPackage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
DownloadPackage	DownloadPackage	1..1	See DownloadPackage .

XML Example

The following XML fragment illustrates an **updateDownloadPackage** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
  <soapenv:Header/>
  <soapenv:Body>
    <dow:updateDownloadPackage>
      <DownloadPackage>
        <DownloadPackageID>AS-DP-031802</DownloadPackageID>
        <Description>AS Download Package 031802 - Updated</Description>
        <Version>2016R2</Version>
        <EffectiveDate>2016-03-18</EffectiveDate>
        <ExpirationDate>2016-12-31</ExpirationDate>
        <ArchiveDate>2017-01-01</ArchiveDate>
        <SortGroup>2016Releases</SortGroup>
      <ExtendedDescription>Extended Description in English for AS Download Package 031801</ExtendedDescription>
      <ExportComplianceClassification>
        <NLR>F</NLR>
        <ECCNCode>5D002</ECCNCode>
        <ENCCCode>NON_RETAIL</ENCCCode>
        <CCATSCCode>Z123456</CCATSCCode>
      </ExportComplianceClassification>
      <Manufacturer>
        <ManufacturerID>FlexeraInternal</ManufacturerID>
        <Name>FLEXERA1INTERNAL</Name>
        <Status>ACTIVE</Status>
      </Manufacturer>
      <ProductLine>
        <ProductLineID>ESD</ProductLineID>
        <Name>ESD</Name>
      </ProductLine>
      <EndUserLicenseAgreement>
        <Description>FLEXERAQAAgreement</Description>
      </EndUserLicenseAgreement>
      <DownloadPackageNote>AVAILABLE FOR DOWNLOAD</DownloadPackageNote>
      <PhysicalDistributionAvailable>0</PhysicalDistributionAvailable>
      <AttributeDescriptor>
        <AttributeName>PACKAGE-TYPE</AttributeName>
      </AttributeDescriptor>
    </DownloadPackage>
  </dow:updateDownloadPackage>
</soapenv:Body>
</soapenv:Envelope>
```

XML Example

```
<StringValue>ESD</StringValue>
</AttributeDescriptor>
<AlternateLanguage>
  <Language>zh</Language>
  <Description>DESCRIPTION IN CHINESE</Description>
  <ExtendedDescription>EXTENDED DESCRIPTION IN CHINESE</ExtendedDescription>
  <DownloadPackageNote>AVAILABLE FOR DOWNLOAD IN CHINESE</DownloadPackageNote>
</AlternateLanguage>
</DownloadPackage>
</dow:updateDownloadPackage>
</soapenv:Body>
</soapenv:Envelope>
```

Element: updateDownloadPackageResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
DownloadPackageTransactionResult	DownloadPackageTransactionResult	1..1	See DownloadPackageTransactionResult .

XML Example

The following XML fragment illustrates a successful **updateDownloadPackageResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p293566130:updateDownloadPackageResponse
      xmlns:p293566130="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <DownloadPackageTransactionResult>
        <TransactionResult>
          <TransactionID>2171679953</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-04-15T16:35:30.162Z</ProcessedTime>
        </TransactionResult>
        <DownloadPackage>
          <DownloadPackageID>AS-DP-031802</DownloadPackageID>
          <Description>AS Download Package 031802 - Updated</Description>
          <Version>2016R2</Version>
          <EffectiveDate>2016-03-18</EffectiveDate>
          <ExpirationDate>2016-12-31</ExpirationDate>
          <ArchiveDate>2017-01-01</ArchiveDate>
          <SortGroup>2016Releases</SortGroup>
        </DownloadPackage>
        <ExtendedDescription>Extended Description in English for AS Download Package 031801</ExtendedDescription>
        <ExportComplianceClassification>
```


XML Example

```
<NLR>No</NLR>
<ECCNCode>5D002</ECCNCode>
<ENCCCode>NON_RETAIL</ENCCCode>
<CCATSCode>Z123456</CCATSCode>
</ExportComplianceClassification>
<Manufacturer>
  <ManufacturerID>FlexeraInternal</ManufacturerID>
  <Name xsi:nil="true"/>
</Manufacturer>
<ProductLine>
  <ProductLineID>ESD</ProductLineID>
</ProductLine>
<EndUserLicenseAgreement>
  <Description xsi:nil="true"/>
</EndUserLicenseAgreement>
<EvaluationEndUserLicenseAgreement>
  <Description xsi:nil="true"/>
</EvaluationEndUserLicenseAgreement>
<DownloadPackageNote>AVAILABLE FOR DOWNLOAD</DownloadPackageNote>
<PhysicalDistributionAvailable>0</PhysicalDistributionAvailable>
<AttributeDescriptor>
  <AttributeName>PACKAGE-TYPE</AttributeName>
  <StringValue>ESD</StringValue>
</AttributeDescriptor>
<AlternateLanguage>
  <Language>zh</Language>
  <Description>DESCRIPTION IN CHINESE</Description>
  <ExtendedDescription>EXTENDED DESCRIPTION IN CHINESE</ExtendedDescription>
  <DownloadPackageNote>AVAILABLE FOR DOWNLOAD IN CHINESE</DownloadPackageNote>
</AlternateLanguage>
</DownloadPackage>
</DownloadPackageTransactionResult>
</p293566130:updateDownloadPackageResponse>
</soapenv:Body>
</soapenv:Envelope>
```

Element: updateManufacturer

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
Manufacturer	Manufacturer	1..1	See Manufacturer .

XML Example

The following XML fragment illustrates an **updateManufacturer** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:dow="http://v1.producersuite.flexerasoftware.com/DownloadPackagingService/"
```

XML Example

```
xmlns:nsAuthn="http://common.handler.flexerasoftware.com/authn">
  <soapenv:Header/>
  <soapenv:Body>
    <dow:updateManufacturer>
      <Manufacturer>
        <ManufacturerID>AS-FLEXERAQA</ManufacturerID>
        <Name>AS-FLEXERAQA</Name>
        <!--Optional:-->
        <Status>INACTIVE</Status>
      </Manufacturer>
    </dow:updateManufacturer>
  </soapenv:Body></soapenv:Envelope>
```

Element: updateManufacturerResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
ManufacturerTransactionResult	ManufacturerTransactionResult	1..1	See ManufacturerTransactionResult .

XML Example

The following XML fragment illustrates a successful **updateManufacturerResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <p707:updateManufacturerResponse
      xmlns:p707="http://v2016R1.producersuite.flexerasoftware.com/DownloadPackagingService/">
      <ManufacturerTransactionResult>
        <TransactionResult>
          <TransactionID>2281494697</TransactionID>
          <TransactionStatus>SUCCESS</TransactionStatus>
          <ProcessedTime>2016-02-18T02:21:01.290Z</ProcessedTime>
        </TransactionResult>
        <Manufacturer>
          <ManufacturerID>AS-FLEXERAQA</ManufacturerID>
          <Name>AS-FLEXERAQA</Name>
          <Status>INACTIVE</Status>
        </Manufacturer>
      </ManufacturerTransactionResult>
    </p707:updateManufacturerResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

UsageService Web Service

Description

Web service to retrieve real-time, reconciled usage data for an organization.

Introduction

The SOAP-based Usage web service enables producers to retrieve the end-user's product line, meter, unit of measure, actual use, entitled quantity, overage since statement, overage since reset, percentage, interval/reset, and time period.

Methods: UsageService

Methods

Name	Description
getUsage	The getUsage operation returns the end-user's product line, meter, unit of measure, actual use, entitled quantity, overage since statement, overage since reset, percentage, interval/reset, and time period.

Method: getUsage

Description

The getUsage operation returns the end-user's product line, meter, unit of measure, actual use, entitled quantity, overage since statement, overage since reset, percentage, interval/reset, and time period.

Parameters

Name	Type	Direction	Description
request	anyType	Input	Generate a request for usage data.

Returns

A [GetUsageResponse](#) element having the structure defined by the following table.

Name	Type	Description
statusInfo	StatusInfo	See StatusInfo .
usages	Usage	See Usage .

Complex Types: UsageService

Complex Types

Name
Period
StatusInfo
Usage

Complex Type: Period

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
startDate	string	1..1	Beginning date of the statement period.
endDate	string	1..1	Ending date of the statement period.

Complex Type: StatusInfo

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
status	string	1..1	Returns one of the following: - SUCCESS - FAILURE
message	string	1..1	If successful, the number of usage statements being returned. If failure, a reason for the failure.

Complex Type: Usage

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
 SEQUENCE		1..1	
productLine	string	1..1	Product line (or category) that groups, classifies, and describes the product.
meter	string	1..1	The name of the meter (usually a feature name) for which usage date is being reported.
usageUnitName	string	1..1	Word used after displaying a quantity ("unit of measure") when displaying usage in Usage Reports UI and other reports. For example, bytes , kilobytes or gigabytes. Works with Scale to describe what metered feature is counting. This value is a String with a maximum length of 64 characters
usageSinceReset	double	1..1	Quantity of units used since the last reset.
entitled	double	1..1	Total quantity of units purchased.
overageSinceStatement	double	1..1	Quantity of units used in excess of the entitled amount in this statement period.
overageSinceReset	double	1..1	Quantity of units used in excess of the entitled amount since the last reset.
percentSinceReset	double	1..1	Percentage of units used since the last reset.
resetIntervalUnitName	string	1..1	Type of reset interval period unit (e.g. month, etc.).
resetInterval	long	1..1	Reset interval expressed in units.
period	Period	1..1	See Period .
entitledScaled	double	1..1	Entitled quantity (with scaling factor applied).
friendlyName	string	1..1	Display name of the feature
gracePeriod	long	1..1	Time allow for the grace period (in days).
gracePeriodUnitName	string	1..1	Name of the grace period unit.
overageSinceResetScaled	double	1..1	Overage since last reset (with scaling factor applied).
overageSinceStatementScaled	double	1..1	Overage since last statement (with scaling factor applied).
percentSinceStatement	double	1..1	Percentage of units used in this statement period.
reconciliationTimeZone	string	1..1	The time zone in which this statement was generated.

Content Model

Component	Type	Occurs	Description
scale	double	1..1	Divider used to take actual quantity used and convert to a smaller number for display purposes in the Usage Reports UI and other reports. For example, if Units are in bytes but you want to report usage in kilobytes, enter 1024 for Scale. This value is a String with a maximum length of 64 characters.
statementInterval	long	1..1	Periodic intervals in which statements are generated.
usageSinceResetScaled	double	1..1	Usage amount since last reset (with scaling factor applied).
usageSinceStatement	double	1..1	Quantity of units used in this statement period.

Elements: UsageService

Elements

Name	Description
GetUsageRequest	
GetUsageResponse	

Element: GetUsageRequest

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
orgName	string	1..1	Name of the end-user organization.

Referenced By

Name	Type
getUsage	Method

XML Example

The following XML fragment illustrates a **GetUsageRequest** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:urn="urn:com.macrovision.flexnet/operations">
  <soapenv:Header xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
    <flex:UserId soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0"
      xmlns:flex="urn:com.macrovision.flexnet/platform">ADMNadmin</flex:UserId>
    <flex:UserPassword soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0"
      xmlns:flex="urn:com.macrovision.flexnet/platform">YWRtaW4=</flex:UserPassword>
  </soapenv:Header>
  <soapenv:Body>
    <urn:GetUsageRequest>
      <urn:orgName>BarryPhoto</urn:orgName>
    </urn:GetUsageRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

Element: GetUsageResponse

Derived By

Restricting anyType

Content Model

Contains elements as defined in the following table.

Component	Type	Occurs	Description
SEQUENCE		1..1	
statusInfo	StatusInfo	1..1	See StatusInfo .
usages	Usage	1..*	See Usage .

Referenced By

Name	Type
getUsage	Method

XML Example

The following XML fragment illustrates a successful **GetUsageResponse** message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Body>
    <GetUsageResponse xmlns="urn:com.macrovision:flexnet/operations">
      <statusInfoType>
        <status>SUCCESS</status>
        <reason>Number of usage statements: 2</reason>
      </statusInfoType>
      <usages>
        <productLine>Demos</productLine>
        <meter>FNEDemoFeature1</meter>
        <usageUnitName/>
        <usageSinceReset>5.0</usageSinceReset>
        <entitled>2000.0</entitled>
        <overageSinceStatement>0.0</overageSinceStatement>
        <overageSinceReset>0.0</overageSinceReset>
        <percentSinceReset>0.25</percentSinceReset>
        <resetIntervalUnitName/>
        <resetInterval>0</resetInterval>
        <period>
          <startDate>2016-04-11</startDate>
          <endDate>2016-05-11</endDate>
        </period>
        <entitledScaled>2000.0</entitledScaled>
        <friendlyName/>
        <gracePeriod>0</gracePeriod>
        <gracePeriodUnitName>Day</gracePeriodUnitName>
        <overageSinceResetScaled>0.0</overageSinceResetScaled>
        <overageSinceStatementScaled>0.0</overageSinceStatementScaled>
        <percentSinceStatement>0.0</percentSinceStatement>
        <reconciliationTimeZone>America/Los_Angeles</reconciliationTimeZone>
        <scale>1.0</scale>
        <statementInterval>1</statementInterval>
        <usageSinceResetScaled>5.0</usageSinceResetScaled>
        <usageSinceStatement>0.0</usageSinceStatement>
      </usages>
    </GetUsageResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

XML Example

```
</usages>
<usages>
  <productLine>Demos</productLine>
  <meter>FNEDemoFeature2</meter>
  <usageUnitName/>
  <usageSinceReset>9.0</usageSinceReset>
  <entitled>1000.0</entitled>
  <overageSinceStatement>0.0</overageSinceStatement>
  <overageSinceReset>0.0</overageSinceReset>
  <percentSinceReset>0.8999999999999999</percentSinceReset>
  <resetIntervalUnitName>Month</resetIntervalUnitName>
  <resetInterval>12</resetInterval>
  <period>
    <startDate>2016-03-01</startDate>
    <endDate>2016-06-01</endDate>
  </period>
  <entitledScaled>1000.0</entitledScaled>
  <friendlyName/>
  <gracePeriod>0</gracePeriod>
  <gracePeriodUnitName>Day</gracePeriodUnitName>
  <overageSinceResetScaled>0.0</overageSinceResetScaled>
  <overageSinceStatementScaled>0.0</overageSinceStatementScaled>
  <percentSinceStatement>0.8999999999999999</percentSinceStatement>
  <reconciliationTimeZone>America/Los_Angeles</reconciliationTimeZone>
  <scale>1.0</scale>
  <statementInterval>3</statementInterval>
  <usageSinceResetScaled>9.0</usageSinceResetScaled>
  <usageSinceStatement>9.0</usageSinceStatement>
</usages>
</GetUsageResponse>
</soapenv:Body>
</soapenv:Envelope>
```

ESD Web Service

Description

The Electronic Software Delivery Web Service has been replaced with the Download Packaging Service, and Flexera Software suggests that existing implementations be migrated to the newer service. Please contact Support if you have an Electronic Software Delivery implementation and you require documentation.

Introduction

Appendix A

Web Service Data Types with Choices

When you view FlexNet Operations web service interfaces through the URL **http://**, Axis–Java does not properly display choices in data types. Therefore, this appendix contains the proper schema definitions for the types that define choices. The following table shows the data types that offer choices for data types that are used in Web service requests. XML fragments illustrating the proper syntax follow the table.

Complex Type (with XSD File)	Description
attributeDescriptorType (commonTypes)	Specify one of several data types for the value of the named license model attribute.
entitlementDataType (commonEntitlementTypes)	Specify simple or bulk entitlement.
expirationTermsDataType (entitlementLifeCycleTypes)	Specify duration (integer and duration units) or an expiration date.
OrganizationQuery (OrganizationAdministration)	Specify either uniqueId or organizationId.
UserList (UserAdministration)	Specify either (FlexNet) users or domain users.

attributeDescriptorType

```
<xs:complexType name="attributeDescriptorType">
  <xs:sequence>
    <xs:element name="attributeName" type="xs:string"/>
    <xs:choice>
      <xs:element name="stringValue" type="xs:string" minOccurs="0"/>
      <xs:element name="dateValue" type="xs:date" minOccurs="0"/>
      <xs:element name="booleanValue" type="xs:boolean" minOccurs="0"/>
      <xs:element name="integerValue" type="xs:integer" minOccurs="0"/>
      <xs:element name="arrayValue" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
    </xs:choice>
  </xs:sequence>
</xs:complexType>
```

entitlementDataType

```
<xs:complexType name="entitlementDataType">
  <xs:choice>
    <xs:element name="simpleEntitlement" type="tns:simpleEntitlementDataType" minOccurs="0"/>
    <xs:element name="bulkEntitlement" type="tns:bulkEntitlementDataType" minOccurs="0" />
  </xs:choice>
</xs:complexType>
```

expirationTermsDataType

```
<xs:complexType name="expirationTermsDataType">
  <xs:choice>
    <xs:element name="term" type="tns:DurationType" minOccurs="0"/>
    <xs:element name="expirationDate" type="xs:date" minOccurs="0"/>
  </xs:choice>
</xs:complexType>
```

```
</xs:choice>  
</xs:complexType>
```

OrganizationQuery

```
<xsd:complexType name="OrganizationQuery">  
  <xsd:choice>  
    <xsd:element ref="impl:uniqueId" />  
    <xsd:element ref="impl:organizationId" />  
  </xsd:choice>  
</xsd:complexType>
```

UserList

```
<xsd:complexType name="UserList">  
  <xsd:choice>  
    <xsd:element name="users" type="impl:User" maxOccurs="unbounded"/>  
    <xsd:element name="domainUsers" type="impl:DomainUser" maxOccurs="unbounded"/>  
  </xsd:choice>  
</xsd:complexType>
```

Appendix B

License Model Attributes

Name-value pairs are used to set license model attributes through the FlexNet Operations Web services. These parameters can be set using the Entitlement Order or License services, depending when in the license lifecycle the license model attributes are required.

Passing License Model Attributes

In an implementation that passes XML structures, the attributes are set:

```
<licenseModelAttributes>
  <attribute>
    <attributeName>SERIAL_NUMBER</attributeName>
    <stringValue>test_serial_number</stringValue>
  </attribute>
  <attribute>
    <attributeName>NOTICE</attributeName>
    <stringValue>test notice</stringValue>
  </attribute>
  <attribute>
    <attributeName>PLATFORMS</attributeName>
    <arrayValue>i86_n</arrayValue>
    <arrayValue>i86_l</arrayValue>
  </attribute>
</licenseModelAttributes>
```

License Model Attributes and Data Types

The following table contains a list of license model attribute names. See `attributeDescriptorType` in Web Service Data Types with Choices.

attributeName	Value Type	Description
ALLOW_ONE_TERMINAL_SERVER	booleanValue	Applicable to node-locked uncounted licenses. FlexNet Licensing detects when a node-locked uncounted license is running under Windows Terminal Server. To allow your FlexEnabled application to run via a single Terminal Server Client window, node-lock the license to the Terminal Server machine and set <code>ALLOW_ONE_TERMINAL_SERVER</code> to true. The <code>ONE_TS_OK</code> keyword is added to the license. To disable access via a Terminal Server Client, set both <code>ALLOW_ONE_TERMINAL_SERVER</code> and <code>ALLOW_TERMINAL_SERVER</code> to false.
ALLOW_TERMINAL_SERVER	booleanValue	Applicable to a FlexEnabled application built with FlexNet Licensing version 8.0 or later and using a node-locked uncounted license. FlexNet Licensing detects when a node-locked uncounted license is running under Windows Terminal Server. To allow your FlexEnabled application to run via a Terminal Server Client window, node-lock the license to the Terminal Server machine and set <code>ALLOW_TERMINAL_SERVER</code> to true. The <code>TS_OK</code> keyword is added to the license. To disable access via a Terminal Server Client, set both <code>ALLOW_ONE_TERMINAL_SERVER</code> and <code>ALLOW_TERMINAL_SERVER</code> to false.

attributeName	Value Type	Description
BORROW_HOURS	integerValue	Applicable to counted licenses. If borrowing is allowed, the maximum number of hours that the license can be borrowed for can be specified as the default (168 hours, or one week) or can be specified in the license model, the entitlement, or at fulfillment time. The BORROW keyword is added to the license. The maximum borrow period is limited by the maximum value of a 32-bit integer: 2 billion hours.
FLOAT_OK	stringValue <i>server_hostid</i>	To specify a FLOAT_OK keyword with a server_hostid. Also specify a FLEXid as a node-locked hostid. The server_hostid is the same hostid that appears on the SERVER line of the license file, or could be a different hostid that refers to the same machine. If the SERVER line hostid is ANY, the FLOAT_OK server_hostid should be specific to the license server machine. The license server can only be run on the machine with the hostid that lmhostid returns equal to the server_hostid specified with FLOAT_OK. A user can run on the license server machine, but he can use only the license being served by the license server, not the node-locked license. Otherwise an extra use for each FLOAT_OK license could occur. Note that without the server_hostid specified on the feature line, the FLOAT_OK license can be served from any computer, as long as the FLEXid is attached to it. The hostid on the FLOAT_OK feature line must be only a single hostid. For multiple FLEXids, use individual feature lines for each FLEXid.
HOST_BASED	integerValue	Applicable to counted licenses. Specify the number of host names that can be specified in INCLUDE statements in the end-user options file.
INCLUDE_USE_SERVER	booleanValue	USE_SERVER takes no arguments and has no impact on the server. When the application sees USE_SERVER, it ignores everything in the license file except preceding SERVER lines and transfers checkout validation to the vendor daemon. For uncounted features, USE_SERVER is used to force logging of usage by the daemons.
ISSUER	stringValue <i>issuer</i>	Issuer of the license.
NOTICE	stringValue <i>notice</i>	Notice string used to identify feature lines.
MAX_BORROW_INTERVAL	integerValue	For FlexNet Embedded served licenses. Specifies the maximum borrow interval in seconds. If used, it overrides the default max borrow interval configured on the license server that is serving the license.
OVERDRAFT_MAX	integerValue	Applicable to counted licenses. The max overdraft setting allows a publisher to specify a number of additional licenses (per entitlement line item) which users are allowed to use, in addition to the licenses they have purchased. Overdraft allows your users to not be denied service when in a "temporary overdraft" state. Usage above the license limit is reported by the FlexNet Manager reporting tool. Expressed using the OVERDRAFT license keyword.

attributeName	Value Type	Description
PLATFORMS	arrayValue <i>platform_key</i>	Specify each platform in a separate arrayValue element. See Platform Key Names table below. Usage is limited to the selected platforms. Expressed using the PLATFORMS license keyword.
SERIAL_NUMBER	stringValue <i>serial_number</i>	Serial number used to identify feature lines. The SN keyword is added to the license.
USER_BASED	integerValue	Applicable to counted licenses. Specify the number of users that can be specified in INCLUDE statements in the end-user options file.
VENDOR_STRING	stringValue <i>vendor_string</i>	Vendor string used to identify feature lines.
VM_PLATFORMS	stringValue <i>vm_platforms</i>	To restrict to physical machines only, set VM_PLATFORMS to PHYSICAL. To restrict to virtual machines only, set VM_PLATFORMS to VM_ONLY.

Platform Key Names

The following table shows the key names of platform settings to pass in the PLATFORMS attribute.

Platform Key	Platform Name
alpha_l	Dec Alpha, Linux < version 6.2
alpha_n	Dec Alpha, Windows/NT
alpha_r	Dec Alpha, Linux version 6.2 or later
alpha_u	Dec UNIX for Alpha
alpha_v	Dec Alpha, OpenVMS version 6.x
amd64_s	AMD 64-bit, SUSE Linux Enterprise Server
hp700_u	HP 9000/700, 800, HP-UX
hp64_u	HP 64-bit, HP-UX
i86_b	BSDI OS
i86_d	DG AViiON Pentium
i86_f	FreeBSD
i86_g	Intel x86, Linux with GNU libc
i86_l	Intel x86, Linux version 1, version 2
i86_n	Intel x86, Windows (all)
i86_r	Intel x86, Red Hat Linux version 6-version 9
i86_re	Intel x86, Red Hat Enterprise Linux
i86_u	Intel x86, Unixware
i86_w	Intel x86, Windows 16-bit
i86_x	Intel x86, Solaris
i86_z	Intel x86, Netware
it32_hp	Itanium 32-bit, HP-UX

Platform Key	Platform Name
it64_hp	Itanium 64-bit, HP-UX
it64_lr	Itanium 64-bit, Red Hat Linux version 7-version 9
it64_n	Itanium 64-bit, Windows
java-0	Java, Version
nec_u	NEC EWS OS
ppc_mac	Power PC, MacOS X
ppc_u	Power PC, AIX
rm400_u	Siemens Nixdorf RM400, Sinux
rs6000_u	IBM RS/6000, AIX
rs64_u	IBM RS/6000 64-bit
sco_u	SCO UNIX (intel)
sgi32_u	SGI 32-bit, IRIX 5, 6
sgi64_u	SGI 64-bit, IRIX 6
sony_u	Sony BSD OS V4
sun4_u	Sun Sparc 4, Solaris
sun64_u	Sun 64-bit, Solaris
vax_v	Dec VAX/VMS

Appendix C

Client Security Credentials Class Source

FlexNet Operations Web services requires a client to provide credentials in the SOAP header or as BASIC HTTP user authentication. BASIC authentication encrypts the user and password with Base64 encoding and passes it as an HTTP request header parameter. For example:

Authorization: Basic QWxhghweljhjrcGVuIHNo2FtZQ==

FlexNet Operations also provides a ClientSecurityCredentials helper class as a convenience. The source of this class is included in this appendix and in FlexNetOperationsWebServices12_10_0.zip.

Listing of ClientSecurityCredentials.java:

```
// COPYRIGHT (c) 2009 by Flexera Software, Inc.

import org.apache.axis.client.Stub;
import org.apache.axis.encoding.Base64;
import org.apache.axis.message.SOAPHeaderElement;

import java.io.UnsupportedEncodingException;
import java.rmi.*;

import javax.xml.soap.Name;
import javax.xml.soap.SOAPEXception;
import javax.xml.soap.SOAPFactory;

/*
 * This class consist of convenient methods that allow to set
 * the user name and password (credentials) for the invoker of
 * the webservice operation. The user name/password can be set
 * in the client context (HTTP Authorization Header) or in the
 * SOAPHeader of the SOAPEnvelope.
 *
 * User Name Syntax :
 * -----
 * userName##domainName
 * where userName --> name of user.
 * domainName --> domain to which the user belongs.
 * If domain is not provided, default domain (FLEXnet) is used.
 */

public class ClientSecurityCredentials {

    public static final String AUTH_SOAP_HEADER = "auth.soapHeader";
    public static final String nameSpace = "flex";
    public static final String nameSpaceURI = "urn:com.macrovision.flexnet/
        platform";

    private final static String CHAR_SET = "UTF-8";

    private Stub stub;
    private SOAPFactory soapFactory;

    /*
     * Allows setting user credentials in the client context (HTTP Authorization
     * Header).
     */

    public ClientSecurityCredentials(Remote service) {
        this.stub = (Stub)service;
    }
}
```

```
}

/*
 * Allows setting user credentials in the SOAP Header.
 */
public ClientSecurityCredentials(Remote service, String authType) throws
    SOAPException {
    this(service);
    if (AUTH_SOAP_HEADER.equals(authType)) {
        soapFactory = SOAPFactory.newInstance();
    }
}

/*
 * Set the user name in the client context (HTTP Authorization Header) or in
 * the SOAP Header, depending on the constructor used.
 */
public void setUsername(String username) throws SOAPException {
    if (stub != null) {
        if (soapFactory != null) {
            this.setSoapHeader("UserId", username);
        }
        else {
            stub.setUsername(username);
        }
    }
}

/*
 * Set the password in the client context (HTTP Authorization Header) or in
 * the SOAP Header, depending on the constructor used.
 */
public void setPassword(String password) throws SOAPException,
    UnsupportedEncodingException {

    if (stub != null) {
        if (soapFactory != null) {
            String encryptedPwd = Base64.encode(password.getBytes(CHAR_SET));
            this.setSoapHeader("UserPassword", encryptedPwd);
        }
        else {
            stub.setPassword(password);
        }
    }
}

/*
 *
 */
private void setSoapHeader(String elementName, String value) throws
    SOAPException {
    Name nameElem = soapFactory.createName(elementName, nameSpace,
        nameSpaceURI);
    SOAPHeaderElement headerElem = new SOAPHeaderElement(nameElem);
    headerElem.addTextNode(value);
    this.stub.setHeader(headerElem);
}
}
```

Appendix D

Error Codes

FlexNet Operations error codes will allow a client to identify issues and take alternate actions in case of a failure. Each error message is generated in the format

<Error Code Identifier>: <Message>

The caller of the Web service can use the error code identifier in the message to determine the alternate logic to use in the event of a failure.

If FlexNet Operations is unable to determine a valid error code for an issue, the default code is used (9999). In such cases, you can correlate the Incident # from the error message and verify the log to determine the actual issue.

FlexNet Operations Error Codes

FlexNet Operations error codes are listed in the file FLEXnetOpsErrorMessageCodes, located in the <ops_install_dir>\site\errorcodes. Callers of public Web service clients can use this file.

Error Code	Description
6001	attribute {0} is immutable: cannot be changed from {1} to {2}.
6002	Error occurred.
6003	A value for property {0} is required.
6004	Cannot deploy {0}: {1} is not deployed.
6005	Cannot create a new revision for {0}: status is {1}, a draft revision {2}.
6006	{0} cannot be moved from {1} state to {2} state.
6007	Count {2, number} is not valid for {0} in {1}.
6008	License Model {0} of {1} is not deployed.
6009	Component {0} with version {1}, license generator {2}, revision {3, number} is a duplicate.
6010	Unexpected property name(s) {0}.
6011	Attribute {0} is required in the definition of {1}.
6012	Attribute {0} is not searchable for entity {1}.
6013	Duration {0, number} is not valid.
6014	Cannot modify {0} of {1}: it is in state {2}, not {3}.
6015	Version format is one of: ({0},{1}) for {2}.
6016	{0} is required to be configured.
6017	Query returned > 1 result: expected 1. See log for details.
6018	Cannot add product {0} to suite. It is in inactive or obsolete state.
6019	{0} can be edited only in Draft state: it is in {1} state. If the system configuration to allow editing deployed entities is turned on, a few additional properties can be edited for deployed entities.
6020	Cannot delete {0}: other entities refer to it.

Error Code	Description
6021	Product {0} with version {1} is a duplicate.
6022	Cannot move state of {0} from {1} to {2}.
6023	Input parameter {0} of {1} cannot be null.
6025	Error occurred.
6026	Cannot redeploy {0}: it is obsolete.
6027	{0} state is not valid for feature.
6028	SKU {0} already exists in the database and refers to orderable {1} {2} of type {3} with option {4}.
6029	Cannot deploy {0}: other entities refer to it.
6030	Cannot delete {0}: it is in state {1}, not {2}.
6031	Feature {0} in component {1} is a duplicate.
6032	Computed duration will be negative: start date {0} is after end date {1}.
6033	Input duration units {0} are not supported. Must be one of DAY, WEEK, YEAR.
6034	License model {0} is not associated with licensed product {1}.
6035	Something bad happened while using Hibernate or the database.
6036	Attribute {0} of {1} should be greater than 0, is: {2, number}.
6037	Feature {0} is not contained in {1}.
6038	A license model with name {0} already exists: cannot create another one with the same name.
6039	Attribute {0} of {1} has un-configured value {2}.
6040	Container {0}'s license generator {1} does not match {2}'s license generator {3}.
6041	Duration units {0} are not valid: must be YEAR, MONTH, WEEK, OR DAY.
6042	Product {0} in suite {1} is inactive or obsolete.
6043	Cannot find entity of type {0} with ID {1}.
6044	{0} state is not valid for feature bundle.
6045	License Generator {0} is set for {1}: cannot be changed.
6046	Cannot redeploy {0}: a deployed revision exists.
6047	Licensed product {0} is not contained in {1}.
6048	{0} can be deleted only in draft or obsolete state: it is in {1} state.
6049	Unassigned SKU {0} already exists in the database.
6050	Product type must be one of {0, 1, 2}, is: {3}.
6051	Status {0} for {1} is not valid.
6052	Bundle {0} is not contained in {1}.
6053	Input parameter {0} of {1} cannot be null.
6054	Cannot create bundle {0}: another bundle with the same name already exists.
6055	Attribute {0} of {1} should be of length {2, number}, is of length {3, number}.
6056	Valid values are required for a multi-valued text attribute.
6057	The maximum allowable length for the trailer resource key is 128.
6058	Cannot save a license generator without setting the technology.

Error Code	Description
6059	Values for lifecycle policy are not valid. Value cannot be less than zero.
6060	Cannot change state of license technology {0}. It is used in deployed products.
6061	Cannot delete license technology {0}. It is used in products.
6062	Values for lifecycle policy are not valid. Value cannot be less than zero.
6063	Part number {0} is already mapped to a product.
6064	License model should belong to {0} technology.
6065	Cannot delete license generator {0}. It is used in products.
6066	Product is used in suites.
6067	Cannot add required attribute {1} to technology {0}. That technology is already deployed, so the required choice must be set to no.
6068	License technology with name {0} already exists.
6069	Products included in the suite should have the same license technology as the suite.
6070	Cannot set node-locked host ID policy on license model {0}. License model does not require a node-locked host.
6071	License technology {0} is used in deployed license models.
6072	Value for lifecycle policy duration is not valid.
6073	Cannot change state of license technology {0}. It is used in deployed license models.
6074	Cannot delete attribute as the associated license technology is deployed.
6075	There is no license generator {0} for the license technology {1}.
6076	Feature with name {0} and version {1} already exists.
6077	Cannot create since there are no license generators for technology {0}.
6078	Cannot set server host ID policy on license model {0}. License model does not require a server host.
6079	Cannot delete license generator {0}. It is used in suites.
6080	Length of description field, {0}, is more than the maximum allowable length 2000.
6081	Part number with name {0} already exists.
6082	Cannot save a license generator with no name.
6083	Cannot deploy {0}: it contains no Products.
6084	Cannot delete generator configuration as the associated license technology is deployed.
6085	License generator configuration should belong to {0} technology.
6086	License generator with name {0} already exists for the license technology {1}.
6087	{0} is used in one or more entitlements.
6088	{0} can be deleted only in Draft state: it is in {1} state.
6089	Custom Generator Service is required.
6090	{0} cannot be deleted.
6091	Not a valid host ID: {0}.
6092	{0} is used in one or more entitlements.
6093	Cannot deploy {0}: it has no license models.
6094	Not enough permissions for attempted operation.

Error Code	Description
6095	License technology {0} is not deployed.
6096	Cannot set redundant server policy on license model {0}. License model does not require a server host.
6097	Cannot find part number with name {0}.
6098	Custom generator service class should be defined.
6099	The license model name must not be blank.
6100	The maximum allowable length for the header resource key is 128.
6101	Cannot delete license technology {0}. It is used in suites.
6102	Cannot delete license technology {0}. It is used in deployed suites.
6103	Cannot change state of {0}: other entities refer to it.
6104	Cannot delete license technology {0}. It is used in license models.
6105	Cannot delete license technology {0}. It has license generators.
6106	License technology is immutable.
6107	Cannot save a license technology with no name.
6108	Cannot set extra activations policy on license model {0}. License model does not allow partial fulfillments.
6109	Cannot edit license generator {0} since it has fulfillments.
6110	Quantity should be a positive integer for {0}.
6111	Unable to delete transaction key. Some products or ASRs are referring this key.
6112	Cannot create more than 256 transaction key configurations.
6113	Unable to generate trusted ID. Perhaps another user has created a transaction key configuration at the same time. Please try again. If the error persists, inspect the log.
6114	Unable to generate trusted ID. Perhaps another user has created a transaction key configuration at the same time. Please try again. If the error persists, inspect the log.
6115	Key name cannot be blank.
6116	Not a valid key seed: {0}. Key seed value must contain 8 hex values.
6117	Only waiting requests can be deleted.
6118	Cannot create more than 256 transaction key configurations.
6119	Values for reinstall policy are not valid. Value cannot be less than zero.
6120	{0} is mapped to a trusted type license model {1}. It should be mapped to at least one of Default Transaction Key or Virtual Transaction Key.
6121	{0} is used in one or more entitlements.
6122	Unable to delete Transaction Key since the key is referred by some products.
6123	At least one of default transaction key and virtual transaction key is required for a deployed product or suite associated with trusted license models.
6124	All 8 key seeds need to be specified.
6125	Not a valid value for reinstall policy duration.
6126	At least one of default transaction key and virtual transaction key is required for a deployed product or suite associated with trusted license models.
6127	Unable to generate local trial-ID. Perhaps another user has created a local trial ID at the same time. Please try again. If the error persists, inspect the log.

Error Code	Description
6128	Not a valid key seed: {0}. Key seed value must contain 8 hex values.
6129	{0} is mapped to a trusted type license model {1}. It should be mapped to a transaction key.
6130	A transaction key configuration with the name: {0} already exists.
6131	Cannot create more than 256 local trial Anchors.
6132	No permission to delete the request {0}.
6133	All the 8 keys seeds need to be specified.
6134	Not allowed to delete seed user {0}.
6135	Publisher ID cannot be blank. Please check whether the system is configured with at least one activation settings publisher xml file or not.
6136	Not allowed to delete seed organization {0}.
6137	Not allowed to delete seed role {0}.
6138	License technology {0} not found.
6139	Specified value {1} is not valid for the custom attribute {0}. Specify a valid integer number.
6140	Cannot change the status of the seed user {0} to inactive.
6141	At least one license file definition should be set for {0}.
6143	Specify at least one attribute value.
6144	Please specify a file name generator class for {0}.
6145	Host type is needed for license technology {0}.
6146	Host Type should belong to {0} technology.
6147	Products included in the suite should belong to the same product category.
6148	Cannot set product category. It is not part of the user's org.
6149	Products included in the suite should have the same host type as the suite.
6150	Products included in a suite should have the same used on device setting as the suite.
6151	License model description cannot be greater than 2000 characters.
6152	A maintenance product cannot be linked to another maintenance product.
6153	Description cannot be greater than 2000 characters.
6154	Cannot change the product category since the product is used in suites.
6155	Relation type cannot be maintenance.
6156	Not enough permissions for attempted operation due to product category rules.
6157	A maintenance product can be linked only as a maintenance relationship.
6158	License model name is required.
6159	Products linked to non-FlexNet technologies cannot be used on devices.
6160	License model name cannot be greater than 64 characters.
6161	Cannot add feature {0}, {1} in a draft state to a deployed product.
6162	Cannot add feature {0}, {1} in a draft state to a deployed feature bundle.
6163	Cannot add product {0}, {1} in a draft state to a deployed suite.
6164	Cannot add feature bundle {0} in a draft state to a deployed product.
6165	{0} is used in one or more local trial ASRs.

Error Code	Description
6166	{0} is used in one or more short code ASRs.
6167	Length of ship to email field, {0}, is more than the maximum allowable length 1024.
6168	Product is used in license templates.
6169	Item is used in one or more license templates.
6170	Length of ship to address field, {0}, is more than the maximum allowable length 1000.
7001	In Entitlement {0} for {1}:{2}, license model cannot be changed from {3} to {4}.
7002	Failed to generate request, error code: {0}.
7003	Web register key {1} already refers to a bulk entitlement: it cannot be reassigned to {0}.
7004	The specified identifier is incomplete: {0}.
7005	Orderable {0} is not a uniform suite or licensed product.
7006	There exists a bulk entitlement with the same ESN. A bulk entitlement ESN can only refer to one product.
7007	Expiring entitlement has no expiration date.
7008	The product "{0}" cannot be linked to package model "{1}" unless all contained features have the same count.
7009	ASR version date does not match line item's version date.
7010	Orderable {0} is not a maintenance orderable.
7012	The package version "{0}" for product "{1}" is too long; it may be no more than 10 ASCII characters.
7013	Rehosts policy is not the same for line item {0} and line item {1}.
7014	Only deployed license models can be used in entitlements.
7015	The supplied count {0} is not valid; count must be greater than zero.
7016	Cannot locate ESN {0}.
7017	The feature bundle with name:{0} is not found.
7018	Cannot delete entitlement {0} with orderable {1}: fulfillments exist.
7019	Entitlement {0} for {1} does not contain licensed product {2}.
7020	Cannot uniquely identify entitlement associated with ID {0}.
7021	A Specification record with the name: {0} already exists.
7022	Cannot add ESN {0} to an entitlement not of type bulk.
7023	Start date is required.
7024	Entitlement ID {0} is same as existing line item ID.
7025	Cannot add ESNs to bulk entitlement {0}: its seat-count {1, number} is less than the total ESNs after import {2, number}.
7027	The product "{0}" could not be activated because it does not have a package name.
7028	Cannot define rehosts policy at entitlement time for the selected license model.
7029	Failed to process the trusted configuration due to the error: {0}.
7030	Entitlement {0} is a bulk transaction ID: cannot activate.
7031	Only deployed maintenance products can be used in entitlements.
7032	Not a valid fulfillment ID: {0}.

Error Code	Description
7033	Cannot move entitlement {0} to draft state. One or more its web register keys have been activated.
7034	Failed to process the trusted configuration due to the error: {0}.
7035	Unknown web register key: {0}.
7036	Esn {0} has ID {1}: cannot be changed to {2}.
7037	Version dates of line item {0} and line item {1} are not the same.
7038	The feature name "{0}" is not valid for FlexNet Licensing Technology; it must contain only ASCII letters, numbers, or '_' (underscore) with no white space.
7039	A transaction key configuration with the name: {0} already exists.
7041	ID {0} is already used as an entitlement ID, activation ID or a web register key. Cannot create another one.
7042	The license model for this request requires a server host ID but none was supplied.
7043	Repairs policy is not the same for line item {0} and line item {1}.
7044	Cannot add duplicate {0} named {1}.
7045	Returns policy is not the same for line item {0} and line item {1}.
7046	A start date is required.
7048	Esn {0} has created by {1}: cannot be changed to {2}.
7049	The specified Fulfillment ID: {0} is no more valid.
7050	Esn {0}: Cannot create an entitlement for orderable {1} of type maintenance.
7051	The specified bulk ESN is not valid: {0}.
7052	A node lock host ID "{0}" was supplied but the license model is not node locked.
7053	Esn {0} can refer to only one orderable.
7054	The requested count {0} exceeds the fulfilled amount {1}.
7056	The attribute {0} is not an array type.
7057	Bulk Entitlement {0} with orderable {1} has seat count {2, number}: cannot change it to {3, number}.
7059	Specified date format is not consistent with the FlexNet date format: e.x., 25-mar-2013. Incorrect date: {0}.
7060	Duplicate Activation ID {0}.
7061	Failed to sign the trusted configuration due to the error: {0}.
7062	The expiration date {0} should be more than the Start Date {1}.
7063	Short code activation must refer to a bulk entitlement.
7064	ASR expiration date does not match line item's expiration date.
7065	Product must be specified.
7066	Start date, {0}, cannot be after expiration date on {1}.
7067	No common license models are found.
7068	{0} is not a valid state for entitlements.
7069	Product {0} is not part of the entitlements for {1}.
7070	Please specify all the attributes.
7071	License model {0} is not valid for {1} on {2}.

Error Code	Description
7072	Product is required for {0}.
7073	Cannot activate web register key {0}, parent bulk entitlement {1} is not deployed.
7074	The specified product {0} does not have an association with a transaction key Configuration.
7075	SoldTo is required.
7076	Entitlement {0} for orderable {1} is not valid until {2}: cannot activate.
7077	Failed to extract details for request short code: {0}.
7078	Model: {0} does not support the specified concurrent counts.
7079	Licensed product or uniform suite is required.
7080	Number of copies cannot be negative for {0}.
7081	Failed to sign the trusted configuration due to the error: {0}.
7082	ASR product does not match line item's product.
7083	Cannot add bulk entitlement {0} to non-bulk ESN {1}.
7084	The property {0} was supplied a value "{1}" but is not expected for this request.
7085	License model is not set for {0}.
7086	Unable to create activation ASR contents due to error: {0}.
7087	License model attribute {0} is not set for {1}.
7088	Cannot create a bulk entitlement with multiple orderable.
7089	Model: {0} does not support the specified activation counts.
7090	Part number is required for {0}.
7091	A product entitlement can specify only one product.
7092	Bulk transaction ID {0} should have only one entitlement associated with it.
7093	Esn {0} can refer to only one orderable.
7094	Null value supplied for attribute {0}.
7095	The package name "{0}" for product "{1}" is too long; it may not be longer than 30 ASCII characters.
7096	Entitlement {0} with orderable {1} requires a Part Number.
7097	Incorrect request. Expecting {0}, but received request of type: {1}.
7098	License model {0} is not valid on {1}. All products in the entitlement line item should be linked to the license model.
7099	The attribute {0} has a configuration string {1} that is not valid.
7100	Permanent does not need a duration.
7101	Cannot move {0} to Inactive or Obsolete state, it contains some draft line items.
7102	Failed to perform the operation. See the failure response XML for more details.
7103	Esn {0} is inactive: cannot delete web register keys from it.
7105	Not a valid class for attribute name: {0}.
7106	Unknown status {1} for entitlement {0}. Must be one of {2}.
7107	Activation request can only contain one pair of counts; (Activation, Activation OD), (Concurrent, Concurrent OD), or (Hybrid, Hybrid OD).
7108	An unexpected error occurred during license generation, please inspect the log for more details.

Error Code	Description
7109	Not a valid activation ID: {0}.
7111	Esn {0} already refers to an entitlement orderable {1}.
7112	The product component with name:{0} version:{1} is not found.
7113	Esn {0} refers to two entitlements, one with sold to {1}, and another with sold to {2}.
7114	The specified license model: {0} is not valid.
7115	The attribute {0} is not a numeric type.
7116	License model attributes are not set for {0}.
7117	Entitlement {0} with orderable {1} is expiring: requires the definition of a duration or expiration date.
7118	Request is tampered, error code: {0}.
7119	License model: {0} is not a trusted license model.
7120	The product "{0}" could not be activated because it does not have a package version.
7121	Cannot delete entitlements.
7122	A server host ID "{0}" was supplied but the license model does not support a server.
7123	The specified Fulfillment ID: {0} is not valid.
7124	The requested count {0} exceeds the remaining available {1} for the entitlement.
7125	Extra activations is not the same for line item {0} and line item {1}.
7126	Entitlement {0} for orderable {1} is not active: cannot activate.
7127	Count is required and must be greater than 0.
7128	Cannot delete line item {0}, following line items refer to it: {1}.
7130	Cannot split count of {0} from entitlement: licensed product {1} has fulfillment amount {2}.
7131	Server activation is not allowed to activate entitlement line item: {0}. Make sure the license model is a server license model.
7132	Specified bulk entitlement ID: {0} is not valid.
7133	Line item needs duration or expiration date to be renewed.
7134	Licensed product {0} is not associated with license model {1}: cannot create an entitlement thus.
7135	Model: {0} does not support the specified hybrid, and/or concurrent counts.
7136	Specified date format is not consistent with the FLEX date format: e.x., 25-mar-2013. Incorrect date:{0}.
7138	The license model for this request requires a node lock host ID but none was supplied.
7139	Not a valid host ID: {0}.
7140	At least one email address is required to send the mail.
7141	Only deployed products can be used in entitlements.
7142	Unable to create the trusted configuration: {0}.
7143	Unable to create the Trusted configuration: {0}.
7144	Esn {0} has order ID {1}: cannot be changed to {2}.
7145	The version string "{0}" for feature "{1}" is too long; it may be no more than 10 ASCII characters.
7147	Entitlement {0} for orderable {1}: attribute {2} has a count that is not valid: {3, number}.
7150	Obsolete state is not valid for entitlements.
7151	The attribute name {0} is not valid.

Error Code	Description
7152	Unable to generate short code response code due to: {0}.
7153	Start dates of line item {0} and line item {1} are not the same.
7154	Maintenance line item {0} cannot be compared.
7155	Fulfillment ID is required.
7156	Product {0},{1},{2} is not part of this request.
7157	No ESN is assigned to entitlement {0}.
7158	Part number {0} is not valid for {1}.
7159	In Entitlement {0} for {1}: attribute validAfter is immutable.
7160	A common set of license models do not exist for the line items.
7161	Duration units or valid until is required.
7162	The package name "{0}" for product "{1}" is not valid; it must contain only ASCII letters, numbers, or ' _ ' (underscore) with no white space.
7163	Order IDs of line item {0} and line item {1} are not the same.
7164	Esn {0} has sold to {1}: cannot be changed to {2}.
7165	Key ASR attributes such as product and model are missing.
7166	ASR part number does not match line item's part number.
7167	Version date is required for {0} on {1}.
7168	Esn {0} cannot be uniquely identified.
7169	{0} is mapped to a trusted type license model {1}. It should be mapped to at least one of Default transaction key or Virtual Transaction Key.
7170	Cannot add web register keys to cancelled entitlement {0}.
7171	License models of line item {0} and line item {1} are not the same.
7172	Orderable is not set on the parent line item.
7173	Esn {0} is not bulk: this is an illegal operation.
7174	Only deployed entitlement line item can be fulfilled.
7175	The specified ESN is not a bulk ESN: {0}.
7176	The attribute {0} could not be loaded from extended properties for {1}.
7177	License model attributes of line item {0} and line item {1} are not the same.
7178	Expiration dates of line item {0} and line item {1} are not the same.
7179	License model is not a trusted license model.
7180	For entitlement {0}:{1} cannot set owned by organization unit {2}: its root organization {3} is different from the sold to root organization {4}.
7181	Entitlement {0} with Orderable {1} cannot split count of {2, number} from entitlement with count of {3, number}.
7182	Required attribute {0} is missing.
7183	The product "{0}" must define a package name to be linked to model "{1}".
7184	Cannot define extra activations policy at entitlement time for the selected license model.
7185	The package version "{0}" for product "{1}" is not a valid FlexNet version: must be <number>.<number>.

Error Code	Description
7186	Entitlement {0} has a part number {1} that is not valid. The part number is not mapped to any products in the entitlement.
7187	Esn {0} cannot be deleted: it is not a web register key.
7188	Durations of line item {0} and line item {1} are not the same.
7189	Client activation is not allowed to activate: {0}. Check the license model to make sure a client can activate.
7190	Cannot change number of copies for inactive line item {0}.
7191	Cannot define repairs policy at entitlement time for the selected license model.
7192	The product feature with name:{0} is not found.
7193	Bulk entitlement {0} does not have short code ASR associated with request code: {1}.
7194	Duration or expiration date should be specified for {0}.
7195	Product or suite is not set for line item {0}.
7196	Entitlement {0} with orderable {1} is never valid. Valid after date: {2} is more than expiration date: {3}.
7197	States of line item {0} and line item {1} are not the same.
7198	Cannot move entitlement {0} to draft state. One or more its line items have been activated.
7199	Cannot renew permanent line item {0} with no version date.
7200	Orderable should be defined before setting the license model on entitlement line item.
7201	Generator defined validation for FLEXIm.
7202	A count was supplied ({0}) but the license model for this request is uncounted.
7203	Cannot activate bulk ESN.
7204	Duration is required.
7206	The specified product name:{0} version:{1} option name:{2} is not found.
7207	Cannot invoke {0} for entitlement {1}:orderable {2} of type suite.
7208	Only deployed line items can be renewed. Line item {0} is not deployed.
7209	Cannot define returns policy at entitlement time for the selected license model.
7210	Number of copies is not the same in line item {0} and line item {1}.
7211	Term type is required.
7212	The attribute {0} was not expected.
7213	The property {0} is required for this request and was not supplied.
7214	Activation request can only contain one pair of counts; (Activation, Activation OD), (Concurrent, Concurrent OD), or (Hybrid, Hybrid OD).
7215	The specified product does not have an association with a transaction key Configuration.
7216	One or more of the products in the entitlement {0} requires the definition of {2}.
7217	The model "{0}" cannot support a SUITE_RESERVED package specification unless client uniqueness is also specified.
7218	Esn {0} already exists, cannot create another one.
7219	Entitlement {0} with orderable {1} is cancelled: attribute {2} cannot be changed from {3} to {4}.
7220	The version string "{0}" for feature "{1}" is not a valid FlexNet version: must be <number>.<number>.
7221	Query for object {0} returned multiple references.

Error Code	Description
7222	Not a valid value for attribute {0}.
7223	Attribute {0} is immutable: cannot be changed from {1} to {2}.
7224	ASR license model does not match line item's license model.
7225	Error occurred while importing web register keys from file.
7226	License model is not a trusted license model.
7227	The web register key is missing in the entitlement ID.
7228	The specified ESN: {0} is already in the system.
7230	Missing the activations settings file: {0}. Expecting an activation settings file at the VCG location.
7231	License generator error: {0}.
7232	ASR duration does not match line item's duration.
7233	There is no deployed Orderable for Part Number "{0}".
7234	Some line items require version dates and others don't.
7235	The feature name "{0}" is too long for FlexNet Licensing Technology; it may not be longer than 30 ASCII characters.
7236	Version date duration is required for {0} on {1}.
7237	Multiple hosts cannot be selected as partial fulfillments are not allowed.
7238	Requested overdraft amount {0} exceeds remaining overdraft amount in the entitlement {1}.
7239	Request type should be upsell.
7240	The rehost of the fulfillment is denied by the rehost policy because {0}.
7241	Sold to Organization Unit is required. Please specify end customer information before saving entitlement.
7242	Version date option specified is not valid for a trusted license model.
7243	Line items having different server host ID policies cannot be activated together.
7244	No data records found.
7245	Request type {0} is not valid for an emergency license request.
7246	Overdraft count {0} is not valid.
7247	Please specify at least one node-locked host.
7248	The repair of the fulfillment is denied by the repair policy because {0}.
7249	Returned overdraft count {0} exceeds overdraft count in the fulfillment {1}.
7250	The entitlement is not mapped to the users portal account.
7251	Cannot set license model attributes for a {0} request.
7252	Line items belonging to different customer organizations cannot be activated together.
7253	Start date of line item {0} is not set.
7254	Line item {0} has a parent defined.
7255	Version date of line item {0} is not set.
7256	Start date cannot be set on {0} request.
7257	Repair operation is not allowed by {0} technology.
7258	Absolute expiration date is required for a local trial ASR.

Error Code	Description
7259	Specified license model Name {0} is not valid.
7260	Start date is required for a {0} request.
7261	Provide either duration or expiration date but not both.
7262	Sold to organization of the renewed line item should be the same as that of the parent line item.
7263	Sold to organization of the upsold line item should be the same as that of the parent line item.
7264	Request type {0} is not valid for a publisher error request.
7265	Failed to perform the operation.
7266	Line items having different hosts defined cannot be activated together.
7267	Duration specified for number of returns lifecycle policy is not valid.
7268	Not a valid Generator Validator Class {0}. This class should implement LicenseGeneratorValidator interface.
7269	Cannot change state of line item {0}. It has been activated.
7270	Cannot a remove line item in a {0} request.
7271	Cannot import fulfillments. Fulfillment with migration ID {0} already exists.
7272	Cannot define node-locked host ID policy at entitlement time for the selected license model.
7273	Selected file not found.
7274	Entitlement ID is required.
7275	No email address specified in the fulfillment record or no additional email addresses provided.
7276	Cannot create attribute {0} with no type. Please specify type.
7277	When logged in with entitlement ID, only that entitlement and it's line items can be viewed.
7278	Orderable of the renewed line item should be the same as that of the parent line item.
7279	This entitlement contains line items that in turn have child line items belonging to different entitlements. Proceeding with transfer may cause issues during fulfillment of these child line items.
7280	Version start date is required. Please provide a value.
7281	Activation ID {0} contains one or more of the following special characters: ', ", &, %, ^, (,), #, @, !, ~, /, <, >, `', {, }, =, .
7282	Overdraft count {0} is not allowed for this request as overdraft is either disabled or exceeded available overdraft count.
7283	Cannot map draft or inactive entitlement to portal user.
7284	Cannot perform support actions on inactive fulfillment record {0}.
7285	Request type {0} is not valid for a return request.
7286	Fulfillments belonging to different customer organizations cannot be consolidated.
7287	Value specified for max length is not valid.
7288	The activation of the fulfillment is denied by the activation policy for activation id {0} because {1}.
7289	Only certificate fulfillments can be consolidated.
7290	Cannot define redundant server policy at entitlement time for the selected license model.
7291	Import file provided is not valid.
7292	Cannot validate product {0}; it must contain at least one Feature to be licensed with FlexNet technology.
7293	Specified client repair count:{0} is not valid. Value must be greater than or equal to 0.

Error Code	Description
7294	Cannot specify server host IDs for entitlement line {0} item using license model {1}.
7295	Please specify at least one set of Server Hosts.
7296	Overdraft count {0} is not valid.
7297	Expiration date cannot be set for a {0} request.
7298	Cannot consolidate fulfillment record {0} because trusted activation fulfillments cannot be consolidated.
7299	Name cannot be blank.
7300	Lifecycle action is not allowed on fulfillment {0}.
7301	When logged in with line item ID, only that line item can be accessed.
7302	Not a valid maintenance Version.
7303	Maximum extra activations exceeded for the parent line item.
7304	The sold to value {0} is not valid.
7305	Cannot map draft or inactive activation ID to portal user.
7306	License model of line item {0} is not set.
7307	Cannot create attribute named {0} for license technology {1} because there is already a Generator Configuration attribute with that name.
7308	Number of copies is required for {0}.
7309	Line items having different redundant server policies cannot be activated together.
7310	Web register key {0} contains one or more of the following special characters: ', ", &, %, ^, (,), #, @, !, ~, /, <, >, `}, {, =, .
7311	Short code activation is Denied by the policy. Resubmit the request with policy override if the user has policy override permission.
7312	Cannot find Generator Validator Class {0}.
7313	Need positive count for rehost operation.
7314	Line Item does not have a parent for upgrade, upsell or renew.
7315	Version date cannot be set on {0} request.
7316	A version start date is required.
7317	Count cannot be more than the remaining copies of the line item {0}.
7318	Expiration date is required.
7319	Expiration date of line item {0} is not set.
7320	Cannot set node-locked hosts on entitlement line item using license model: {0}.
7321	Sold to organization cannot be set on {0} request.
7322	Cannot preload web register keys to bulk entitlement {0}. web register keys have to be added as part of activation.
7323	Partial fulfillments are not allowed for line item {0}.
7324	Identifier {0} is not valid.
7325	Cannot specify host IDs for entitlement line {0} item using license model {1}.
7326	Line items belonging to different license technologies cannot be activated together.
7327	The user {0} has no override policy permission.
7328	Trusted storage licenses cannot be rehosted.

Error Code	Description
7329	No upgrade relationship between product {0} and {1} exists.
7330	Sold to organization of the upgraded line item should be the same as that of the parent line item.
7331	Node-locked host ID policy, for portal, is not the same for line item {0} and line item {1}.
7332	The supplied overdraft count {0} is not valid; overdraft cannot be negative.
7333	Maintenance {0} requires expiration date.
7334	Extra activations cannot be set to a number less than the fulfilled extra activations amount {0}.
7335	No data records found.
7336	Entitlement ID {0} contains one or more of the following special characters: ' , " , & , % , ^ , (,) , # , @ , ! , ~ , / , < , > , ` , } , { , = , , .
7337	Rehosted overdraft count {0} exceeds overdraft count in the fulfillment {1}.
7338	Number of copies cannot be zero for {0}.
7339	Cannot copy entitlement {0} as it has maintenance line items or it has been upgraded, upsold or renewed.
7340	Value specified for number of extra activations lifecycle policy is not valid.
7341	Part number {0} is not mapped to any product.
7342	Number of copies must be a positive integer for {0}.
7343	Entitlement line item {0} has expired on {1}.
7344	The length of the specified valid value ({0}) exceeds the maximum length ({1}) for this attribute.
7345	User does not have permission to perform operation on line item.
7346	Redundant server hosts must be unique.
7347	Not a valid product name.
7348	Cannot define server host ID policy at entitlement time for the selected license model.
7349	Cannot specify node-locked host IDs for entitlement line {0} item using license model {1}.
7350	Start date has not been specified.
7351	No data records found.
7352	Duration or expiration date is required.
7353	Return operation is not allowed by {0} technology.
7354	Not a valid period for license term {0}; value must be positive.
7355	Number of copies for {0} should be less than the sum of seat counts of all line items upsold from parent {1}.
7356	Duration of line item {0} is not set.
7357	Concurrent modification error. Please retry your operation.
7359	Cannot create attribute with no name for license technology {0}.
7360	Cannot perform any support action obsolete fulfillment {0}.
7361	Cannot transfer line item {0} since number of copies is more than the remaining copies.
7362	Only deployed line items allowed for upsell. Line item {0} is not deployed.
7363	Not a valid uniform suite name.
7364	Line item {0} is not marked as upgrade or upsell or renew.

Error Code	Description
7365	Number of copies should be less than the sum of seat counts of all line items upgraded, upsold or renewed from parent {1}.
7366	Please provide a valid request file.
7367	Publisher error licenses cannot be generated for trusted storage fulfillments.
7368	Server host ID policy, for portal, is not the same for line item {0} and line item {1}.
7369	Redundant license servers are not allowed.
7370	Cannot add web register key {0} to bulk entitlement {1} as part of activation. It should be preloaded.
7371	No data records found.
7372	Version date has not been specified.
7373	Input activation ID cannot be null.
7374	Emergency licenses cannot be generated for trusted storage fulfillments.
7375	The attribute {0} must be a valid integer between 0 and {1}.
7376	License servers of type {0} are not allowed.
7377	License Model is required for bulk entitlement to set the model attributes.
7378	Start date is after expiration date.
7379	Generating publisher error licenses is not allowed by {0} technology.
7380	Could not instantiate custom host ID validator class: {0}.
7381	This entitlement contains child line items that have corresponding parent line items belonging to different entitlements. Proceeding with transfer will cause these child line items to be created in the new organization with no parent defined.
7382	Stop gap licenses cannot be generated for trusted storage fulfillments.
7383	Cannot change number of copies of line item {0} after fulfillment as license model {1} does not allow partial fulfillments.
7384	Server host ID policy is not the same for line item {0} and line item {1}.
7385	Sold to organization of the parent line item {0} should be the same as that of the child line item {1}.
7386	Server host IDs not unique.
7387	Incorrect number of server hosts specified. Specify either one or three hosts.
7388	Cannot change state of line item {0}, one or more line items refer to it.
7389	Value specified for number of repairs lifecycle policy is not valid.
7390	Maximum extra activations exceeded.
7391	Cannot deploy technology {0} because the generator {1} is not valid due to this error: {2}.
7392	Number of copies cannot be set to a number less than the fulfilled amount {0}.
7393	License model attributes of line item {0} is not set.
7395	At least one of default transaction key or virtual transaction key is required for a deployed product or suite associated with trusted license models.
7396	Hosts of type {0} are not allowed by policy.
7397	First server host not specified.
7398	A version date is required.

Error Code	Description
7399	Overdraft count {0} is not allowed for this request as overdraft is either disabled or exceeded available overdraft count.
7400	Expiration date or duration is required for a local trial ASR.
7401	Cannot deploy test entitlement {0}.
7402	The bulk entitlement ID is not valid.
7403	Count is more than the total fulfilled copies of the parent line item {0} on the host {1}.
7404	Duration cannot be set for a {0} request.
7406	Cannot delete a predefined FlexNet technology attribute.
7407	Cannot perform support actions on inactive entitlement line item {0}.
7408	Specified part number {0} is not valid.
7409	Redundant server hosts are not allowed by policy.
7410	Stop gap license cannot be generated for {0} technology.
7411	This entitlement contains child line items having parent line items belonging to different entitlements. It also contains line items that in turn have child line items belonging to different entitlements.
7412	Not enough permissions for attempted operation.
7413	Expiration date is before today.
7414	Fulfillments belonging to different technologies cannot be consolidated.
7415	Activation ID is required.
7416	Request type {0} is not valid for activation.
7417	redundant server policy is not the same for line item {0} and line item {1}.
7419	The product {0}, version {1} is already added to the Entitlement.
7420	Request type should be renew.
7421	User with user ID {0} does not exists.
7422	Please provide target sold to organization where the entitlement will be transferred.
7423	Cannot create attribute {0} with no When Choices. Please select at least one When Choice.
7424	Please specify at least one node-locked host for the server host {0}.
7425	Request type cannot be null.
7426	No product found with the given name {0} and version {1}.
7427	Request type {0} is not valid for a repair request.
7428	Valid values are required.
7429	Node-locked hosts of type {0} are not allowed.
7430	Not a valid maintenance name.
7431	Duration or expiration date is required.
7432	No host IDs specified.
7433	Permanent is set to true and also duration/expiration date is provided. Please specify exactly what type of expiration terms to set.
7434	Not a valid product Version.
7435	Cannot transfer entitlement {0} since it has active fulfillments. Fulfillments have to be returned before the transfer.

Error Code	Description
7436	Quantity should be a positive integer for {0}.
7437	Cannot update a generator attribute named {0} for license technology {1} because there is already a license model attribute with that name.
7438	No data records found.
7439	Fulfillment cannot be null.
7440	Duration specified for number of rehosts lifecycle policy is not valid.
7441	Users belonging to a customer organization can only redeem web register keys.
7442	Request is either null or contains empty data.
7443	When logged in with entitlement ID, only the line items that belong to it can be accessed.
7444	Maintenance {0} requires start date.
7445	Specified bulk entitlement ID: {0}, and activation ID: {1} are not compatible. Check to make sure the specified activation ID is not associated with a different bulk entitlement.
7446	Licenses belonging to different customer org units cannot be emailed together. Please select fulfillments belonging to the same customer org unit.
7447	Version start date cannot be set on {0} request.
7448	Cannot deploy line item {0}. The parent entitlement {1} is not deployed.
7449	Request type should be upgrade, upsell or renew.
7450	Trusted or embedded license models cannot be set to line item {0} since it is not a new order and does not have a parent defined.
7451	Value specified for number of rehosts lifecycle policy is not valid.
7452	Duration or expiration date is required for a {0} request.
7453	Request type should be upgrade.
7454	Value specified for number of returns lifecycle policy is not valid.
7455	Quantity is required for {0}.
7456	Fulfill count exceeded the seat count of a parent line item.
7457	Request type {0} is not valid for a rehost request.
7458	No data records found.
7459	Line Item {0} does not allow partial fulfillments. Hence multiple hosts are not allowed.
7460	Consolidate operation cannot be performed for {0} request.
7461	Cannot delete line item {0}. It has been activated.
7462	Specified expiration date is not valid.
7463	Not a valid Generator Service Class {0}. This class must implement LicenseGeneratorService interface.
7464	Request type {0} is not valid for a stop gap license request.
7465	Cannot define partial fulfillments policy at entitlement time for the selected license model.
7466	The return of the fulfillment is denied by the return policy because {0}.
7467	Upgrade/Upsell/Renew operation is not allowed by license technology {0}.
7468	Server host ID cannot be ANY, DEMO or ID=. Please enter a valid server host ID.
7469	Rehost operation is not allowed by {0} technology.
7470	Cannot find license Consolidator Class {0}.

Error Code	Description
7471	Version date is required. Please provide a value.
7472	Version start date has not been specified.
7473	Not licensed for legacy feature override functionality.
7474	Cannot create attribute named {0} for license technology {1} because there is already a license model attribute with that name.
7475	Not a valid uniform suite Version.
7476	Please provide target entitlement to which the line item will be transferred.
7477	Activation request must contain a count in addition to an overdraft count.
7478	Cannot deploy technology {0} because the license model {1} is not valid due to this error: {2}.
7479	Line items cannot have different license model types.
7480	Cannot delete line item {0}, other line items refer to it.
7481	Fulfillment request type is not set.
7482	Node-locked host ID policy is not the same for line item {0} and line item {1}.
7483	Attributes are not valid: {0} must not be greater than {1}.
7484	Cannot create text attribute {0} with no text type. Please specify text type.
7485	The model "{0}" cannot support a suite package specification because it is not a counted certificate model.
7486	Number of copies for {0} should be less than the sum of seat counts of all line items upgraded from parent {1}.
7487	Start date is required. Please provide a value.
7488	Emergency license cannot be generated for a {0} technology.
7489	Line items with license models having different partial fulfillments settings cannot be activated together.
7490	Not a valid license Consolidator Class {0}. This class must implement LicenseConsolidator interface.
7491	Cannot set server hosts on entitlement line item using license model: {0}.
7492	Failed to perform the operation.
7493	Only active fulfillments can be consolidated.
7494	Web register key cannot be longer than {0}.
7495	Count specified is more than the fulfilled copies of the parent line item {0} in this fulfillment record.
7496	ASR is missing the transaction key.
7497	Number specified for trusted ID search is not valid.
7498	The entitlement line item is not mapped to the users portal account.
7499	Duration {0} is not valid.
7500	Cannot update a license model attribute named {0} for LicenseTechnology {1} because there is already a generator attribute with that name.
7501	Node-locked host ID cannot be ANY, DEMO or ID=. Please enter a valid node-locked host ID.
7502	Duration specified for number of repairs lifecycle policy is not valid.
7503	Only deployed line items can be upgraded. Line item {0} is not deployed.
7504	Start date is after expiration date.
7505	Fulfill count exceeded the available seat count.

Error Code	Description
7506	Unable to process the request. Please contact system administrator.
7507	Host {0} is not allowed by line item {1}.
7508	Web register key is required.
7509	ASR Name {0} contains one or more of the following special characters: ', ", &, %, ^, (,), #, @, !, ~, /, <, >, `', {, }, =, .
7510	Line items having different node-locked host ID policies defined cannot be activated together.
7511	License model is required for line item to set the model attributes.
7512	Cannot update attribute named {0} for license technology {1} as there is no attribute with that name.
7513	Entitlement ID cannot be longer than {0}.
7514	Cannot find Generator Service Class {0}.
7515	Fulfillments belonging to {0} technology cannot be consolidated.
7516	Unable to perform short code activation due to reason: {0}.
7517	No upsell relationship between product {0} and {1} exists.
7518	Activation ID cannot be longer than {0}.
7519	Cannot email license for inactive fulfillment.
7520	Cannot import fulfillments. Line item with activation ID {0} does not exist.
7521	Cannot import fulfillments. Line item with order # {0}, and line # {1} does not exist.
7522	Bulk entitlement ID: {0} is not valid and does not exist in the system.
7523	The existing web register key {0} does not belong to bulk entitlement {1}.
7524	Duration should be an integer greater than 0 for {0}.
7525	Cannot delete line item {0} since it has been referenced by other line items as a result of transfer process.
7526	Max transfers cannot be less than 0 for {0}.
7527	Duration is required for {0}.
7528	Max transfers is required for {0}.
7529	This operation cannot be performed on obsolete fulfillments.
7530	Cannot delete entitlement {0} since it has been referenced by other entitlements as a result of transfer process.
7531	This operation cannot be performed since the line item {0} is inactive.
7532	Unauthorized access denied.
7533	Unable to process email. Not a valid email template {0}. Please report to system administrator.
7534	Only one node locked host is allowed.
7535	Only one server host ID is allowed.
7536	Partial upgrade/upsell/renew of fulfillment is not possible since parent line item {0} is marked obsolete.
7537	Version date duration should be an integer greater than or equal to 0 for {0}.
7538	Since line item {0} is in test state, the target entitlement to which this will be transferred also needs to be in the Test State.
7539	Error processing input file.
7540	Version date duration is required for {0}.

Error Code	Description
7543	Could not instantiate vendor dictionary response class: {0}.
7544	Cannot map activatable item to the user since multiple owners are not allowed.
7545	Merge was not successful. There was an issue with merging hosts between the source and target organizations.
7546	Value specified for number of reinstall lifecycle policy is not valid.
7547	Cancel license policy is not the same for line item {0} and line item {1}.
7548	Selected items should have the same license technology.
7549	Selected items should have the same license model type.
7550	Merge was not successful. There was an issue with merging entitlements between the source and target organizations.
7551	Duration specified for number of reinstall lifecycle policy is not valid.
7552	The reinstall of the fulfillment is denied by the reinstall policy because {0}.
7553	Merge was not successful. There was an issue with merging users between the source and target organizations.
7554	VCG is not able to generate license because of a timeout. Check VCG wait time system configuration setting.
7555	Cannot define cancel license policy at entitlement time for the selected license model.
7556	No VCG for config: {0} at location {1}.
7557	Short code activation failed : More than one fulfillment records found for the given short code and activation ID.
7558	Please select at least one more target host.
7559	Specified value {1} is not valid for the custom attribute {0}. Specify a valid integer number.
7560	Number of short code response override keys {0} are not matching with the keys {1} returned from the ResponseOverrideGenerator.
7561	Response override key name: {0} contains one or more of the following special characters: ', ", &, %, ^, (,), #, @, !, ~, /, <, >, `.
7562	Owner does not belong to the sold to organization.
7563	Short code response overrides generator class {0} was not found.
7564	Empty key name not allowed for response overrides.
7565	Number Value is not provided for the number type custom attribute: {0}. Please set number value and retry.
7566	Boolean value is not provided for the boolean type custom attribute: {0}. Please set boolean value and retry.
7567	User with user ID {0} does not exist.
7568	Length of attribute {0} is not valid. Maximum length for TEXT and MULTI VALUED TEXT TYPES allowed is 4000 characters.
7569	Custom attribute in request is not valid: {0}.
7570	The publisher ID {0} in the request is not supported by the FNO Server. Please check with your FNO administrator.
7571	At least two fulfillments are required to consolidate.
7572	Owner does not belong to the sold to organization.

Error Code	Description
7573	Please select at least one host.
7574	Date Value is not provided for the date type custom attribute: {0}. Please set date value and retry.
7575	Names of short code response override keys does not match with the Keys in the returned data from the ResponseOverrideGenerator.
7576	Response overrides contains duplicate key names. Please remove duplicates and save again.
7577	The max length value for the key name: {0} should be an integer value.
7578	String value is not provided for the text type custom attribute: {0}. Please set String value and retry.
7579	Fulfillment ID: {0} is not trusted type.
7580	Selected expiration date was not valid. Please select a future date.
7581	Online return/repair request for the activation ID {0} is not originated from the original client machine.
7582	Unable to process trusted activation request for transaction ID {0}. Please retry after a while.
7583	The max length value for the key name: {0} should be more than 0.
7584	Source and target hosts are the same.
7586	Please select one target host.
7587	The reinstall request is not valid since there are no fulfillments on this host.
7588	Vendor dictionary response key name: {0} contains one or more of the following special characters: ' , " , & , % , ^ , (,) , # , @ , ! , ~ , / , < , > , ` .
7591	Transfer was not successful. There was an issue with returning fulfillments during transfer of entitlement. Please check application log.
8001	Error in selecting {0} data from database.
8002	Transformation process is not valid.
8003	Cannot add Required attribute {1} to host type {0}. The host type is used in host entities so the required choice must be set to No.
8004	Error in saving {0} data in database.
8005	Hierarchy can be added only to customer or publisher organization.
8006	Counted and uncounted line items cannot be activated together.
8007	Roles not mapped to the user {0}. Please specify roles for the User.
8008	Cannot change the time when the attribute {0} is defined since this license model is deployed.
8009	Unable to generate alias ID for short code ASR.
8010	Cannot create User with no organizations and Roles. Please add organizations and Roles.
8011	Cannot map entitlement to the user since multiple owners are not allowed.
8012	Cannot create User with no last name. Please specify last name.
8013	Cannot create User with no user name. Please specify user name.
8014	Cannot find Filename Generator Class {0}.
8015	The reason for return specified is not valid because there are no {0} line items.
8016	Error in loading driver manager for {0} database.
8017	License can be set only on-hold fulfillments.
8018	The configuration={0} was expected to be configured as an integer but instead was configured as={1}.

Error Code	Description
8019	Cannot create attribute named {0} for license technology {1} because there is already a license host attribute with that name in this technology.
8020	Errors related to database access.
8021	Error in retrieving {0} data from database.
8022	Error in saving {0} to config service.
8023	Unable to read the email template {0}. Please check the log file for more details.
8024	Cannot create technology {0} with no type. Please specify type.
8025	Host attribute named {1} does not exist for license technology {0}.
8026	Product is not associated with a trusted license model.
8027	Selected file not found.
8028	Cannot create organization {0} with no name. Please specify name.
8029	Cannot create organization {0} with no display name. Please specify display name.
8030	Cannot delete host {0}. It is being used in other entities.
8031	This operation cannot be performed on obsolete consolidated licenses.
8032	Not a valid Filename Generator Class {0}. This class must implement CustomTechFilenameGenerator interface.
8033	Error in retrieving {0} from config service.
8034	Fulfillment is not active.
8035	Cannot create host attribute named {0} for the default host types in FlexNet license Technology.
8036	Only on-hold fulfillments can be deleted.
8037	This operation cannot be performed on on-hold consolidated licenses.
8038	Cannot create User with no first name. Please specify first name.
8039	Error in updating custom attributes definition: Please check the reporting server.
8040	Cannot create User with no email address. Please specify email address.
8041	Unable to perform short code activation due to reason : license Text does not match with that of the ASR.
8042	Unable to find unique 6-digit short code alias ID in the number range 1 to 999999.
8043	Roles not mapped to the organization {0}. Please specify roles for the organization.
8044	This operation cannot be performed on on-hold fulfillments.
8045	ReportManager failed to search reports by description.
8046	Cannot rehost {0}. license technology {1} does not allow rehost operation.
8047	The specified user {0} does not belong to the org unit {1}.
8048	SecurityService failed validating SignonObject.
8049	ReportService failed saving report.
8052	Please provide an organization to redeem the web register key.
8053	Organization unit {0} cannot be deleted. This organization unit owns hosts.
8054	Cannot create attribute named {0} and type {1}. There is already a license attribute created with this name and type of {2} in the license technology {3}.

Error Code	Description
8055	Cannot create attribute named {0} and type {1}. There is already a Host attribute created with this name and type of {2}.
8056	DataSourceService cannot update an existing DS.
8057	The organization cannot be null when saving.
8058	Start date option is required to be set.
8059	Error in retrieving time dimension start and end dates. Please check reporting database.
8060	Cannot perform this operation on selected items. license technology {0} does not allow rehost operation.
8061	ReportService failed executing a report.
8062	Organization data specified for saving user is not valid.
8063	ReportingPaginationReportsModeHelper failed while getting CurrentPage.
8064	Cannot create organization of type PUBLISHER.
8065	Reporting database transform failed, unable to create process in database.
8066	The license model for this request requires a custom host ID but none was supplied.
8067	user ID cannot be null or empty.
8068	Organization unit {0} cannot be deleted as one of its users {0} cannot be deleted.
8069	The specified user is null or does not exist in the system.
8070	Activation ID is must be present and be valid while saving the user.
8071	The parent organization must be specified with adding sub organizations.
8072	Cannot transfer entitlement {0} in the obsolete or inactive or on-hold state.
8073	No host has been provided for the API - getFulfilledProductCountOnHost.
8074	The organization {0} already exists.
8075	SecurityService failed adding user.
8076	ContentStoreService cannot import data file.
8077	User {0} cannot be deleted. This user is the logged-in user.
8078	The PKs specified {0}, {1}, {2}, {3} are not valid and User could not be retrieved.
8079	Cyclic dependency detected, the specified child orgs cannot be added to the parent {0}.
8080	Not enough permissions for attempted operation.
8081	Cannot remove the user {0} from the organization {1}. The user has to exist in at least one organization. If you would like to remove the user from the database, please delete the user.
8082	ReportingPaginationMixedModeHelper failed while getting CurrentPage.
8083	Organizations and Roles must be specified while saving the user {0}.
8084	Non FlexNet Domain Users cannot be managed through portal.
8085	ContentStoreService cannot create deployment option package.
8086	ReportService failed getting LastOutputObject.
8087	The sub organization must be specified and existing to retrieve the parents.
8088	User {0} cannot be deleted. This user owns entitlements.
8089	User {0} cannot be deleted. This user has fulfillment history records.

Error Code	Description
8090	ReportService failed getting report.
8091	ReportService failed querying saved report.
8092	Cannot delete publisher, portal and unknown organizations.
8093	Error in saving {0} data in database.
8094	ReportService failed while getting a list of reports name.
8095	Transformation process is not valid.
8096	DataSourceService cannot update connection string.
8097	ReportService failed while querying ContentManager.
8098	ReportService failed getting report graphics.
8099	ReportService failed saving report.
8100	Addition of sub organization failed. Please see the log.
8101	The parent organization must exist in the system to unlink the sub organizations.
8102	For a user {0} with can login Status, the role set cannot be null or empty.
8103	ReportManager failed to get seed report QueryStrings.
8104	This operation is valid only for on-hold entitlements.
8105	ReportingServerManager failed while setting up reporting server.
8106	DataSourceService failed while adding a new data source.
8107	Error in retrieving {0} data from database.
8108	Host identifier generator class {0} is not valid. This class must implement the HostIdentifierGenerator interface.
8109	Seed users cannot be deleted.
8110	Null user passed for delete operation.
8111	The organization could not be retrieved. Please inspect the log for more details.
8112	ReportManager failed to search reports by name.
8113	ReportService failed getting LastReportSearchpath.
8114	Both user ID and organization ID are mandatory and cannot be null to retrieve roles.
8115	The organization and the user must be specified to map the organization to the user.
8116	Data transformation failed while retrieving the time ID for entity {0}.
8117	The parent organization must exist in the system to retrieve the sub organizations.
8118	This entitlement line item {0} has child line items. If you transfer this line item child line items may not be activatable.
8119	ReportService failed while getting reports SearchPaths.
8120	Cannot transfer line item {0} since number of copies is more than the number of copies available to transfer.
8121	The sub organization must be specified with adding sub organizations.
8122	Cannot merge users belonging to home organization.
8123	Data transformation failed for entity {0}.
8124	Data transformation failed while retrieving the time ID for entity {0}.

Error Code	Description
8125	ReportManager failed to get report attributes.
8126	Reporting data transformation failed.
8127	The sub organization(s) must be specified and existing to unlink sub organizations.
8128	The organization name cannot be empty when retrieved by name.
8129	User {0} cannot be deleted. This user has historical web register key import job records.
8130	{0} is not a parent of {1}.
8131	The sub organization has only one parent and unlinking will result in child organization unit {0} becoming an orphan.
8132	ReportService failed querying report output.
8133	Cannot perform this operation on host {0}. license technology {1} does not allow rehost operation.
8134	SecurityService failed creating SignonObject.
8135	User {0} cannot be deleted. This user owns entitlement line items.
8136	Start date is required.
8137	The organization unit supplied is not compatible with the existing organization unit the user belongs to.
8138	Custom attributes transformation failed.
8139	Date value provided for the attribute {0} should be in the format YYYY-MM-DD whereas the value is set as {1}.
8140	ReportService failed adding style to report.
8141	Failed to run the report. Please check the report on reporting server.
8142	User {0} cannot be deleted. This user has state change history records.
8143	Please provide either the number of copies or fulfillment records to transfer the line item {0}.
8144	ReportManager failed to get publisher-report QueryStrings.
8145	Cannot transfer test line item {0}.
8146	User {0} cannot be deleted. This user has historical shipment records.
8147	The user does not belong to this organization.
8148	ContentStoreService cannot import data package.
8149	Organization unit {0} cannot be deleted. This organization unit owns entitlements.
8150	Reporting database transform denied, already in process.
8151	DirectoryService failed while creating a new CSFolder.
8152	User {0} cannot be deleted. This user has historical part number import job records.
8153	ReportManager failed to save report.
8154	DataSourceService failed while testing DS connection.
8155	The organization and the user must be specified to unmap the organization to the user.
8156	user ID must be present and be valid while saving the user.
8157	user ID or/and organization ID specified is/are null.
8158	ReportService failed getting search path.
8159	Invalid user data specified when saving the user.
8160	ReportService failed getting a list of objects.

Error Code	Description
8161	ReportService failed searching reports by description.
8162	The user cannot be null or empty when retrieving the organizations for the user.
8163	ReportManager failed running report.
8164	Failed while testing the reporting server's web port.
8165	User {0} cannot be deleted. This user has historical import job records.
8166	The start date option of define now is not valid for bulk entitlements.
8167	Roles specified for user {0} in the organization {0} cannot be empty.
8169	Organizations and Roles must be specified for promoting the user {0}.
8170	ReportService failed querying partial match NamedReport.
8172	Cannot find host identifier generator class {0}.
8173	ContentStoreService cannot import canned reports.
8174	The organization unit argument is null or the organization unit does not exist {0}.
8175	DataSourceService cannot get query-string given a DSName.
8176	At least one host attribute value needs to be provided to create the host.
8177	Not a valid target organization.
8178	ReportingPaginationQueriesModeHelper failed while getting CurrentPage.
8179	ReportManager failed to get report Search Path List.
8180	The sub organization must exist in the system to retrieve the parent organizations.
8181	ReportService failed while scheduling a report.
8182	Reset Password failed, user {0} does not belong to FlexNet domain.
8183	Cannot create hierarchies for portal and unknown organizations {0}.
8184	User {0} cannot be deleted. This user owns host entities.
8185	Error in selecting {0} data from database.
8186	Can not download license for host {0}. No binary license for license technology {1}.
8187	Self registered user {0} cannot be linked to other organizations.
8188	User cannot update his own roles.
8189	Null Value for sold to is populated for IDGenerator. Sold to Name value is required for line item / web register key ID generator.
8190	Organizations and Roles must be specified while replacing the orgs and roles the user {0}.
8191	Seed organizations cannot be linked to other organizations.
8192	User {0} cannot belong to both {1} and {2} organization types.
8193	Self registered organization unit {0} can only have one user.
8194	User(s) [{0}] belong to {1} or its parents and {2} or its children. So, organizations {1} and {2} cannot be linked together.
8195	Cannot download license for host {0}. No consolidator specified for license technology {1}.
8196	Self registered user {0} cannot be linked to other organizations.
8197	Organizations {1} and {2} are in the same organization sub-tree. User {0} cannot be mapped to both of them.

Error Code	Description
8198	Organizations with different types cannot be linked.
8199	User {0} cannot exist without organization.
8200	Null Value for productName or Version is populated for IDGenerator. product name value is required for line item / web register key ID generator.
8201	Reporting custom attribute configuration is already in process. Please contact your reporting administrator for details.
8202	DataSourceService cannot delete an existing DS.
8203	Not enough permissions for creating a custom license technology.
8204	Error sending email since the mail server host provided - {0} - is unknown.
8205	ReportingServerManager failed while setting up custom attributes.
8206	Reporting server configuration is already in process. Please contact your reporting administrator for redeployment.
8207	Not a valid Role Name {0}.
8208	Organization unit cannot be null.
8209	Roles cannot be null or empty.
8210	Given child organization {0} is already a child of the parent organization {1}.
8211	Custom host attribute in request is not valid: {0}.
8212	String value is not provided for the text type custom host attribute: {0}. Please set String value and retry.
8213	Boolean value is not provided for the boolean type custom host attribute: {0}. Please set boolean value and retry.
8214	Number value is not provided for the number type custom host attribute: {0}. Please set number value and retry.
8215	Date Value is not provided for the date type custom host attribute: {0}. Please set date value and retry.
8216	Execution error finding selected organizations for the bulk operation named {0}.
8217	Execution error scheduling the bulk operation named {0}.
8218	Finding selected organizations.
8219	Can not rehost since license technology does not support hosts.
8220	Execution error clearing selected line items for the bulk operation named {0}.
8221	Getting all of a bulk operation's selected line items.
8222	Host identifier generator Classname is required for {0} in license technology {1}.
8223	Execution error building the bulk operation named {0}.
8224	Removing a work item.
8225	Execution error adding selected organizations for the bulk operation named {0}.
8226	Clearing selected line items.
8227	Checking if a bulk operation has a work batch.
8228	Domain user {0} cannot belong to other organizations.
8229	At least one organization is required to do the {0}.
8230	Getting all of a bulk operation's selected organizations.
8231	For the activation ID {0} upgrade Count {1} is not valid. Please supply a positive integer value.

Error Code	Description
8232	Products {0} added to the entitlement should belong to the same license technology.
8233	A name must be less than 256 characters in length.
8234	Error in query for maintenance items {0}.
8235	At least one target line item is required to do the renewal.
8236	Product Categories can only be added to Publisher Org units.
8237	Cannot create attribute with name as Date since it is a special keyword.
8238	No data records were found. You do not have enough permission.
8239	Cannot remove bulk operation because a work batch that has not yet executed exists for the bulk operation named {0}.
8240	License technology {0} has multiple host types. Specify a host type.
8241	Repair policies are not the same for license models {0} and {1}.
8242	Cannot build bulk operation named {0} because it has previously been built.
8243	Products in the renewed line item should be the same as that of the parent line item.
8244	Host type {0} does not exist in {1} technology.
8245	Error building product cache.
8246	Execution error removing work batch for the bulk operation named {0}.
8247	A device host ID "{0}" was supplied but the license model is not for a device.
8248	Cannot create text attribute {0} with no text type. Please specify text type.
8249	Cannot create product category attribute {0} because there already exists another attribute with this name in the category.
8250	Cannot update a bulk operation spec after it has been submitted.
8251	Cannot create product category {0} because there already exists another category with this name.
8252	The uncategorized product category cannot be removed from the org.
8253	Not a valid duration {0}.
8254	Checking if a bulk operation has any selected line items.
8255	Cannot rehost {0}. license technology {1} is of manual or hands-free type.
8256	Line items belonging to different host types cannot be activated together.
8257	Cannot schedule bulk operation named {0} because it has not been built.
8258	Cancel license policies are not the same for license models {0} and {1}.
8259	Requires a maintenance orderable.
8260	Seed users cannot be removed from this organization.
8261	No host identifier has been provided. Host identifier is required to create a host.
8262	Execution error removing selected line items for the bulk operation named {0}.
8263	Execution error checking if any selected line items exist for the bulk operation named {0}.
8264	Cannot set activation ID - maintenance item {0}.
8265	Not a valid support action.
8266	Cannot delete the product category. It is referenced by org units.
8267	Expiration date is before start date.

Error Code	Description
8268	No products to upgrade to in bulk operation spec named {0}.
8269	Partner tier name {0} is not valid.
8270	For the activation ID {0} renew Count {1} is not valid. Please supply a positive integer value.
8271	The line item {0} does not have any copies remaining to activate.
8272	Cannot create, edit or delete any license file definitions for FlexNet license Technology.
8273	Execution error during bulk renewal.
8274	Creating a work item.
8275	Not able to start a transaction.
8276	Unable to delete the attribute because it could be referred by other entities.
8277	Finding selected line items.
8278	Cannot create host type named {0} for License. Technology {1} because there is already another host type with that name in the system. Please use Select host type button to re-use it.
8279	Quartz Scheduler Error. Please submit again.
8280	Permanent line items without version date cannot be renewed.
8281	The schedule time submitted is in the past. Please submit a time in the future.
8282	Cannot delete the host type. It is used in products.
8283	At least one from product is required to do the {0}.
8284	Selected items should have the same host type.
8285	Execution error checking if any selected organizations exist for the bulk operation named {0}.
8286	Return policies are not the same for license models {0} and {1}.
8287	Please select one maintenance.
8288	license File Definition {0} does not exist for license technology {1}.
8289	Adding selected line items.
8290	Tier1 Channel partner is required.
8291	Error during bulk upgrade.
8292	At least one organization is required to do the renewal.
8293	Please select at least one product.
8294	Execution error removing selected organizations for the bulk operation named {0}.
8295	Execution error running the bulk operation named {0}.
8296	Finding a work batch.
8297	Cannot copy entitlement as the parent line item {0} of line item {1} belongs to another entitlement.
8298	Preparing statement.
8299	A SQL error occurred while {0}.
8300	Cannot create organization with no name.
8301	License File Definition does not exist for license technology {0}.
8302	Cannot delete default product category.
8303	Extra activations policies are not the same for license models {0} and {1}.
8304	Cannot create a required attribute since there are deployed products associated with the category {0}.

Error Code	Description
8305	Cannot delete the license file definition. Other entities refer to it.
8306	Cannot delete the product category. It is used in orderable.
8307	Cannot remove work batch because work items exist for the bulk operation named {0}.
8308	Cannot configure bulk operation named {0} because it has previously been configured.
8309	Maintenance item {0}.
8310	A SQL error occurred while {0}.
8311	Org {0} already contains product category {1}.
8312	Products {0} added to the entitlement should be linked to at least one common license model.
8313	A name must be entered.
8314	Channel partners should belong to customer organization units.
8315	Cannot create product category attribute with no name.
8316	Product category attribute does not exist.
8317	Could not find {0} object with unique ID {1}.
8318	The length of the specified valid value ({0}) exceeds the maximum length ({1}) for this attribute.
8319	Execution error adding selected line items for the bulk operation named {0}.
8320	Cannot create product category attribute with no type.
8321	Requires an activation ID.
8322	Execution error clearing selected organizations for the bulk operation named {0}.
8323	Removing selected organizations.
8324	Attribute Name: {0} can only contain characters A-Z, a-z, 0-9 and _ .
8325	Execution error removing bulk operation named {0}.
8326	Please select at least one product to add to the line item.
8327	Product {0} is a maintenance product. It cannot be added to a line item.
8328	Performing execute batch on a callable statement.
8329	Checking if a bulk Operation has any selected organizations.
8330	Cannot copy entitlement as the maintenance line item {0} is associated to line item {1} which belongs to another entitlement.
8331	A valid license model of type {0} is not defined on entitlement line item {1}.
8332	Host type ID {0} does not exist.
8333	Rehost policies are not the same for license models {0} and {1}.
8334	Cannot create product category with no name.
8335	Maintenance relationship does not exist between the products of the line items.
8336	Build of organization unit cache failed.
8337	IOperationsQuery input instance not supported by this DAO: {0}({1})".
8338	No license models found for selected products.
8339	At least one target line item is required to do the {0}.
8340	Execution error configuring the bulk operation named {0}.
8341	Clearing selected organizations.

Error Code	Description
8342	Cannot create host type with no name.
8343	Execution error assembling the status of the bulk operation named {0}.
8344	Cannot delete default host type for FlexNet licensing technology.
8346	requires a parent entitlement.
8347	Product category does not exist.
8348	Entity {0} with ID {1} not found.
8349	Execution error finding selected line items for the bulk operation named {0}.
8350	For the product {0} [version {1}] the quantity {2} is not valid; please supply a positive integer value.
8351	Checking if a work batch has any work items.
8352	Sold to organization is not the same for the line items.
8353	Host type does not exist for license technology {0}.
8354	At least one license file is required.
8355	Cannot create host attribute without a host type.
8356	Removing selected line items.
8357	Products {0} added to the entitlement should be linked to the same host type.
8358	Org {0} already contains product category {1}.
8359	Error during bulk renewal.
8360	The name is already in use - a name must be unique.
8361	Cannot create license file definition named {0} for license technology {1} because there is already another file definition with that name in this technology.
8362	Org {0} does not contain product category {1}.
8363	Please provide at least one channel partner.
8364	Work batch NOT FOUND for bulk operation named {0}.
8365	Cannot delete the host type. It is referenced by host entities or devices.
8366	User cannot remove himself from an organization.
8367	Only certificate or custom technology based child line items can be activated from here.
8368	Host and product do not belong to the same host type.
8369	Execution error closing database connection.
8370	Cannot create product category {0} because there already exists another category with this name.
8371	Product category needs to be associated with at least one org and hence cannot be removed.
8372	A start date cannot be set when the specified start date option is set.
8373	Host and product do not belong to the same license technology.
8374	Upgrade, upsell and renewal line item {0} cannot be created when it is linked to multiple products.
8375	Unable to load self-registered user from database.
8376	Please provide version date.
8377	Target organization for transfer should be a customer organization.
8378	Execution error finding bulk operation for line item {0}.
8379	For the activation ID {0} upsell Count {1} is not valid. Please supply a positive integer value.

Error Code	Description
8380	Contact {0} cannot be deleted. This contact is referenced in entitlements.
8381	Cannot transfer entitlement {0}. You do not have access to all line items in this entitlement.
8382	Cannot update the storage type of the license file definition since there are fulfillments.
8383	Maintenance item activation ID {0} is already in use.
8384	Products {0} added to the entitlement should be linked to the same license generator configuration.
8385	A description must be less than 256 characters in length.
8387	Products added to the entitlement should be linked to the same default transaction key and the same virtual transaction key (if applicable).
8388	Finding bulk operation for line item.
8389	Unique identifier {0} is not valid.
8390	Entitlement line item can be linked to at most one certificate, one trusted storage and one embedded license model.
8391	Quantity has to be greater than zero.
8392	Description cannot be greater than 2000 characters.
8393	User is not valid.
8394	Organization unit is not valid.
8395	Cannot delete maintenance item in state - {0}.
8396	Version date is required.
8397	Alternate license models cannot be defined for custom technology entitlements.
8398	Maintenance item is not editable.
8399	Cannot create license file definition with no name.
8400	Organization unit {0} cannot be deleted since it contains product categories. Please unlink the categories prior to deletion.
8401	UsedOnDevice flag is not applicable to custom technology.
8402	Publisher organization {0} cannot be unlinked from its only parent.
8403	Line item {0} is in use by bulk pperation named {1}. Remove the line item from the Bulk Operation or delete the Bulk Operation.
8404	Removing bulk operation named {0}.
8405	Contact {0} does not belong to organization unit {1}.
8406	Maintenance item is linked to line items - cannot delete.
8407	You do not have enough license to use channel partner features.
8408	Activation ID generator not generating unique keys after {0} retries for bulk operation spec named {1}.
8409	End customer is not valid for bulk entitlement.
8410	License generator for product is different from the transaction key license generator.
8411	Line item {0} can only be transferred to sub-organization of {1}.
8412	Failed to create the web register key entitlement since the sold to organization cannot be determined.
8413	Specified default country code {0} in system configuration is not valid.
8414	Specified country code {0} is not valid.
8415	Return action is not valid with a repair action.

Error Code	Description
8416	Activate action is not valid with a repair action.
8417	No record found. Activation ID: {0}.
8418	Request cannot be empty. It must contain at least one request action.
20002	Product host type does not match device host type.
20003	Product cannot be null.
20004	Cannot update attributes of obsolete device.
20005	Device cannot be null.
20006	Cannot add new products to obsolete device: "{0}".
20007	Publisher keys are not valid.
20008	Cannot create or update device; requested device ID "{0}" is not unique for publisher and ID type. Another device is already using "{1}".
20009	Product to associate. "{0}", must be in test state for test device "{1}".
20010	Publisher identity cannot be null.
20011	Product "{0}" cannot have features or packages with date based versions.
20012	Product to associate cannot be null.
20013	Problem serializing the publisher identity: {0}.
20014	Cannot parse publisher identity data: {0}.
20015	Orderable to associate must be in draft or deployed state for test device.
20016	Device with ID "{0}" could not be found.
20017	Unable to generate add on license for {0}: {1}.
20018	Device cannot be null.
20019	Product "{0}" must have embedded license model.
20020	User name or user identifier is not valid.
20021	The license expiration date must be in the future.
20022	Device identifier is not valid.
20023	Device with ID "{0}" could not be found.
20024	Publisher identifier is not valid.
20025	Organization name or organization identifier is not valid.
20026	Cannot generate license for obsolete device.
20027	Product to associate. "{0}", must be in deployed state for active device "{1}".
20028	Publisher with ID "{0}" could not be found.
20029	Product "{0}" has mismatched host type for device "{1}".
20030	Product "{0}" has mismatched sold-to for device "{1}".
20031	Not a valid state change: Cannot move from "{0}" state to "{1}" state.
20032	Orderable to associate must be in deployed state for active device.
20033	Unexpected add-on type: {0}.
20034	Publisher identity with ID "{0}" could not be found.
20035	Device with ID "{0}" could not be found.

Error Code	Description
20036	Too many characters in value for {0} field. Maximum length is {1}.
20037	Cannot create device: Device cannot have an empty device ID.
20038	Cannot delete publisher identity because it is in use by one or more devices.
20039	Device with ID "{0}" could not be found.
20040	Cannot create publisher: publisher with name "{0}" already exists.
20041	Cannot create publisher identity: publisher identity with name "{0}" already exists.
20042	Device associated with license model that does not allow use on devices.
20043	Problem signing license: {0}.
20044	Problem serializing license: {0}.
20045	Device associated with product that does not allow use on devices.
20046	Cannot create device, "sold to" organization information is missing.
20047	Host type is not valid.
20048	License model cannot be null.
20049	User does not belong to the submitted organization.
20050	The specified device is a server.
20051	The specified device is a client.
20052	Unable to modify the client ID. The device is a server.
20053	Unable to modify the server IDs. The device is a client.
20054	Product to remove "{0}" is not currently linked.
20055	Array parameters have mismatched lengths.
20056	Product "{0}" must have at least one copy for counted license model.
20057	License model not one of those linked to built-in product.
20058	For the product line item {0} the Quantity {1} is not valid; please supply a positive integer value.
20059	Product cannot have features or packages with date based versions.
20060	Product Identifier is not valid.
20061	Cannot create device: device type information missing.
20062	Product "{0}" cannot have more copies assigned than total available.
20063	License model identifier is not valid.
20064	An active device cannot be deleted.
20065	Unable to add a channel partner into a device that already has that tier.
20066	Initialization failed - Unable to set/verify permissions or license.
20067	License model to associate must be in deployed state for deployed orderable.
20069	License model to associate must be in draft or deployed state for draft orderable.
20070	Cannot split the line item since user is not the current owner of the entitlement.
20071	Value provided for the VM_PLATFORMS keyword was not valid.
20072	The device ID "{0}" is expected to be used with client devices.
20073	{0} count is either not supported or incorrect. Please use the exact count type for partial return.

Error Code	Description
20074	Error in auto-fulfill validation finding fulfillments with a license model type of FLOATING_CERTIFICATE, NODE_LOCKED, or CUSTOM.
20075	Error during Auto fulfill operation.
20076	Inactive, obsolete or expired product "{0}" cannot be added or have copies increased.
20077	Cannot activate line item {0} since the sold to organization has not been specified.
20078	Partner org units can be associated to other partner or customer org units.
20079	Please specify at least one channel partner as the current owner of the entitlement.
20080	Trusted activation failed because fulfillment {0} is disabled on the client system.
20081	Time zone values needs to be defined for entitlement line item {0}.
20082	Only publisher or channel partner users can split the line item.
20083	Host type must be specified for a device to be added.
20084	Unknown device request type.
20085	Cannot claim device that is in obsolete state.
20086	Cannot split line item {0} in the Obsolete or Inactive state.
20087	Host type {0} does not exist in FlexNet technology.
20088	Line Item: {0} is not associated with a trusted license model.
20089	Device request specifies a device ID that is not valid.
20090	Execution error running the email bulk operation named {0}.
20091	Only deployed or test entitlements can be split.
20092	Device request references unknown publisher.
20093	This entitlement line item {0} has child line items. If you split this line item, then child line items may not be activatable.
20094	Discovering metadata.
20095	Error fetching supersede signs for parent fulfillment {0}.
20096	Only one of ALLOW_TERMINAL_SERVER and ALLOW_ONE_TERMINAL_SERVER can be set to true in a feature line.
20097	Execution error scheduling {0} email Job for the bulk operation named {1}.
20098	Cannot change state of products for an on-hold device: "{0}".
20099	Bulk operation {0}: cannot auto-fulfill because no entitlement line item has a license model type of FLOATING_CERTIFICATE, NODE_LOCKED, or CUSTOM.
20100	Bulk operation {0}: cannot auto-fulfill because license technology {1} is not allowed in bulk operations.
20101	Line item can only be split to customer or partner organizations.
20102	Not a valid organization for split.
20103	Non-device passed to transfer device.
20104	Matching line item not found for {0}.
20105	Execution error sending entitlement line item email to address "{0}" in bulk operation named {1} for work item {2} entitlement line item {3}.
20106	Host ID type not valid for node-locked host ID: {0}.
20107	The device ID "{0}" is expected to be used with server devices.

Error Code	Description
20108	For the activation ID {0} Overdraft Count {1} is not valid. Please supply a positive integer value.
20109	Cannot schedule email bulk operation named {0} because it has not completed.
20110	Bulk operation {0}: cannot auto-fulfill because license technology is different between source and target products.
20111	Existing device is not a server device.
20112	Cannot activate on Host {0} since it is in the on-hold state.
20113	Device request is missing the device ID.
20114	Cannot claim device that is already claimed by another user.
20115	Existing device is not a client device.
20116	Cannot transfer device "{0}"; product for line item "{1}" must have same value for requested and consumed copies.
20118	Error during bulk entitlement line item email.
20119	Device is not accessible to the logged in user.
20120	Error in auto-fulfill validation finding entitlement line items with a license model type of FLOATING_CERTIFICATE, NODE_LOCKED, or CUSTOM.
20121	Corrupted device request.
20122	Cannot split the line item since the sold to organization has already been specified on the entitlement.
20123	Cannot create or update device; requested device ID "{0}" is not unique for publisher and ID type. Another device is already using "{1}".
20124	Only partner org units can be associated to other orgs.
20125	Sold to information not available for device: {0}.
20126	No wildcards allowed in this host ID: {0}.
20127	Please provide line item to split.
20128	Host type "{0}" does not match host type of existing device "{1}".
20129	Cannot split line item {0} since number of copies is more than the remaining copies.
20130	Device request is missing publisher information.
20131	Device request has a signature that is not valid.
20132	Error verifying the auto-fulfill feature can be used for bulk operation named {0}.
20133	Cannot create device: device type information missing.
20134	A time zone value is required for the license model used by line item {0}.
20135	Device request is for the wrong device: {0} ({1} ID type).
20136	Only one channel partner can be the current owner of the Entitlement.
20137	Checking if a completed work batch has any fulfill items.
20138	Error fetching node-locked host units for parent fulfillment {0}.
20139	Execution error sending fulfillment email to addresses "{0}" in bulk operation named {1} for fulfill item {2} and license fulfillment ID {3}.
20141	Error during fulfillment email.
20142	Bulk operation {0}: cannot auto-fulfill because no fulfillment has a license model type of FLOATING_CERTIFICATE, NODE_LOCKED, or CUSTOM.

Error Code	Description
20143	Comma not allowed in device ID or too many device IDs specified.
20144	Please provide target sold to organization to split the line item to.
20145	For the activation ID {0} Fulfill Count {1} is not valid. Please supply a positive integer value.
20146	The reason for return request must be a number: 1, 2, 3 or 4.
20147	Cannot transfer device "{0}"; a move for that device already in progress.
20148	Both number and string values not allowed for dictionary entry.
20149	Missing number or string value in dictionary entry.
20150	Cannot Split to tier {0} since this tier has already been defined on the entitlement.
20151	No available copies remaining on {0} to split.
20152	Cannot transfer device "{0}"; the target sold-to is the same as its current sold-to.
20153	Not a valid capability request, unable to process.
20154	Bulk Entitlement {0} does not match the original bulk entitlement {1}.
20155	Line Item {0} does not match the original line item {1}.
20156	Cannot transfer obsolete device(s) "{0}".
20157	Device request has host ID type that does not match host type.
20158	Device request has host ID type that does not match device.
20159	Product cannot be added, line item "{0}" does not exist.
20160	Failed to create unknown device {0} specified in device request: {1}.
20161	Cannot transfer device "{0}"; no sold-to information available.
20162	Publisher identity must be specified for a device to be added.
20163	Device request has publisher information that does not match device.
20164	Cannot add partner to device {0} since user is not the current owner.
20165	Failed to create unknown device specified in device request.
20166	Cannot add partner to device {0} since the sold to organization has already been specified.
20167	End Customer cannot be a channel partner organization.
20168	Cannot create or update server; requested redundant device IDs "{0}" must not be the same.
20169	Cannot transfer line item {0} since target entitlement {1} is either in the obsolete or inactive state.
20170	Product "{0}" must have sold-to set to be added.
20171	Maintenance item {0} requires an expiration date.
20172	Device request specifies an on-hold device ID.
20173	Cannot relate organization to itself.
20174	Product "{0}" cannot be added, user does not have permission.
20175	Cannot delete line item {0} since it has been referenced by other line items as a result of split process.
20176	Cannot delete product {0}; it is currently being used for a device pre-installed license.
20177	Cannot set product {0} to draft state; it is currently being used for a device pre-installed license.
20178	Maintenance item {0} requires a start date.
20179	Device end customer cannot be a channel partner organization.

Error Code	Description
20180	Cannot transfer host since the host {0} already exists in the target org {1}.
20181	Trusted host information is not valid. Please select a valid host.
20182	Maintenance {0} cannot be linked to obsolete line item {1}.
20183	Failed to parse the request file. Please upload a valid file.
20184	Count must be specified for Server Based license Model.
20185	Cannot split the line item since the current owner of the entitlement is not set.
20186	Trusted storage or embedded license models cannot be fulfilled in bulk.
20187	Redundant device capability request: No changes performed to the license.
20188	Device request has host type that does not match device.
20189	Not a valid count: the count specified is more than the fulfill count.
20190	Bulk operation {0}: cannot auto-fulfill because host type is different between source and target products.
20191	Device capability request successful.
20192	Device request has an unknown host type.
20193	License File(s) should not be empty.
20194	Current owner marked on more than one channel partner tier.
20195	Cannot delete line item {0} since it has fulfillment history.
20196	Cannot create an organization of Self Registered type.
20197	Please select at least one host.
20198	Cannot email license for trusted fulfillments.
20199	Cannot relate two customer organizations.
20200	No license for FlexNet Embedded device support.
20201	Default model needs to be set before setting alternate models.
20202	Service not applicable for customer users.
20203	The keyword VM_PLATFORMS was introduced in a future version of the VCG. Update your VCG and create a new license generator configuration with the VCG version set.
20204	The keyword TZ was introduced in a future version of the VCG. Update your VCG and create a new license generator configuration with the VCG version set.
20206	No license models is found for entitlement line item {0}.
20207	Cannot merge entitlements since the source {0} and target {1} organizations are of different types.
20208	Cannot transfer line item {0} since it is either in the obsolete or inactive state.
20209	Counted and uncounted line items cannot be repaired together.
20210	The keyword ONE_TS_OK was introduced in a future version of the VCG. Update your VCG and create a new license generator configuration with the VCG version set.
20211	Counted and uncounted line items cannot be returned together.
20212	Products of all line items should be associated with the same publisher ID.
20213	Value specified for trusted request ID search is not valid.
20214	Fulfillments of the parent line item cannot be returned because the host type of child and parent line item is different.
20215	Line items belonging to different customer organizations cannot be returned together.

Error Code	Description
20216	Not a valid activation: both parent and child line items cannot be activated together in a single activation request.
20217	Line items belonging to different customer organizations cannot be repaired together.
20218	Cannot auto-fulfill bulk operation named {0} - license technology {1} does not allow upgrade/upsell/renew operations.
20219	Cannot transfer device "{0}": product line item "{1}" is inactive.
20220	Not a valid maintenance item ID {0}.
20221	Cannot transfer host {0} since it is in the on-hold state.
20222	Redundant server hosts must belong to same family of host ID types.
20223	Please specify valid numeric value for custom attribute "{0}".
20224	Cannot set entitlement line item {0} to draft state; it is currently being used in a device add on.
20225	Cannot delete entitlement line item {0}; it is currently being used in a device add on or short code activation.
20226	A UUID host ID type cannot be mixed with other host ID types in a redundant server.
20227	Not configured to allow redundant servers.
20228	Device request failed.
20229	Cannot delete entitlement {0} since it has been referenced by other entitlements.
20230	Cannot set both TS_OK and ONE_TS_OK in request.
20231	Attribute value {0} is not valid.
20232	Line item cannot be upgraded from certificate to trusted.
20233	The specified device is a served client.
20234	The specified device cannot be a served client.
20235	Repair action is not valid with either activate or return Action.
20236	States of line item {0} and line item {1} are not the same.
20237	Time zones of line item {0} and line item {1} are not the same.
20238	Time zone of line item {0} is not set.
20239	Some line items require time zone and others do not.
20240	The entitlements being transferred are not visible to any user in the target organization.
20241	Cannot define virtual license policy at entitlement time for the selected license model.
20242	User {0} cannot be deleted. This user has product categories assigned.
20243	Type of fulfillment {0} and fulfillment {1} are not the same.
20244	Sold to of fulfillment {0} and fulfillment {1} are not the same.
20245	For the fulfillment ID {0} Return Count {1} is not valid. Please supply a positive integer value.
20246	Trusted fulfillments cannot be returned in a batch.
20247	Host ID type not valid for redundant servers.
20248	Unable to re-parse message from server {0} in sync queue.
20249	Host type must have at least one allowed device ID type.
20250	Virtual license policies are not the same for license models {0} and {1}.

Error Code	Description
20251	Virtual license policy is not the same for line item {0} and line item {1}.
20252	The default device ID type must be an allowed ID type.
20253	Product "{0}" not supported on Virtual Device(s).
20254	Sold-To is not valid.
20255	Device request has host ID type, "{0}", that does not match host type "{1}".
20256	The activation of the fulfillment is denied by the virtualization policy.
20257	Host ID is not valid.
20258	User must have at least one product category assigned.
20259	Device request has device type (server or client) that does not match device.
20260	Host ID type must be specified for a device to be added.
20261	Permanent line items without version date cannot be renewed.
20262	Sold-to is not valid.
20263	User {0} cannot be assigned role {1} in organization {2}.
20264	Organization unit is not related to user.
20265	Please supply missing required attributes and retry.
20266	The entitlements being transferred are not visible to any user in the target organization.
20267	Part number is not mapped to any of the specified products in the line item.
20268	Cannot change the status this user. This user is currently logged into the system.
20269	Template name cannot be empty.
20270	Short code character set must have at least two characters.
20271	Bad short code checksum segment size, {0}, must be either zero or at least 2.
20272	Not a valid short-code request: license template not found.
20273	Not a valid product or suite quantity.
20276	Please select a license model.
20277	Please select a publisher identity.
20278	Nothing selected.
20281	License template with ID "{0}" could not be found.
20282	Cannot create or update template; requested template ID "{0}" is already in use by publisher.
20283	Template ID must be an integer between {0} and {1}.
20284	Please select a valid expiration date.
20285	Please select at least one item.
20288	Short code character set cannot contain space characters.
20289	Device {0} not found.
20290	Short code character set cannot contain duplicate characters ({0}).
20291	Add a product or suite to the license template.
20295	Cannot delete publisher identity because it is in use by one or more license templates.
20298	License model is missing from the product or suite.

Error Code	Description
20301	Template license model does not match product or suite license model.
20302	Cannot undeploy template: template ID is missing.
20304	Expiration date is not valid.
20308	Cannot undeploy template because some short code activation(s) use it.
20318	Host type is not valid.
20319	Cannot delete a deployed license template.
20322	Cannot change state of line item {0}. It has been used in one or more short code activations.
20329	Selected license model does not support activations on virtual devices.
20331	Cannot delete license template. It is in use by one or more devices for short code activation.
20333	Date based feature is not allowed on items that can be used on devices.
20335	Device ID type not allowed on host type.
20339	Multiple devices with ID {0} were found.
20340	Could not find entitlement.
20341	Date-based features are not allowed in a suite that can be used on device.
20342	Date-based features are not allowed in a product that can be used on device.
20343	Could not find line item.
20344	Template name cannot be empty.
20345	Not a valid template.
20346	A template must have a product or suite in it.
20347	Template ID must be an integer between {0} and {1}.
20348	Please select a publisher identity.
20349	Cannot create device: Device cannot have an empty device ID.
20350	Cannot activate short-code request: license template "{0}" has expired.
20351	License template with ID "{0}" is not deployed.
20352	Error:
20353	Not a valid request count.
20354	Keyboard activation is not supported for server devices.
20355	Incorrect expiration date.
20356	License template and line item must have identical license model.
20357	License template and line item must have identical product or suite.
20358	Host type in request code does not match the host type of product or suite in template.
20359	Line item cannot have more than one product or suite.
20360	Cannot activate short-code: device "{0}" is obsolete.
20361	Line item expiration date is missing.
20362	Not a valid license template: publisher identity is missing.
20363	toRequired=Sold to organization is required. Please provide a value.
20364	Expiration date cannot be after license template expiration date.

Error Code	Description
20365	License model does not support activation on virtual devices.
20366	Requested copies cannot be less than previously requested count {0}.
20367	No orderables found for selected line item.
20368	Selected line item does not have enough copies remaining to generate license.
20369	Not a valid template: expiration date is missing.
20370	Line item "{0}" must have embedded license model.
20371	Not a valid short-code request.
20372	Device "{0}" does not have any host type associated with it.
20373	The specified host ID type is not supported by the VCG. Update your VCG and create a new license generator configuration with the VCG version set.
20374	Requested copies cannot be more than 1 for uncounted license model.
20375	Short response code too long. Maximum length is 2000 characters.
20376	Not a valid short request code.
20377	Cannot activate short-code: device "{0}" is not active.
20378	Cannot generate response: license template has expired.
20379	Line item "{0}" not supported on virtual device(s).
20383	Please select a line item.
20384	Please enter a valid number of requested copies for line item.
20385	Selected line item has expired.
20386	Not a valid device: host is missing.
20387	Error occurred when trying to delete: keyboard activation does not exist.
20388	Template does not contain product or suite.
20389	Please enter a valid activation ID.
20390	Unable to validate short code: machine types of the device and the license template do not match.
20391	Product or suite has date-based version.
20392	Cannot find line item "{0}".
20393	Product or suite in template does not have host type associated with it.
20395	Short-code request is missing.
20396	Not a valid short code: {0}.
20397	Not a valid feature activation summary: Feature ID is missing.
20398	Feature activation summary cannot be empty.
20399	Server ID cannot be null.
20401	Line item {0} has mismatched sold-to for device {1}.
20402	Not a valid feature activation summary: Activated count "{0}" is not valid for feature "{1}".
20403	Cannot find activation summary: Feature ID is missing.
20404	Cannot save activation summary: Feature ID is missing.
20405	Device "{0}" cannot switch from buffer license to trusted storage based license.
20406	Device "{0}" cannot switch from trusted storage based license to buffer license.

Error Code	Description
20407	Buffer response is not supported on a server device.
20408	At least one rightsID is required to generate buffer license on a device.
20409	The email address {0} is not valid.
20410	Device does not have a response to restore to.
20411	RightsID count specified is not valid. Count value must be a positive integer.
20412	Device request has host that is not valid.
20413	Cannot switch between buffer and trusted storage based response.
20414	Existing device is not a served device.
20415	Cannot generate buffer response for a served client device.
20416	Cannot decrease product copies. Device has buffer license.
20417	Cannot generate response for an expired or dropped client.
20418	Unexpected organization id {0} found, please select any organization from the provided list.
20419	Request includes the Activation ID {0} which is a {1} and another Activation ID {2} which is a {3}. Counted and uncounted line items cannot be activated together.
20420	Request includes the Activation ID {0} which is a {1} and another Activation ID {2} which is a {3} . Line items cannot have different license model types.

Appendix E

Supported Hostid Types

The following supported FlexNet Publisher host ID types can be differentiated by the Vendor Certificate Generator (VCG):

Hostid Type	Description
ANY	Special FlexNet Publisher Licensing Toolkit host ID ANY. Allows the license to run on any machine.
DEMO	Special FlexNet Publisher Licensing Toolkit host ID DEMO: Can be used only for node-locked licenses, never for Server host IDs. Allows the license to run on any machine.
Ethernet	Ethernet address and also called MAC address. This is the hardware address from the Network Interface Card (NIC). This value consists of 12 hexadecimal digits (a 48-bit number).
Long	Used only with Solaris machines. It is the Solaris 32-bit hardware machine ID. This value consists of 8 hexadecimal digits (a 32-bit number).
User	User name: Enter as USER=user_name. The FlexNet C/C++ Licensing toolkit uses the login name. FlexNet Publisher Licensing Toolkit for Java uses the username environment variable.
Host Name	This can a simple host name or a fully qualified DNS name. Host name: Enter as HOSTNAME=host_name.
Display	On Unix, this is the X display name. On Windows, it is the display adapter. Display name: Enter as DISPLAY=display_name.
Routable IP Address	This setting allows you to define the host ID as a routable, public IP addresses. Use the format, INTERNET=w.x.y.z, where each letter represents an octet with a decimal value between 0 and 255. FlexNet Operations validates that the address is not among the private, non-routable sets. The routable address cannot be an address in the primary three reserved, private network address ranges: 10.0.0.0-10.255.255.255, 172.16.0.0-172.31.255.255, and 192.168.0.0-192.168.255.255. In addition, the address cannot be 127.0.0.1 (localhost). Note: FlexNet Operations's IP address validation can be disabled in the Administrative Console's system configuration settings and in the VCG.
Routable IP Address with Wildcards	This setting allows you to define the host ID as a routable, public IP addresses with a wildcard (*) as one or more octets. Use the format, INTERNET=w.x.y.z, where each letter represents an octet with a decimal value between 0 and 255. FlexNet Operations validates that the address is not among the private, non-routable sets. The routable address cannot be an address in the primary three reserved, private network address ranges: 10.0.0.0-10.255.255.255, 172.16.0.0-172.31.255.255, and 192.168.0.0-192.168.255.255. In addition, the address cannot be 127.0.0.1 (localhost). The wildcard rules for routable IP addresses also apply. For an IP address of w.x.y.z • If w is less than or equal to 127, then x, y, and z can be wildcards. • If w is between 127 and 192, then only y and z can be wildcards. • If w is greater than or equal to 192, then only z can be a wildcard. Note: FlexNet Operations's IP address validation can be disabled in the Administrative Console's system configuration settings and in the VCG.

Hostid Type	Description
FLEXid	This is for Windows, Mac, Linux only. Locks the software to a PC with a hardware dongle (hardware key) with serial number id_string. The format of this identifier depends on the brand of dongle used. Enter as FLEXID=id_string.
Composite	A composite host ID combines multiple FlexNet Publisher Licensing Toolkit host IDs together to provide a more secure host ID. For instance, you can use USER and Disk SN to identify a host ID. A composite host ID is a hashed 12-character hexadecimal value formed by combining the values of multiple simple host IDs types. If you select the Composite format, you must provide your end user with a program to calculate the Composite host ID for the host machine. Enter as COMPOSITE=comp_id. For more information about using Composite host IDs, see the FlexNet Publisher Licensing Toolkit Toolkit documentation.
Vendor Defined	Pass the vendor-defined host as <code>VENDOR_DEFINED=<vendor_defined_hostid></code>, where <code><vendor_defined_hostid></code> is formed as <code><name>=<string></code>. Hence a vendor defined hostid takes the form of <code>VENDOR_DEFINED=<name>=<string></code>. For example, where TWVDH=2 is the vendor defined hostid as it would appear in a license file, in the web service request you must pass <code>VENDOR_DEFINED=TWVDH=2</code> A vendor-defined hostid is returned the same way in a query response: <pre> ... <nodeIds> <nodeId>VENDOR_DEFINED=TWVDH=2</nodeId> </nodeIds> ... </pre> Note: If you specify a vendor-defined host ID, you must build your VCG to support your vendor-defined host ID type. Note: You can use a completely new entity to validate the host. The host ID for this entity is defined in Operations as <code><name>=<string></code>, where <code><name></code> is the entity name you want to use. You must define a list of allowable name values in the VCG. You must also create the code in the application or vendor daemon that obtains the string value.

Hostid Type	Description
Virtualization-Aware	Virtualization-aware host ID prefixes define server host ID types that permit or restrict the kind of virtual environments, if any, on which a license server can run. These new host ID types begin with PHY_, VM_, VMW_, HPV_, or LMB_. - Use the PHY_ prefix with ETHER, INTERNET, HOSTNAME, DISPLAY, USER, DISK_SERIAL_NUMBER, or FLEXID to restrict license operation to physical machines. - Use the VM_ prefix with UUID to restrict license server operation to any supported virtual environments: Xen, Hyper-V, and VMWare. VM_UUID supersedes VMW_UUID and HPV_UUID. - Use the VMW_ prefix with UUID, ETHER, INTERNET, and HOSTNAME to restrict license server operation to VMWare Workstation and ESX Server virtualizations. VMW_UUID is still supported, but has been superseded by VM_UUID. - Use the HPV_ prefix with UUID, ETHER, INTERNET, HOSTNAME, and VSN to restrict license server operation to Microsoft Hyper-V virtualizations. HPV_UUID is still supported, but has been superseded by VM_UUID. - Use the LMB_ prefix with ETHER, INTERNET, HOSTNAME, or FLEXID (9 or 10) to permit license server operation with bare metal binding. This permits operation in a virtualization but binds the license to the physical host machine. Note: VMW_HOSTNAME, HPV_HOSTNAME, and LMB_HOSTNAME host IDs cannot contain wildcards (asterisks). Note: When used with three-server redundancy, virtualization-aware host ID types for all servers in the triad must use the same prefix: PHY_, VW_, VMW_, HPV_, or LMB_.
Cloud-Specific	Cloud-specific hostid types permit the kinds of cloud-hosted environments, if any, in which the product can operate. There are two server hostid type options and two nodelocked hostid type options: - AMZN Routable EIP Address and AMZN Routable EIP Address with Wildcards—The AMZN_EIP hostid types permit license server operation in Amazon EC2 (public cloud) environments with binding to an elastic IP address. Routable and Routable with Wildcard addresses are supported. Non-routable addresses are not supported. This hostid type cannot be used with three-server redundancy. - AMZN AMI Template ID and AMZN IID Instance ID—The AMZN_AMI and AMZN_IID hostid types permit nodelocked licensing in Amazon EC2 environments with binding to the AMI template ID or AMI instance ID, respectively. Template ID binding is typically used in virtual appliance scenarios. Instance ID binding supports more generic cloud-based usage such as running software in the public cloud or in a virtual private cloud.

Index

A

accountIdentifierType	70, 476, 879, 1145	addEntitlementLineItemData Type	479
accountPKType	70, 476, 879, 1146	addGroups	1257
accountType	1011	addGroupsRequest	1289
accountTypeList	879	addGroupsResponse	1290
acpiGenerationIdLicensePolicy Data Type	477	addonLineItemDataDataType	1373
activatableItemDetailType	477	addOnlyEntitlementLineItem RequestType	480
activateLicensesRequest	1017	addOnlyEntitlementLineItem ResponseType	481
activateLicensesRequestType	880	addOrganizations	1318
activateLicensesResponse	1019	addOrganizationsRequest	1334
activateLicensesResponseType	880	addOrganizationsResponse	1335
activateShortCode	835	addressDataType	71, 483, 884, 1146
activateShortCodeRequest	1020	addUsers	1258
activateShortCodeRequestType	881	addUsersRequest	1291
activateShortCodeResponse	1021	addUsersResponse	1292
activateShortCodeResponse Type	882	addWebRegKeyDataType	483
activationDataType	883	addWebRegKeyRequest	707
activationIdOverDraftMapType	883	addWebRegKeyRequestType	484
activationIdsListType	883	addWebRegKeyResponse	708
ActivationType	1011	addWebRegKeyResponseType	484
ActualSHA256 [type File]	1543	advancedFmtLCResponseData ListType	884
addedEntitlementLineItemData ListType	478	advancedFmtLCResponseData Type	885
addedEntitlementLineItemData Type	479	advancedFulfillmentLCData Type	885
		advancedFulfillmentLCInfo Type	886

advancedFulfillmentLCListType 887
pe

advancedFulfillmentLCRequestType 887

advancedFulfillmentLCResponseType 888

advancedReinstallPolicyType 487
e

Agreement 1505

AgreementCountResult 1506

AgreementQueryParameters 1506

AgreementQueryResponseDataType 1507

AgreementQueryResults 1507

AgreementTransactionResult 1508

AllGroupsResponse 1267

AllOrganizationResponse 1323

AllUsersResponse 1268

Ascending [type DownloadPackageSortBy] 1544

assignDownloadPackageToProduct 1486, 1544

assignDownloadPackageToProductResponse 1545

assignFileToDownloadPackage 1486

assignProductCategoriesToOrg 7

assignProductCategoriesToOrgRequest 277

assignProductCategoriesToOrgResponse 278

assignProductCategoriesToUser 8

assignProductCategoriesToUserRequest 279

assignProductCategoriesToUserResponse 280

AttributeDescriptor 1508

attributeDescriptorDataType 71, 488, 889, 1147, 1374

attributeDescriptorType 72, 488, 890, 1147, 1375

attributeMetaDescriptorDataType 72, 489, 890

attributeMetaDescriptorType 72, 489, 891

Availability [type MultipleDownloadPackagesQueryParameters] 1545

B

BatchSize [element getDownloadPackageInProductQuery] 1546

BatchSize [element getMultipleDownloadPackagesQuery] 1546

bulkEntitlementDataType 490

bulkEntitlementPropertiesType 493

bulkEntitlementResponseConfigurationRequestType 495

C

cancelLicensePolicyDataType 497

capabilityRequestType 1375

capabilityResponseDataType 1376

categoryAttributeDataType 73

categoryAttributesDataType 74

changeGroupStatus 1258

changeGroupStatusRequest 1293

changeGroupStatusResponse 1293

changeUserStatus 1259

changeUserStatusRequest 1294

changeUserStatusResponse	1295	countOrganizationsResponse	1337
channelPartnerDataListType	497, 1376	CountOrganizationsResponse	1325
channelPartnerDataType	498, 1376	CountResponseDataType	1508
ClientSecurityCredentials Class Source	1616	countUsers	1259
cloneSuspect	1377	CountUsersQuery	1269
CollectionOperationAccount Type	1012	countUsersRequest	1296
CollectionOperationType	271	countUsersResponse	1297
commonBatchDataSetType	891	CountUsersResponse	1269
Complex Types	62, 468, 873, 1143, 1267 1323, 1351, 1370, 1504, 1603	createAgreement	1487, 1547
consolidatedFulfillmentsQPT ype	892	createAgreementResponse	1547
consolidatedLicenseDataType	895	createBulkEntitlement	415
consolidatedLicenseIdListTy pe	896	createBulkEntitlementDataT ype	498
consolidatedResponseDataT ype	896	createBulkEntitlementReque st	710
consolidateFulfillments	836	createBulkEntitlementReque stType	502
consolidateFulfillmentsRequ est	1022	createBulkEntitlementRespo nse	712
consolidateFulfillmentsRequ estType	897	createBulkEntitlementRespo nseType	502
consolidateFulfillmentsResp onse	1023	createChildLineItemFulfillme nt	837
consolidateFulfillmentsResp onseType	897	createChildLineItemFulfillme ntDataType	900
Contact	1324	createChildLineItemFulfillme ntRequest	1025
correlationDataType	74, 498, 898	createChildLineItemFulfillme ntRequestType	901
countDataSetType	899	createChildLineItemFulfillme ntResponse	1026
countDataType	899	createChildLineItemFulfillme ntResponseType	902
countForHostsType	899	createdBulkEntitlementData ListType	503
countOrganizations	1319	createdBulkEntitlementData Type	504
CountOrganizationsQuery	1324		
countOrganizationsRequest	1336		

createdChildLIFmtResponse 903 DataType	createdPartNumberDataTyp 78 e
createdChildLIFulfillmentDat 903 aType	createdProductCategoryDat 78 aListType
createdChildLIFulfillmentInfo 904 Type	createdProductCategoryDat 78 aType
createdDeviceDataListType 1378	createdProductDataListType 79
createdEntitlementLifeCycle 504 DataListType	createdProductDataType 79
createdEntitlementLifeCycle 505 DataType	createdRenewEntitlementDa 505 taListType
createDevice 1359	createdRenewEntitlementDa 505 taType
createDeviceIdentifier 1378	createdSimpleEntitlementDa 506 taListType
createDeviceRequest 1443	createdSimpleEntitlementDa 506 taType
createDeviceResponse 1445	createdUniformSuiteDataList 80 Type
createDevRequestType 1379	createdUniformSuiteDataTyp80 e
createDevResponseType 1380	createdUserDataListType 1148
createdFeatureBundleDataLi 75 stType	createEntitlementLineItem 416
createdFeatureDataListType 75	createEntitlementLineItemDa507 taType
createdFeatureDataType 75	createEntitlementLineItemRe714 quest
createdFulfillmentDataListTy 904 pe	createEntitlementLineItemRe716 sponse
createdFulfillmentDataType 905	createFeature 9
createdMaintenanceDataType76	createFeatureBundle 10
createdMaintenanceDataList 76 Type	createFeatureBundleDataTy 80 pe
createdOrganizationDataList 1148 Type	createFeatureBundleReques282 t
createdOrgDataListType 77	createFeatureBundleReques81 tType
createdOrgDataType 77	createFeatureBundleRespon283 se
createDownloadPackage 1488, 1548	createFeatureBundleRespon81 seType
createDownloadPackageRe 1550 sponse	
createdPartNumberDataList 77 Type	

createFeatureRequest	285	createMaintenanceResponse	289
createFeatureRequestType	82	createMaintenanceResponseType	86
createFeatureResponse	286	createManufacturer	1489, 1552
createFeatureResponseType	83	createManufacturerResponse	1552
createFile	1488	createOrganization	12, 1126
createFulfillmentDataType	905	createOrganizationRequest	291
createFulfillmentRequestType	907	createOrganizationRequestType	87
createFulfillmentResponseType	907	createOrganizationResponse	292
createLicense	838	createOrganizationResponseType	87
createLicenseRequest	1028	createOrgRequest	1209
createLicenseResponse	1029	createOrgRequestType	1148
createLicensesAsBatch	839	createOrgResponse	1210
createLicensesAsBatchAndConsolidate	841	createOrgResponseType	1149
createLicensesAsBatchAndConsolidateRequest	1031	CreateOrUpdateOperationAccountType	1012
createLicensesAsBatchAndConsolidateResponse	1032	CreateOrUpdateOperationType	701, 1012
createLicensesAsBatchRequest	1034	createPartNumber	13
createLicensesAsBatchRequestType	909	createPartNumberDataType	88
createLicensesAsBatchResponse	1035	createPartNumberRequest	293
createLicensesAsBatchResponseDataType	909	createPartNumberRequestType	89
createLicensesAsBatchResponseType	909	createPartNumberResponse	294
createMaintenance	11	createPartNumberResponse89Type	
createMaintenanceDataType	84	createProduct	16
createMaintenanceLineItemDataType	510	createProductCategory	17
createMaintenanceRequest	288	createProductCategoryDataType	92
createMaintenanceRequestType	85	createProductCategoryRequest	296

createProductCategoryRequestType	92	createUniformSuiteResponse	306
createProductCategoryResponse	297	createUniformSuiteResponseType	103
createProductCategoryResponseType	93	createUser	1126
createProductDataType	94	createUserDataTypes	1150
createProductRelationship	18	createUserOrganizationRolesListType	1152
createProductRelationshipRequest	299	createUserOrganizationsListType	1152
createProductRelationshipRequestType	97	createUserOrganizationType	1152
createProductRelationshipResponse	300	createUserRequest	1212
createProductRelationshipResponseType	98	createUserRequestType	1153
createProductRequest	302	createUserResponse	1214
createProductRequestType	99	createUserResponseType	1154
createProductResponse	303	createWebRegKey	421
createProductResponseType	100	CreationDateEnd [type MultipleDownloadPackagesQueryParameters]	1553
createShortCodeDataType	911	CreationDateStart [type MultipleDownloadPackagesQueryParameters]	1553
createSimpleEntitlement	418	CustomAttribute	1270
createSimpleEntitlementDataType	511	customAttributeDescriptorDataTypes	105, 1380
createSimpleEntitlementRequest	718	customAttributeDescriptorTypes	105, 515, 1381
createSimpleEntitlementRequestType	512	CustomAttributeMetadata	1271
createSimpleEntitlementResponse	720	customAttributeQueryTypes	105, 516, 911, 1381
createSimpleEntitlementResponseType	513	customAttributesQueryListTypes	107, 517, 913, 1383
createUniformSuite	19	customAttrMetadataRequest	1298
createUniformSuiteDataType	101	customAttrMetadataResponse	1298
createUniformSuiteRequest	305	CustomAttrMetadataResponse	1271
createUniformSuiteRequestType	103	CustomHostIDType	913

D

DateQueryType	1383	deleteFailAddonDataType	1387
DateTimeQueryType	107, 1155, 1384	deleteFeature	21
decrementAddonLineItems	1360	deleteFeatureBundle	21
decrementAddonLineItemsRequest	1446	deleteFeatureBundleDataType	108
decrementAddonLineItemsResponse	1447	deleteFeatureBundleRequest	308
deleteAddonLineItemDataTypes	1384	deleteFeatureBundleRequestType	108
deleteAddonLineItems	1360	deleteFeatureBundleResponse	309
deleteAddonLineItemsRequest	1448	deleteFeatureBundleResponseType	109
deleteAddonLineItemsRequestType	1385	deleteFeatureDataType	110
deleteAddonLineItemsResponse	1449	deleteFeatureRequest	310
deleteAddonLineItemsResponseType	1385	deleteFeatureRequestType	111
deleteDevice	1361	deleteFeatureResponse	311
deleteDeviceRequest	1451	deleteFeatureResponseType	111
deleteDeviceRequestType	1386	deleteFile	1490
deleteDeviceResponse	1451	deleteLineItemDataType	1388
deleteDeviceResponseType	1386	deleteLineItemIdentifier	1388
deleteEntitlement	423	deleteMaintenance	22
deleteEntitlementDataType	518	deleteMaintenanceDataType	112
deleteEntitlementLineItem	424	deleteMaintenanceLineItem	425
deleteEntitlementRequest	724	deleteMaintenanceLineItemDataType	520
deleteEntitlementRequestType	518	deleteMaintenanceLineItemRequest	726
deleteEntitlementResponse	724	deleteMaintenanceLineItemRequestType	520
deleteEntitlementResponseType	519	deleteMaintenanceLineItemResponse	726
deleteFailAddonDataListType	1387	deleteMaintenanceLineItemResponseType	521
		deleteMaintenanceRequest	313

deleteMaintenanceRequestType	113	deleteProductDataType	118
deleteMaintenanceResponse	314	deleteProductRelationship	27
deleteMaintenanceResponseType	113	deleteProductRelationshipRequest	319
deleteOnholdFulfillments	842	deleteProductRelationshipRequestType	118
deleteOnholdFulfillmentsRequest	1038	deleteProductRelationshipRequestResponse	320
deleteOnholdFulfillmentsRequestType	914	deleteProductRelationshipRequestResponseType	119
deleteOnholdFulfillmentsResponse	1039	deleteProductRequest	322
deleteOnholdFulfillmentsResponseType	914	deleteProductRequestType	120
deleteOrganization	1127	deleteProductResponse	322
DeleteOrganizationList	1326	deleteProductResponseType	121
deleteOrganizationRequest	1216	deleteUniformSuite	28
deleteOrganizationRequestType	1156	deleteUniformSuiteDataType	122
deleteOrganizationResponse	1217	deleteUniformSuiteRequest	324
deleteOrganizationResponseType	1156	deleteUniformSuiteRequestType	123
deleteOrganizations	1319	deleteUniformSuiteResponse	325
deleteOrganizationsRequest	1338	deleteUniformSuiteResponseType	123
deleteOrganizationsResponse	1339	deleteUser	1128
deleteOrgDataType	1157	DeleteUserList	1272
deletePartNumber	23	deleteUserRequest	1218
deletePartNumberDataType	114	deleteUserRequestType	1158
deletePartNumberRequest	316	deleteUserResponse	1219
deletePartNumberRequestType	115	deleteUserResponseType	1158
deletePartNumberResponse	316	deleteUsers	1260
deletePartNumberResponseType	115	deleteUsersRequest	1300
deleteProduct	26	deleteUsersResponse	1301
		deleteWebRegKey	426
		deleteWebRegKeyRequest	728

deleteWebRegKeyRequestType	522	DownloadPackageCountResult [element getMultipleDownloadPackagesCountResponse]	1556
deleteWebRegKeyResponse	729	DownloadPackageDescription [type DownloadPackageQueryParameters]	1557
deleteWebRegKeyResponse522Type		DownloadPackageDescription [type MultipleDownloadPackagesQueryParameters]	1558
deviceDataType	1388	DownloadPackageDisassociationResult	1512
deviceIdIdentifier	1389	DownloadPackageID [type DownloadPackageSortOrderType]	1558
DeviceMachineTypeQueryType	1390	DownloadPackageID [type MultipleDownloadPackagesQueryParameters]	1559
deviceQueryDataType	1391	DownloadPackageIDType	1513
DeviceServedStateQueryType	1393	DownloadPackageInProductCountResult	1513
deviceServedStatusType	1441	DownloadPackageInProductCountResult [element getDownloadPackageInProductCountResponse]	1559
DeviceStateQueryType	1394	DownloadPackageInProductQueryParameters	1514
deviceTypeList	1395	DownloadPackageInProductQueryParameters [element getDownloadPackageInProductCount]	1560
Dictionary	915	DownloadPackageInProductQueryParameters [element getDownloadPackageInProductQuery]	1561
DictionaryEntriesCollection	916	DownloadPackageInProductQueryResponseData	1514
dictionaryEntry	1395	DownloadPackageInProductQueryResults	1515
DictionaryEntry	916	DownloadPackageInProductQueryResults [element getDownloadPackageInProductQueryResponse]	1561
dictionaryType	1396	DownloadPackageQueryParameters	1515
DisplayGroup	1273		
DisplayOrganization	1326		
DisplayUser	1273		
DomainGroup	1274		
DomainUser	1275		
DownloadPackage	1509		
DownloadPackage [type DownloadPackageResult]	1554		
DownloadPackageAlternateLanguage	1511		
DownloadPackageAssociationResult	1512		
DownloadPackageCountResult	1512		

DownloadPackageQueryResponseDataType 1516	Elements	272, 702, 1014, 1208, 1288 1334, 1353, 1442, 1540, 1606
DownloadPackageQueryResults 1517	emailActivatableItem	428
DownloadPackageResult 1517	emailActivatableItemRequest	731
DownloadPackageResult [type DownloadPackageInProductQueryResponseDataType] 1562	emailActivatableItemRequestType	526
DownloadPackageResult [type DownloadPackageQueryResponseDataType] 1563	emailActivatableItemResponse	732
DownloadPackageResult [type MultipleDownloadPackagesQueryResponseDataType] 1563	emailActivatableItemResponseType	527
DownloadPackageSortBy 1518	emailConsolidatedLicenses	843
DownloadPackageSortBy 1518	emailConsolidatedLicensesRequest	1041
DownloadPackageSortKey 1538	emailConsolidatedLicensesRequestType	918
DownloadPackageSortOrder [type FileResult] 1564	emailConsolidatedLicensesResponse	1041
DownloadPackageSortOrderType 1519	emailConsolidatedLicensesResponseType	919
DownloadPackageSystemID [type DownloadPackageResult] 1565	emailContactListType	126, 528, 919
DownloadPackageTransactionResult 1519	emailEntitlement	429
DownloadPackageVersion [type DownloadPackageQueryParameters] 1565	emailEntitlementRequest	734
DownloadPackageVersion [type MultipleDownloadPackagesQueryParameters] 1566	emailEntitlementRequestType	528
DownloadPackagingService 1484	emailEntitlementResponse	735
dupGroupDataType 124	emailEntitlementResponseType	529
duplicateFulfillmentRecordListDataType 917	emailLicense	844
DurationType 125, 525, 917, 1396	emailLicenseRequest	1043
	emailLicenseRequestType	920
	emailLicenseResponse	1044
	emailLicenseResponseType	921
	emergencyFulfillmentDataType	922
	emergencyFulfillmentRequestType	922
	emergencyFulfillmentResponseDataType	923

E

emergencyFulfillmentResponseType	923
emergencyLicense	845
emergencyLicenseRequest	1045
emergencyLicenseResponse	1046
emergencyResponseDataType	924
EmptyRequest	1276, 1327
entCustomAttributeQueryType	530
entCustomAttributesQueryListType	531
entitledProductDataListType	126, 531, 924, 1397
entitledProductDataType	126, 531, 925, 1397
entitlementDataType	532
entitlementIdentifierType	127, 532, 925
entitlementLifeCycleDataType	533
EntitlementLifeCycleRequestType	533
EntitlementLifeCycleResponseType	534
entitlementLineItemDataType	535
entitlementLineItemIdentifierType	127, 539, 925
entitlementLineItemPropertiesType	539
entitlementLineItemResponseConfigRequestType	543
entitlementListType	544
EntitlementOrderService	409
entitlementStateChangeDataType	545
entitlementStateChangeListType	545
entitlementStateDataType	545

Error Codes	1618
EsdWebService	1609
ExpectedChecksum [type File]	1566
expirationTermsDataType	546
ExportComplianceClassification	1520
extraActivationDataType	546

F

failedAddEntitlementLineItemDataListType	547
failedAddEntitlementLineItemDataType	547
failedAddWebRegKeyDataListType	547
failedAddWebRegKeyDataType	548
failedAdvancedFmtLCDataType	926
failedAdvancedFmtLCResponseDataType	926
failedBulkEntitlementDataListType	548
failedBulkEntitlementDataType	549
failedCapabilityResponseDataType	1398
failedChildLIFmtResponseDataType	927
failedChildLIFulfillmentDataType	927
failedCreateDevDataListType	1398
failedCreateDeviceDataType	1398
failedCreateOrgDataListType	1159
failedCreateOrgDataType	1160

failedCreateUserDataListType 1160 e	failedDeleteUserDataListType 1162 e
failedCreateUserDataType 1160	failedDeleteUserDataType 1162
failedDeleteDevDataListType 1399 e	failedDeleteWebRegKeyDat 551 aType
failedDeleteDevDataType 1399	failedDeleteWebRegKeyList 551 Type
failedDeleteEntitlementData 549 ListType	failedEmergencyResponseD 927 ataType
failedDeleteEntitlementData 549 Type	failedEmergencyResponseli 928 stDataType
failedDeleteFeatureBundleD 128 ataListType	failedEntitlementLifeCycleDa 551 taListType
failedDeleteFeatureBundleD 128 ataType	failedEntitlementLifeCycleDa 552 taType
failedDeleteFeatureDataList 128 Type	failedEntitlementStateDataLi 552 stType
failedDeleteFeatureDataType 129 e	failedEntitlementStateDataT 552 ype
failedDeleteMaintenanceDat 129 aListType	failedFeatureBundleDataList 132 Type
failedDeleteMaintenanceDat 130 aType	failedFeatureBundleDataType 132 e
failedDeleteMaintenanceLin 550 eltemDataListType	failedFeatureBundleStateDat 133 aListType
failedDeleteMaintenanceLin 550 eltemDataType	failedFeatureBundleStateDat 133 aType
failedDeleteOrgDataListType 1161	failedFeatureDataListType 134
failedDeleteOrgDataType 1161	failedFeatureDataType 134
failedDeletePartNumberData 130 ListType	failedFeatureStateDataListT 134 ype
failedDeletePartNumberData 130 Type	failedFeatureStateDataType 135
failedDeleteProductDataList 131 Type	failedFulfillmentDataListType 928
failedDeleteProductDataType 131 e	failedFulfillmentDataType 928
failedDeleteUniformSuiteDat 131 aListType	failedGenerateCapabilityRes 1399 ponseDataType
failedDeleteUniformSuiteDat 132 aType	failedGeneratePrebuiltLicens 1400 eDataListType
	failedGeneratePrebuiltLicens 1400 eDataType

failedGetDevicesDataType	1400	failedOnholdFulfillmentDataT929 ype	
failedIdDataType	553	failedOnholdFulfillmentListTy929 pe	
failedLineItemStateDataListT553 ype		failedOrgDataListType	137
failedLineItemStateDataType554		failedOrgDataType	137
failedLinkMaintenanceLineIt 554 emDataType		failedPartNumberDataListTy 137 pe	
failedLinkMaintenanceLineIt 554 emListType		failedPartNumberDataType	138
failedLinkOrgDataListType	1162	failedProductCategoryDataLi 138 stType	
failedLinkOrgDataType	1163	failedProductCategoryDataT 139 ype	
failedMaintenanceDataListT 135 ype		failedProductDataListType	139
failedMaintenanceDataType	135	failedProductDataType	139
failedMaintenanceLineItemS 555 tateDataListType		failedProductRelationshipDa 140 taListType	
failedMaintenanceLineItemS 555 tateDataType		failedProductRelationshipDa 140 taType	
failedMaintenanceStateData 136 ListType		failedProductStateDataListT 140 ype	
failedMaintenanceStateData 136 Type		failedProductStateDataType	141
failedMapEntitlementsToUse 555 rDataListType		failedPublisherErrorResponse 930 eDataType	
failedMatchingBulkEntDataT 556 ype		failedPublisherErrorResponse 930 elistDataType	
failedMatchingBulkEntsListT 556 ype		failedRehostResponseDataT 930 ype	
failedMatchingLineItemData 557 Type		failedRehostResponselistDat931 aType	
failedMatchingLineItemsList 557 Type		failedRelateOrganizationsDa 1163 taListType	
failedMoveDeviceDataType	1401	failedRelateOrganizationsDa 1163 taType	
failedMoveDeviceListDataTy 1401 pe		failedRemoveEntitlementLin 557 eltemDataListType	
failedObsoleteHostDataType	1401	failedRemoveEntitlementLin 558 eltemDataType	
failedObsoleteHostListDataT 1402 ype		failedRenewEntitlementData 558 ListType	

failedRenewEntitlementData 558 Type	failedTransferHostDataType 935
failedRepairResponseDataT 931 ype	failedTransferHostListDataT 936 ype
failedRepairResponseListDat 931 aType	failedTransferLineItemDataT 562 ype
failedRepairShortCodeDataT932 ype	failedTransferLineItemListTy 562 pe
failedReturnHostDataType 1402	failedUniformSuiteDataListT 141 ype
failedReturnHostListDataTyp 1402 e	failedUniformSuiteDataType 142
failedReturnResponseDataT 932 ype	failedUniformSuiteStateData 142 ListType
failedReturnResponseListDat 933 aType	failedUniformSuiteStateData 142 Type
failedReturnShortCodeDataT933 ype	failedUnlinkMaintenanceLine 563 ItemDataType
failedSetLicenseOnholdFulfill933 mentDataType	failedUnlinkMaintenanceLine 563 ItemListType
failedSetLicenseOnholdFulfill934 mentListType	failedUpdateBulkEntitlement 563 DataListType
failedShortCodeDataType 934	failedUpdateBulkEntitlement 564 DataType
failedSimpleEntitlementData 559 ListType	failedUpdateDevDataListTyp 1403 e
failedSimpleEntitlementData 559 Type	failedUpdateDeviceDataType 1403 e
failedSplitBulkEntitlementDat560 aType	failedUpdateEntitlementLineI 564 temDataListType
failedSplitBulkEntitlementList560 Type	failedUpdateEntitlementLineI 565 temDataType
failedSplitLineItemDataType 560	failedUpdateFeatureBundle 143 DataListType
failedSplitLineItemListType 561	failedUpdateFeatureBundle 143 DataType
failedStopGapResponseDat 935 aType	failedUpdateFeatureDataList 143 Type
failedStopGapResponseListD 935 ataType	failedUpdateFeatureDataTyp 144 e
failedTransferEntitlementDat 561 aType	failedUpdateMaintenanceDa 144 taListType
failedTransferEntitlementList 562 Type	

failedUpdateMaintenanceDataListType 145	featureBundleStateChangeListType 1567
failedUpdateOrgDataListType 1164	featureBundleStateDataType 151
failedUpdateOrgDataType 1164	featureDataDataType 1404
failedUpdateProductDataListType 145	featureDataType 152
failedUpdateProductDataType 145	featureIdentifierType 152, 567, 937, 1166
failedUpdateProductRelationshipDataListType 146	featureIdentifierWithCountDataListType 153
failedUpdateProductRelationshipDataType 146	featureIds 1404
failedUpdateSimpleEntitlementDataListType 565	featureListType 568
failedUpdateSimpleEntitlementDataType 565	featureOverrideParamsType 153
failedUpdateUniformSuiteDataListType 147	featurePKType 937
failedUpdateUniformSuiteDataType 147	featureQueryDataType 154
failedUpdateUserDataListType 1164	featureQueryParametersType 155
failedUpdateUserDataTypes 1165	featuresListType 157
failedUpdateUserRolesDataListType 1165	featureStateChangeDataType 568
failedUpdateUserRolesDataType 1165	featureStateChangeListType 569
featureBundleIdentifierType 147, 566, 936	featureStateDataType 157
featureBundleIdentifierWithCountDataType 148	File 1520
featureBundleListType 566	File [type FileResult] 1567
featureBundlePKType 936	FileAlternateLanguage 1522
featureBundleQueryDataType 148	FileCountResult 1522
featureBundleQueryParametersType 149	FileDeleteResult 1523
featureBundlesListType 151	FileIDType 1523
featureBundleStateChangeDataListType 567	FileInDownloadPackageType 1524
	FileQueryParameters 1524
	FileQueryResponseDataType 1525
	FileQueryResults 1526
	FileResult 1526
	FileResult [type FileQueryResponseDataType] 1568

FileStatusType	1538	generateCapabilityResponse 1405 DataType
FileTransactionResult	1527	
FileUploadResult	1527	generateCapabilityResponse 1405 Dictionary
findOrganizations	1320	generateCapabilityResponse 1405 DictionaryEntry
FindOrganizationsQuery	1327	
findOrganizationsRequest	1339	generateCapabilityResponse 1452 Request
findOrganizationsResponse	1340	generateCapabilityResponse 1406 RequestType
FindOrganizationsResponse	1328	
findUsers	1261	generateCapabilityResponse 1454 Response
FindUsersQuery	1277	generateCapabilityResponse 1406 ResponseType
findUsersRequest	1302	
findUsersResponse	1303	generateCloneDetectionRep 1363 ort
FindUsersResponse	1278	generateCloneDetectionRep 1407, 1455 ortRequest
FlexNet Operations 2020 R1.1 On Premises SOAP Web Services Guide	1	generateCloneDetectionRep 1408, 1456 ortResponse
FlexnetAuthentication	1348	generatePrebuiltLicense 1363
fulfillmentDataType	937	generatePrebuiltLicenseDat 1408 aListType
fulfillmentHistoryDataType	939	
fulfillmentHistoryDetailsType	940	generatePrebuiltLicenseDat 1408 aType
fulfillmentHistoryRecordType	940	generatePrebuiltLicenseReq 1458 uest
fulfillmentIdentifierListType	941	
fulfillmentIdentifierType	569, 941	generatePrebuiltLicenseReq 1409 uestType
fulfillmentIdListType	942	generatePrebuiltLicenseRes 1459 ponse
fulfillmentPropertiesType	942	
fulfillmentResponseConfigR equestType	944	generatePrebuiltLicenseRes 1409 ponseType
FulfillmentSourceType	1012	getActivatableItemCount 430
fulfillmentsQueryParameters Type	946	getActivatableItemCountReq 736 uest
		getActivatableItemCountReq 569 uestType
		getActivatableItemCountRes 737 ponse

G

generateCapabilityResponse 1361

getActivatableItemCountRes 570 ponseType	getConsolidatedFulfillmentC 1050 ountResponse
getActivatableItemsQuery 431	getConsolidatedFulfillmentC 952 ountResponseType
getAgreementCount 1490, 1569	getConsolidatedFulfillments 847 Query
getAgreementCountRespon 1569 se	getConsolidatedFulfillments 1052 QueryRequest
getAgreementQuery 1491, 1570	getConsolidatedFulfillments 953 QueryRequestType
getAgreementQueryRespon 1571 se	getConsolidatedFulfillments 1053 QueryResponse
getAutoProvisionedServer 1364	getConsolidatedFulfillments 954 QueryResponseDataType
getAutoProvisionedServerR 1410, 1460 equest	getConsolidatedFulfillments 954 QueryResponseType
getAutoProvisionedServerR 1411, 1461 esponse	getDeviceCount 1364
getBulkEntitlementCount 432	getDeviceCountRequest 1462
getBulkEntitlementCountReq739 uest	getDeviceCountResponse 1463
getBulkEntitlementCountReq571 uestType	getDeviceCountResponseD 1411 ataType
getBulkEntitlementCountRes 739 ponse	getDeviceCountResponseTy 1411 pe
getBulkEntitlementCountRes572 ponseType	getDevicesCountRequestTy 1412 pe
getBulkEntitlementProperties433 Query	getDevicesParametersType 1412
getBulkEntitlementProperties741 Request	getDevicesQuery 1365
getBulkEntitlementProperties573 RequestType	getDevicesRequest 1464
getBulkEntitlementProperties742 Response	getDevicesRequestType 1419
getBulkEntitlementProperties574 ResponseType	getDevicesResponse 1468
getConsolidatedFulfillmentC 846 ount	getDevicesResponseDataTy 1421 pe
getConsolidatedFulfillmentC 1049 ountRequest	getDevicesResponseType 1421
getConsolidatedFulfillmentC 951 ountRequestType	getDownloadPackageCount 1492, 1572
	getDownloadPackageCount 1573 Response
	getDownloadPackageInProd 1492, 1573 uctCount

getDownloadPackageInProd 1574 uctCountResponse	getFeatureBundleCountReq 327 uest
getDownloadPackageInProd 1493, 1574 uctQuery	getFeatureBundleCountReq 158 uestType
getDownloadPackageInProd 1574 uctQueryResponse	getFeatureBundleCountRes 327 ponse
getDownloadPackageQuery 1494, 1575	getFeatureBundleCountRes 158 ponseType
getDownloadPackageQuery 1576 Response	getFeatureBundlesQuery 30
getEntitlementAttributesFro 434 mModel	getFeatureBundlesQueryRe 329 quest
getEntitlementAttributesReq 745 uest	getFeatureBundlesQueryRe 159 questType
getEntitlementAttributesReq 575 uestType	getFeatureBundlesQueryRe 330 sponse
getEntitlementAttributesRes 746 ponse	getFeatureBundlesQueryRe 160 sponseDataType
getEntitlementAttributesRes 576 ponseType	getFeatureBundlesQueryRe 161 sponseType
getEntitlementCount 435	getFeatureCount 31
getEntitlementCountRequest 748	getFeatureCountRequest 332
getEntitlementCountRequest 578 Type	getFeatureCountRequestTy 162 pe
getEntitlementCountRespon 749 se	getFeatureCountResponse 333
getEntitlementCountRespon 578 seType	getFeatureCountResponseT 162 ype
getEntitlementLineItemPrope 436 rtiesQuery	getFeaturesQuery 32
getEntitlementsQuery 438	getFeaturesQueryRequest 335
getExactAvailableCount 439	getFeaturesQueryRequestTy 163 pe
getExactAvailableCountReq 751 uest	getFeaturesQueryResponse 336
getExactAvailableCountReq 579 uestType	getFeaturesQueryResponse 164 DataType
getExactAvailableCountRes 751 ponse	getFeaturesQueryResponse 164 Type
getExactAvailableCountRes 580 ponseType	getFileCount 1495
getFeatureBundleCount 29	getFileQuery 1495
	getFmtAttributesForBatchAct 1055 ivationRequest

getFmtAttributesForBatchAct955 ivationRequestType	getFulfillmentPropertiesQuer 852 y
getFmtAttributesForBatchAct 1056 ivationResponse	getFulfillmentPropertiesRequ 1066 est
getFmtAttributesForBatchAct956 ivationResponseType	getFulfillmentPropertiesRequ965 estType
getFmtAttributesForBatchDa 957 taType	getFulfillmentPropertiesResp 1068 onse
getFulfillmentAttributesDataT958 ype	getFulfillmentPropertiesResp966 onseType
getFulfillmentAttributesForBa848 tchActivation	getFulfillmentsQuery 853
getFulfillmentAttributesFrom 849 Model	getFulfillmentsQueryRequest1071
getFulfillmentAttributesRequ 1058 est	getFulfillmentsQueryRequest967 Type
getFulfillmentAttributesRequ 959 estType	getFulfillmentsQueryRespon 1072 se
getFulfillmentAttributesResp 1059 onse	getFulfillmentsQueryRespon 968 seDataType
getFulfillmentAttributesResp 959 onseType	getFulfillmentsQueryRespon 969 seType
getFulfillmentCount 850	getHostAttributesDataType 970
getFulfillmentCountRequest 1061	getHostAttributesFromLicens854 eTechnology
getFulfillmentCountRequest 960 Type	getHostAttributesRequest 1074
getFulfillmentCountRespons 1061 e	getHostAttributesRequestTy 970 pe
getFulfillmentCountRespons 961 eDataType	getHostAttributesResponse 1075
getFulfillmentCountRespons 961 eType	getHostAttributesResponseT 970 ype
getFulfillmentHistory 851	getLicenseModelIdentifiers 33
getFulfillmentHistoryRequest 1063	getLicenseTechnologiesQue 34 ry
getFulfillmentHistoryRequest962 Type	getLicenseTechnologyQuery 337 Request
getFulfillmentHistoryRespon 1065 se	getLicenseTechnologyQuery 165 RequestType
getFulfillmentHistoryRespon 964 seType	getLicenseTechnologyQuery 338 Response
	getLicenseTechnologyQuery 166 ResponseType

getMaintenanceCount	35	getMatchingLineItemInfoType	584
getMaintenanceCountRequest	340	getMatchingLineItems	442
getMaintenanceCountRequestType	167	getMatchingLineItemsListType	585
getMaintenanceCountResponse	341	getMatchingLineItemsRequest	755
getMaintenanceCountResponseType	168	getMatchingLineItemsRequestType	585
getMaintenanceQuery	36	getMatchingLineItemsResponse	756
getMaintenanceQueryRequest	343	getMatchingLineItemsResponseListType	586
getMaintenanceQueryRequestType	169	getMatchingLineItemsResponseType	586
getMaintenanceQueryResponse	344	getModelIdentifiersRequest	346
getMaintenanceQueryResponseType	170	getModelIdentifiersRequestType	171
getMaintenanceQueryResponseListType	170	getModelIdentifiersResponse	347
getManufacturerCount	1496, 1576	getModelIdentifiersResponseType	172
getManufacturerCountResponse	1577	getMultipleDownloadPackagesCount	1498, 1580
getManufacturerQuery	1497, 1578	getMultipleDownloadPackagesCountResponse	1581
getManufacturerQueryResponse	1579	getMultipleDownloadPackagesQuery	1498, 1581
getMatchingBulkEntInfoType	581	getMultipleDownloadPackagesQueryResponse	1582
getMatchingBulkEnts	440	getOrganizationCount	1129
getMatchingBulkEntsListType	582	getOrganizationCountRequest	1220
getMatchingBulkEntsRequest	753	getOrganizationCountRequestType	1166
getMatchingBulkEntsRequestType	582	getOrganizationCountResponse	1221
getMatchingBulkEntsResponse	754	getOrganizationCountResponseListType	1167
getMatchingBulkEntsResponseListType	583	getOrganizationCountResponseType	1167
getMatchingBulkEntsResponseType	583		

getOrganizationsQuery	1130	getProductCategoriesReque	356
getOrganizationsQueryRequ	1223	st	
est		getProductCategoriesReque	179
getOrganizationsQueryRequ	1168	stType	
estType		getProductCategoriesRespo	356
getOrganizationsQueryResp	1224	nse	
onse		getProductCategoriesRespo	180
getOrganizationsQueryResp	1169	nseDataType	
onseDataType		getProductCategoriesRespo	180
getOrganizationsQueryResp	1169	nseType	
onseType		getProductCount	41
getParentOrganizations	1131	getProductCountRequest	358
getParentOrganizationsReq	1225	getProductCountRequestTy	181
uest		pe	
getParentOrganizationsReq	1170	getProductCountResponse	359
uestType		getProductCountResponseT	182
getParentOrganizationsResp	1226	ype	
onse		getProductRelationships	42
getParentOrganizationsResp	1171	getProductRelationshipsReq	361
onseType		uest	
getPartNumberCount	37	getProductRelationshipsReq	183
getPartNumberCountReque	348	uestType	
st		getProductRelationshipsRes	361
getPartNumberCountReque	173	ponse	
stType		getProductRelationshipsRes	184
getPartNumberCountRespo	349	ponseType	
nse		getProductsQuery	43
getPartNumberCountRespo	174	getProductsQueryRequest	363
nseType		getProductsQueryRequestTy	185
getPartNumbersQuery	39	pe	
getPartNumbersQueryRequ	351	getProductsQueryResponse	364
est		getProductsQueryResponse	185
getPartNumbersQueryRequ	176	DataType	
estType		getProductsQueryResponse	186
getPartNumbersQueryResp	352	Type	
onse		getRelatedOrganizations	1132
getPartNumbersQueryResp	177	getRelatedOrganizationsReq	1228
onseType		uest	
getProductCategories	41		

getRelatedOrganizationsReq 1172 uestType	getUniformSuiteCountRespo 369 nse
getRelatedOrganizationsRes 1228 ponse	getUniformSuiteCountRespo 189 nseType
getRelatedOrganizationsRes 1173 ponseType	getUniformSuiteQuery 46
getSecureToken 1349	getUniformSuitesQueryRequ 371 est
getStateChangeHistory 444	getUniformSuitesQueryRequ 190 estType
getStateChangeHistoryRequ 758 est	getUniformSuitesQueryResp 372 onse
getStateChangeHistoryRequ 587 estType	getUniformSuitesQueryResp 191 onseDataType
getStateChangeHistoryResp 759 onse	getUniformSuitesQueryResp 191 onseType
getStateChangeHistoryResp 588 onseType	getUsage 1602
getSubOrganizations 1133	GetUsageRequest 1606
getSubOrganizationsReques 1230 t	GetUsageResponse 1606
getSubOrganizationsReques 1174 tType	getUserCount 1134
getSubOrganizationsRespon 1231 se	getUserCountRequest 1233
getSubOrganizationsRespon 1175 seType	getUserCountRequestType 1176
getTransactionKeyIdentifiers 44	getUserCountResponse 1234
getTransactionKeyIdentifiers 366 Request	getUserCountResponseData 1177 Type
getTransactionKeyIdentifiers 187 RequestType	getUserCountResponseType 1177 e
getTransactionKeyIdentifiers 367 Response	getUserPermissions 1135
getTransactionKeyIdentifiers 188 ResponseType	getUserPermissionsRequest 1235
getUniformSuiteCount 45	getUserPermissionsRequest 1178 Type
getUniformSuiteCountReque 368 st	getUserPermissionsRespon 1236 se
getUniformSuiteCountReque 189 stType	getUserPermissionsRespon 1179 seDataType
	getUserPermissionsRespon 1179 seType
	getUsersForProductCategor 47 y

getUsersForProductCategoryRequest 374
 getUsersForProductCategoryRequestType 192
 getUsersForProductCategoryResponse 375
 getUsersForProductCategoryResponseDataType 193
 getUsersForProductCategoryResponseType 193
 getUsersQuery 1136
 getUsersQueryRequest 1238
 getUsersQueryRequestType 1180
 getUsersQueryResponse 1239
 getUsersQueryResponseDataType 1181
 getUsersQueryResponseType 1181
 getUserToken 1349
 getWebRegKeyCount 445
 getWebRegKeyCountRequest 761
 getWebRegKeyCountRequestType 589
 getWebRegKeyCountResponse 762
 getWebRegKeyCountResponseType 590
 getWebRegKeysQuery 447
 getWebRegKeysQueryRequest 764
 getWebRegKeysQueryRequestType 592
 getWebRegKeysQueryResponse 765
 getWebRegKeysQueryResponseType 593
 GroupList 1278
 GroupQuery 1279

GroupResponse 1279
 GroupStatus 1280

H

handleProductCategoriesToUserRequestType 194
 handleProductCategoriesToUserResponseType 195
 handleProductCategoryToOrGroupRequestType 196
 handleProductCategoryToOrGroupResponseType 197
 hostIdDataDetailsType 971
 hostIdDataSetType 972
 hostIdDataType 972
 hostIdDetailsType 973
 hostTypeIdIdentifier 1422
 hostTypePKType 198, 595, 973

I

identifierQueryParametersType 199
 IdentityType 1351
 idListType 595
 idType 596
 incrementAddonLineItems 1366
 incrementAddonLineItemsRequest 1470
 incrementAddonLineItemsResponse 1471

L

License Model Attributes 1612
 licenseFileDataListType 974
 licenseFileDataType 974

licenseGeneratorIdentifierType 199, 596, 974
pe

licenseGeneratorsDetailsType 200
e

licenseModelDetailsType 200

licenseModelIdentifierType 201, 596, 975, 1422

licenseModelListType 597

licenseModelPKType 201

licenseModelsListType 201

licenseModelStateChangeData 597
ataType

licenseModelStateChangeList 598
stType

LicenseService 831

licenseTechnologyDataListType 202
ype

licenseTechnologyDetailsType 202
pe

licenseTechnologyIdentifierType 203, 598, 975
ype

licenseTechnologyPKType 203, 598, 976

licenseTechnologyQueryParametersType 203
ametersType

lifeCycleLinItemDataType 599

linItemCustomAttributeQuery 599
yType

linItemCustomAttributesQuery 600
eryListType

linItemLifeCycleDataType 600

linItemStateDataType 601

linkAddonLinItemDataType 1423

linkAddonLinItems 1366

linkAddonLinItemsRequest 1472

linkAddonLinItemsRequestType 1423
Type

linkAddonLinItemsResponse 1473
e

linkAddonLinItemsResponse 1424
eType

linkFailAddonDataListType 1424

linkFailAddonDataType 1425

linkLinItemDataType 1425

linkLinItemIdentifier 1425

linkMaintenanceLinItem 449

linkMaintenanceLinItemData 601
aType

linkMaintenanceLinItemList 602
Type

linkMaintenanceLinItemRequest 768
quest

linkMaintenanceLinItemRequest 602
questType

linkMaintenanceLinItemResponse 769
ponse

linkMaintenanceLinItemResponse 603
ponseType

linkOrganizations 1137

linkOrganizationsDataType 1182

linkOrganizationsRequest 1241

linkOrganizationsRequestType 1183
pe

linkOrganizationsResponse 1242

linkOrganizationsResponseType 1183
ype

M

maintenanceIdentifierType 204, 604, 976

maintenanceLinItemData 604
pe

maintenanceLinItemProperties 605
iesType

maintenanceLinItemStateData 606
ataType

maintenancePKType 204, 976

maintenanceQueryDataType 205
 maintenanceQueryParametersType 205
 maintenanceStateDataType 208
 ManageDeviceService 1356
 manualActivation 855
 manualActivationRequest 1077
 manualActivationResponse 1077
 manualRepair 856
 manualRepairRequest 1079
 manualRepairResponse 1079
 manualReturn 857
 manualReturnRequest 1080
 manualReturnResponse 1081
 Manufacturer 1527
 ManufacturerCountResult 1528
 ManufacturerQueryParameters 1528
 ManufacturerQueryResponseDataType 1529
 ManufacturerQueryResults 1530
 ManufacturerTransactionResult 1530
 mapEntitlementsToUser 450
 mapEntitlementsToUserRequest 771
 mapEntitlementsToUserRequestType 607
 mapEntitlementsToUserResponse 772
 mapEntitlementsToUserResponseType 607
 matchingBulkEntDataType 609
 matchingLineItemDataType 609
 mergeEntitlements 451

mergeEntitlementsRequest 774
 mergeEntitlementsRequestType 609
 mergeEntitlementsResponse 774
 mergeEntitlementsResponse610Type
 Methods 3, 410, 832, 1125, 1257, 1318, 1349, 1357, 1485, 1602
 modelAttributesType 209
 modelIdentifiersDataListType 209
 moveDevice 1367
 moveDeviceList 1426
 moveDeviceRequest 1474
 moveDeviceRequestType 1426
 moveDeviceResponse 1475
 moveDeviceResponseType 1427
 MultipleDownloadPackagesQueryParameters 1531
 MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesCount] 1582
 MultipleDownloadPackagesQueryParameters [element getMultipleDownloadPackagesQuery] 1583
 MultipleDownloadPackagesQueryResponseDataType 1531
 MultipleDownloadPackagesQueryResults 1532
 MultipleDownloadPackagesQueryResults [element getMultipleDownloadPackagesQueryResponse] 1583

N

newEntitlementLineItemDataType 611
 NodeIDsType 977

O

NumberQueryType	1428
obsoleteHost	1367
obsoleteHostRequest	1477
obsoleteHostRequestListType	1428
obsoleteHostResponse	1477
obsoleteHostResponseType	1429
obsoleteHostType	1429
offlineFNPTTrustedStorageActivation	858
onHoldFmtLicenseDataType	977
onholdFulfillmentListType	978
OpsEmbeddedStatusInfoType	1430
OpTypeType	1539
Organization	1329
OrganizationAdministration	1317
organizationBasicDataType	209
organizationDataType	1184
organizationDetailDataType	1185
organizationIdentifierType	210, 612, 978, 1186, 1430
OrganizationList	1329
organizationPKType	210, 612, 978, 1186, 1431
OrganizationQuery	1330
organizationQueryParametersType	1187
OrganizationResponse	1330
OrgTypeList	210, 612, 979, 1188
overDraftDataListType	979

P

packagePropertiesDataType	211
pageNumber [element getDownloadPackageInProductQuery]	1584
pageNumber [element getMultipleDownloadPackagesQuery]	1584
PartnerTierQueryType	613, 1431
partNumberDataListType	212
partNumberDataType	212
partNumberIdentifierType	212, 614
partNumberIdentifierWithModelType	213, 614, 980
partNumberPKType	213, 615, 980
partNumberQueryParametersType	214
partNumbersListType	216
partNumbersSimpleListType	217
Period	1603
policyAttributesDataType	615
policyAttributesListType	616
policyTermType	617
prodCustomAttributeQueryType	217
prodCustomAttributesQueryListType	217
Product [type DownloadPackageResult]	1585
ProductAssociationResult	1532
productCategoryDataType	218
productCategoryParametersType	218
ProductDisassociationResult	1533
productIdentifierType	219, 618, 981, 1431
productIdentifierWithCountDataType	219, 618, 981
ProductIDType	1533

ProductLine	1534
ProductLineAlternateLanguage	1534
productListType	619
ProductName [type DownloadPackageInProductQueryParameters]	1585
ProductPackagingService	2
productPKType	220, 619, 1432
productQueryDataType	220
productQueryParametersType	223
productRelationshipDataType	226
productsListType	227
productStateChangeDataType	619
productStateChangeListType	620
productStateDataType	228
ProductVersion [type DownloadPackageInProductQueryParameters]	1586
publisherAttributesListDataType	982
publisherErrorFulfillmentDataType	982
publisherErrorFulfillmentRequestType	983
publisherErrorFulfillmentResponseDataType	983
publisherErrorFulfillmentResponseType	984
publisherErrorLicense	859
publisherErrorLicenseRequest	1082
publisherErrorLicenseResponse	1083
publisherErrorResponseDataType	984

publisherIdentifier	1432
---------------------	------

Q

QueryError	1535
QueryResult	1535
QueryResult [type DownloadPackageInProductCountResult]	1586
QueryResult [type DownloadPackageInProductQueryResults]	1587
QueryResult [type MultipleDownloadPackagesQueryResults]	1588

R

rehostFulfillmentDataType	985
rehostFulfillmentRequestType	985
rehostFulfillmentResponseDataType	986
rehostFulfillmentResponseType	986
rehostLicense	860
rehostLicenseRequest	1086
rehostLicenseResponse	1087
rehostResponseDataType	987
reinstallPolicyDataType	620
relateOrganizations	1138
relateOrganizationsDataType	1189
relateOrganizationsRequest	1244
relateOrganizationsRequestType	1189
relateOrganizationsResponse	1245
relateOrganizationsResponseType	1190

removeDownloadPackageFromProduct	1499, 1588	renewLicenseResponse	779
removeDownloadPackageFromProductResponse	1589	renewLineItemDataType	625
removeEntitlementLineItemData	621	renewParametersDataType	626
removeEntitlementLineItemRequest	776	repairFulfillmentDataType	988
removeEntitlementLineItemRequestType	621	repairFulfillmentRequestType	988
removeEntitlementLineItemResponse	777	repairFulfillmentResponseData	989
removeEntitlementLineItemResponseType	622	repairFulfillmentResponseDataType	989
removeFileFromDownloadPackage	1500	repairLicense	862
removeProductCategoriesFromOrg	48	repairLicenseRequest	1093
removeProductCategoriesFromOrgRequest	377	repairLicenseResponse	1094
removeProductCategoriesFromOrgResponse	378	repairResponseDataType	990
removeProductCategoriesFromUser	49	repairShortCode	863
removeProductCategoriesFromUserRequest	379	repairShortCodeDataType	991
removeProductCategoriesFromUserResponse	380	repairShortCodeRequest	1097
renewedEntitlementLineItemData	623	repairShortCodeRequestType	991
renewEntitlementDataType	623	repairShortCodeResponse	1098
renewEntitlementRequestType	624	repairShortCodeResponseType	992
renewEntitlementResponseType	624	replaceEntitlementLineItem	453
renewFulfillment	861	replaceEntitlementLineItemRequest	781
renewFulfillmentRequest	1090	replaceEntitlementLineItemResponse	782
renewFulfillmentResponse	1091	replaceOnlyEntitlementLineItemRequestType	628
renewLicense	452	replaceOnlyEntitlementLineItemResponse	629
renewLicenseRequest	778	resetPassword	1261
		resetPasswordRequest	1304
		resetPasswordResponse	1305
		responseData [type DownloadPackageInProductCountResult]	1590

responseData [type DownloadPackageInProductQueryResults] 1590

responseData [type MultipleDownloadPackagesQueryResults] 1591

restrictCode [type DownloadPackage] 1592

retrieveAllGroups 1262

retrieveAllGroupsRequest 1305

retrieveAllGroupsResponse 1306

retrieveAllOrganizations 1321

retrieveAllOrganizationsRequest 1342

retrieveAllOrganizationsResponse 1342

retrieveAllUsers 1262

retrieveAllUsersRequest 1307

retrieveAllUsersResponse 1308

retrieveCustomAttrMetadata 1263

retrieveGroup 1263

retrieveGroupRequest 1309

retrieveGroupResponse 1310

retrieveOrganization 1321

retrieveOrganizationRequest 1343

retrieveOrganizationResponse 1344

retrieveUser 1264

retrieveUserRequest 1311

retrieveUserResponse 1312

ReturnContainedObjects [element getDownloadPackageInProductQuery] 1592

ReturnContainedObjects [element getMultipleDownloadPackagesQuery] 1593

returnFulfillmentDataType 993

returnFulfillmentRequestType 993

returnFulfillmentResponseDataType 994

returnFulfillmentResponseType 994

returnHost 1368

returnHostRequest 1478

returnHostRequestListType 1433

returnHostResponse 1479

returnHostResponseType 1433

returnHostType 1434

returnLicense 864

returnLicenseRequest 1099

returnLicenseResponse 1100

returnResponseDataType 995

returnShortCode 865

returnShortCodeDataType 996

returnShortCodeRequest 1104

returnShortCodeRequestType 996

returnShortCodeResponse 1105

returnShortCodeResponseType 997

Role 1281

roleIdentifierType 228, 630, 1191

rolePKType 630, 1191

S

searchActivatableItemDataType 630

searchActivatableItemRequest 784

searchActivatableItemRequestType 637

searchActivatableItemResponse	785	setFeatureBundleStateResponse	382
searchActivatableItemResponseType	638	setFeatureBundleStateResponseType	229
searchBulkEntitlementDataType	639	setFeatureState	51
searchEntitlementDataType	644	setFeatureStateRequest	384
searchEntitlementLineItemPropertiesRequest	787	setFeatureStateRequestType	230
searchEntitlementLineItemPropertiesRequestType	652	setFeatureStateResponse	385
searchEntitlementLineItemPropertiesResponse	789	setFeatureStateResponseType	231
searchEntitlementLineItemPropertiesResponseType	653	setLicense	866
searchEntitlementRequest	792	setLicenseRequest	1106
searchEntitlementRequestType	654	setLicenseRequestType	999
searchEntitlementResponse	792	setLicenseResponse	1106
searchEntitlementResponseType	655	setLicenseResponseType	999
secureTokenRequest	1353	setLineItemState	455
secureTokenResponse	1353	setLineItemStateRequest	797
ServerIdsType	1434	setLineItemStateRequestType	658
ServerIDsType	998	setLineItemStateResponse	798
setEntitlementState	454	setLineItemStateResponseType	659
setEntitlementStateRequest	795	setMaintenanceLineItemState	456
setEntitlementStateRequestType	656	setMaintenanceLineItemStateRequest	800
setEntitlementStateResponse	795	setMaintenanceLineItemStateRequestType	660
setEntitlementStateResponseType	657	setMaintenanceLineItemStateResponse	800
setFeatureBundleState	50	setMaintenanceLineItemStateResponseType	661
setFeatureBundleStateRequest	382	setMaintenanceState	52
setFeatureBundleStateRequestType	228	setMaintenanceStateRequest	387
		setMaintenanceStateRequestType	232

setMaintenanceStateResponse	387	splitBulkEntitlementRequest	664
setType		Type	
setMaintenanceStateResponseType	233	splitBulkEntitlementResponse	803
setType		e	
setProductState	53	splitBulkEntitlementResponseListType	665
setProductStateRequest	389	eListType	
setProductStateRequestType	234	splitBulkEntitlementResponseListType	665
e		eType	
setProductStateResponse	389	splitLineItem	458
setProductStateResponseType	235	splitLineItemDataType	666
pe		splitLineItemInfoType	667
setUniformSuiteState	54	splitLineItemListType	668
setUniformSuiteStateRequest	391	splitLineItemRequest	804
t		splitLineItemRequestType	668
setUniformSuiteStateRequestType	236	splitLineItemResponse	805
tType		splitLineItemResponseListType	669
setUniformSuiteStateResponse	392	pe	
se		splitLineItemResponseType	669
setUniformSuiteStateResponseType	237	stateChangeDataType	670
seType		stateChangeResponseType	671
Simple Types	271, 701, 1011, 1441, 1538	StatusInfo	1603
simpleEntitlementDataType	661	StatusResponseList	1281, 1331
soldToType	1434	stopGapFulfillmentDataType	1000
SortBy [type DownloadPackageSortBy]	1593	stopGapFulfillmentRequestType	1001
SortBys [element getMultiple DownloadPackagesQuery]	1594	ype	
SortKey [type DownloadPackageSortBy]	1594	stopGapFulfillmentResponseDataType	1001
SortOrder [type DownloadPackageSortOrderType]	1595	Data Type	
splitBulkEntitlement	457	stopGapFulfillmentResponse1002Type	
splitBulkEntitlementDataType	662	stopGapLicense	867
e		stopGapLicenseRequest	1108
splitBulkEntitlementInfoType	663	stopGapLicenseResponse	1109
splitBulkEntitlementListType	664	stopGapResponseDataType	1002
splitBulkEntitlementRequest	802	successAddonDataListType	1435
		suiteCustomAttributeQueryType	238
		ype	

suiteCustomAttributesQuery 239
ListType

suiteIdentifierType 239, 671, 1003

suitePKType 240, 1003

suiteQueryParametersType 240

Supported Hostid Types 1662

T

TokenResponseType 1351

TransactionError 1536

transactionKeyIdentifiersDataListType 243

TransactionResult 1536

transferEntitlement 459

transferEntitlementInfoType 672

transferEntitlementsListType 673

transferEntitlementsRequest 807

transferEntitlementsRequestType 673

transferEntitlementsResponse 808

transferEntitlementsResponseType 674

transferHost 868

transferHostIdDataType 1004

transferHostList 1004

transferHostRequest 1112

transferHostRequestType 1004

transferHostResponse 1113

transferHostResponseType 1005

transferLineItem 460

transferLineItemInfoType 675

transferLineItemsListType 676

transferLineItemsRequest 810

transferLineItemsRequestType 676

transferLineItemsResponse 811

transferLineItemsResponseType 677

transferredEntitlementDataType 678

transferredEntitlementsListType 679

transferredLineItemDataType 679

transferredLineItemMapType 680

transferredLineItemsListType 680

trustedKeyIdentifierType 244, 680

trustedKeyPKType 244

trustedRequestType 1006

trustedResponseType 1007

typeLineItem 1008

U

UnexpectedError 1537

uniformSuiteQueryDataType 244

uniformSuiteStateDataType 246

unlinkMaintenanceLineItem 461

unlinkMaintenanceLineItemDataType 681

unlinkMaintenanceLineItemListType 681

unlinkMaintenanceLineItemRequest 813

unlinkMaintenanceLineItemRequestType 682

unlinkMaintenanceLineItemResponse 814

unlinkMaintenanceLineItemResponseType 682

updateAgreement	1500, 1595	updateFeature	55
updateAgreementResponse	1596	updateFeatureBundle	56
updateBulkEntitlement	462	updateFeatureBundleDataTy247 pe	
updateBulkEntitlementDataT 683 ype		updateFeatureBundleReque 394 st	
updateBulkEntitlementRequ 816 est		updateFeatureBundleReque 247 stType	
updateBulkEntitlementRequ 686 estType		updateFeatureBundleRespo 394 nse	
updateBulkEntitlementResp 817 onse		updateFeatureBundleRespo 248 nseType	
updateBulkEntitlementResp 687 onseType		updateFeatureBundlesListTy249 pe	
updateChannelPartnerDataL 1435 istType		updateFeatureDataType	250
updatedDeviceDataListType 1436		updateFeatureRequest	396
updateDevDataType	1436	updateFeatureRequestType	251
updateDevice	1368	updateFeatureResponse	397
updateDeviceRequest	1480	updateFeatureResponseType 251 e	
updateDeviceResponse	1482	updateFeaturesListType	252
updateDevRequestType	1438	updateFile	1501
updateDevResponseType	1438	updateGroups	1265
updateDownloadPackage	1501, 1597	updateGroupsRequest	1313
updateDownloadPackageRe 1598 sponse		updateGroupsResponse	1314
updateEntitledProductDataLi 246, 688 stType		updateHostTypeListType	253
updateEntitlementLinItem	463	updateLicenseModelsListTy 253 pe	
updateEntitlementLinItemD 688 ataType		updateLinItemDataType	690
updateEntitlementLinItemR 819 equest		updateMaintenance	57
updateEntitlementLinItemR 689 equestType		updateMaintenanceDataTyp 254 e	
updateEntitlementLinItemR 819 esponse		updateMaintenanceLinItem 693 DataType	
updateEntitlementLinItemR 689 esponseType		updateMaintenanceRequest	399
		updateMaintenanceRequest 255 Type	

updateMaintenanceResponse	399	updateProductRelationshipResponse	262
updateMaintenanceResponseType	255	updateProductRequest	404
updateManufacturer	1502, 1599	updateProductRequestType	263
updateManufacturerResponse	1600	updateProductResponse	404
updateOrganization	1139	updateProductResponseType	264
UpdateOrganization	1332	updateProductsListType	265
UpdateOrganizationList	1332	updateRelatedOrganizationsListType	1194
updateOrganizationRequest	1247	updateSimpleEntitlement	464
updateOrganizationRequestType	1191	updateSimpleEntitlementData	694
updateOrganizationResponse	1248	updateSimpleEntitlementRequest	821
updateOrganizationResponseType	1192	updateSimpleEntitlementRequestType	695
updateOrganizations	1322	updateSimpleEntitlementResponse	822
updateOrganizationsRequest	1345	updateSimpleEntitlementResponseType	695
updateOrganizationsResponse	1346	updateSubOrganizationsListType	1194
updateOrgDataType	1193	updateUniformSuite	60
updatePartNumbersListType	256	updateUniformSuiteData	266
updatePartNumbersSimpleListType	257	updateUniformSuiteRequest	406
updateProduct	58	updateUniformSuiteRequestType	267
updateProductDataType	257	updateUniformSuiteResponse	407
updateProductRelationship	59	updateUniformSuiteResponseType	268
updateProductRelationshipData	260	updateUser	1140
updateProductRelationshipRequest	401	updateUserData	1195
updateProductRelationshipRequestType	261	updateUserOrganizationRolesListType	1196
updateProductRelationshipResponse	402	updateUserOrganizationsListType	1196

updateUserOrganizationType 1197
 e
 updateUserRequest 1250
 updateUserRequestType 1197
 updateUserResponse 1251
 updateUserResponseType 1198
 updateUserRoles 1141
 updateUserRolesDataType 1199
 updateUserRolesListType 1200
 updateUserRolesOrganizationData 1200
 Type
 updateUserRolesRequest 1253
 updateUserRolesRequestType 1201
 pe
 updateUserRolesResponse 1253
 updateUserRolesResponseType 1201
 ype
 updateUserUsers 1265
 updateUserUsersRequest 1315
 updateUserUsersResponse 1315
 upgradeFulfillment 869
 upgradeFulfillmentRequest 1114
 upgradeFulfillmentResponse 1115
 upgradeLicense 465
 upgradeLicenseRequest 824
 upgradeLicenseResponse 825
 uploadFile 1503
 upsellFulfillment 870
 upsellFulfillmentRequest 1117
 upsellFulfillmentResponse 1118
 upsellLicense 466
 upsellLicenseRequest 827
 upsellLicenseResponse 828

Usage 1604
 UsageService 1601
 User 1282
 UserAdministration 1256
 userCustomAttributeQueryType 1202
 userCustomAttributesQueryListType 1203
 userDetailDataType 1203
 userIdentifierType 269, 696, 1204, 1439
 UserList 1284
 UserOrgHierarchyService 1124
 userPKType 270, 697, 1205, 1439
 UserQuery 1285
 userQueryParametersType 1205
 UserReset 1285
 UserResponse 1286
 UserStatus 1286
 UserTokenInput 1354
 UserTokenReturn 1355
 UserTokenReturn Type 1352

V

verifiedFulfillmentDataType 1009
 verifyCreateLicense 871
 verifyCreateLicenseRequest 1120
 verifyCreateLicenseResponse 1121
 e
 versionDateAttributesType 270, 697, 1009, 1207
 VersionDateOptionType 271, 701, 1013
 VersionFormatQueryType 698, 1010
 virtualLicensePolicyDataType 698
 e

W

Web Service Data Types with Choices 1610

webRegKeyCountDataType 698

webRegKeyDataListType 699

webRegKeyDataType 699

webRegKeysDataListType 700

webRegKeysListType 700